



MAGIC



Technical and Installation

www.belldinni.com

INVISIBLE SLIDING DOOR SYSTEM

MAGIC

MODEL IN WOOD

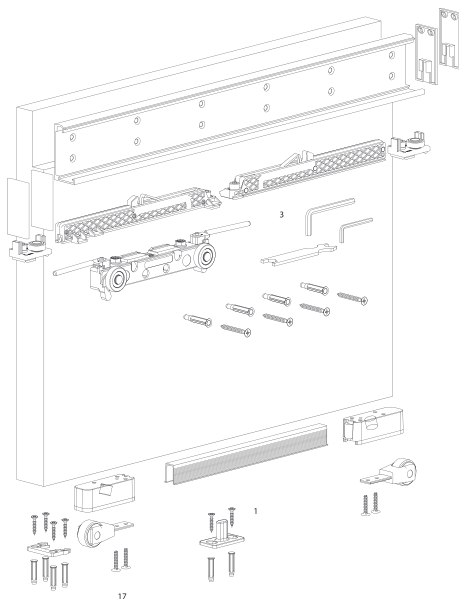

10 mm [3/8 in]




80 kg [176lb]




680 mm ÷ 1800 mm
[26 3/4 - 70 7/8 in]

PATENTED


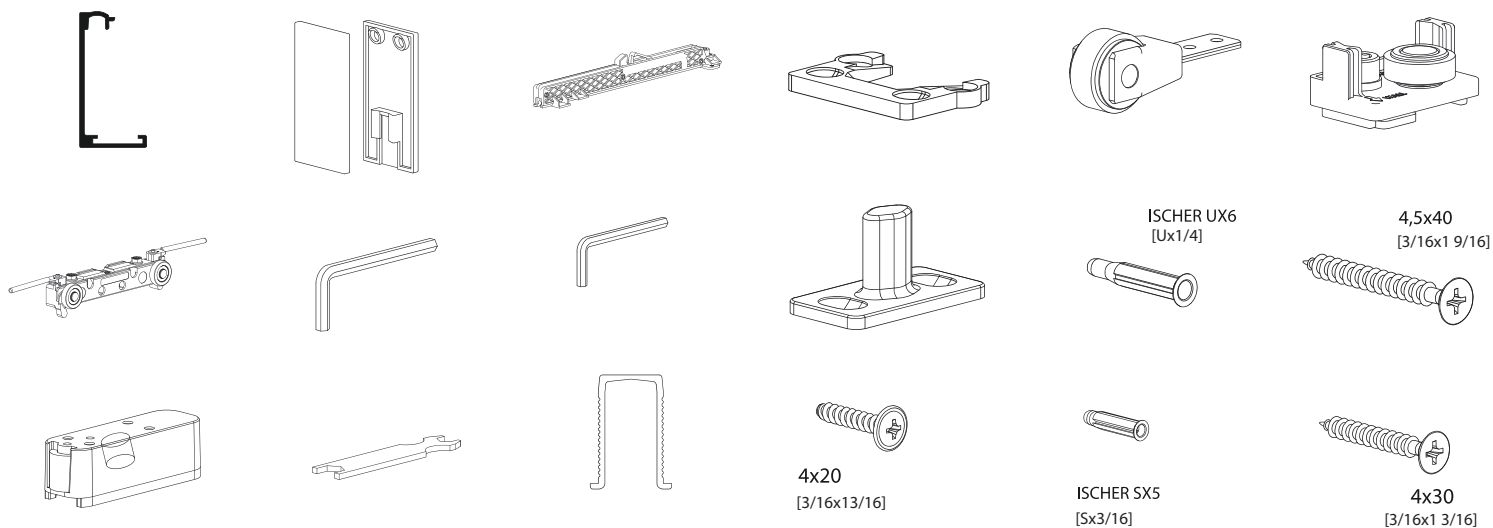


PROFILES CUTTING MEASUREMENTS / MISURI


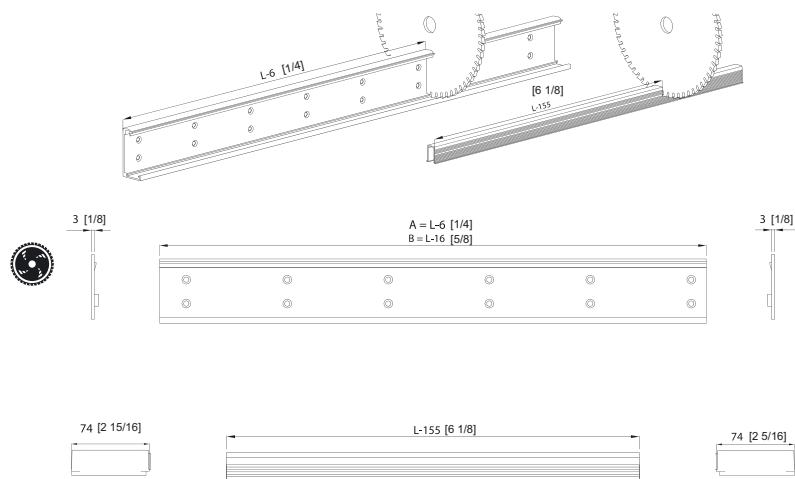


MILLING DESCRIPTION

A

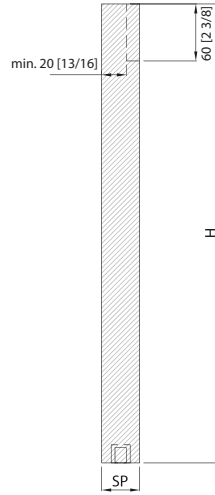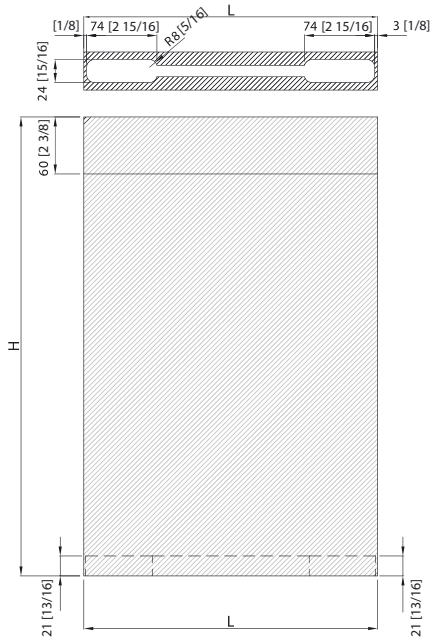


B

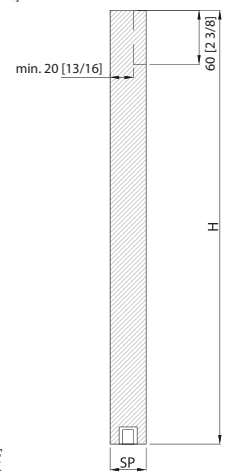
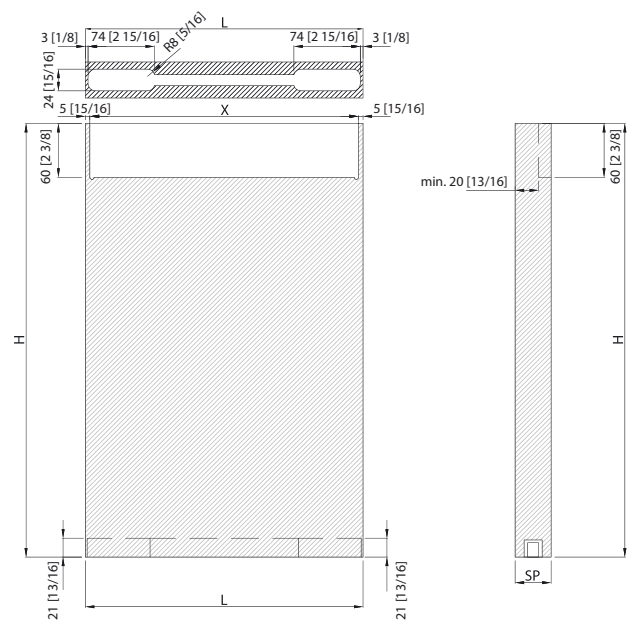


ACCESSORIES PLACEMENT

LEFT OPENING

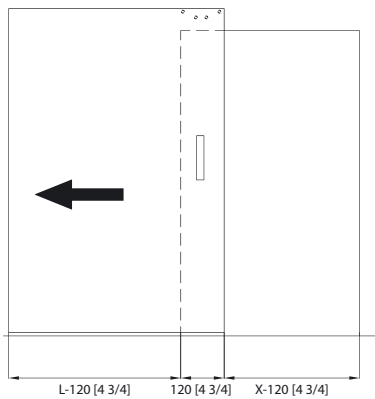

RIGHT OPENING

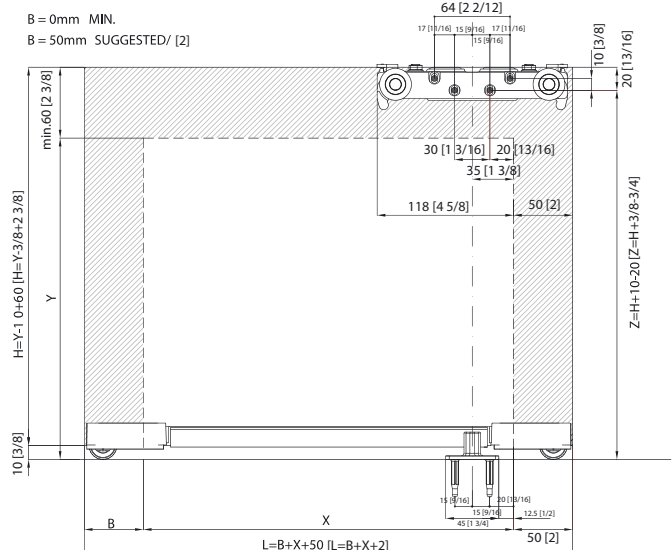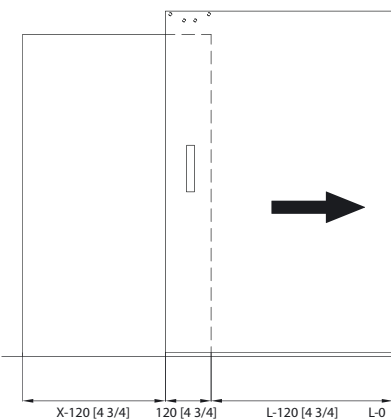


ART. Magik2/1100 B=0 [43 5/16]
 X= MIN. 800 (L=850) [31 1/2] [33 7/16]
 X= MAX. 1050 (L=1100) [41 5/16] [43 5/16]
 ART. Magic2/1100 B=50 [43 5/16][1 15/16]
 X= MIN. 800 (L=900) [31 1/2][35 7/16]
 X= MAX. 1000 (L=1100) [39 3/8][43 5/16]



ART. Magic2/1800 B=0
 X= MIN. 800 (L=850) [31 1/2] [33 7/16]
 X= MAX. 1750 (L=1800) [68 7/8][70 7/8]
 ART. Magic2/1800 B=50
 X= MIN. 800 (L=900) [31 1/2] [35 7/16]
 X= MAX. 1700 (L=1800) [66 15/16][70 7/8]

ACCESSORIES PLACEMENT

LEFT OPENING

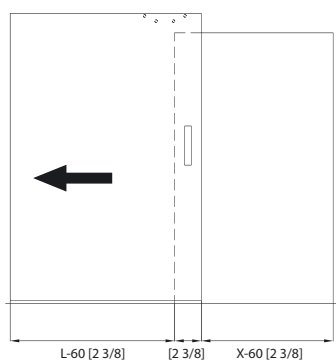

RIGHT OPENING

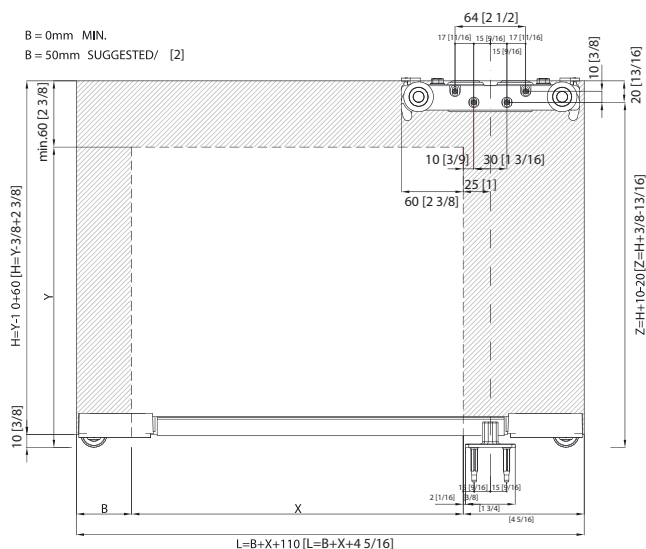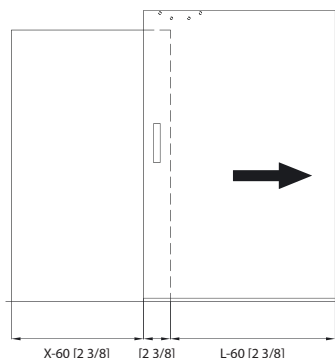


ART. Magic2/1100 B=0
X= MIN.740 (L=850)
[X= min 29 1/8 (L=33 7/160)]
X= MAX. 990 (L=1100)
[X= max 39 (L=43 5/16)]

ART. Magic2/1100 B=50 [2]
X= MIN.740 (L=900)
[X=min 29 1/8 (L=35 7/8)]
X= MAX. 940 (L=1100)
[X=max 37 (L=43 5/16)]



ART. Magic2/1800 B=0
X= MIN. 740 (L=850)
[X= min 29 1/8 (L=33 7/160)]
X= MAX. 1690 (L=1800)
[X= max 66 9/16 (L=70 7/8)]

ART. Magic2/1800 B=50 [2]
X= MIN. 740 (L=900)
[X=min 29 1/8 (L=35 7/8)]
X= MAX. 1640 (L=1800)
[X=max 64 9/16 (L=70 7/8)]

ACCESSORIES PLACEMENT

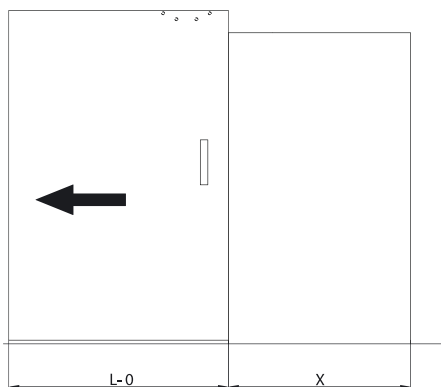

RIGHT OPENING

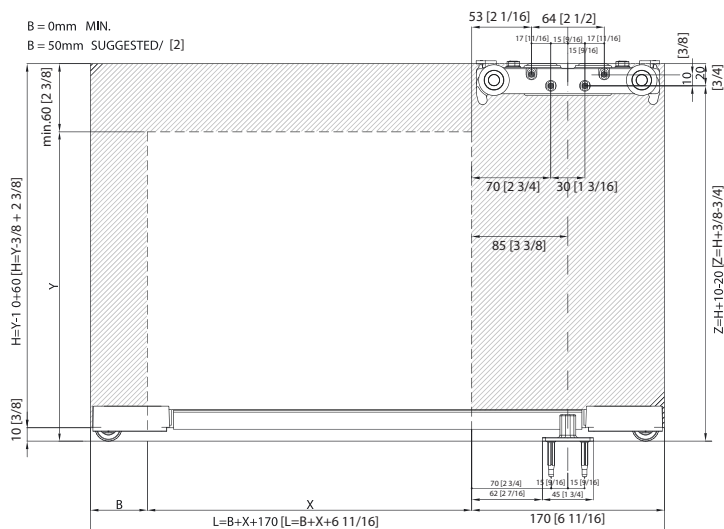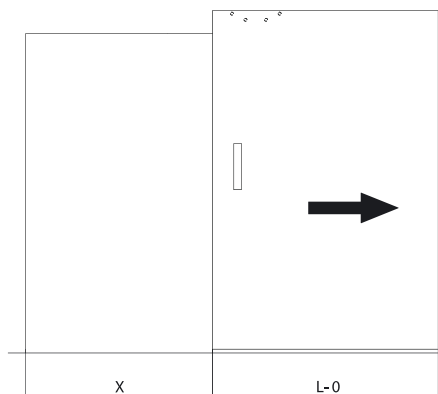



ART. Magic2/1100 B=0
X= MIN. 680 (L=850)
[X=min 31 1/2 (L=33 7/16)]
X= MAX. 930 (L=1100)
[X=max 41 5/16 (L=43 5/16)]

ART. Magic2/1100 B=50
X= MIN. 680 (L=900)
[X=min 31 1/2 (L=35 7/16)]
X= MAX. 880 (L=1100)
[X=max 39 3/8 (L=43 5/16)]

ART. Magic2/1800 B=0
X= MIN. 680 (L=850)
[X=min 31 1/2 (L=33 7/16)]
X= MAX. 1630 (L=1800)
[X=max 68 7/8 (L=70 7/8)]

ART. Magic2/1800 B=50
X= MIN. 680 (L=900)
[X=min 31 1/2 (L=35 7/16)]
X= MAX. 1580 (L=1800)
[X=max 66 15/16 (L=70 7/8)]

DESCRIPTION OF MEASURES / DESCRIZIONE MISURE

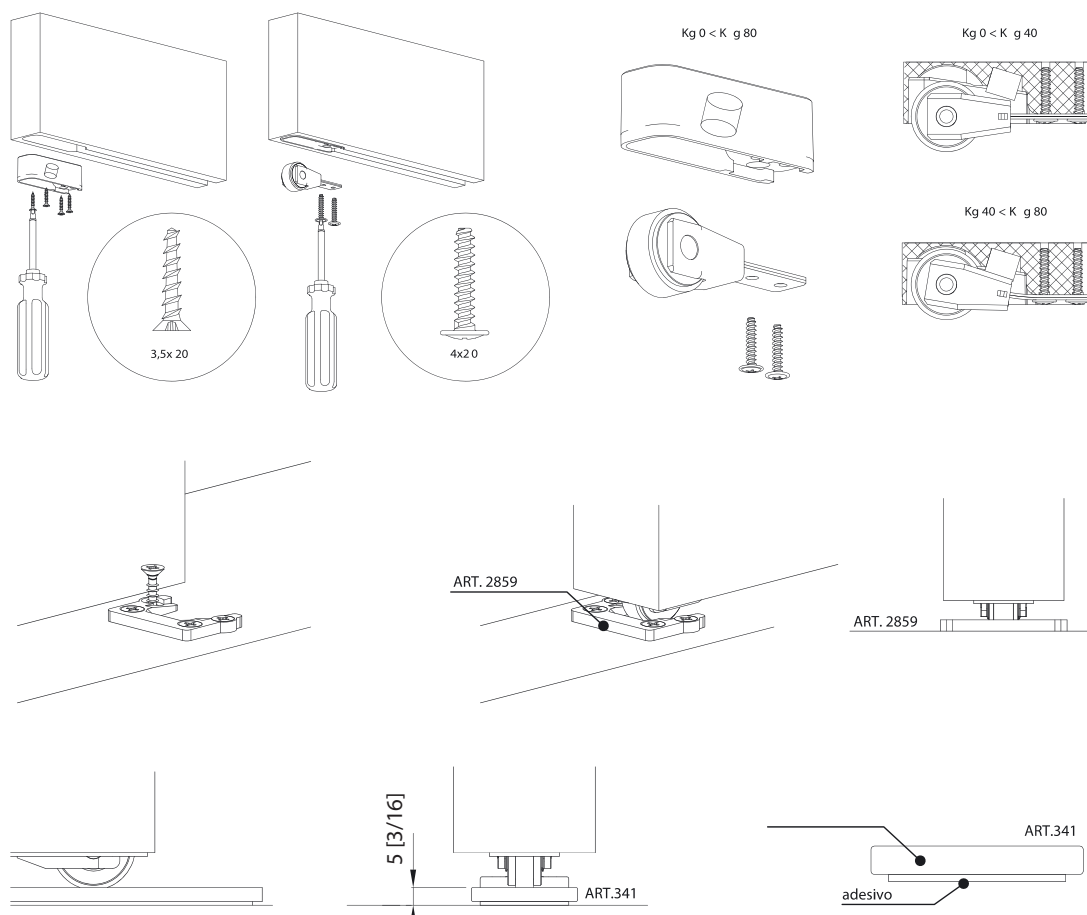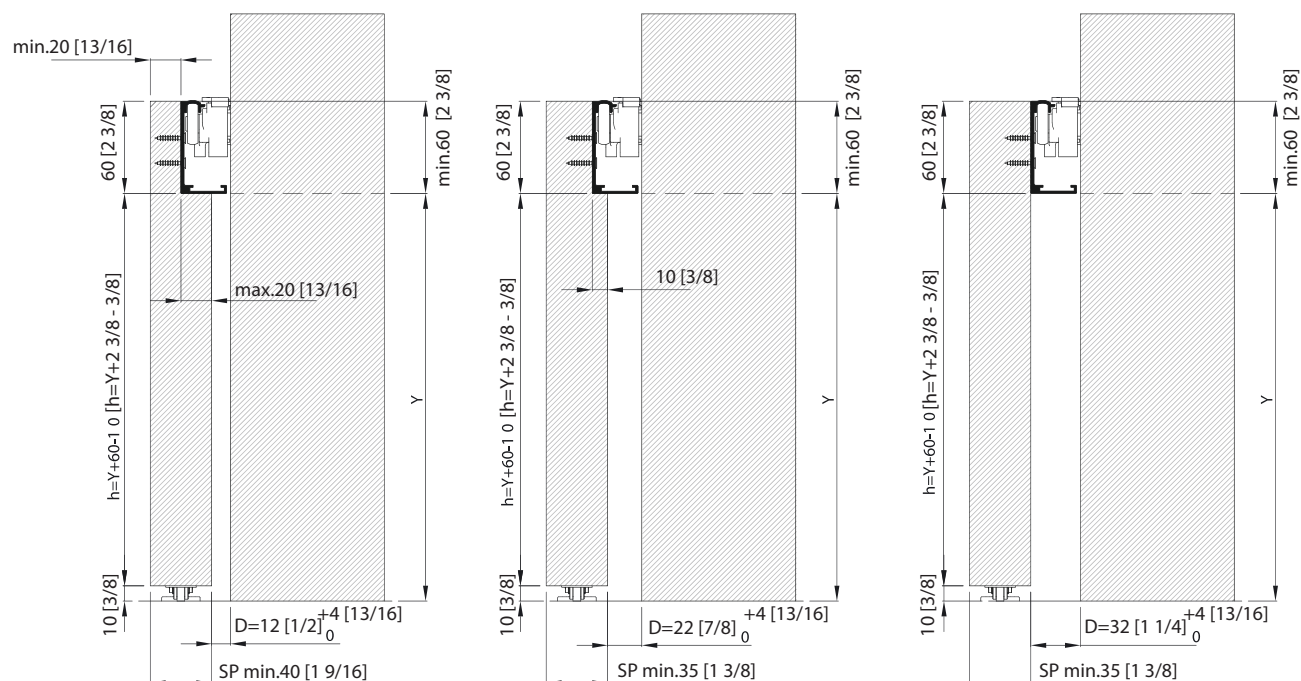


MAGIC

MODEL IN WOOD


DOOR APPLICATION

SELF ACTIVATING SOFT CLOSING SYSTEM


DOOR POSITIONING

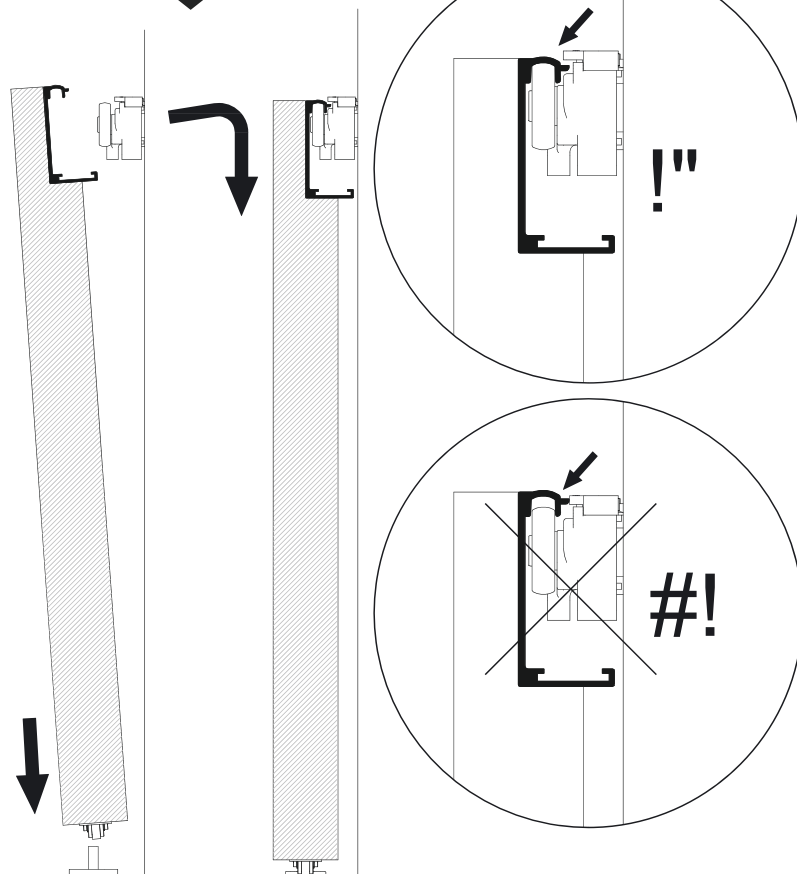




END CAPS



SOFT CLOSING

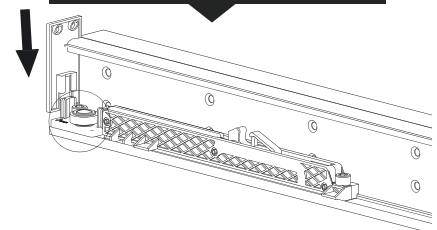


SPACER

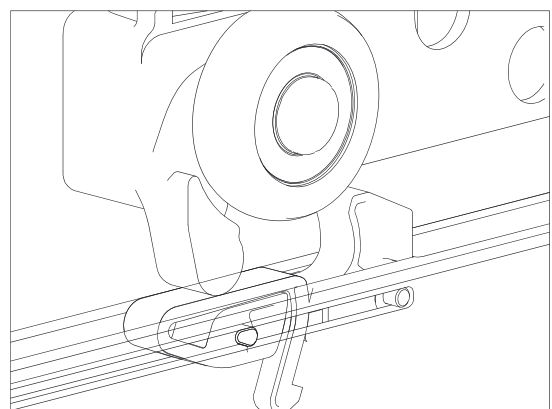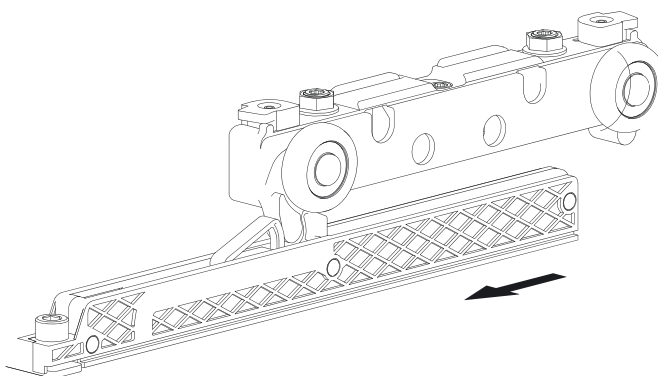


MOUNTING / MONTAGGIO


SLIDING HEIGHT ADJUSTMENT

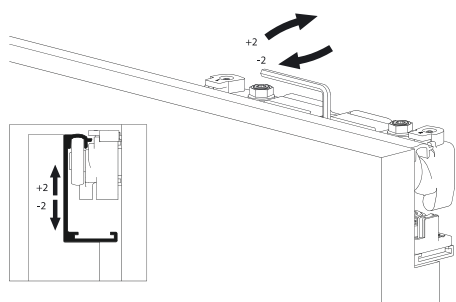


ANTI-UNHOOKING ACTIVATION

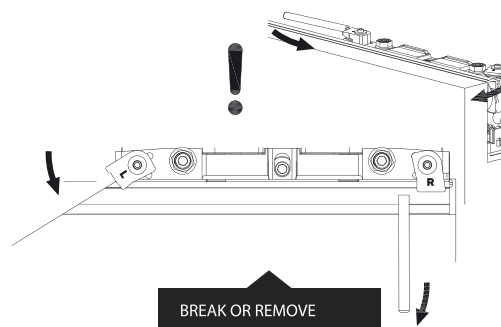


SLIDING ADJUSTMENT TO COMPENSATE WALL DIPS

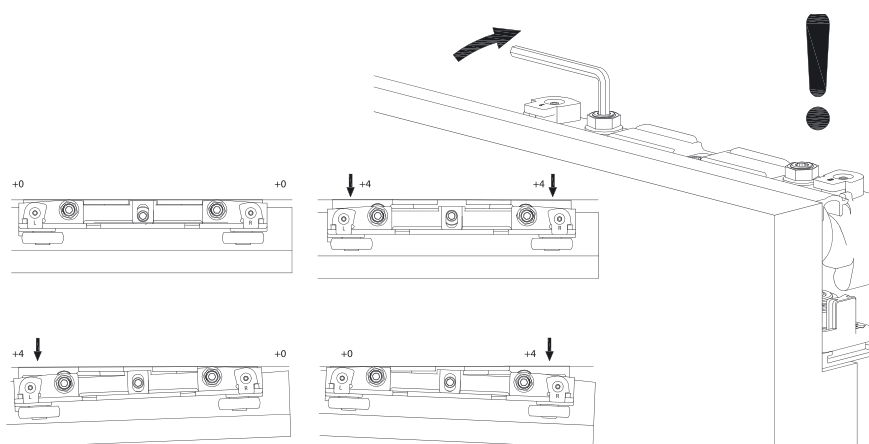

WHEN NEEDED, ADJUST POSITION OF SOFT CLOSING SYSTEM

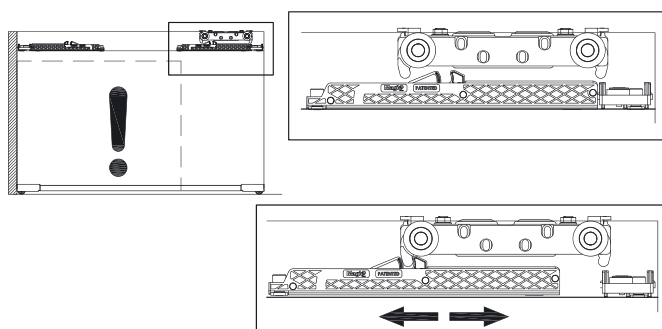

LOCK AFTER ADJUSTING

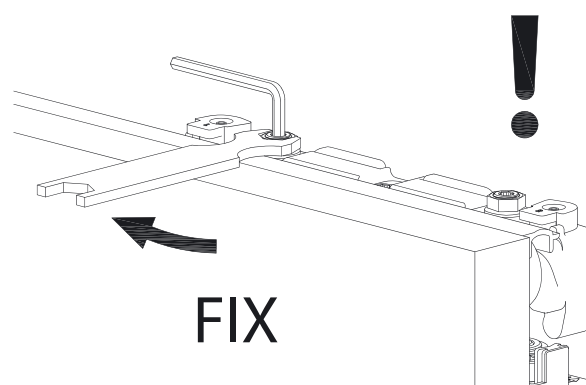



belldinni
interior doors

www.belldinni.com
970 New Brunswick Ave,
Rahway, NJ, 07065
(908) 888-6802