

ASSEMBLY INSTRUCTIONS


1) Fitting rear bars.

Remove nails either side of the join as shown. Use the 3 space bars at the ends of the join and the single space bars in between



2) Fitting front fillets

Using the width gauges supplied set the distance between the two racks to be joined

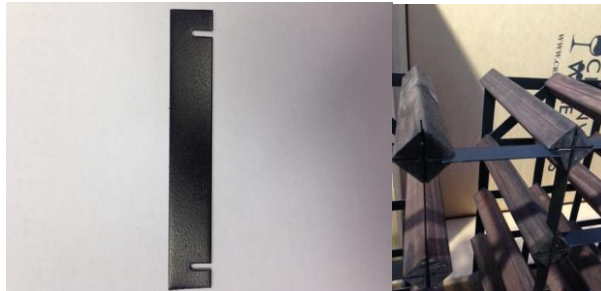

Tap the metal fillets into place.

