


WARNING (To reduce the risk of fire, electric shock, or personal injury):





1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at a later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done.
 - » Go to the main fuse, or circuit breaker, box in your home.
Place the main power switch in the “**OFF**” position.
 - » Place the wall switch in the “**OFF**” position.
1. Mounting surface should be clean, dry, flat, strong enough and 1/4” larger than the canopy on all sides. Any gaps between the mounting surface and canopy exceeding 3/16” should be corrected as required.
2. Make sure that the ceiling or wall can stand the weight of the lamp before installation.
3. Make sure the voltage you are using is **120V**. The maximum wattage is **Type B, Max 40W** per bulb.
4. Keep the lamp away from acidic and alkaline substances in case of damaging the surface of the lamp.
5. When replacing bulbs, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
6. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

IMAGE FOR FINISHED PRODUCT:

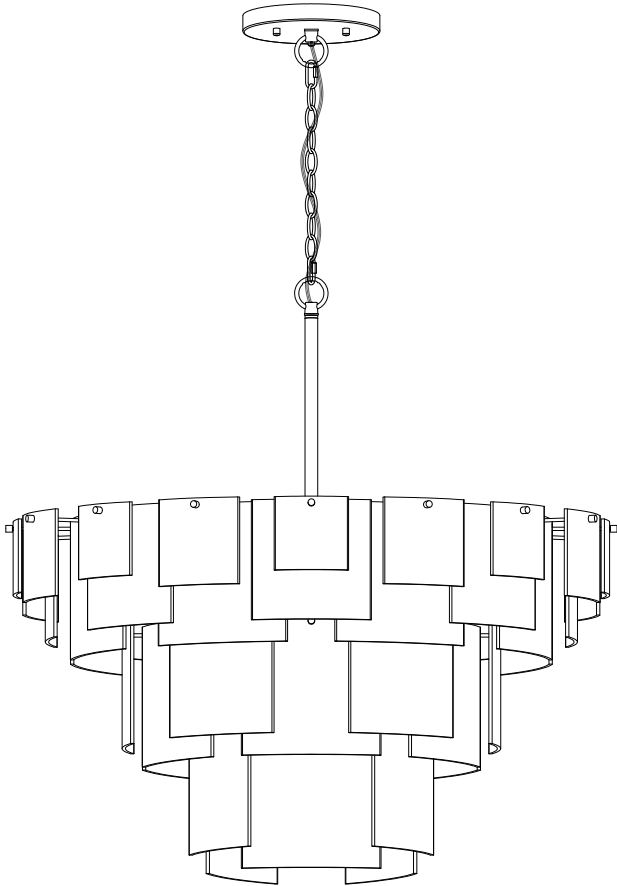


**TOOLS REQUIRED
(NOT INCLUDED):**

Before starting assembly and installation please prepare the needed tools as below picture

				
Ladder	Philips Head or Flat Blade Screwdriver	Electrical Tape	Pliers	Wire Cutter/Stripper

PARTS TYPE & QTY INCLUDED:

- (E) Mounting plate (1)
- (F) Canopy (1)
- (G) Knob nut (3)
- (H) Quick link (2)
- (I) Chain (1)
- (J) Loop (2)
- (K) Tube (1)
- (L) Lamp body(1)
- (M) Long connecting pipe (8)
- (N) Short connecting pipe (8)
- (O) Nut (34)
- (P) Gasket (272)
- (Q) Glass sheet (17)
- (R) Glass sheet (17)
- (S) Glass sheet (8)
- (T) Glass sheet (8)
- (U) Insurance buckle (1)
- (V) Safety cable assembly (1)
- (W) Steel wire (1)

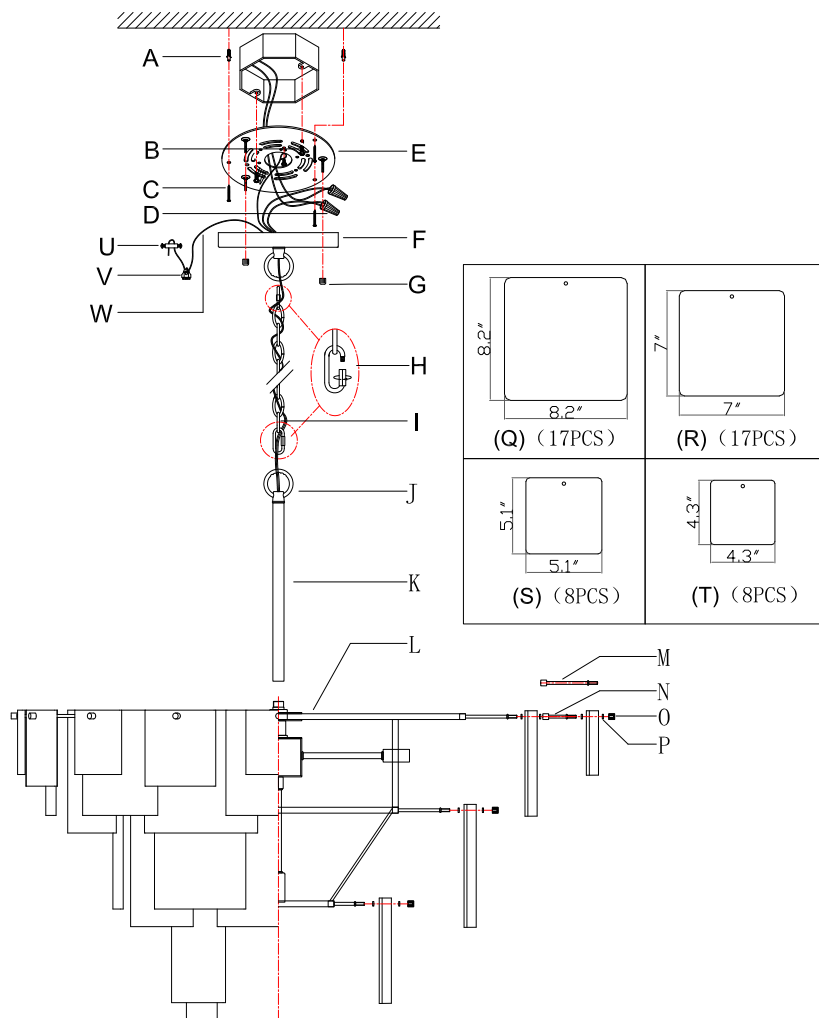


ACCESSORIES & QTY ENCLOSED:

- (A) Anchor (3)
- (B) Green ground screw (1)
- (C) Anchor screw (3)
- (D) Plastic Wire Connector (3)
- (O) Nut (1) spare parts
- (P) Gasket (1) spare parts
- (Q) Glass sheet (1) spare parts
- (R) Glass sheet (1) spare parts
- (S) Glass sheet (1) spare parts
- (T) Glass sheet (1) spare parts

ASSEMBLY & INSTALLATION INSTRUCTIONS:

1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.

2. Make pre-installation

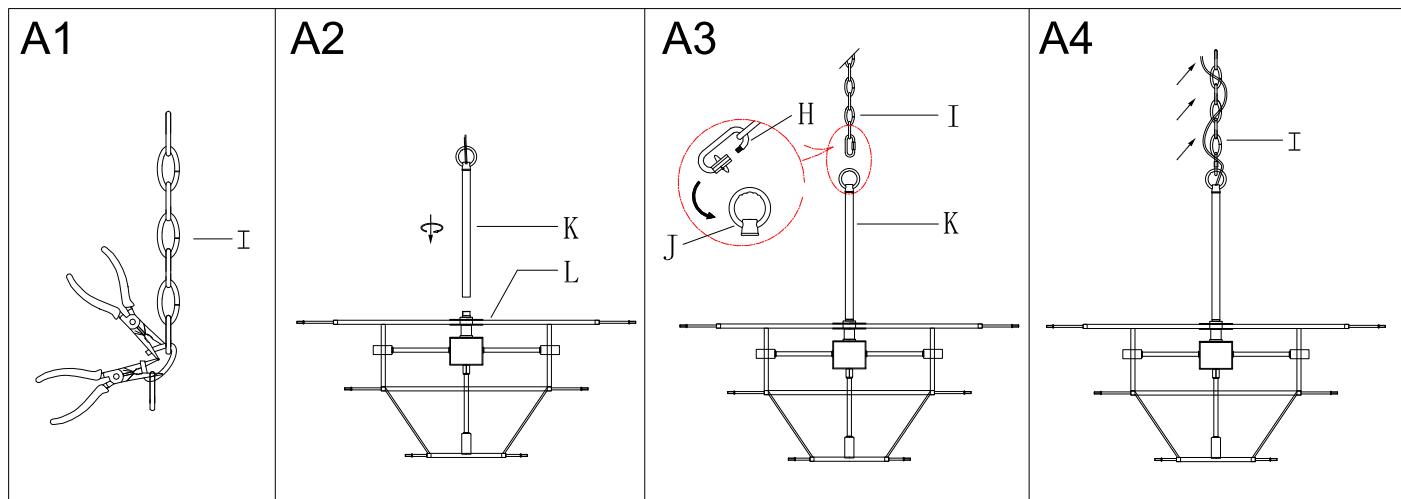

Step A1 » By measuring, determine the correct number of links needed for proper hanging height. Using the chain pliers, disconnect and discard the unwanted part.

Step A2 » Screw the tube (K) onto the lamp body (L).

Step A3 » Attach quick link (H) to chain (I) and loop (J) as shown in the illustration.


Step A4 » Carefully weave the fixture wires through chain (I) in and out of every other link and stop just when you reach the top of chain (I). Gently pull the wires to ensure the wires are not stressed.

3. Turn off power

Before you start the installation, NEVER attempt any work without shutting off the electricity until the work is done.

- » Go to the main fuse, or circuit breaker, box in your home.
Place the main power switch in the “OFF” position.
- » Place the wall switch in the “OFF” position.

4. Make installation

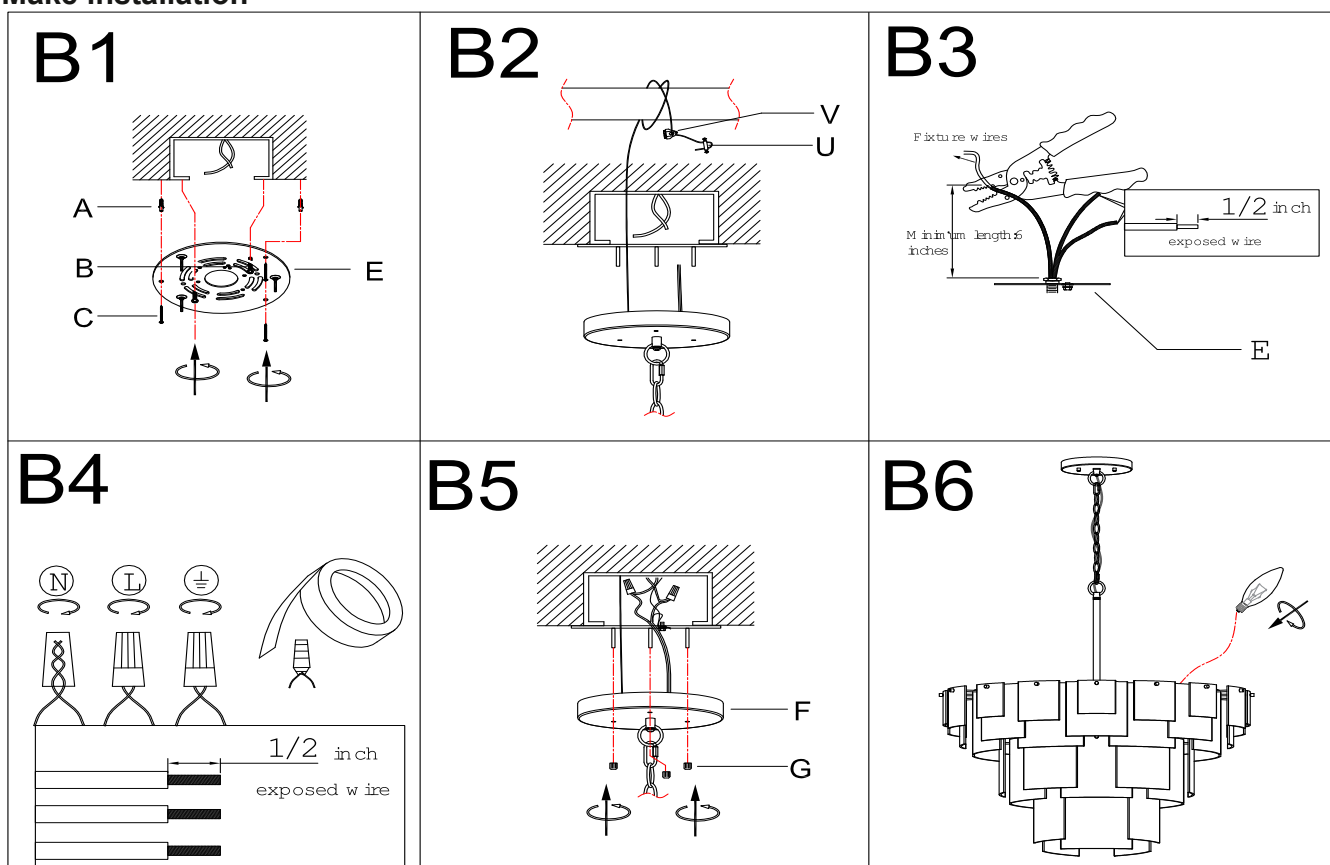

Step B1 » Carefully pass the supply wires from the outlet box through mounting plate (E).

NOTE: To drill the holes in the wall for anchors (A), attach mounting plate (E) to wall with anchor screws (C)

- 1) Attach mounting plate (E) to outlet box and then mark the position of holes in the wall with a pen as shown in the illustration.
- 2) Drill holes and gently knock anchors (A) into the marked holes until anchors (A) are level with the wall.
- 3) Secure mounting plate (E) to the wall with screwing anchor screws (C) into anchors (A).

Step B2 » 1) Wrap steel wire (W) around the roof beam several times, and then thread the steel wire (W) through the safety cable assembly (V).


- 2) Wrap steel wire (W) passing through safety cable assembly (V) around safety cable assembly (V) several times, and then pass the remaining steel wire (W) through insurance buckle (U) to secure the steel wire (W).

Step B3 » If needed, shorten the length of fixture wires. At this point, the remaining wire length measured above mounting plate (E) is at least 6".

Step B4 » Make wire connections

Connect wires as shown in the charts below. **PLEASE NOTE THAT GROUND WIRE IS BARE COPPER WIRE, NEVER CONNECT OTHER WIRES TO GROUND WIRES.**

Connect ground wires according to the chart below

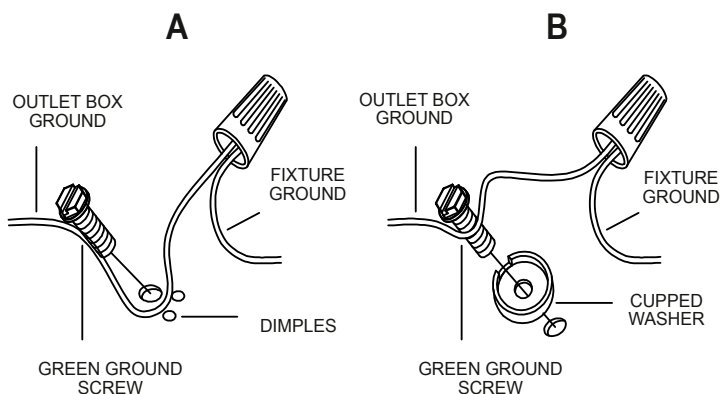

Connect wires according to the chart below

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

* Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



Neutral Wire

- **Twist wires together with plastic wire connectors until tightly joined.**
- **Wrap each connector with approved electrical tape.**
- **Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box.**

Step B5 » Raise canopy (F) to the ceiling and secure canopy (F) in place by tightening knob nuts (G) to threads of mounting plate (E).

Step B6 »

- Install the bulb (not included) (Please do not exceed the maximum wattage recommended on the socket.)
- Begin installing the glass plates from the bottom layer, continuing until all glass plates are secured to the lamp frame (L). (Please refer to the diagram below for installation.)

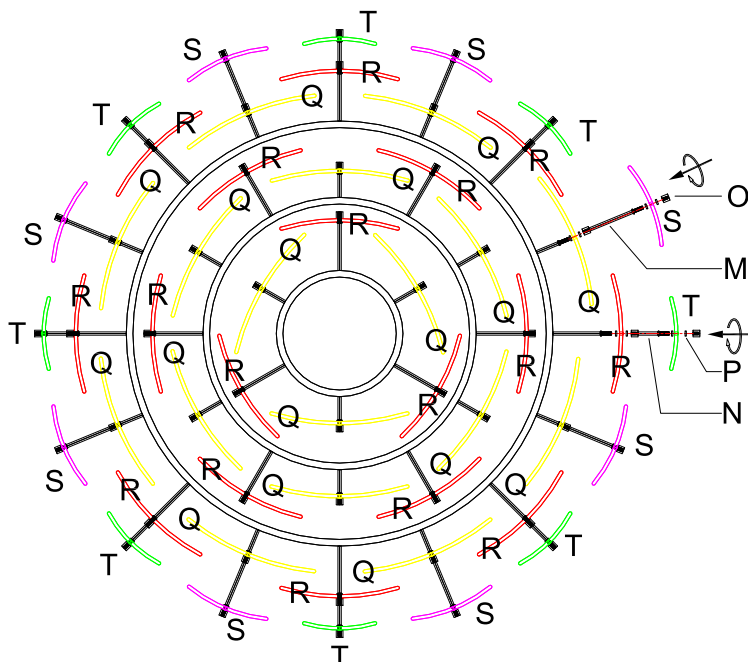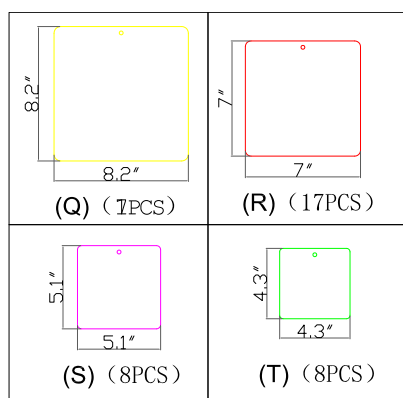

5. Check that everything is installed properly, then you can turn on the light. We hope you enjoy your new lighting!

ORDERING PARTS

Keep this sheet for future reference in case you need to order replacement parts. All parts for this fixture can be ordered from the place of purchase. Be sure to use exact wording from illustration when ordering parts.

CLEANING

To clean, wipe the fixture with a soft cloth. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.