

Fairfax® | K-12181

Centerset bathroom sink faucet with single Lever handle, 1.2 gpm

Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows for both volume and temperature control
- High-temperature limit setting for added safety
- Lever handle
- 6" (152 mm) escutcheon plate
- 5" (127 mm) spout reach
- Metal pop-up drain with tailpiece
- Flexible supplies
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)



Sustainability



Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
NSF/ANSI/CAN 61|NSF/ANSI/CAN 372
ADA
ICC/ANSI A117.1
CSA B651
OBC

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 5" (127 mm)

Flow Rate

Faucet Flow Rate: 1.2 gpm (4.5 l/min)

Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner


Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-04-2026 17:02 - US-CA

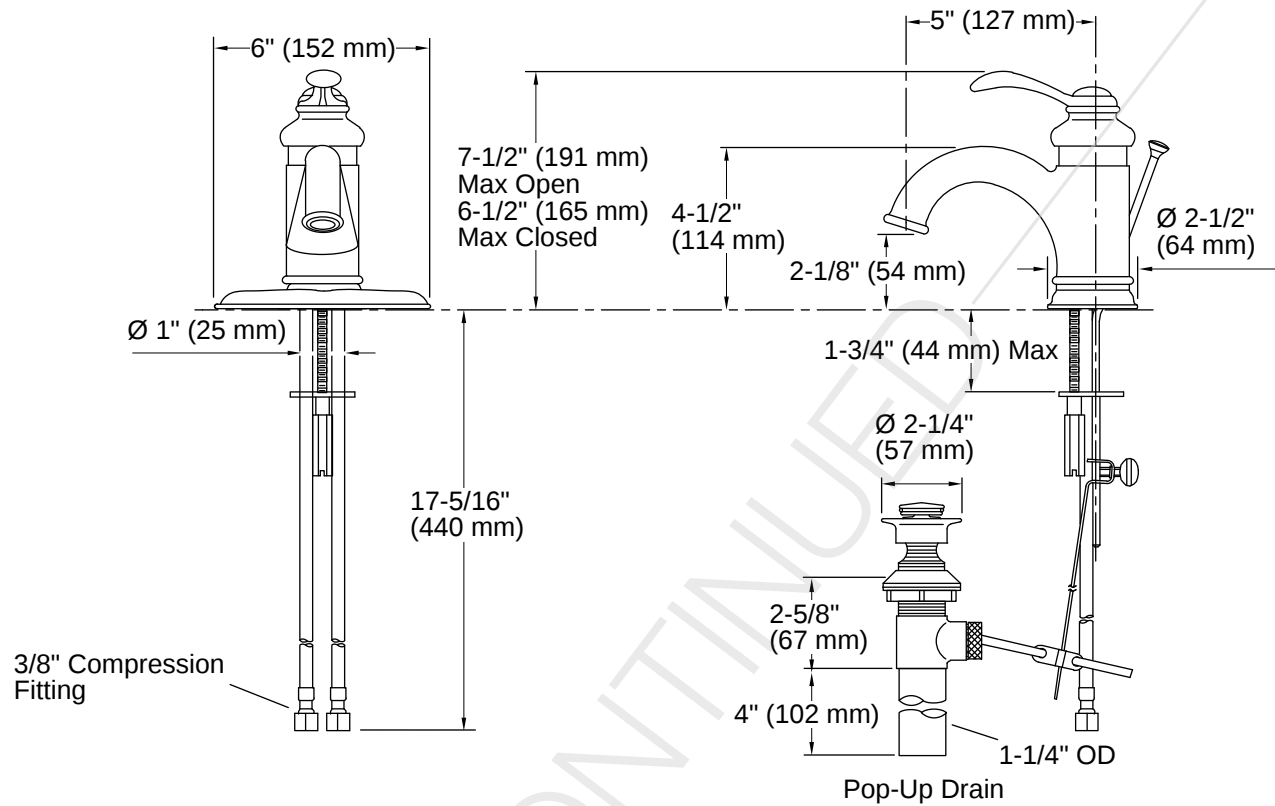

Installation Notes

Install this product according to the installation instructions.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-04-2026 17:02 - US-CA