


① light fixture 1pcs

② ③ ③ lock nut 3PCS

② threaded rod 1PCS



④ metal tube 1PCS

⑤ small metal cover 1PCS


⑥ big metal cover 2PCS



⑦ glass ball 1PCS



⑧ ⑭ ⑧ canopy 1PCS ⑭ 4PCS



⑨ glass lampshade 16+2pcs


⑩ screw & plastic washer 32+4PCS



⑪ ground line 1PCS

⑫ metal round piece 1PCS

⑬ teeth lock washer 2PCS




⑯ X 1PCS


⑮ X 4PCS

⑰ X 3PCS

⑱ X 4PCS

lock nut ③ should be level with the open ending of the glass ball ⑦




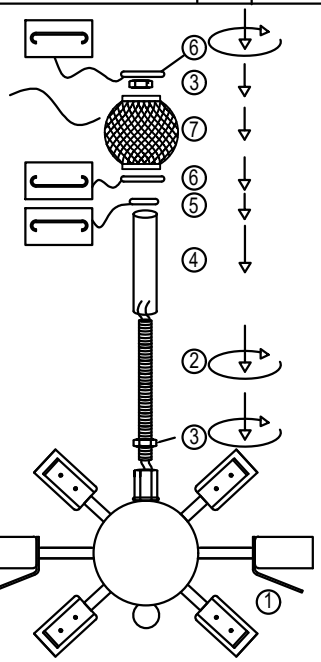


remove out the lock nuts ③ from threaded rod ② before installation




1.Rotate to install the rod ② to the light fixture ①, fasten it with lock nut ③.
2.Let the metal tube ④, small metal cover ⑤ and big metal cover ⑥ go through the threaded rod ②.
3.Install the glass ball ⑦ to the threaded rod ② with lock nut ③, lock nut ③ should be level with the open ending of the glass ball ⑦, put another big metal cover ⑥ on top of glass ball ⑦.

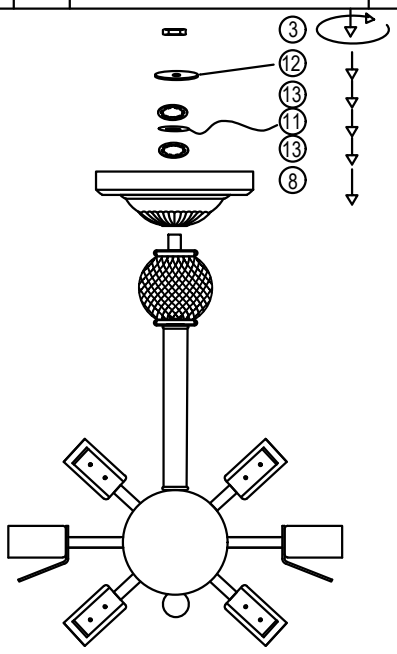

4.Rotate to install the canpy ⑧, teeth lock washer ⑬, ground line ⑪, teeth lock washer ⑬, metal piece ⑫ to the fixture with lock nut ③.

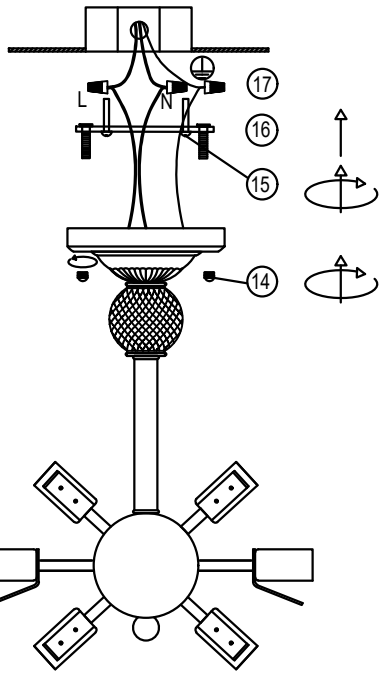

5.Install the bracket ⑯ to the ceiling junction box with screw ⑮.
6.Connect the wire to the home line with cap connector ⑰.
7.Install the fixture to the bracket with cap nut ⑭.

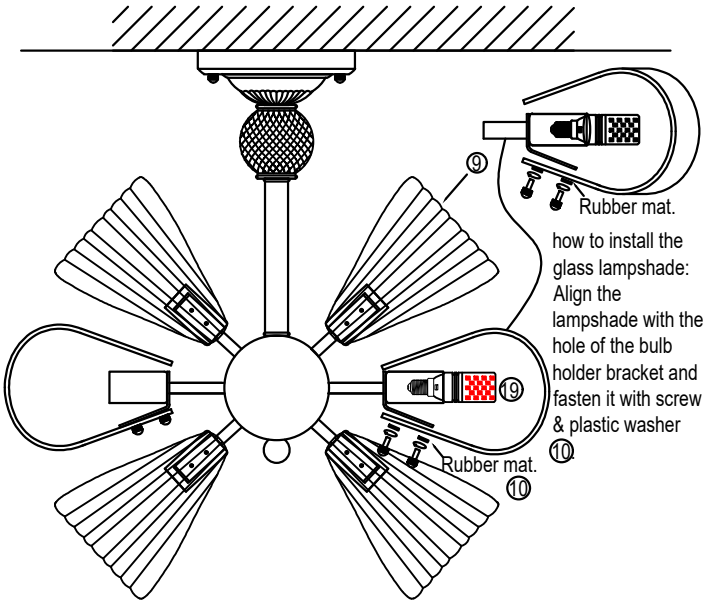

how to install the glass lampshade: Align the lampshade with the hole of the bulb holder bracket and fasten it with screw & plastic washer ⑩

8.Install the bulbs ⑲. (bulbs are not included in the package)
9.Align the lampshade ⑨ with the hole of the bulb holder bracket and fasten it with screw & plastic washer ⑩.

ZJX00332-16
Please read it carefully before installation!!
Attention: Please ensure that the power is disconnected during the installation process!
This type of product can only be installed by professional electricians.