


Features

- Acrylic
- Drop-in or undermount installation
- Molded lumbar support
- 60" (152.4 cm) x 30" (76.2 cm) x 19" (48.3 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- ASME A112.19.7M
- ANSI Z124.1.2
- CSA B45.0
- CSA B45.5
- ASTM E162
- ASTM E662
- UL 1795

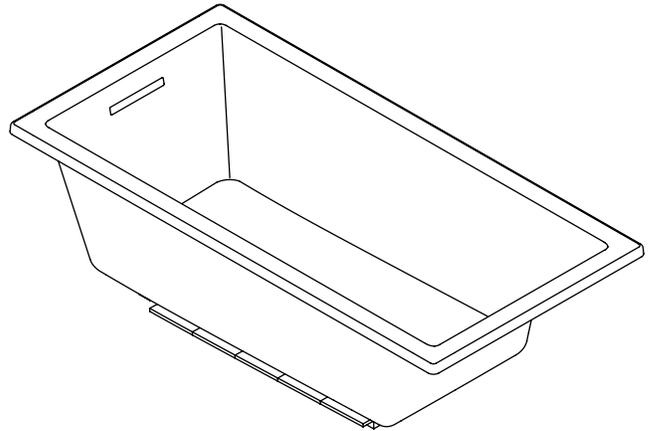

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

| Model | Description | Colors/Finishes | | |
|-----------------------------|--|-----------------------------|-------------------------------------|-------------------------------------|
| K-1121 | Bath | <input type="checkbox"/> 0 | <input type="checkbox"/> Other_____ | |
| Required Accessories | | | | |
| K-7271 | Clearflo slotted overflow brass bath drain OR | <input type="checkbox"/> CP | <input type="checkbox"/> PB | <input type="checkbox"/> Other_____ |
| K-7272 | Clearflo slotted overflow bath drain – PVC pipe | <input type="checkbox"/> CP | <input type="checkbox"/> PB | <input type="checkbox"/> Other_____ |
| Optional Accessories | | | | |
| K-531 | Undermount kit | | <input type="checkbox"/> NA | |
| K-1491 | Pillow | <input type="checkbox"/> 0 | | <input type="checkbox"/> Other_____ |
| K-1601 | Footstop | <input type="checkbox"/> 0 | | <input type="checkbox"/> Other_____ |

Product Specification

The acrylic bath shall be 60" (152.4 cm) in length, 30" (76.2 cm) in width, and 19" (48.3 cm) in height. Bath shall be for drop-in or undermount installation. Bath shall have molded lumbar support. Bath shall be Kohler Model K-1121-_____.

UNDERScore®

Technical Information

| | |
|---|---|
| Fixture*: | |
| Bathing well: | |
| Basin area, bottom | 42-3/8" (107.6 cm) x 20" (50.8 cm) |
| Basin area, top | 54-3/8" (138.1 cm) x 24-5/16" (61.8 cm) |
| Weight | 71 lbs (32.2 kg) |
| To overflow: | |
| Water depth | 15-1/16" (38.3 cm) |
| Capacity | 59.8 gal (226 L) |
| * Approximate measurements for comparison only. | |
| Drop-in cut-out | 59-1/2" (151.1 cm) x 28-1/2" (72.4 cm) |


Installation Notes

Install this product according to the installation guide.


Will comply with **ADA** when installed per Section 607 Bathtubs of the Act.

Floor support under bath must provide for a minimum of 50 lbs/square foot (242 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

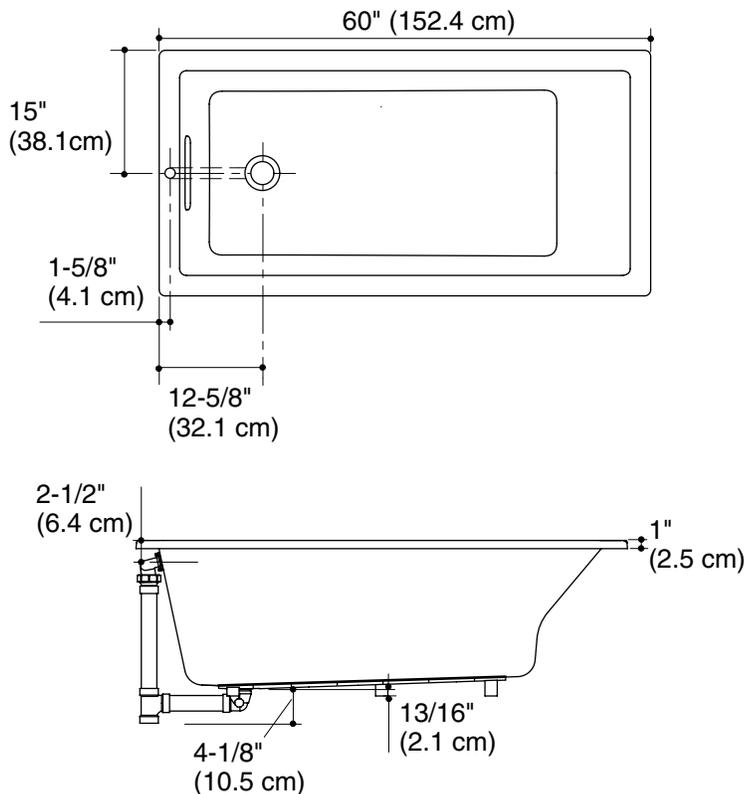

No change in measurement if connected with drain illustrated. (K-7272)

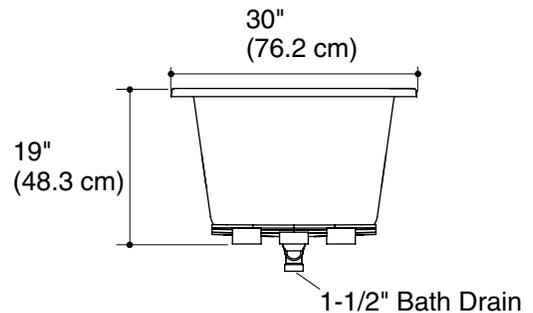

Product Diagram