Safety Precautions

Important! Read all safety precautions and installation instructions carefully before installing or servicing this fixture. Failure to comply with these instructions could result in potentially fatal electric shock and/or property damage.

It is recommended that a certified licensed electrician perform all wiring. This fixture must be wired in accordance with all national and local electrical codes.

Disconnect electrical power from the main fuse box/circuit breaker before installing or servicing any part of this fixture.

Do not handle any energized fixture or attempt to energize any fixture with wet hands or while standing on a wet or damp surface.


Make sure that the power source confirms to the requirements of the fixture.

To reduce the risk of electrical shock, and to assure the proper operation, this fixture must be adequately grounded. To accomplish proper grounding there must be a separate ground wire (green) or bare metal contact (metal conduit) between this fixture and the ground connection of your main power supply panel. If your lighting circuit does not have a ground connection, contact a certified licensed electrician to install one for you.

This fixture is intended to be used for general lighting in dry, indoor locations only.

Clean with dry cloth only. Do not use liquid or cleaning agents on this pendant for risk of shock and it will damage the finish.

INSTALLATION INSTRUCTIONS

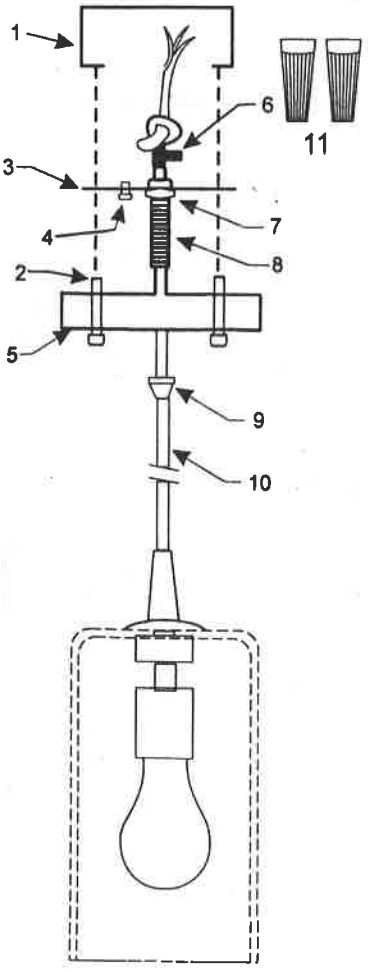

IMPORTANT! DISCONNECT POWER AT MAIN BOX TO PREVENT POSSIBLE INJURY FROM ELECTRICAL SHOCK.
Remove all Parts and parts packages from carton.

Remove the side knob (9) to get free the canopy (5) from the crossbar (3) and adjust the length Of threaded tube (8) which is already attached to crossbar (3) according to side knob (9) to get Fix the canopy (5) to cross bar (3), now take hex nut (7) near the crossbar and tight it to fix the crossbar (3) to threaded tube (8).

Make connections with **WIRE CONNECTORS (11). CAUTION: BE CERTAIN THAT NO BARE WIRE STRANDS ARE EXPOSED OUTSIDE OF THE WIRE CONNECTORS.**
FOR BLACK OR WHITE CORD (10) connect WHITE cord wire to WHITE supply wire ; BLACK cord wire to BLACK supply wire. Attach GREEN GROUND WIRE and ground wire from outlet box to the CROSSBAR (3) with green GROUND SCREW (4) and tighten.
Carefully push wires and connections up into OUTLET BOX (1)

From Canopy the wire length should be 6"attached cord grip (6) to the threaded tube (8) and determine hanging length of CORD and tight the screw of cord grip (6) accordingly thereafter tie snug KNOT over the cord grip (6).
Attach CANOPY (5) to the OUTLET BOX (1) with OUTLET SCREWS (2) provided with packing using the slots in the CANOPY (5) Passing through the Slots in CROSSBAR (3) to the OUTLET BOX(1).
Raise CANOPY (5) up against ceiling to cover OUTLET BOX (1) and secure to THREADED TUBE (8) with KNOB (9).