




## TOILET TANK LINER INSTRUCTIONS

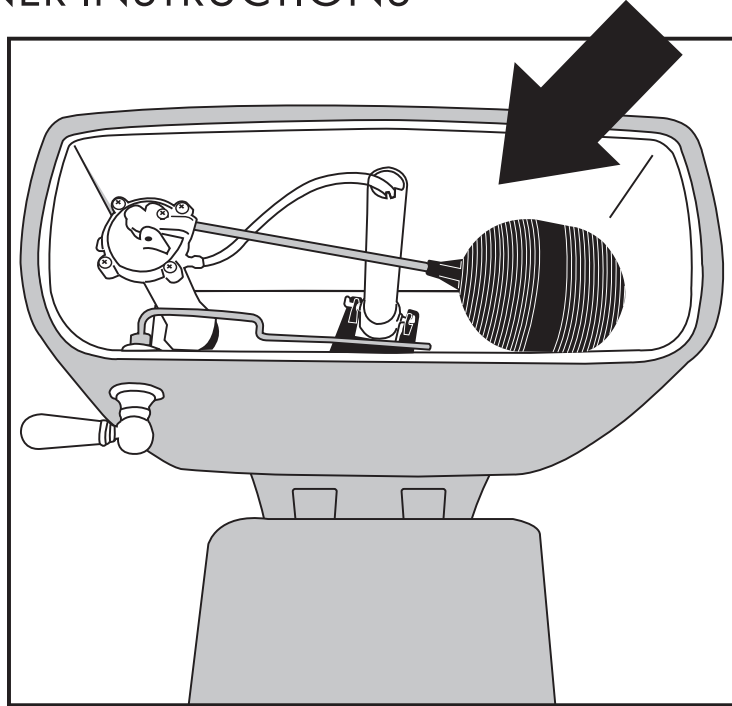

### Instructions

1. Turn off water supply to toilet and flush to drain the tank.
2. Using a sponge remove any excess water from the bottom of the tank.
3. Removal of the fill valve and/or tank lever is not necessary but may make installation easier in toilets with a smaller size tank.
4. Unroll the foam liner, without removing the backer, dry fit it around the walls of the tank. Mark the liner where it needs to be cut, remove from the tank and cut liner. Also mark any obstructions, such as the tank lever, where liner material may need to be removed to ensure a good fit. Note: This kit is not designed to cover the bottom of the toilet tank.
5. Spray the inside walls of the tank with glass cleaner, this will keep the adhesive from sticking and allow you to move the liner once in place.
6. Starting in an exposed area, peel back a few inches of the backer and adhere the liner to the tank wall. Slowly work your way around the tank peeling the backer as you go will help ensure the liner does not stick prematurely or where you don't want it to. Smooth as you go to eliminate air bubbles.
7. If necessary reinstall fill valve and tank lever. Turn on water supply to the toilet and flush to ensure all toilet parts move freely and do not bind on the liner. If necessary remove any liner material that may interfere with the toilet's function.

### LIMITED WARRANTY

If this Keeney product, when used for its intended purpose, fails due to defects in materials or workmanship over a period of one (1) year from the date of original installation, return the item to The Keeney Manufacturing Company (at your expense) where, at our option, we will exchange or recondition the item free of charge. We require a proof of purchase. For full warranty details visit [keeneymfg.com/warranty](http://keeneymfg.com/warranty)