

E2-WPF-WP10-40W-30/40/50K-M-P

FULL CUT-OFF WALL PACK with 2-in-1 Motion Sensor / Photocell and CCT Tunable


NEW

Good heat dissipation, light weight, cost-effective and low transportation cost.



UV-resistant polycarbonate refractor lens.

Plug & Play sensor with microwave and daylight harvesting function, 2-in-1 sensor.

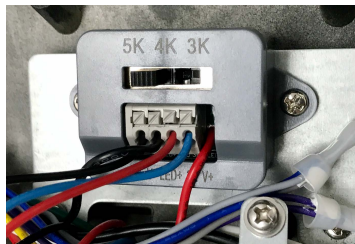

PRODUCT DESCRIPTION:

E2 LIGHTING'S Full Cut-Off Wall Pack is a highly efficient, multi-function fixture that provides a long-lasting and energy saving lighting solution. This fixture comes equipped with a Plug & Play 2-in-1 microwave motion sensor and daylight harvesting photocell function; programmable with optional remote. Internal CCT color temperature tunable switch. The rugged housing offers advanced thermal management and protection against outdoor environments without compromising aesthetics.

FEATURES AND STANDARDS:

- ETL/cETL/DLC premium certificate.
- Easy installation.
- Wet location rated IP65.
- Durable die-cast aluminum housing.
- Photocell and motion sensor options.
- UV-resistant polycarbonate refractor lens.
- Type III distribution optics standard/ Other optics available by request.

APPLICATION:

Outdoor wall-mount applications: building facade, commercial, industrial, retail, hospitality buildings that demand long service life and low maintenance.

TESTED DATA:

- Input Power - 40W
- Lumen - 5200lm
- Efficacy - 130LM/W ($\pm 10\%$)
- Input Voltage - 120-347VAC
- Color Temperature - 3000K-4000K-5000K
- THD - $< 20\%$
- Dimmable - 0-10V
- LED Brand - Lumileds
- LED Type - 3030
- LED QTY - 48 pcs
- Viewing Angle - Type III
- Operating Temperature - 86°F to 113°F (-30°C to +45°C)
- Operating Humidity - RH $< 90\%$
- Color Rendering Index - Ra > 70
- IP Rating - IP65
- Certification - cETL/ETL/DLC Premium
- Housing - Die-cast Aluminum
- Life Time - $> 50,000$ Hrs
- Warranty - 5 Years



3CCT Tunable



5000K

4000K


3000K



E2-WPF-WP10-40W-30/40/50K-M-P FULL CUT-OFF WALL PACK

Product Number	Wattage	Color	Certifications	Dimmable	Voltage	Lumens	Working Hours	CRI
E2-WPF-WP10-40W-30/40/50K-M-P	40W	30/40/50K	UL & DLC® Premium	0-10V	AC100-277V	5200 lm	50,000hrs	Ra>70

DIMMENSIONS:

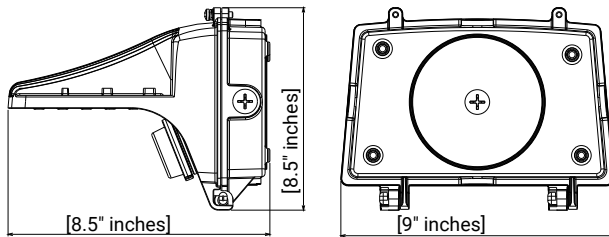

30-40W

Optional Remote

