




Product Installation Instructions

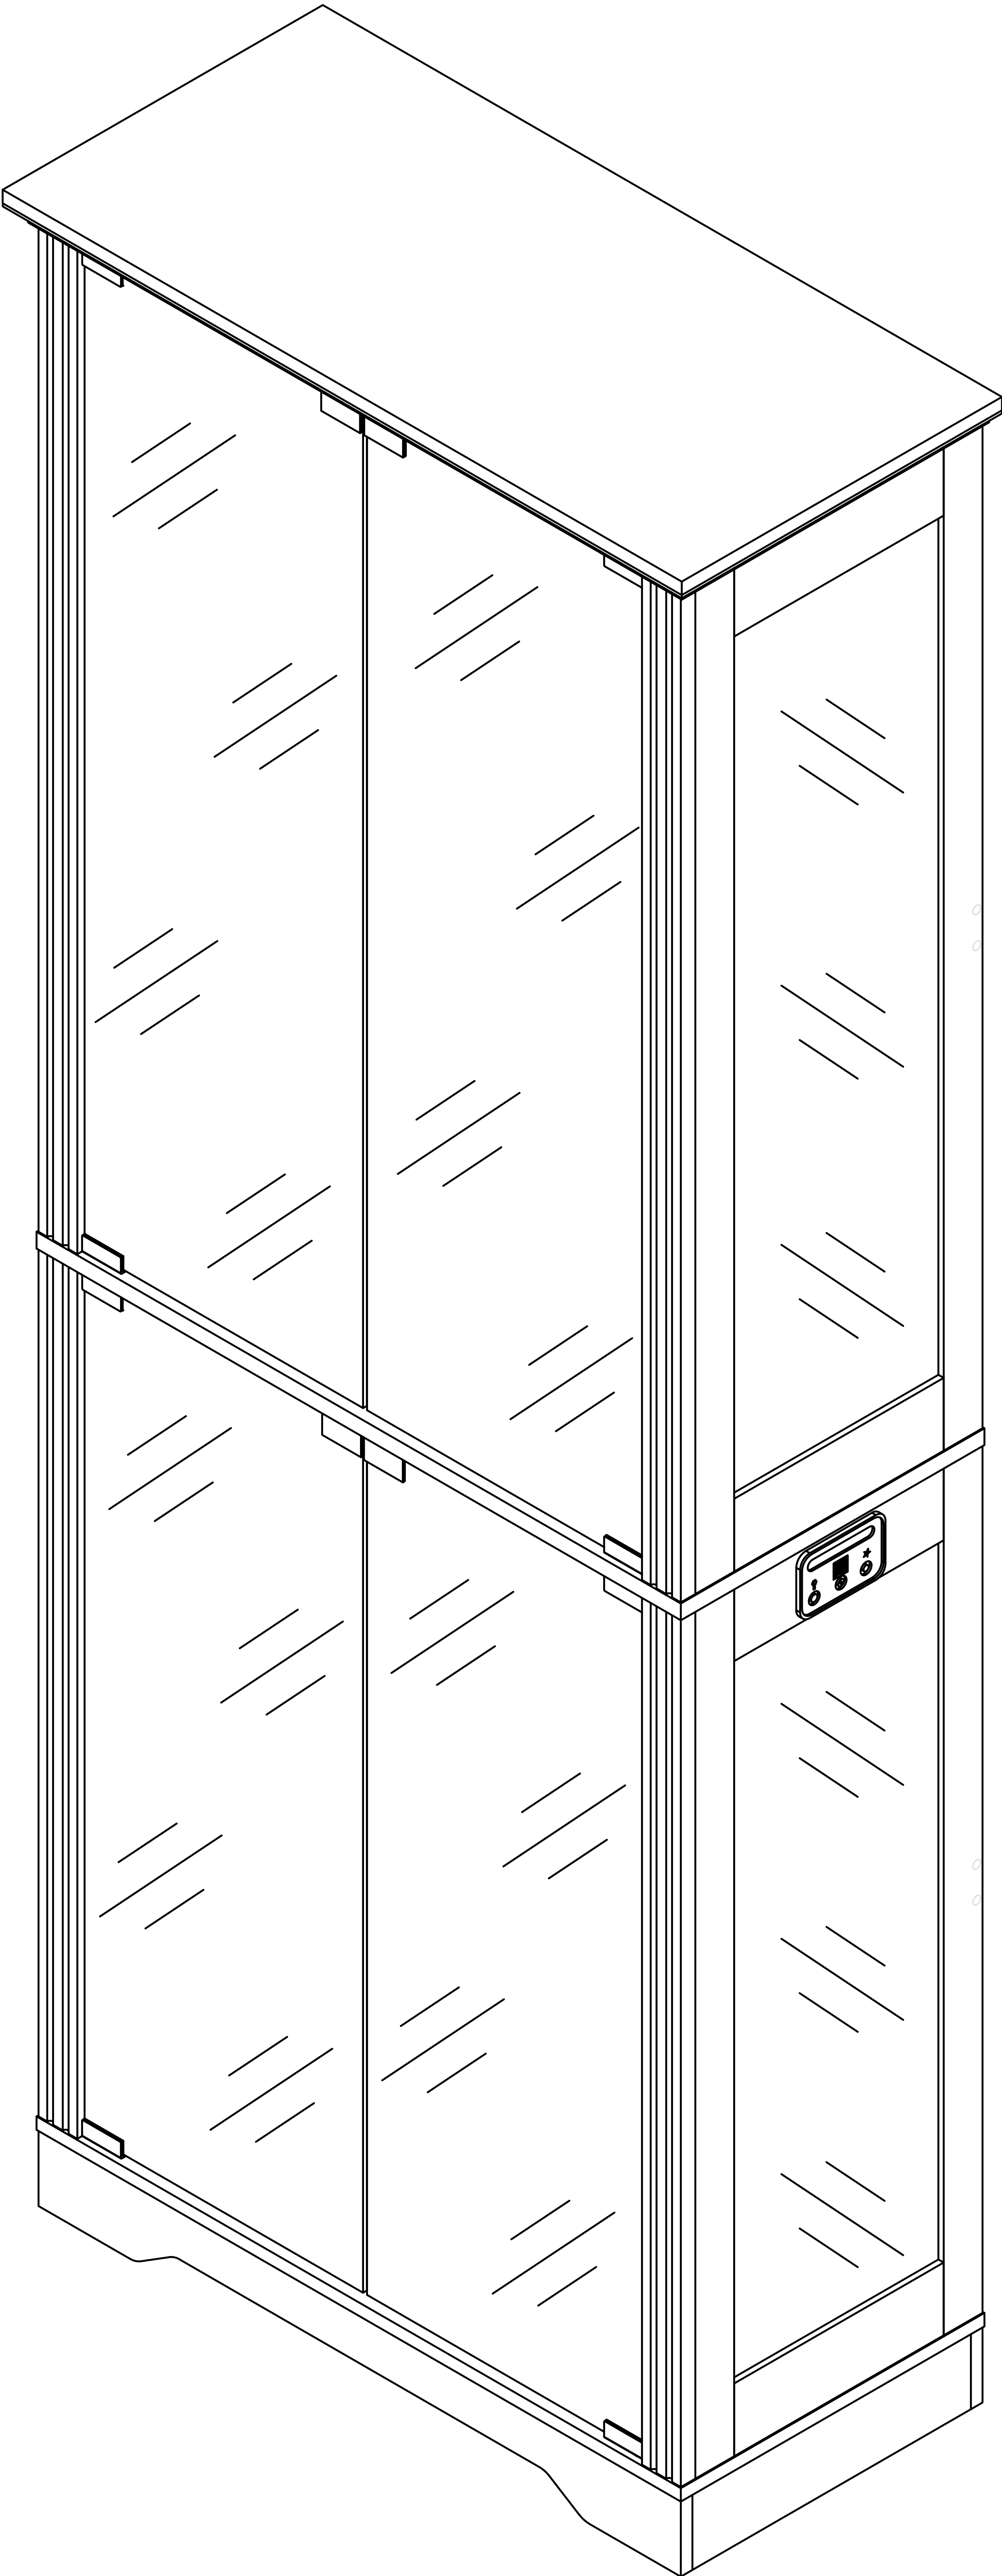


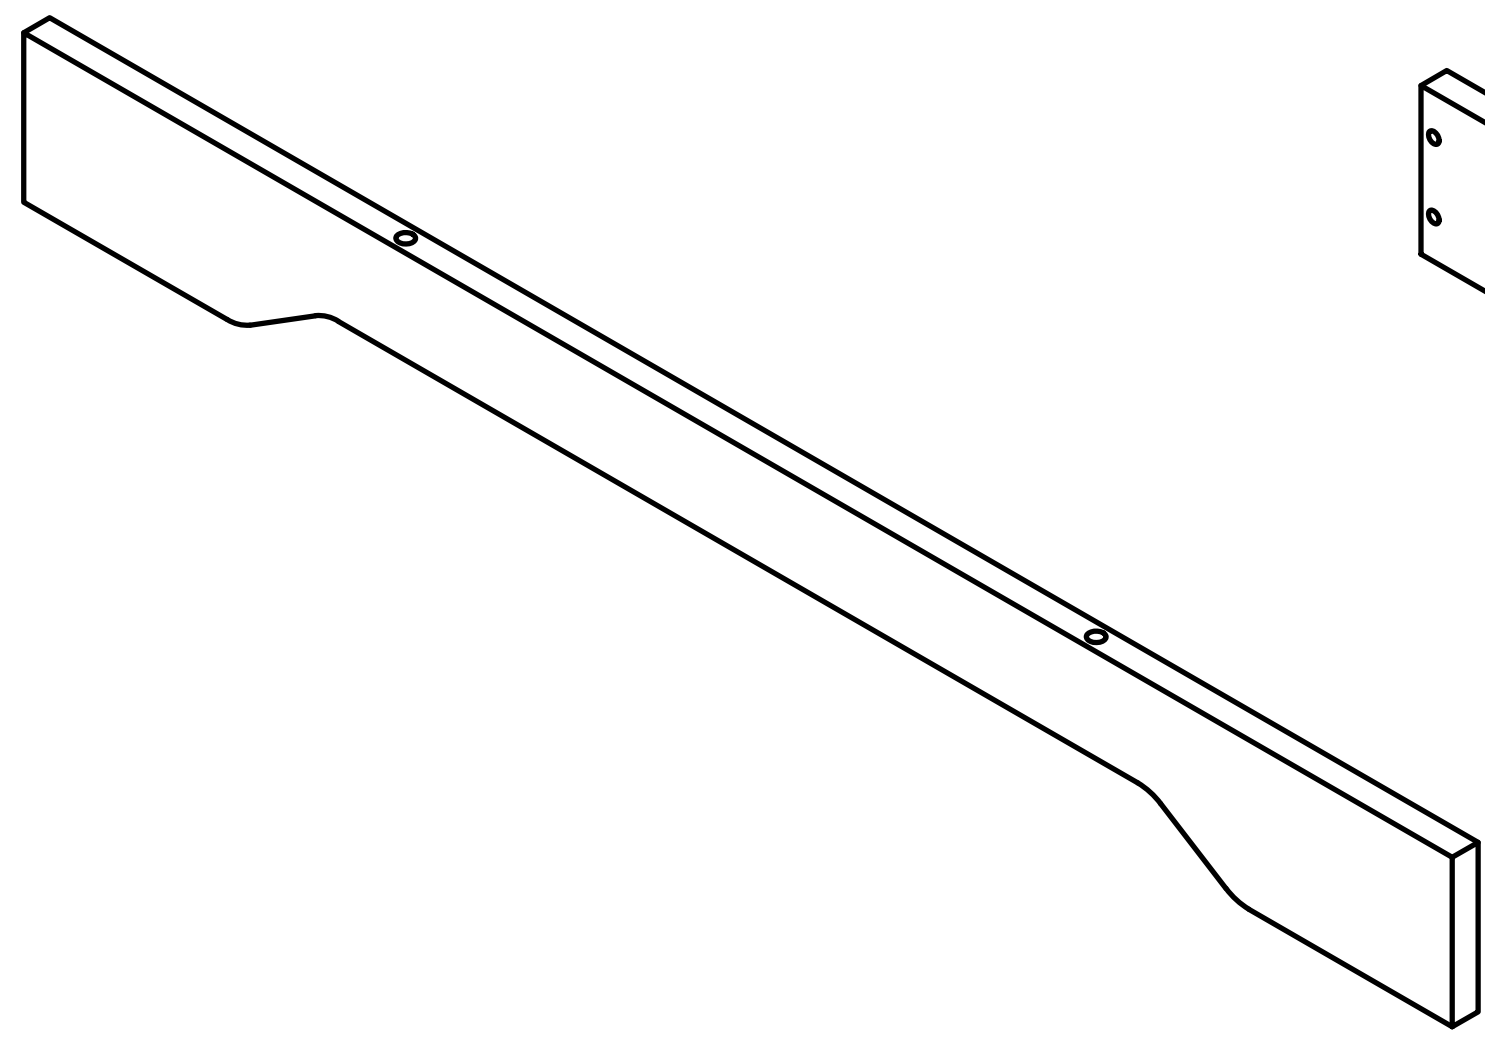


Ax1

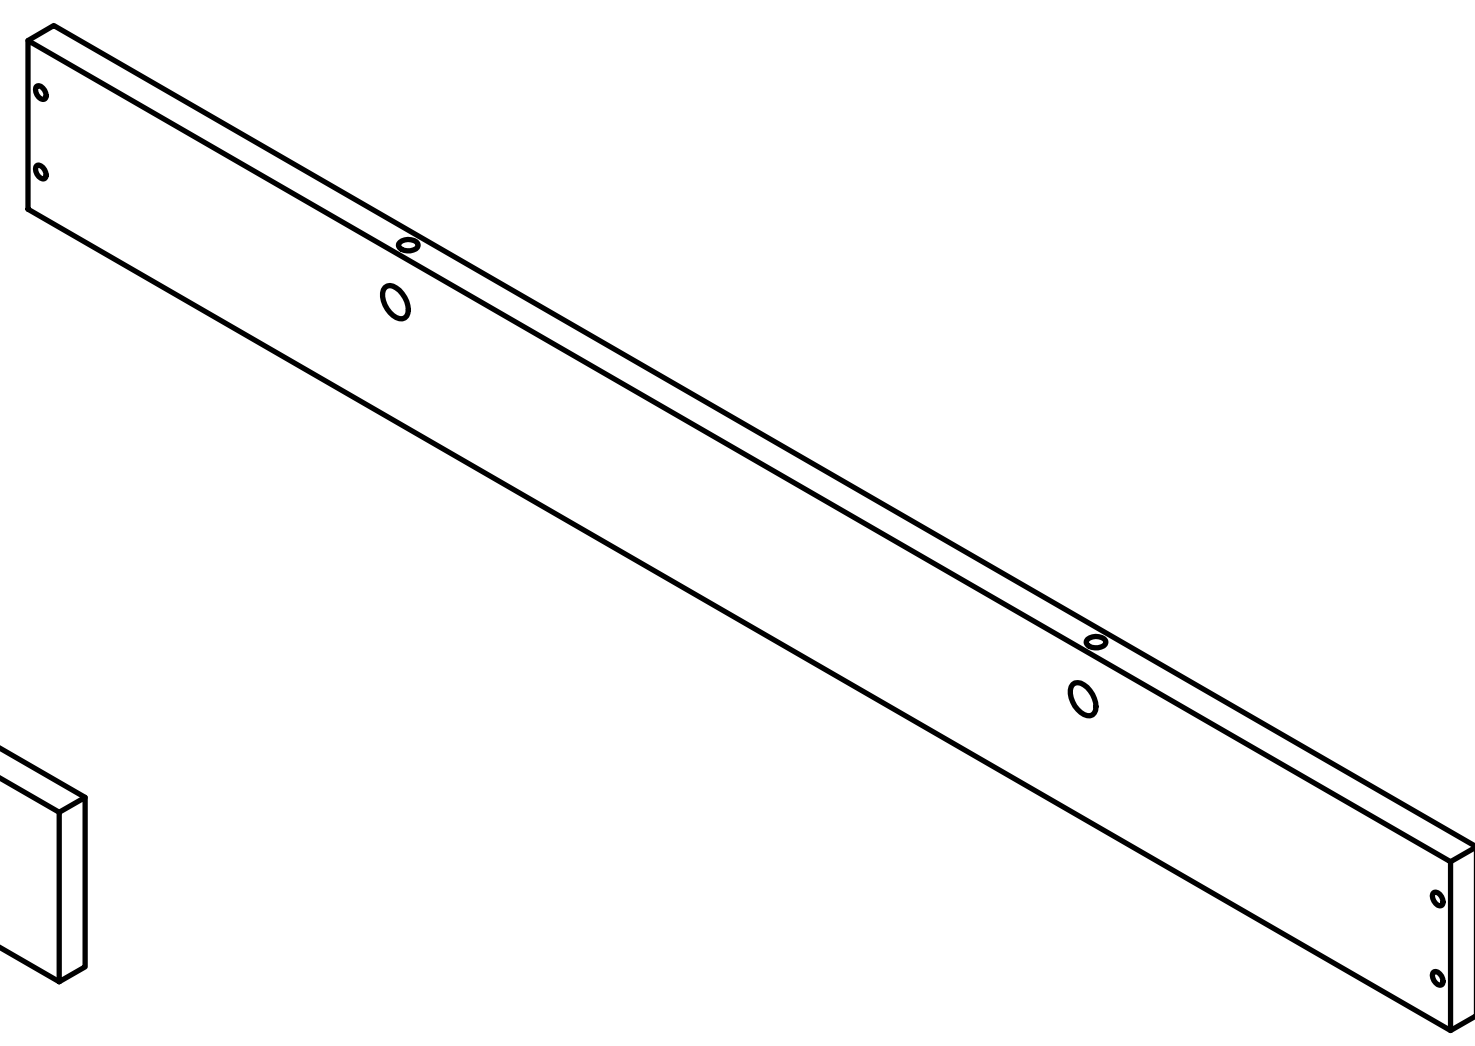


Bx1

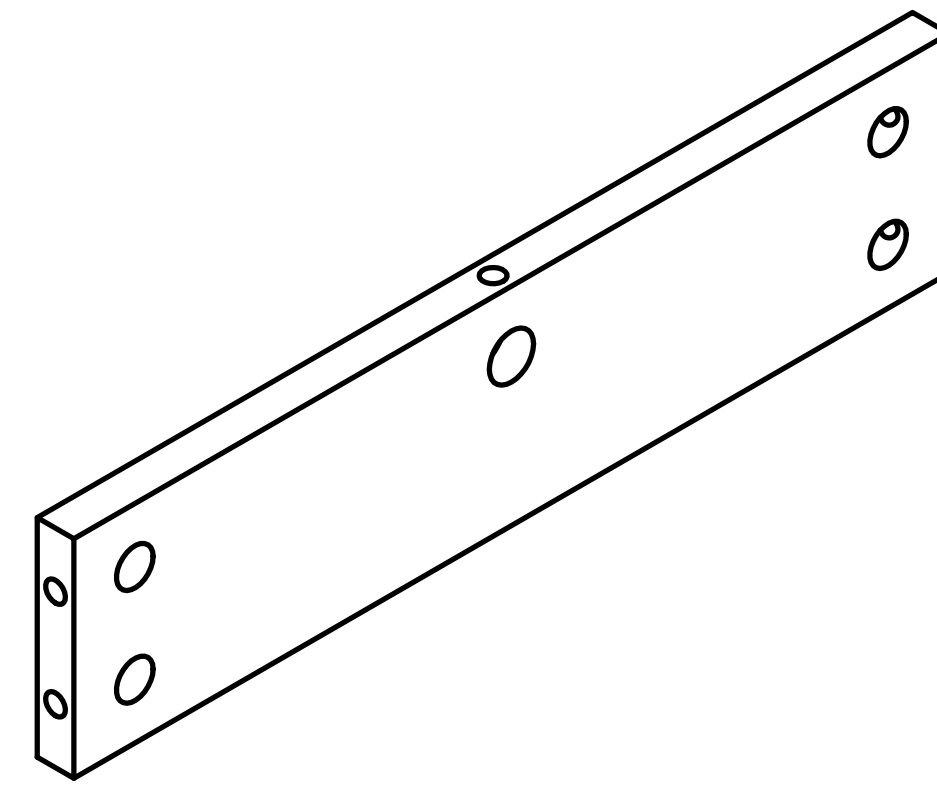


Cx2

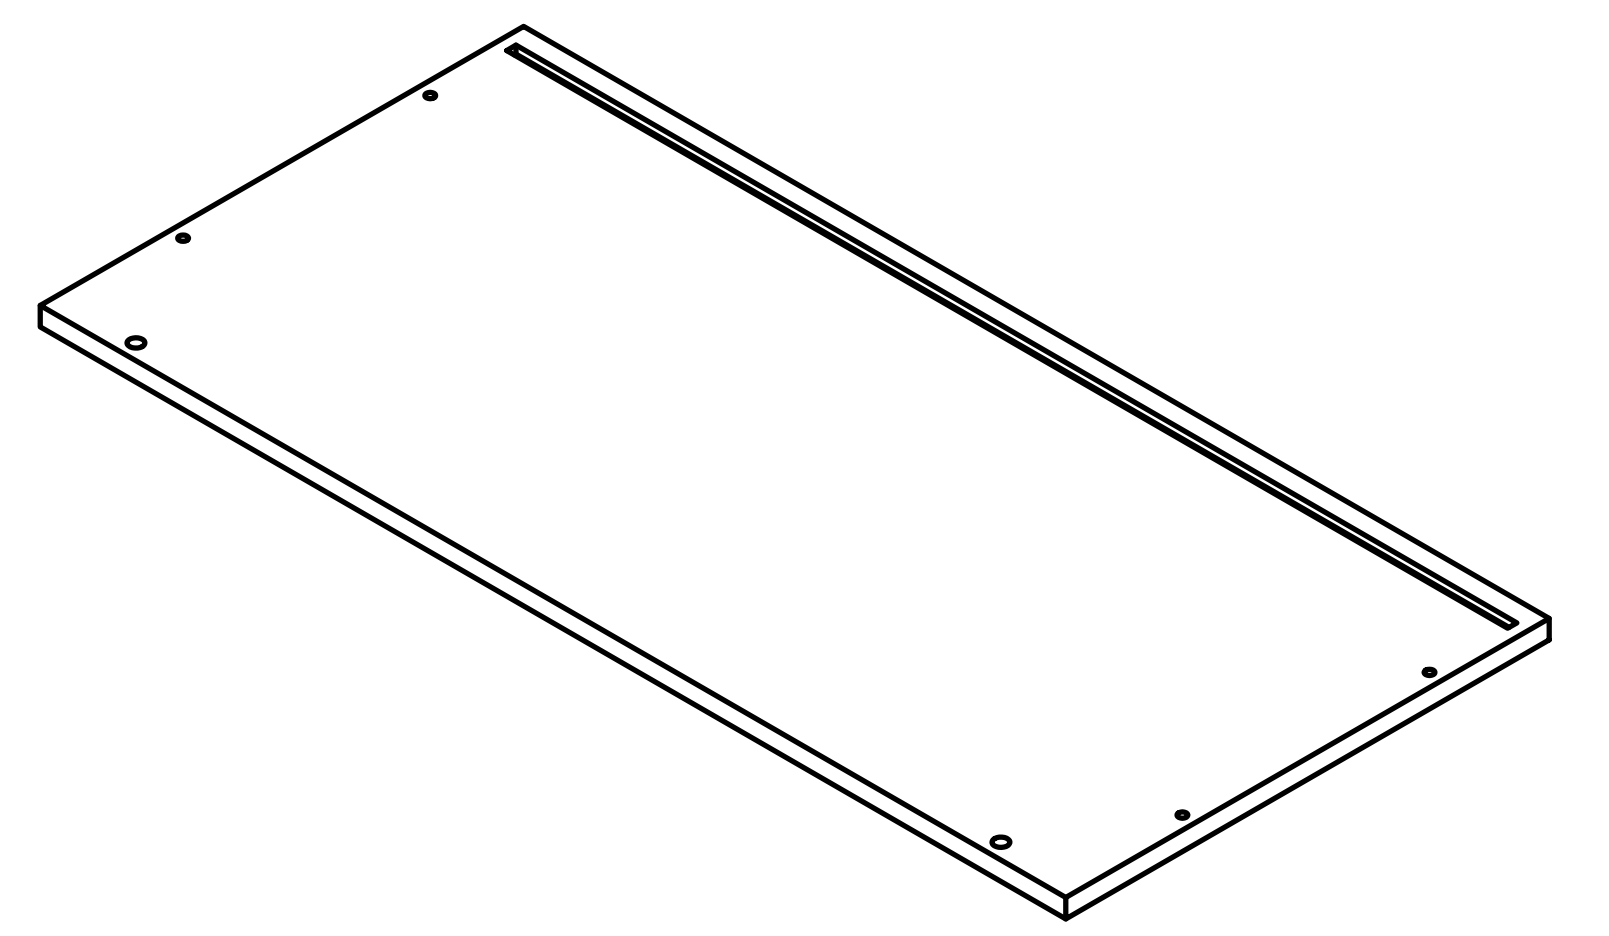


Dx1

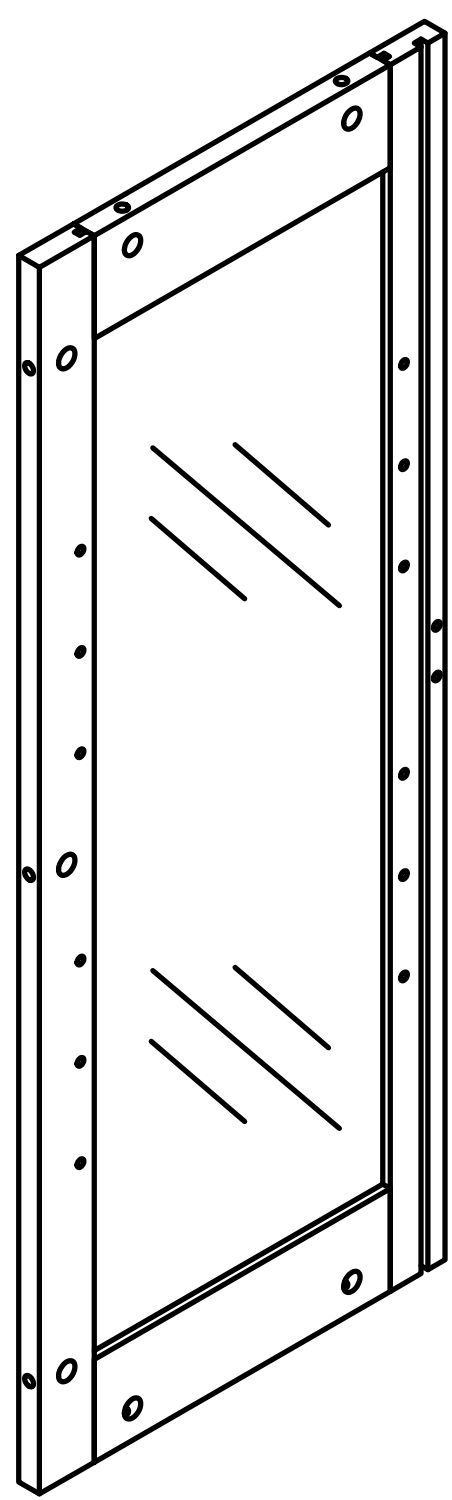


Ex1

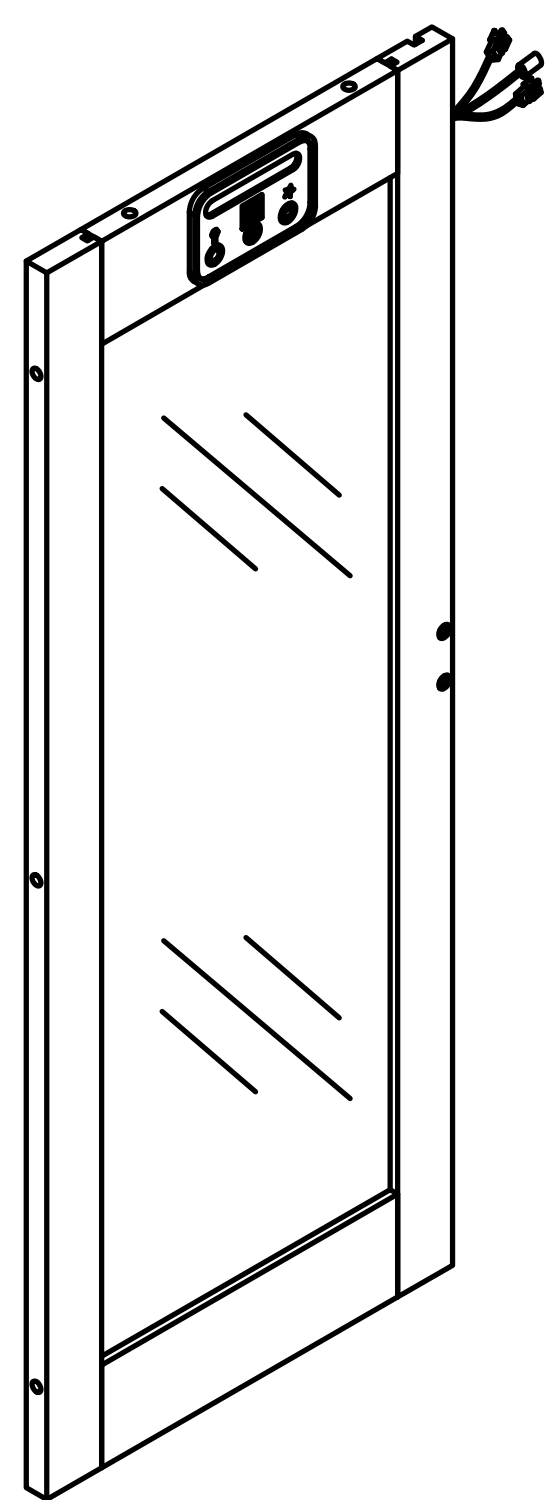


Fx1

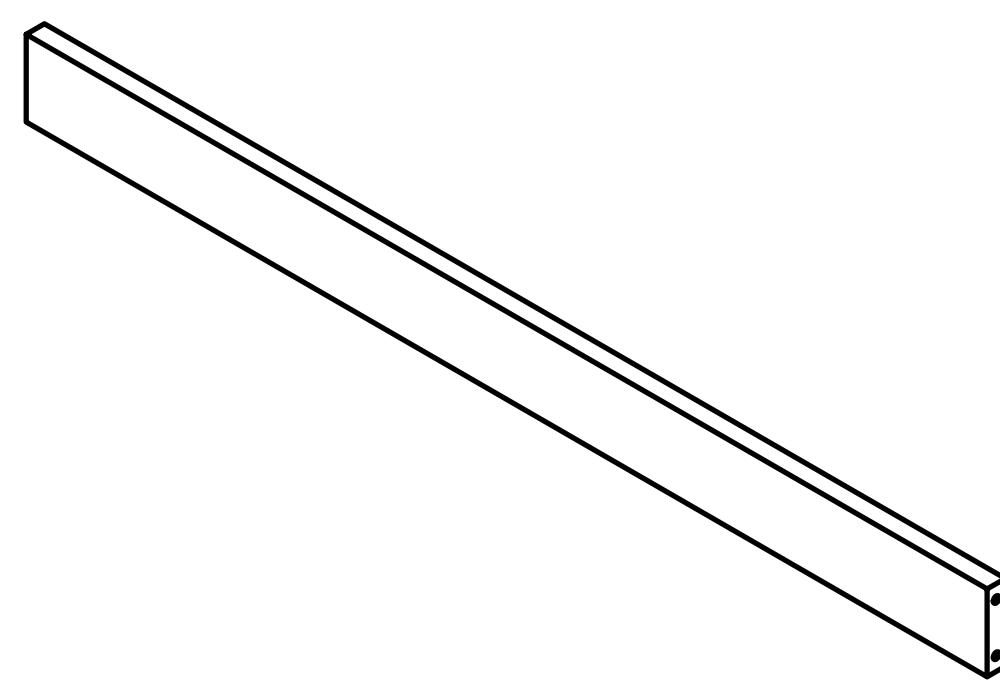


Gx2

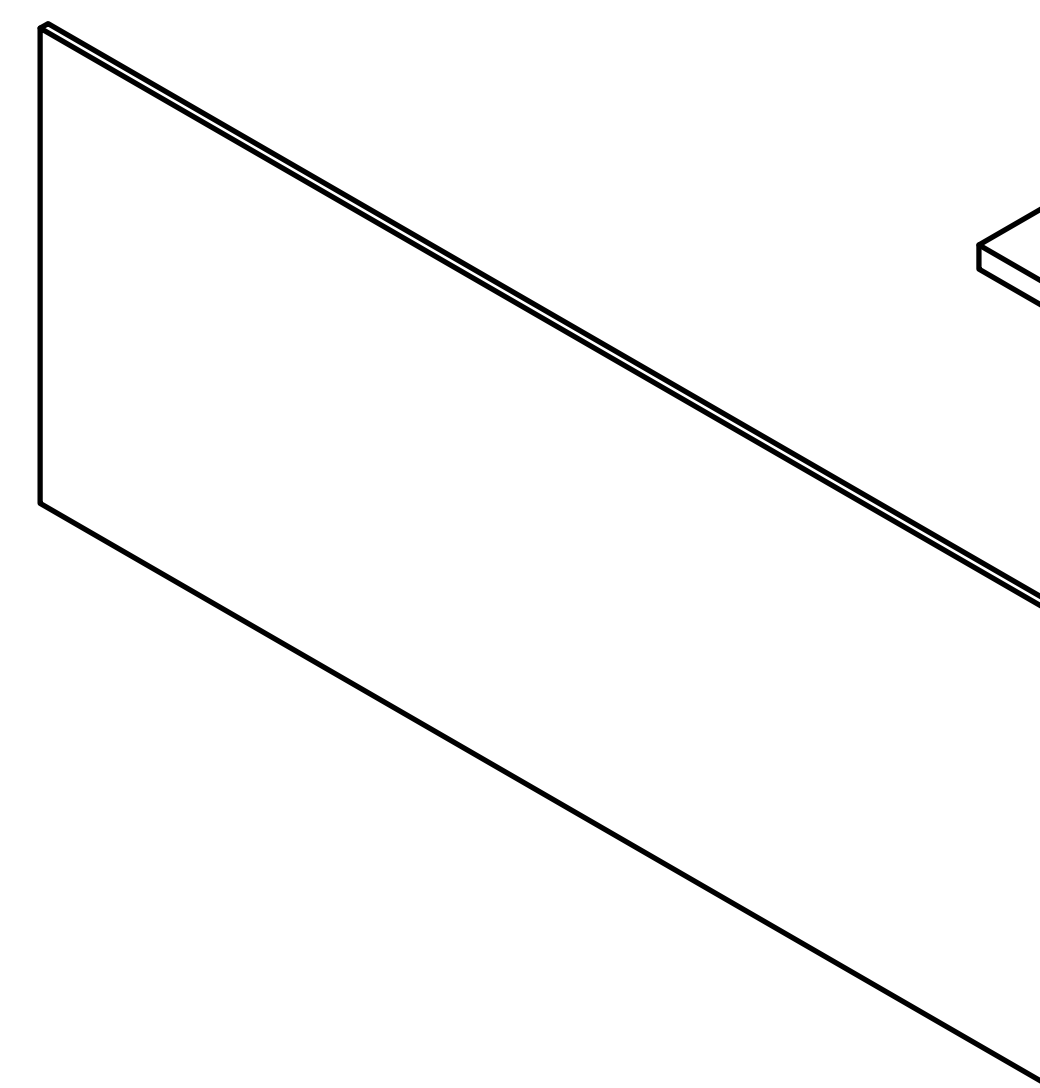


Hx3

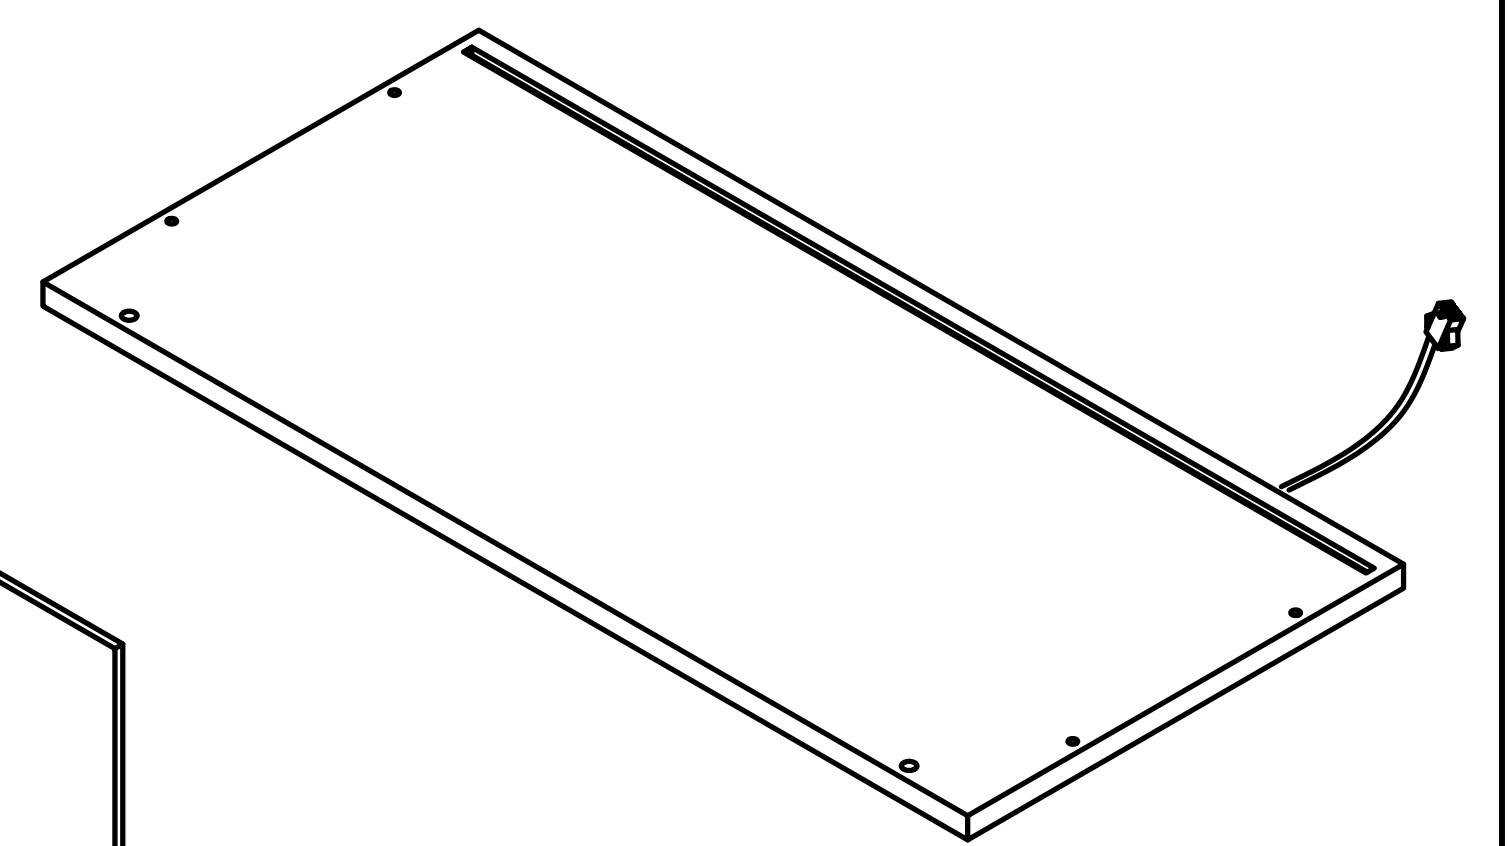


Ix1

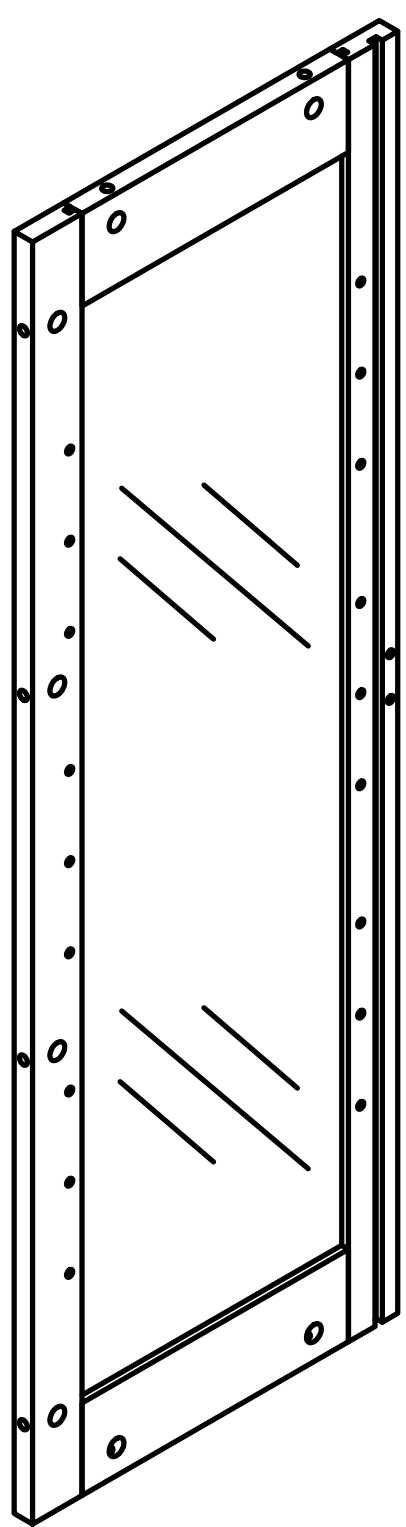


Jx2

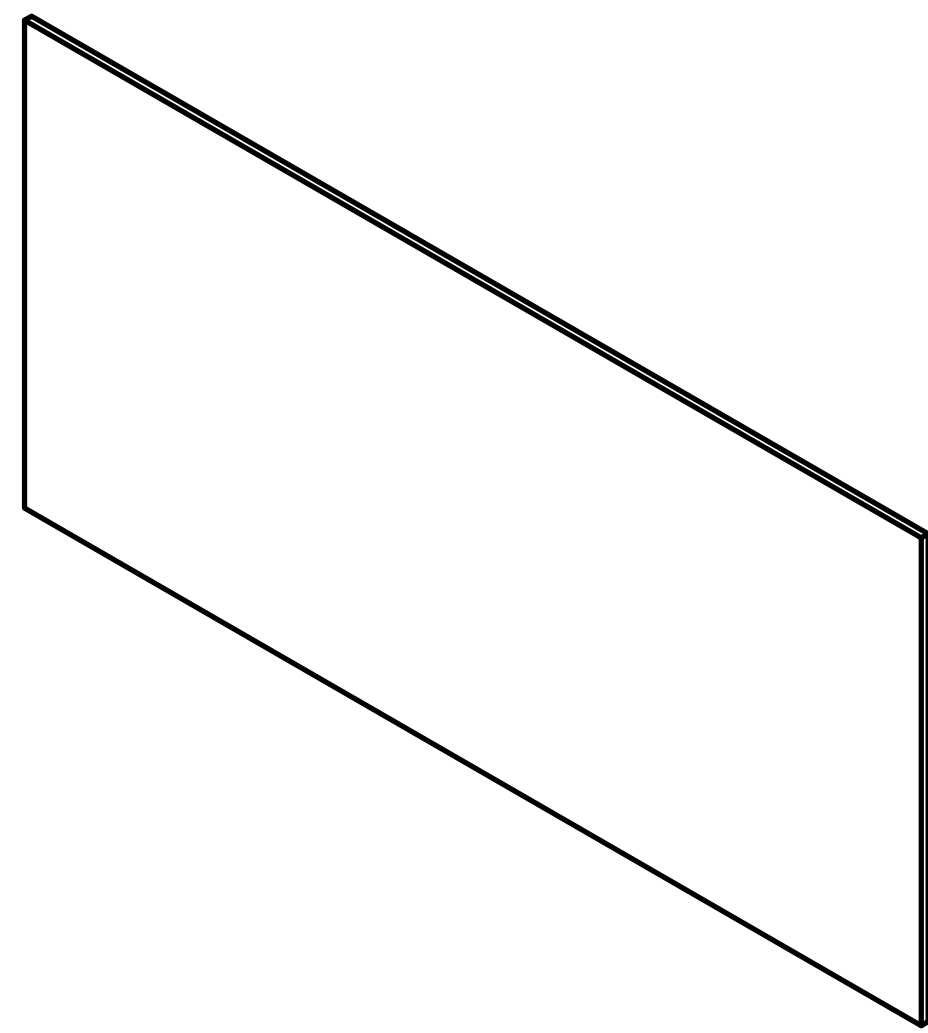


Kx3

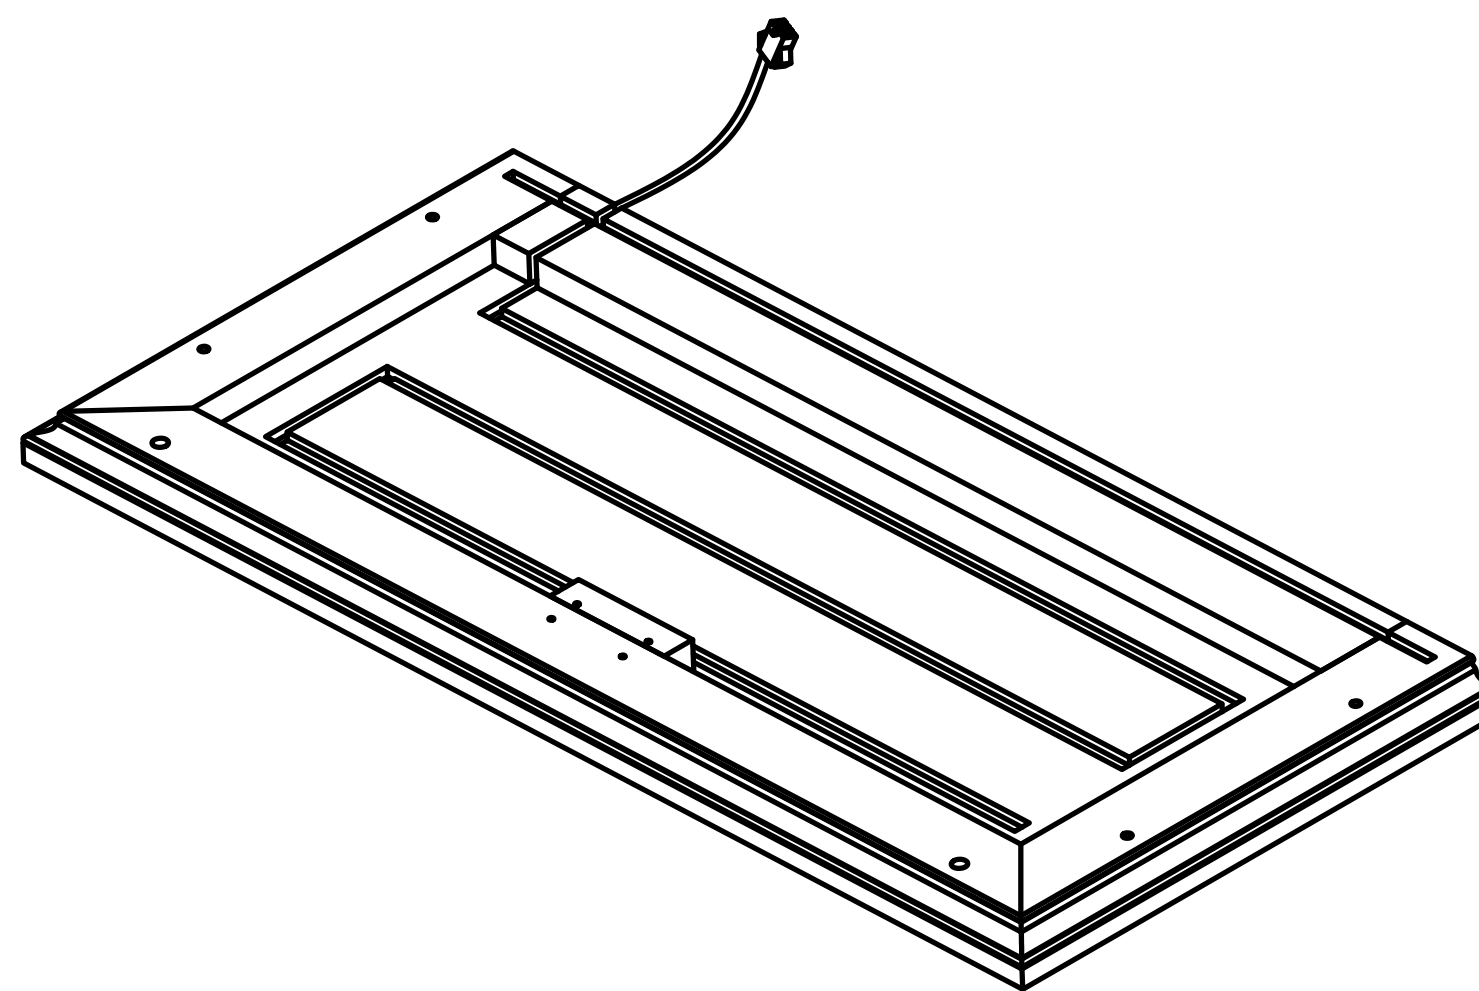


Lx1

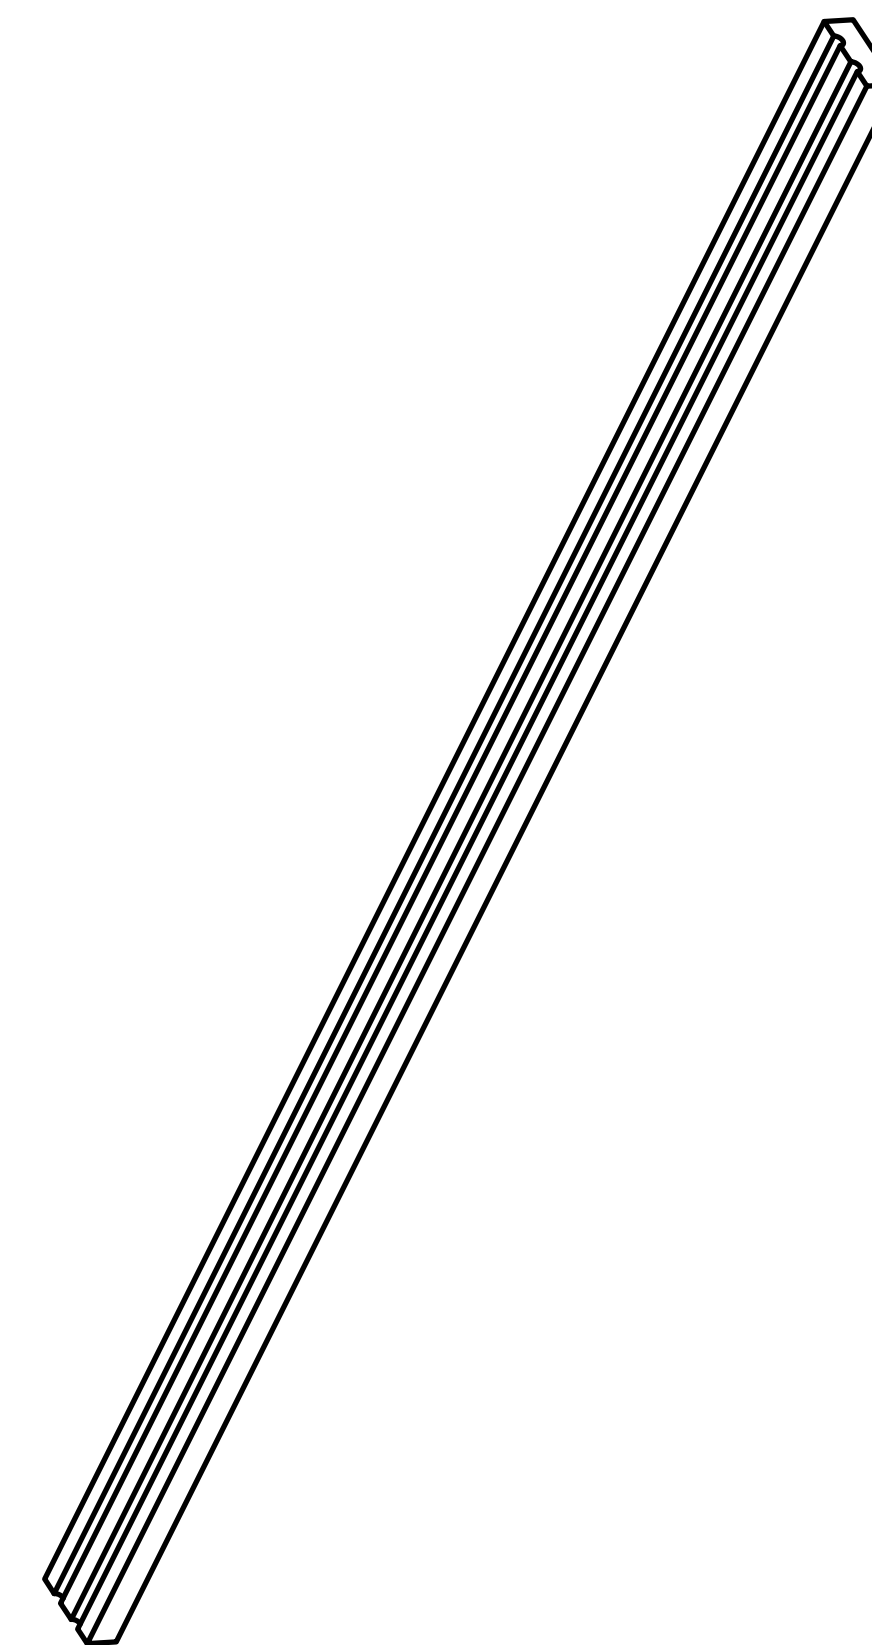


Mx2

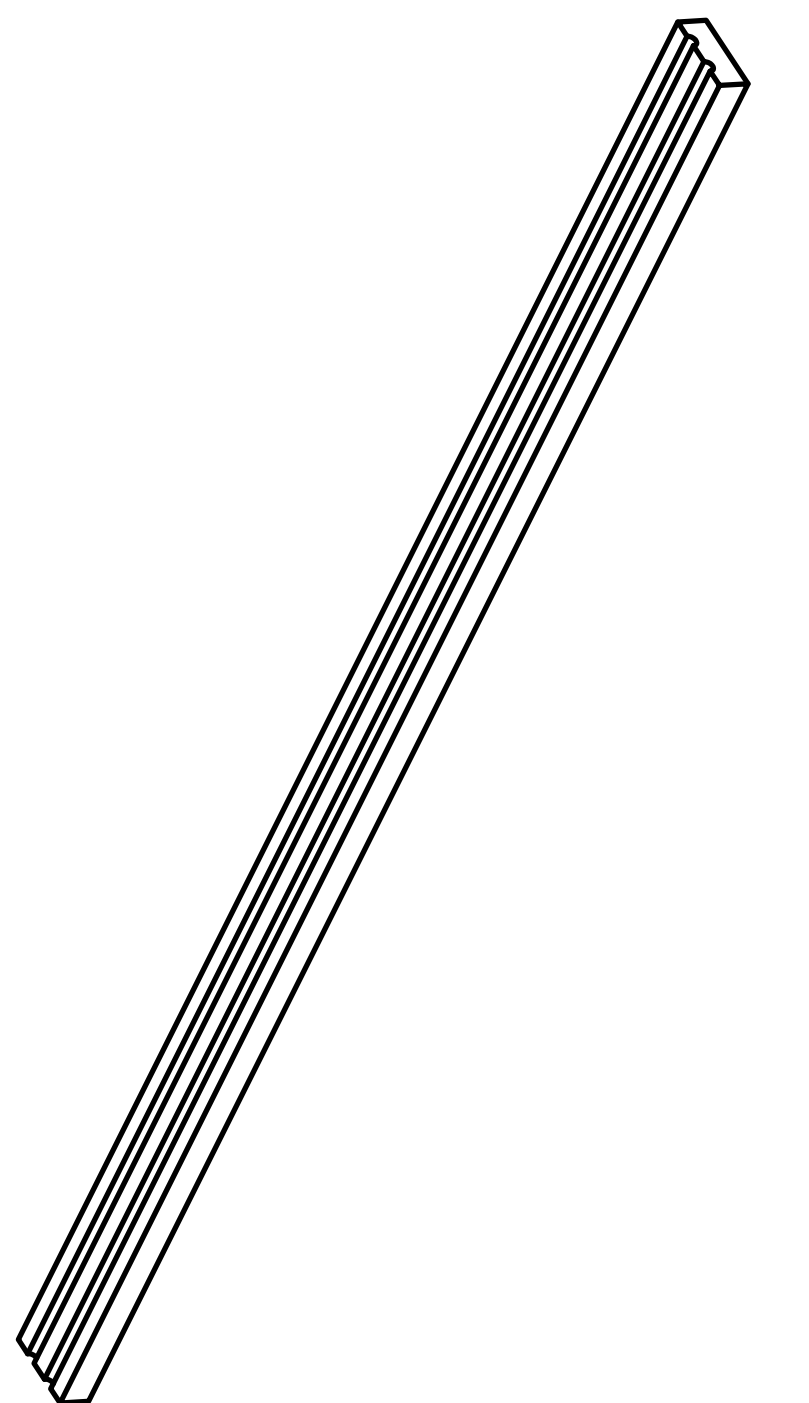


Nx2

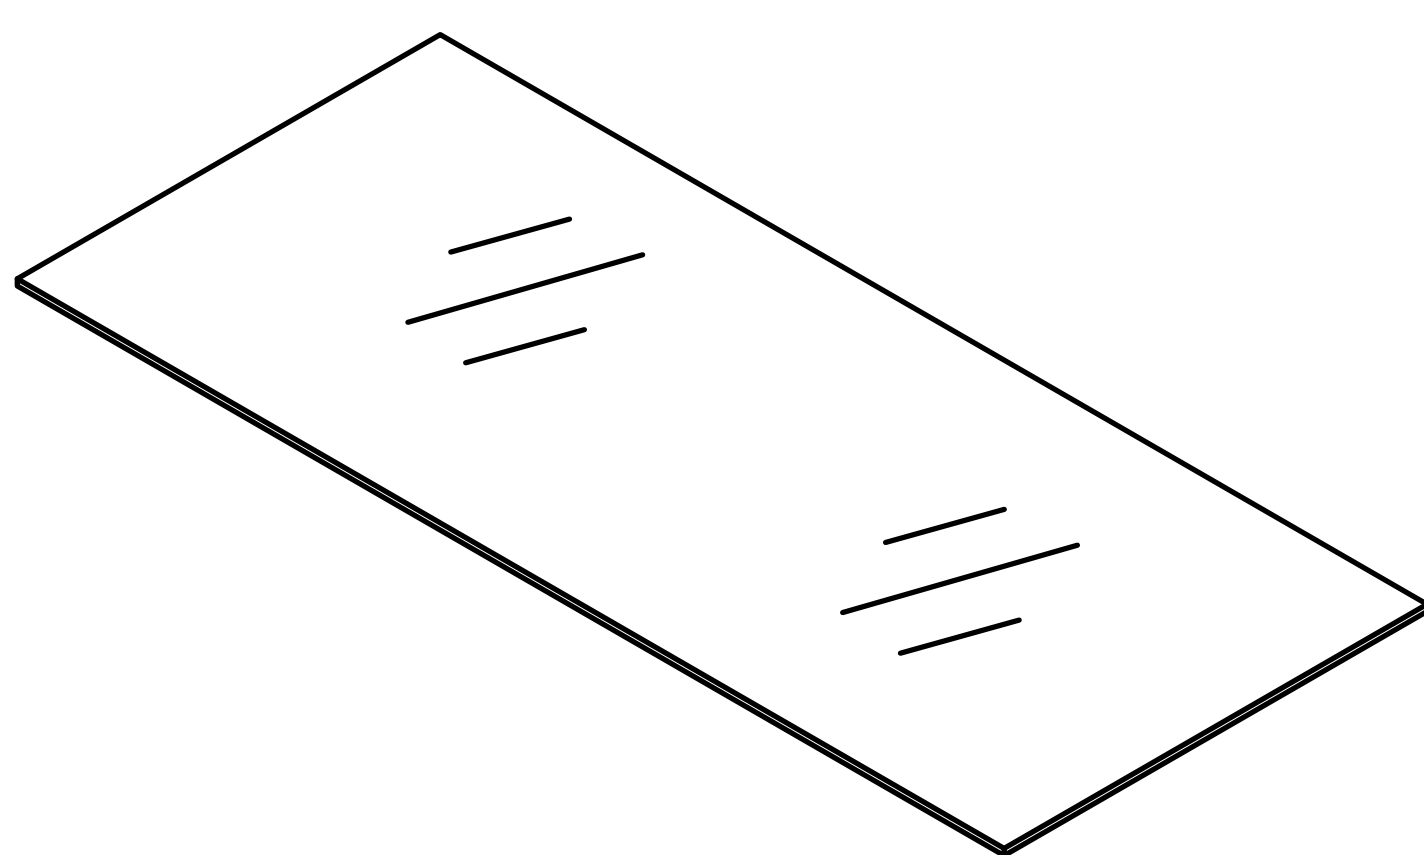


Ox5

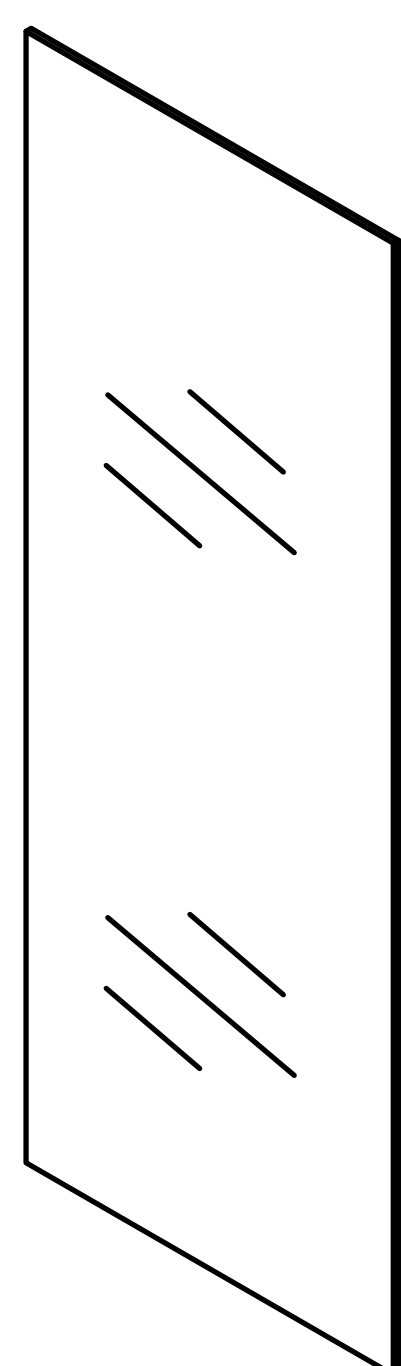


Px2

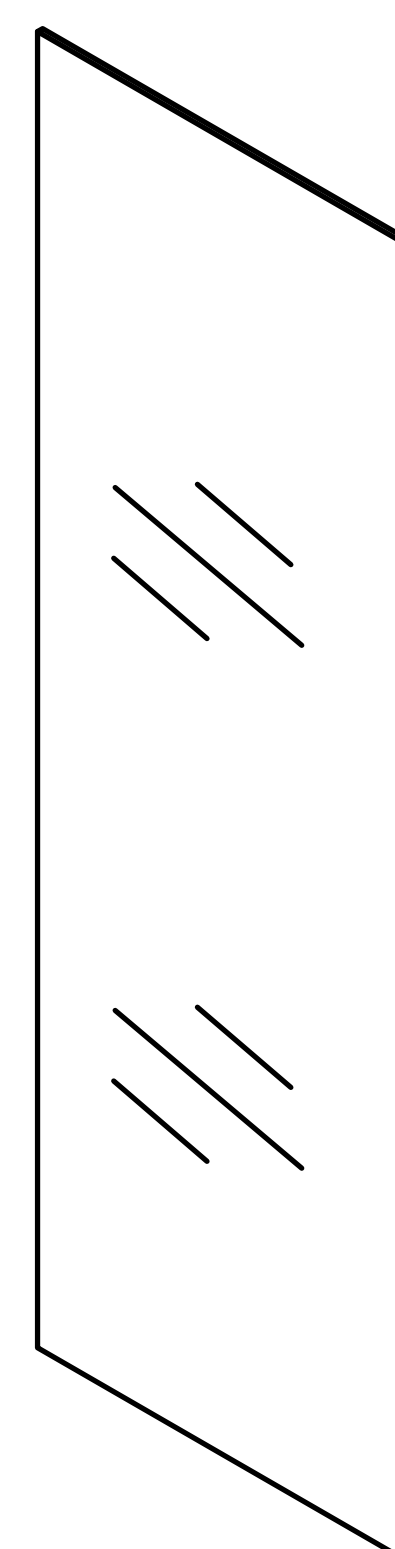

















Qx2

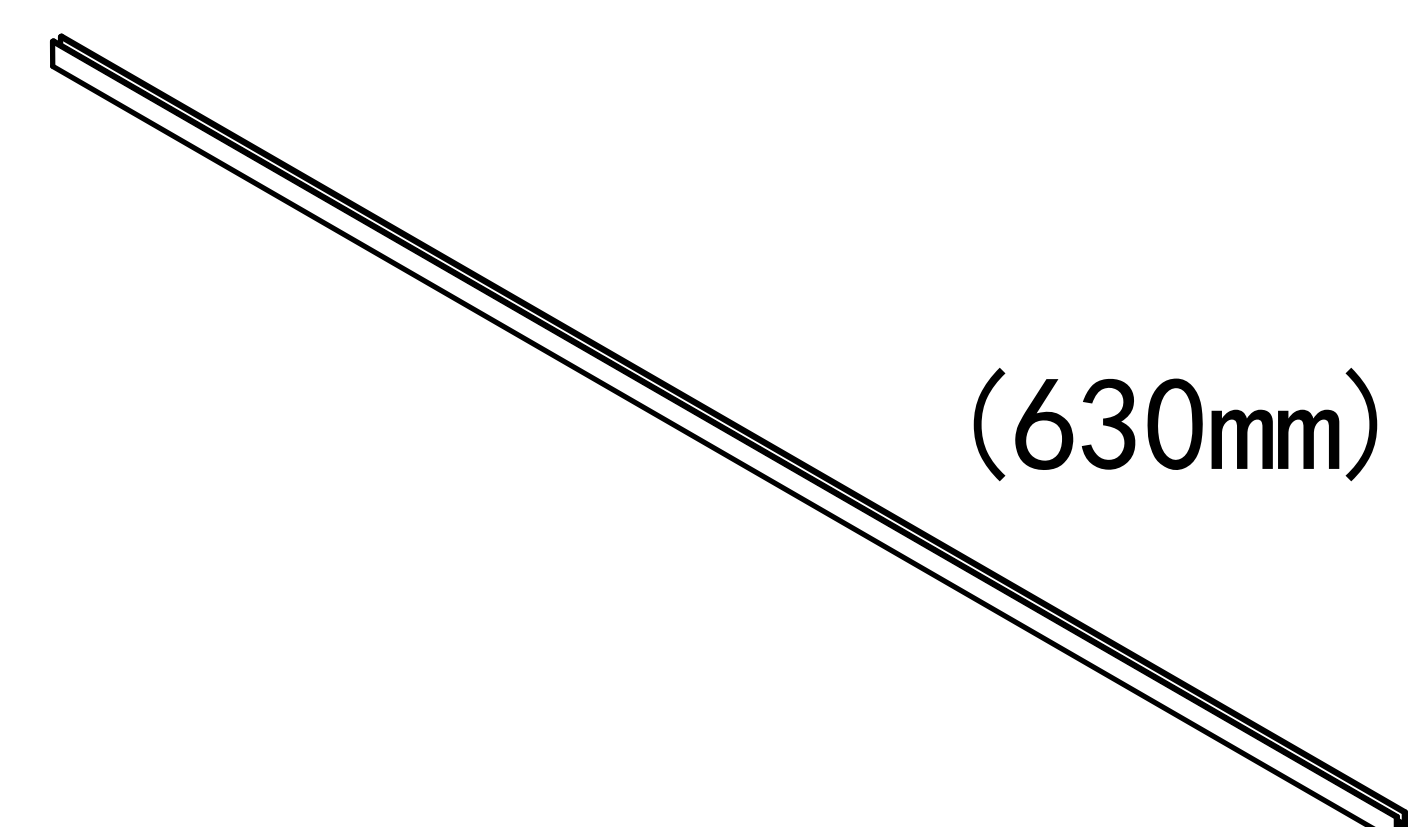


Rx4

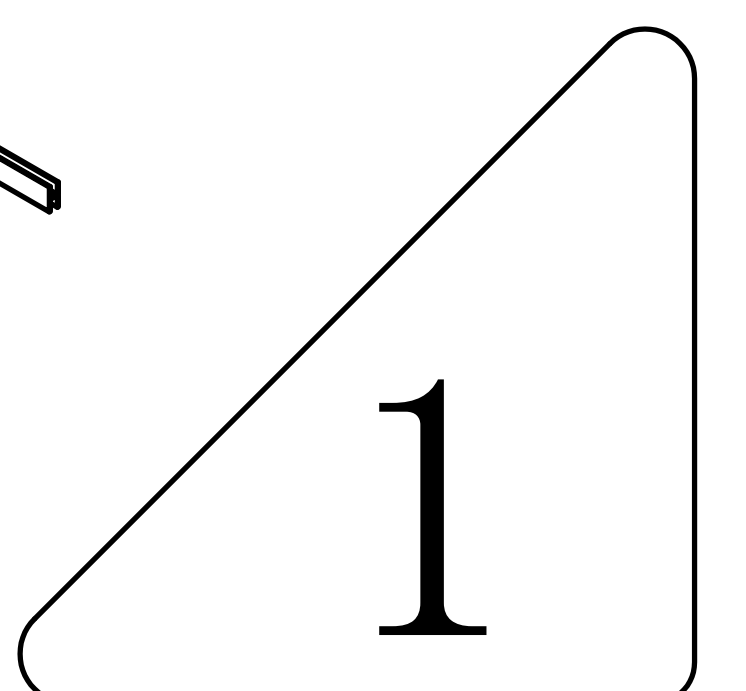

1

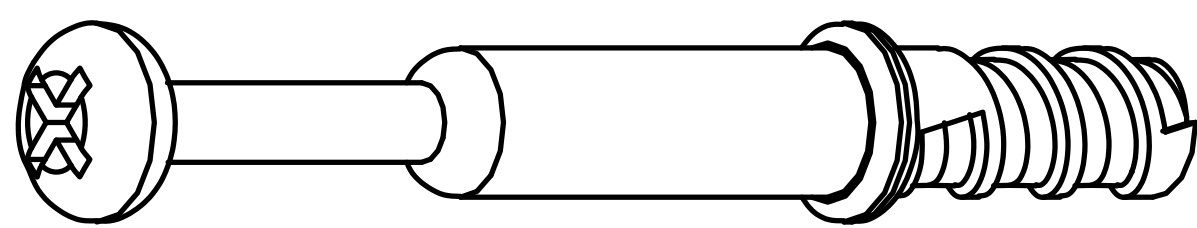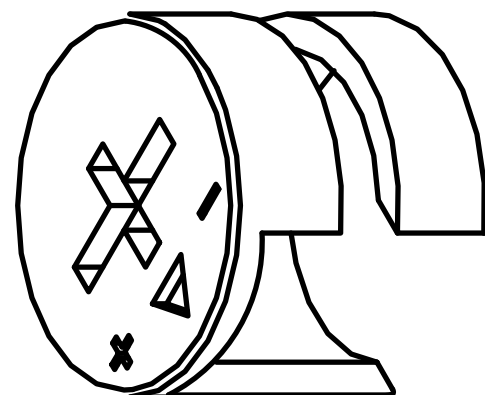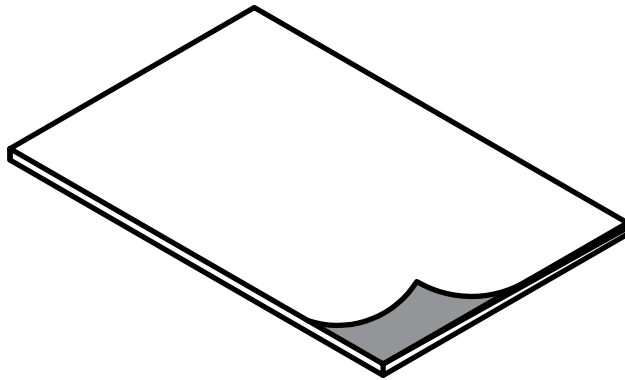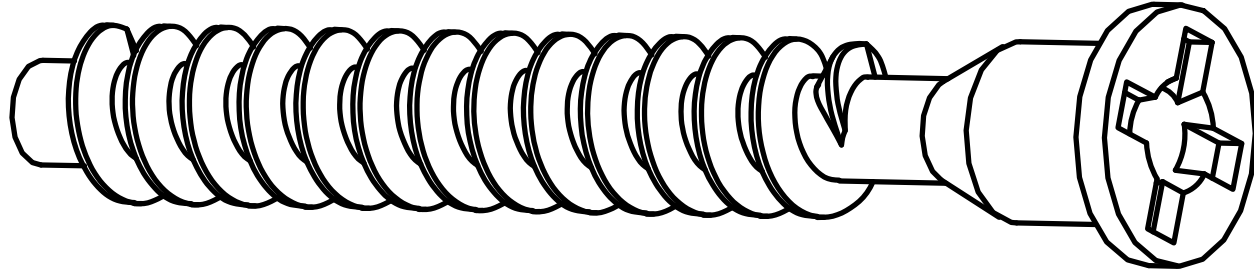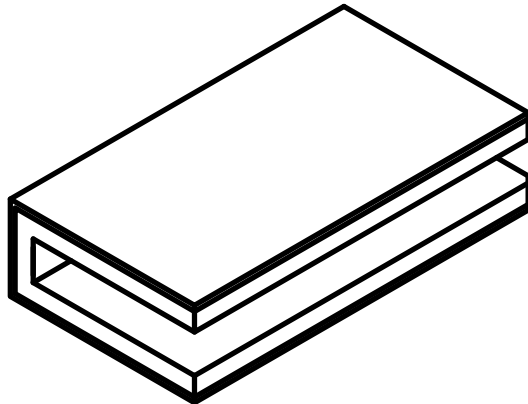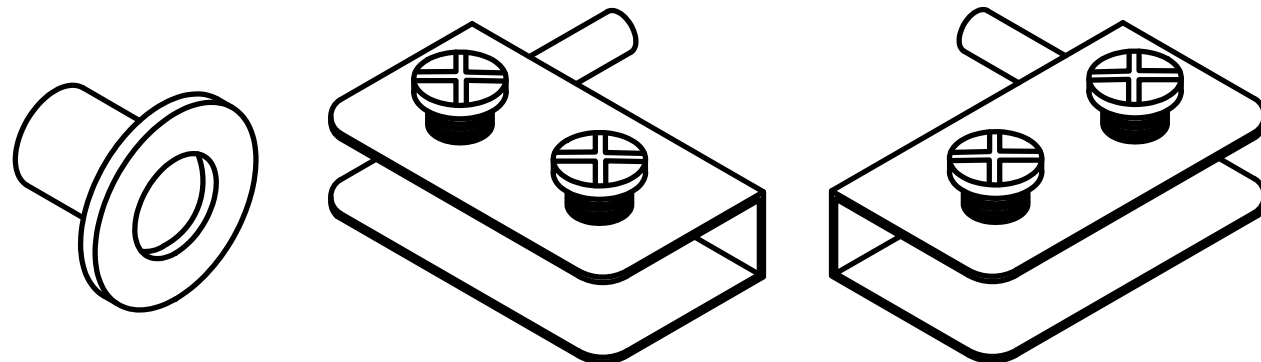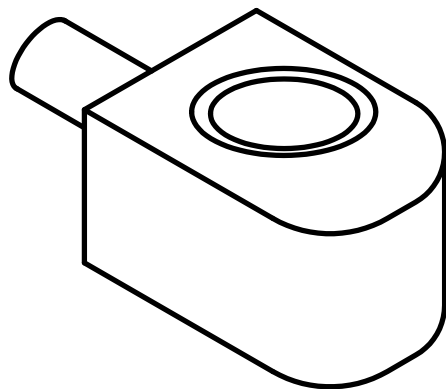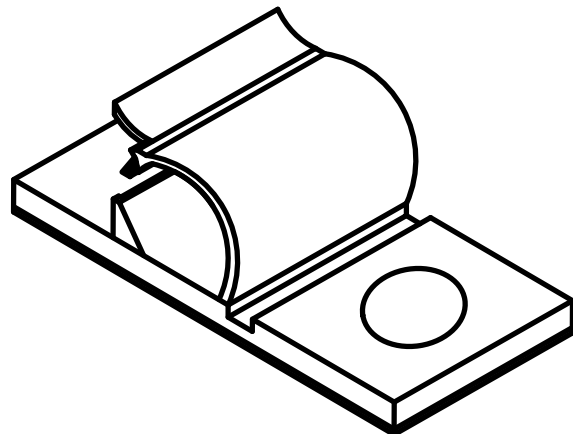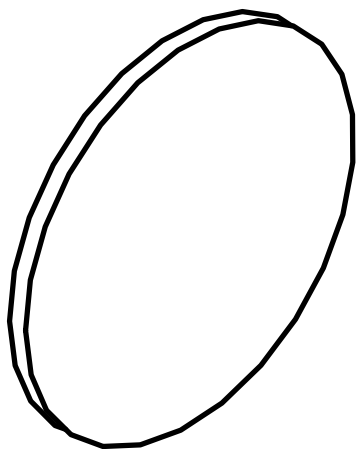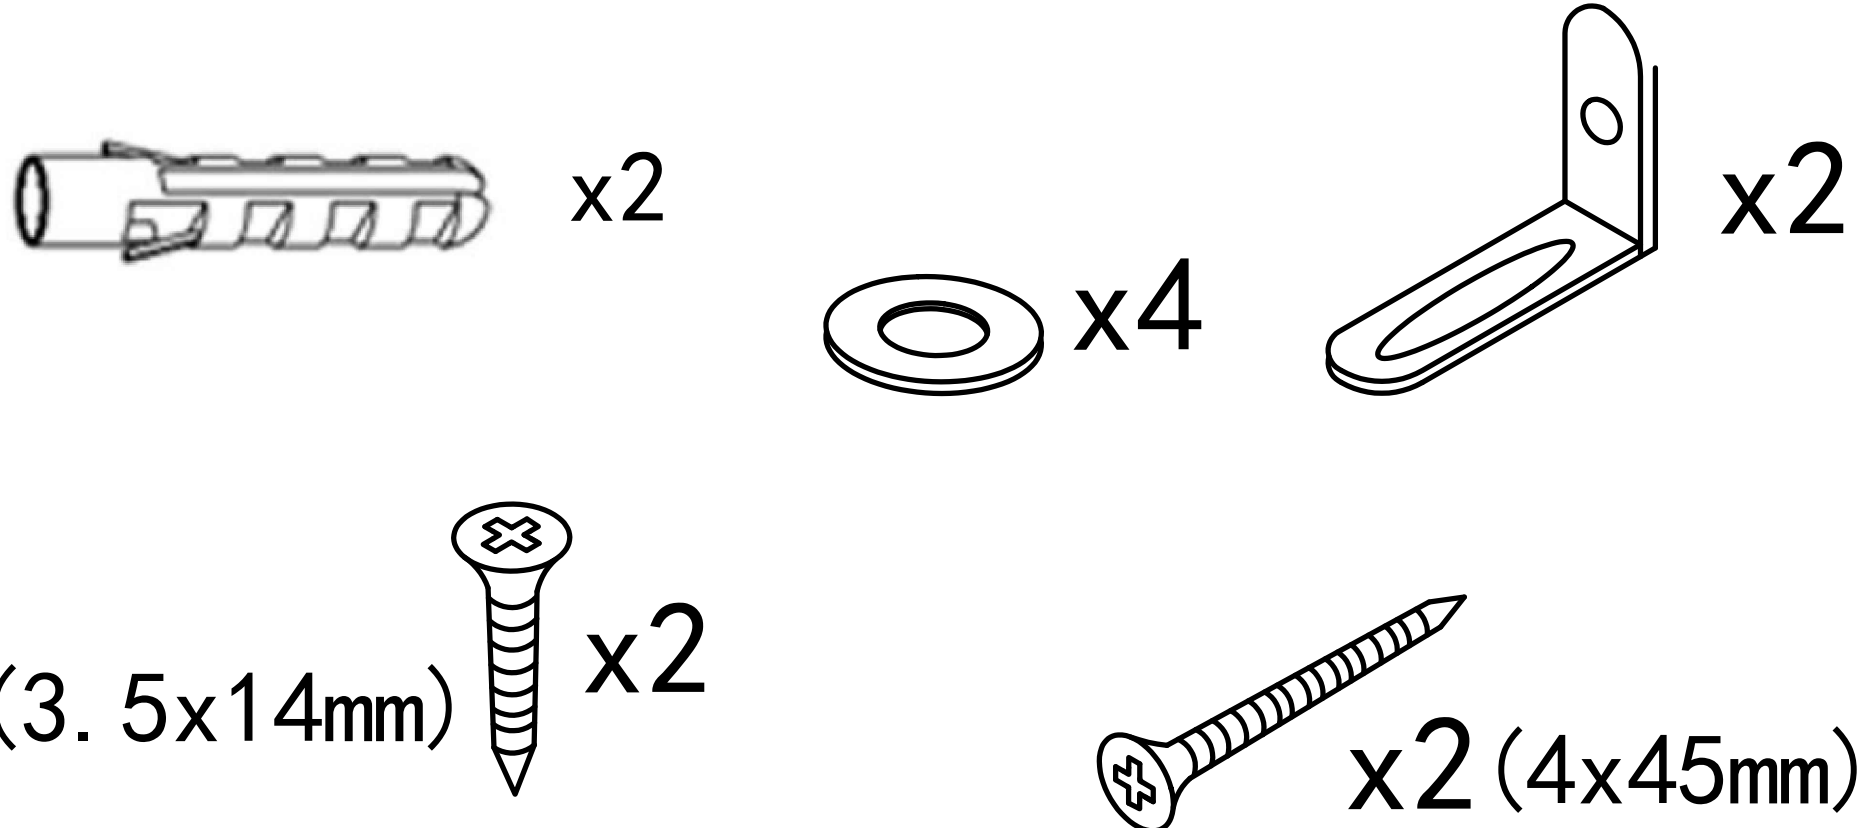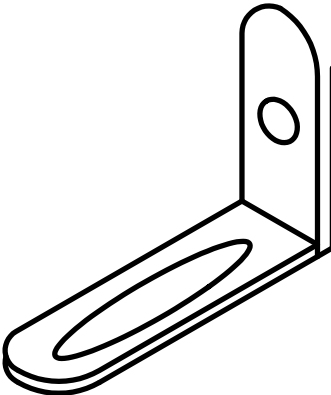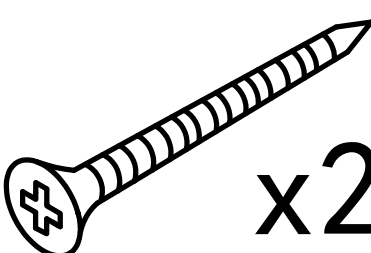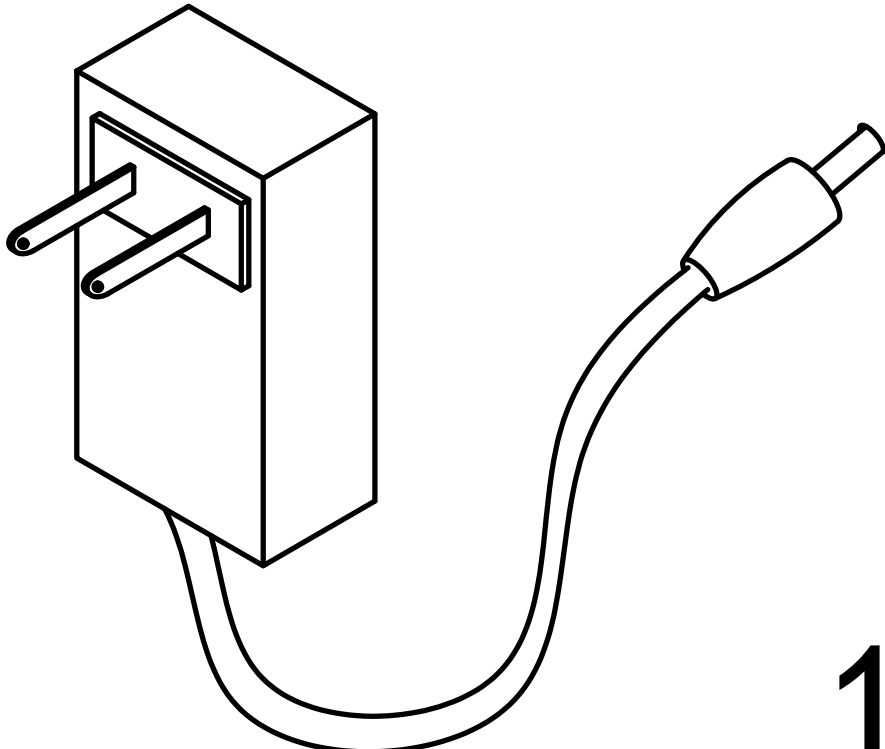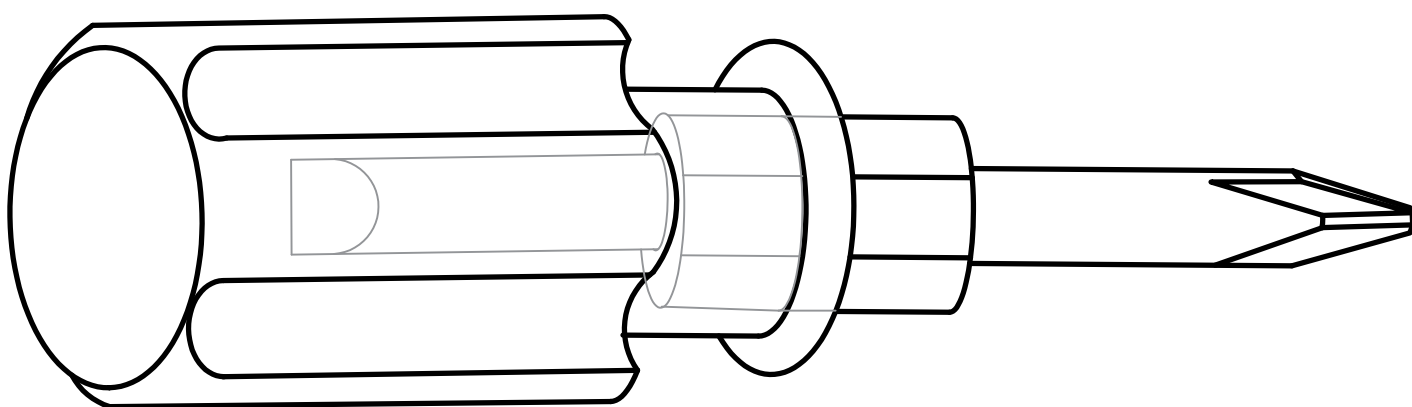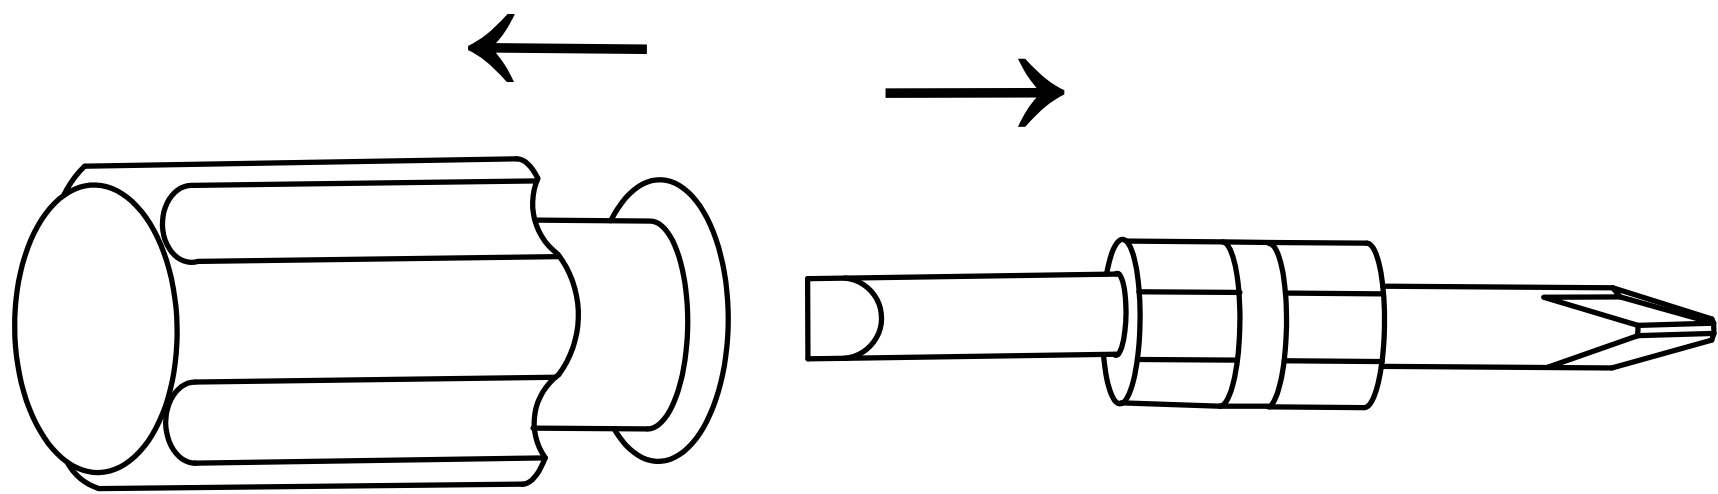
①		Two In One Screw (6x28mm)	44pcs +4pcs
②		Two In One Nut (10x12mm)	44pcs +4pcs
③		Non-slip pads (50x10mm)	4pcs +2pcs
④		Screw (5x40mm)	8pcs +1pcs
⑤		Rebound device & Screw (3x16mm)	8pcs +1pcs 2pcs
		Iron sheet	4pcs
		Hinge	4 pcs2 pcs2 pcs
⑥		Laminate Support Nail	20pcs +2pcs
⑦		Fixing clip & screw (3x16mm)	24pcs +2pcs
⑧		Wire clamp	2pcs +1pcs
⑨		Sticker (Ø10mm)	8pcs +2pcs
⑩	  x2  x4  x2  x2  x2	Anti Fall Hardware	1pcs
AC/DC Adapter (12V $\equiv$ 3.0A)  1pcs		 1pcs  Double-head screwdriver, use as required 2	

Product structure decomposition

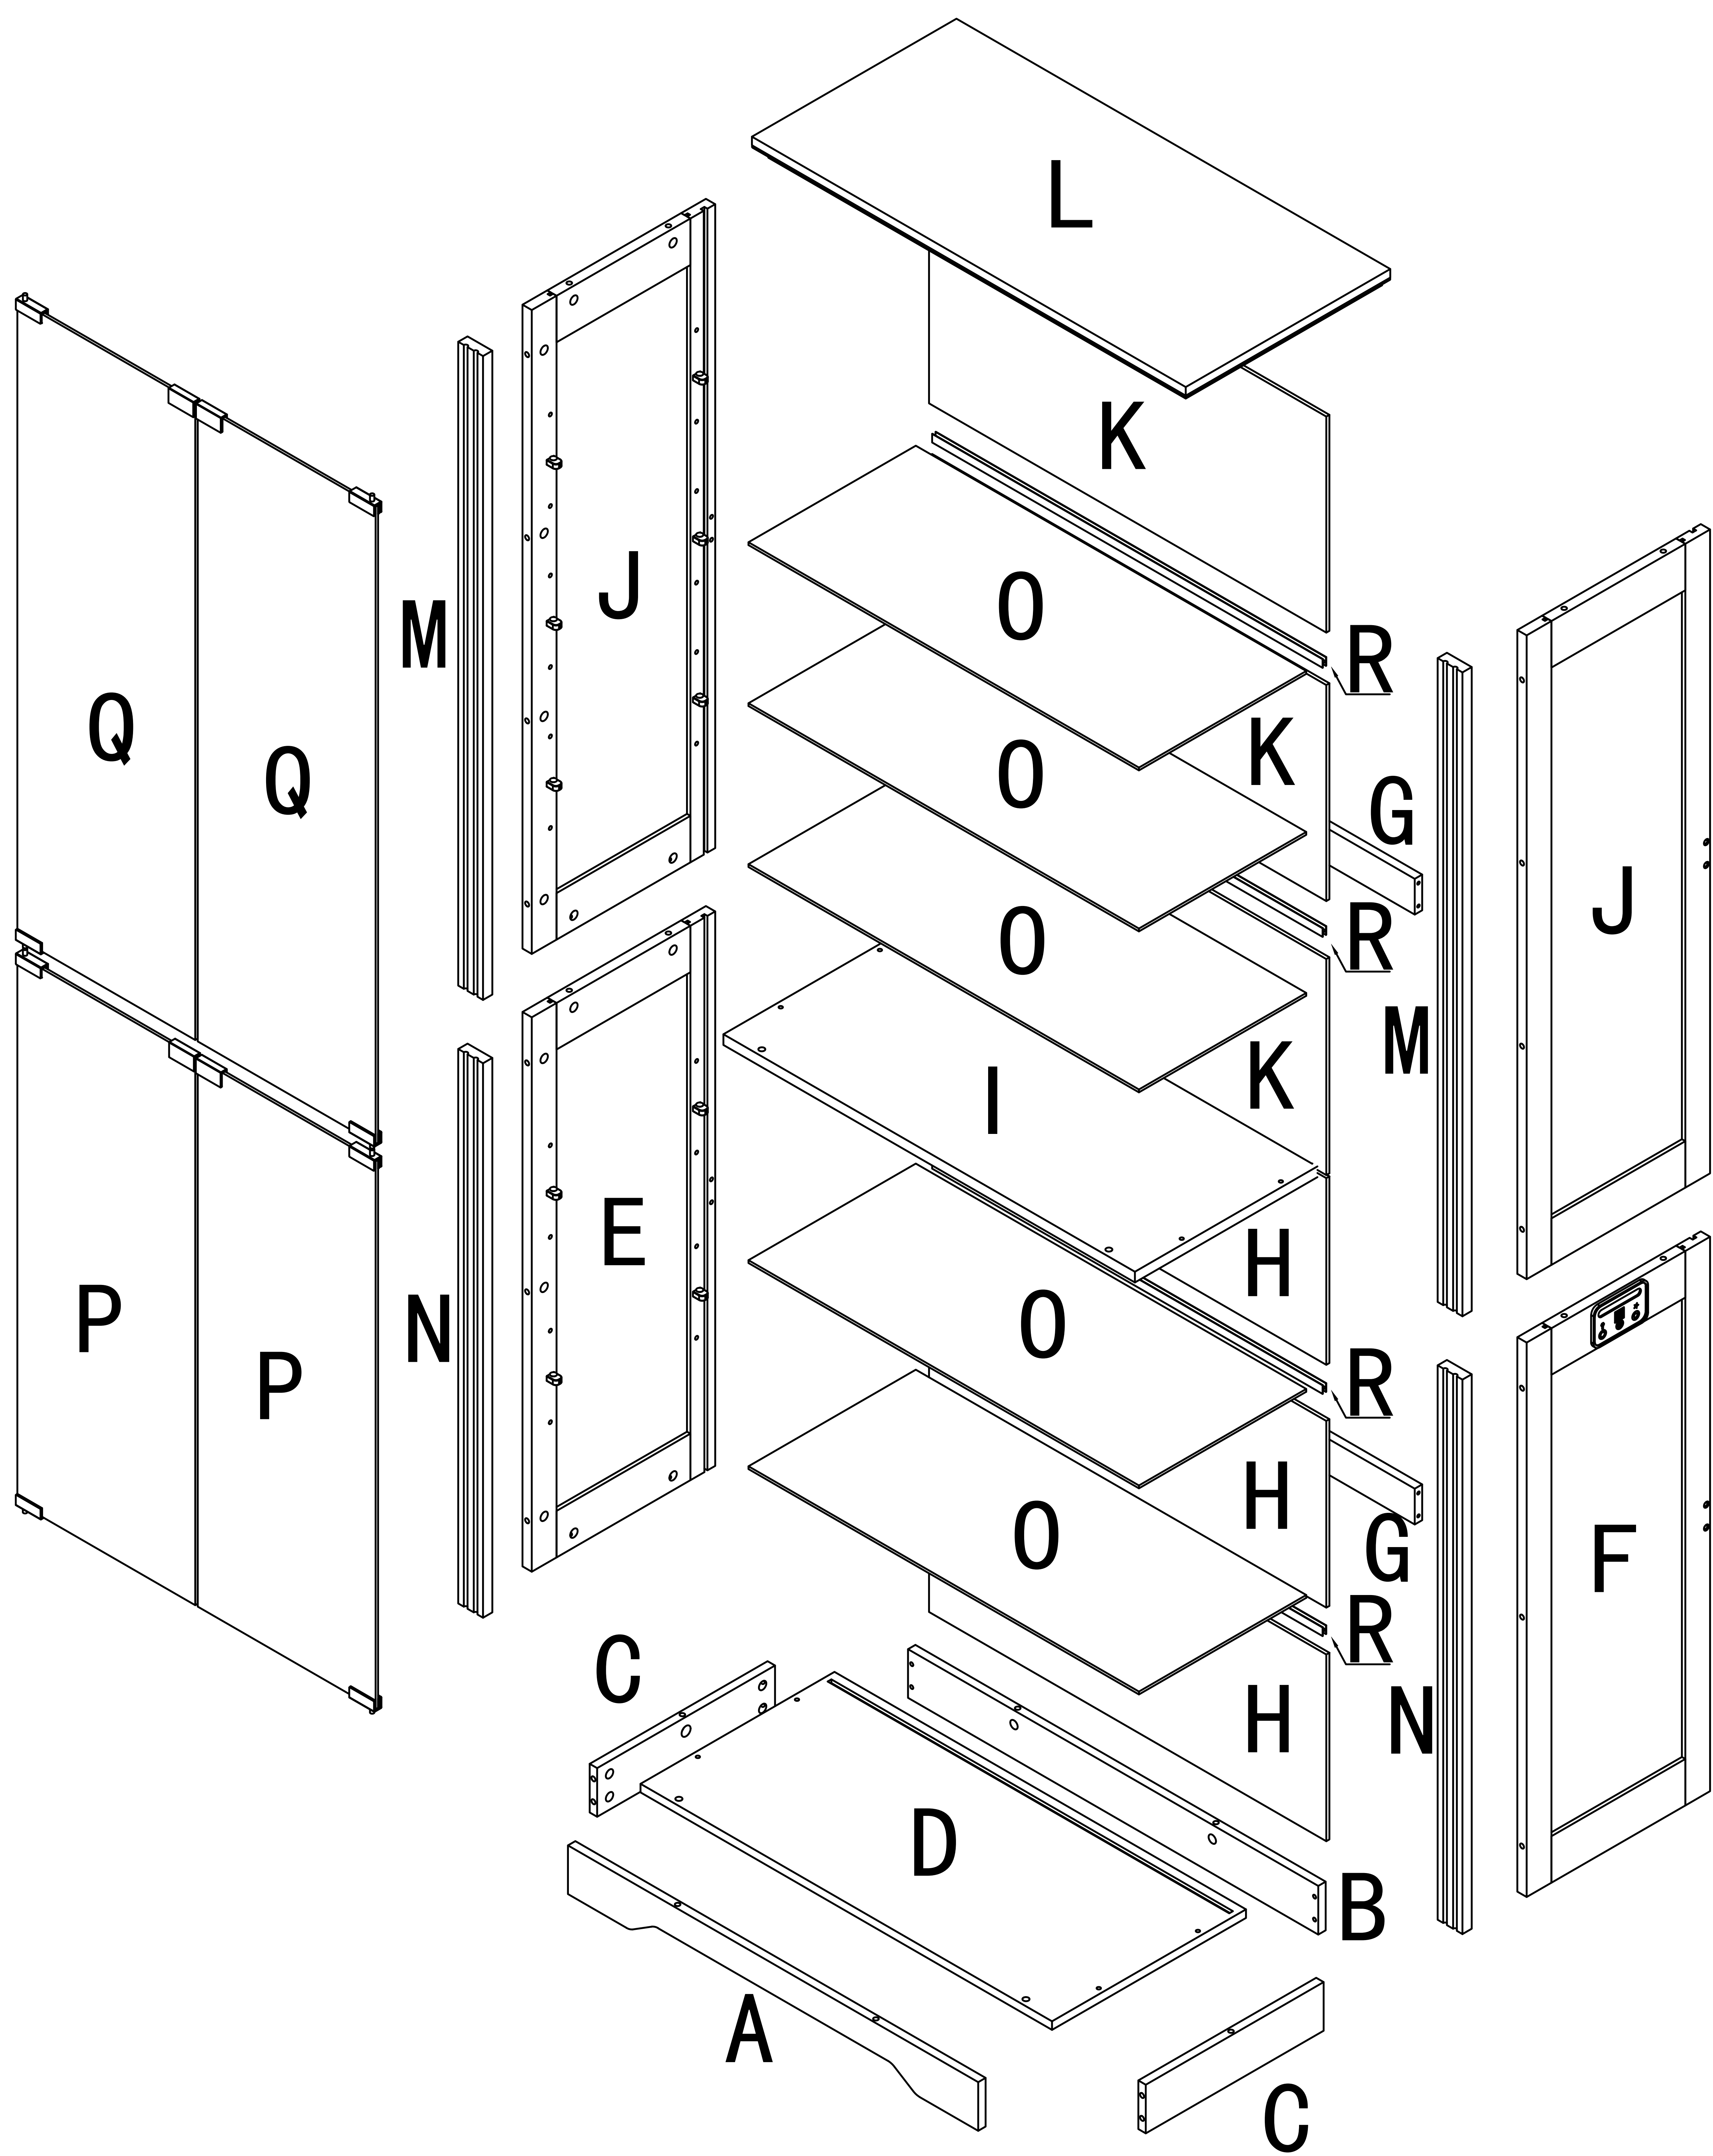


Use parts ① and ②




Step1

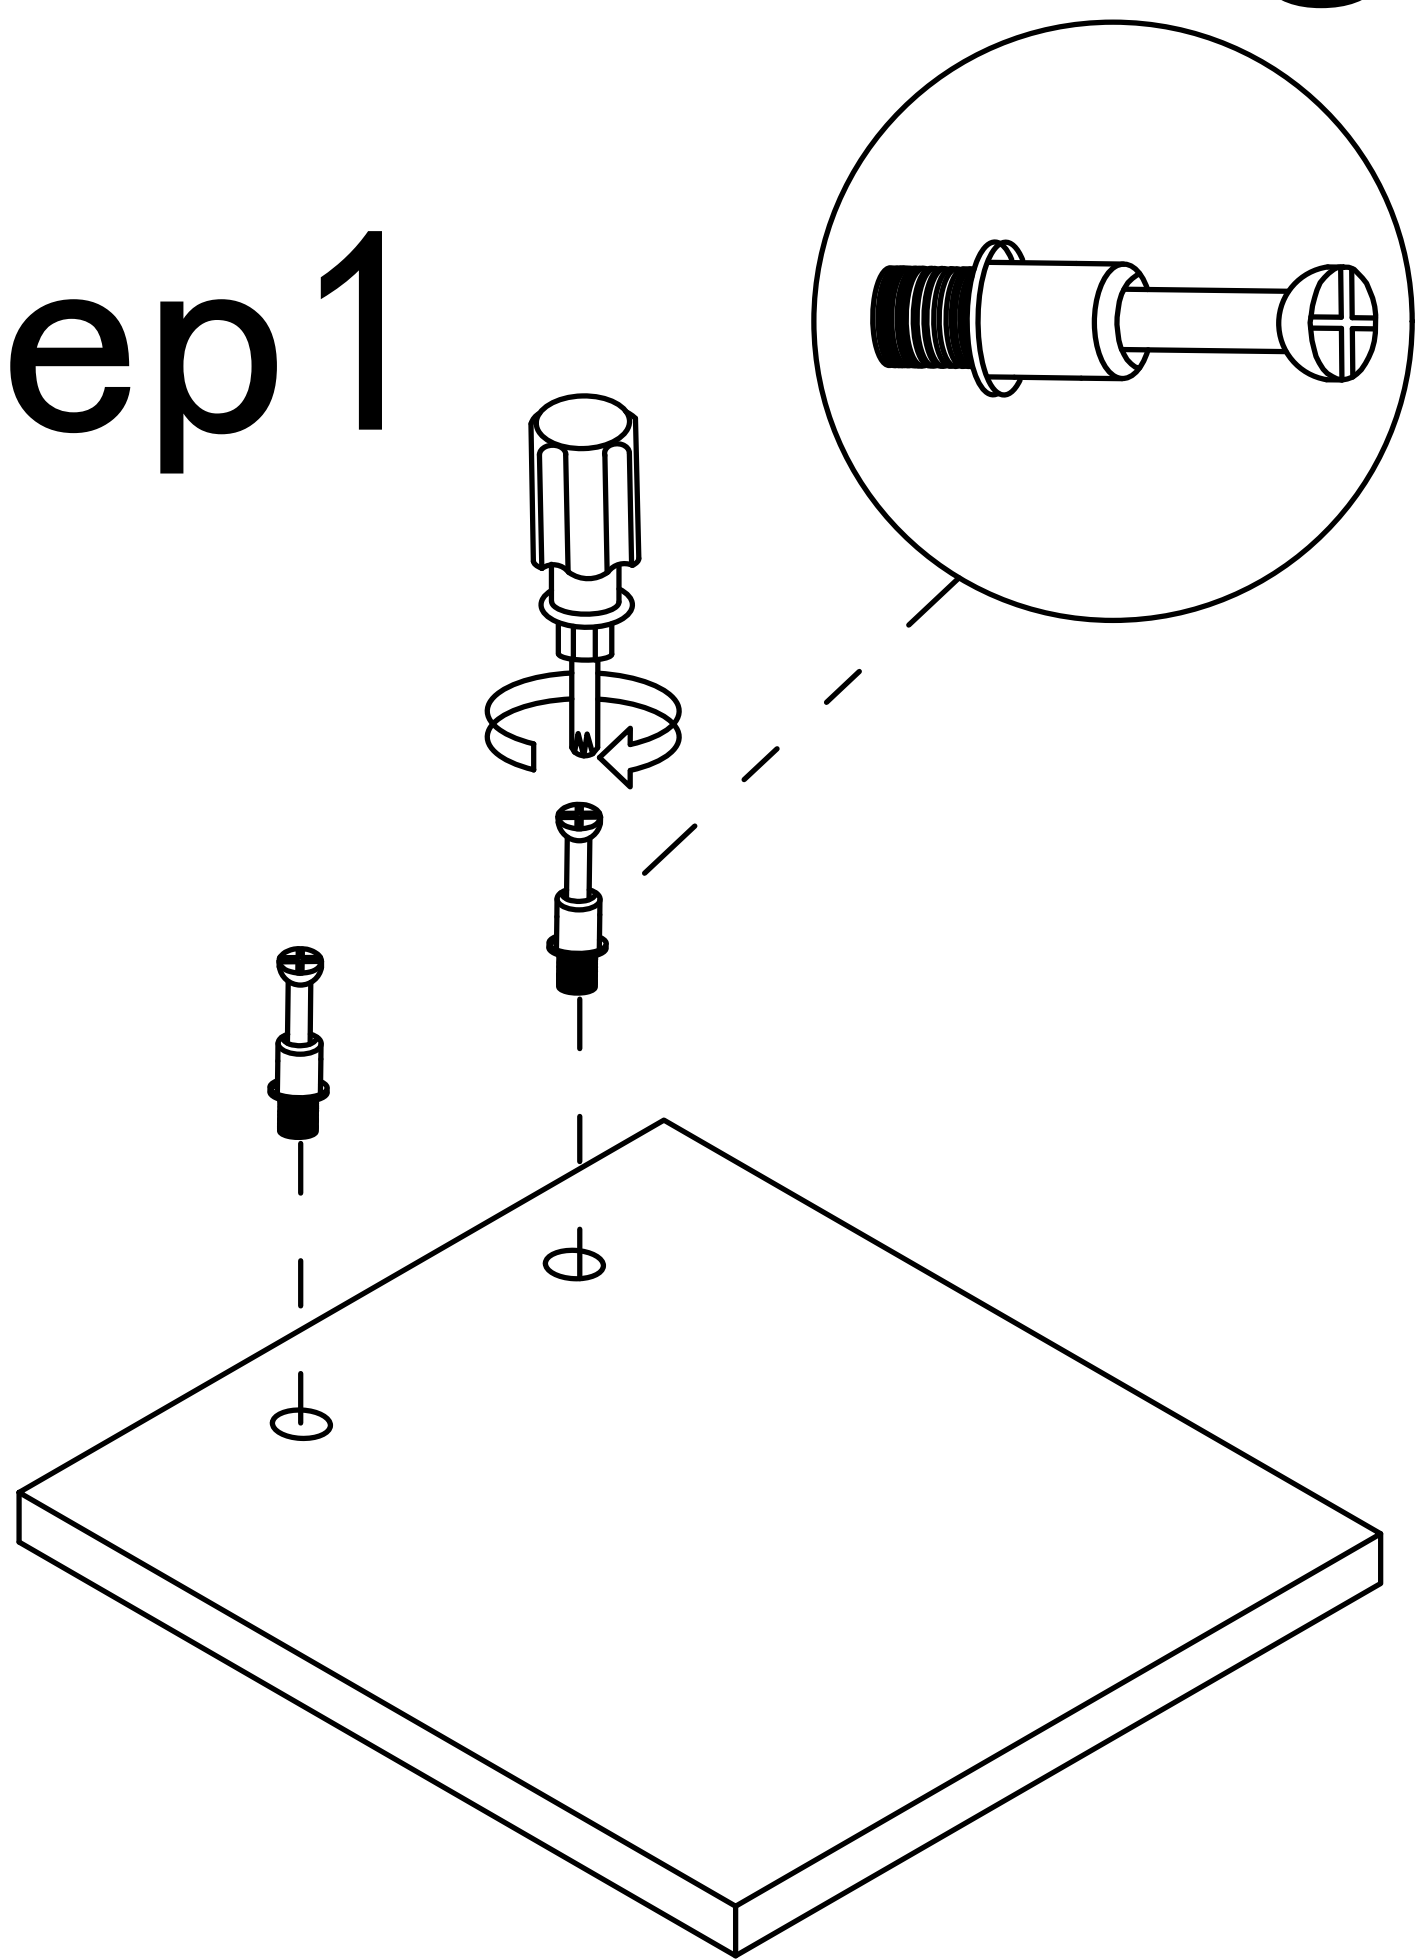

Step2

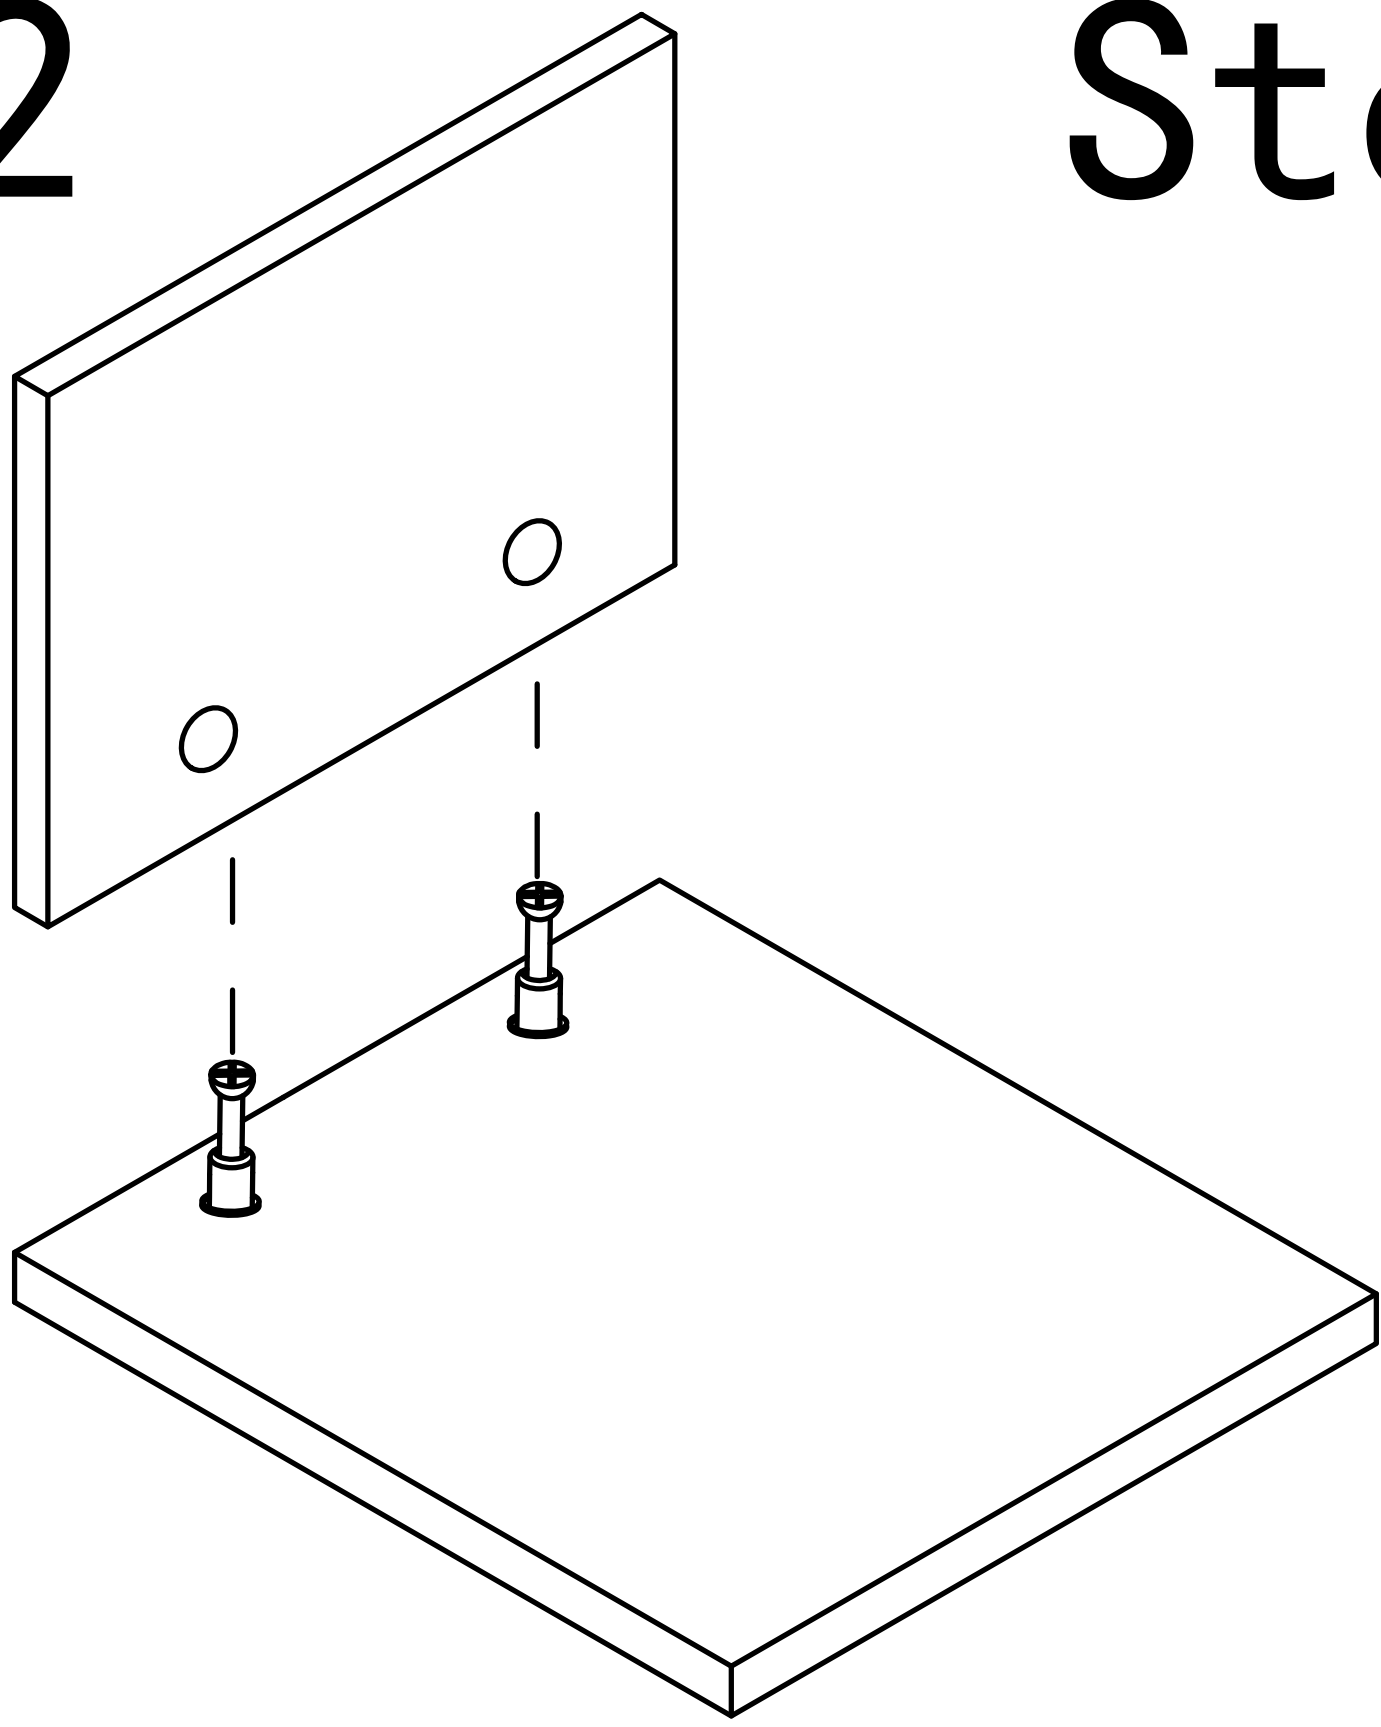



Step3

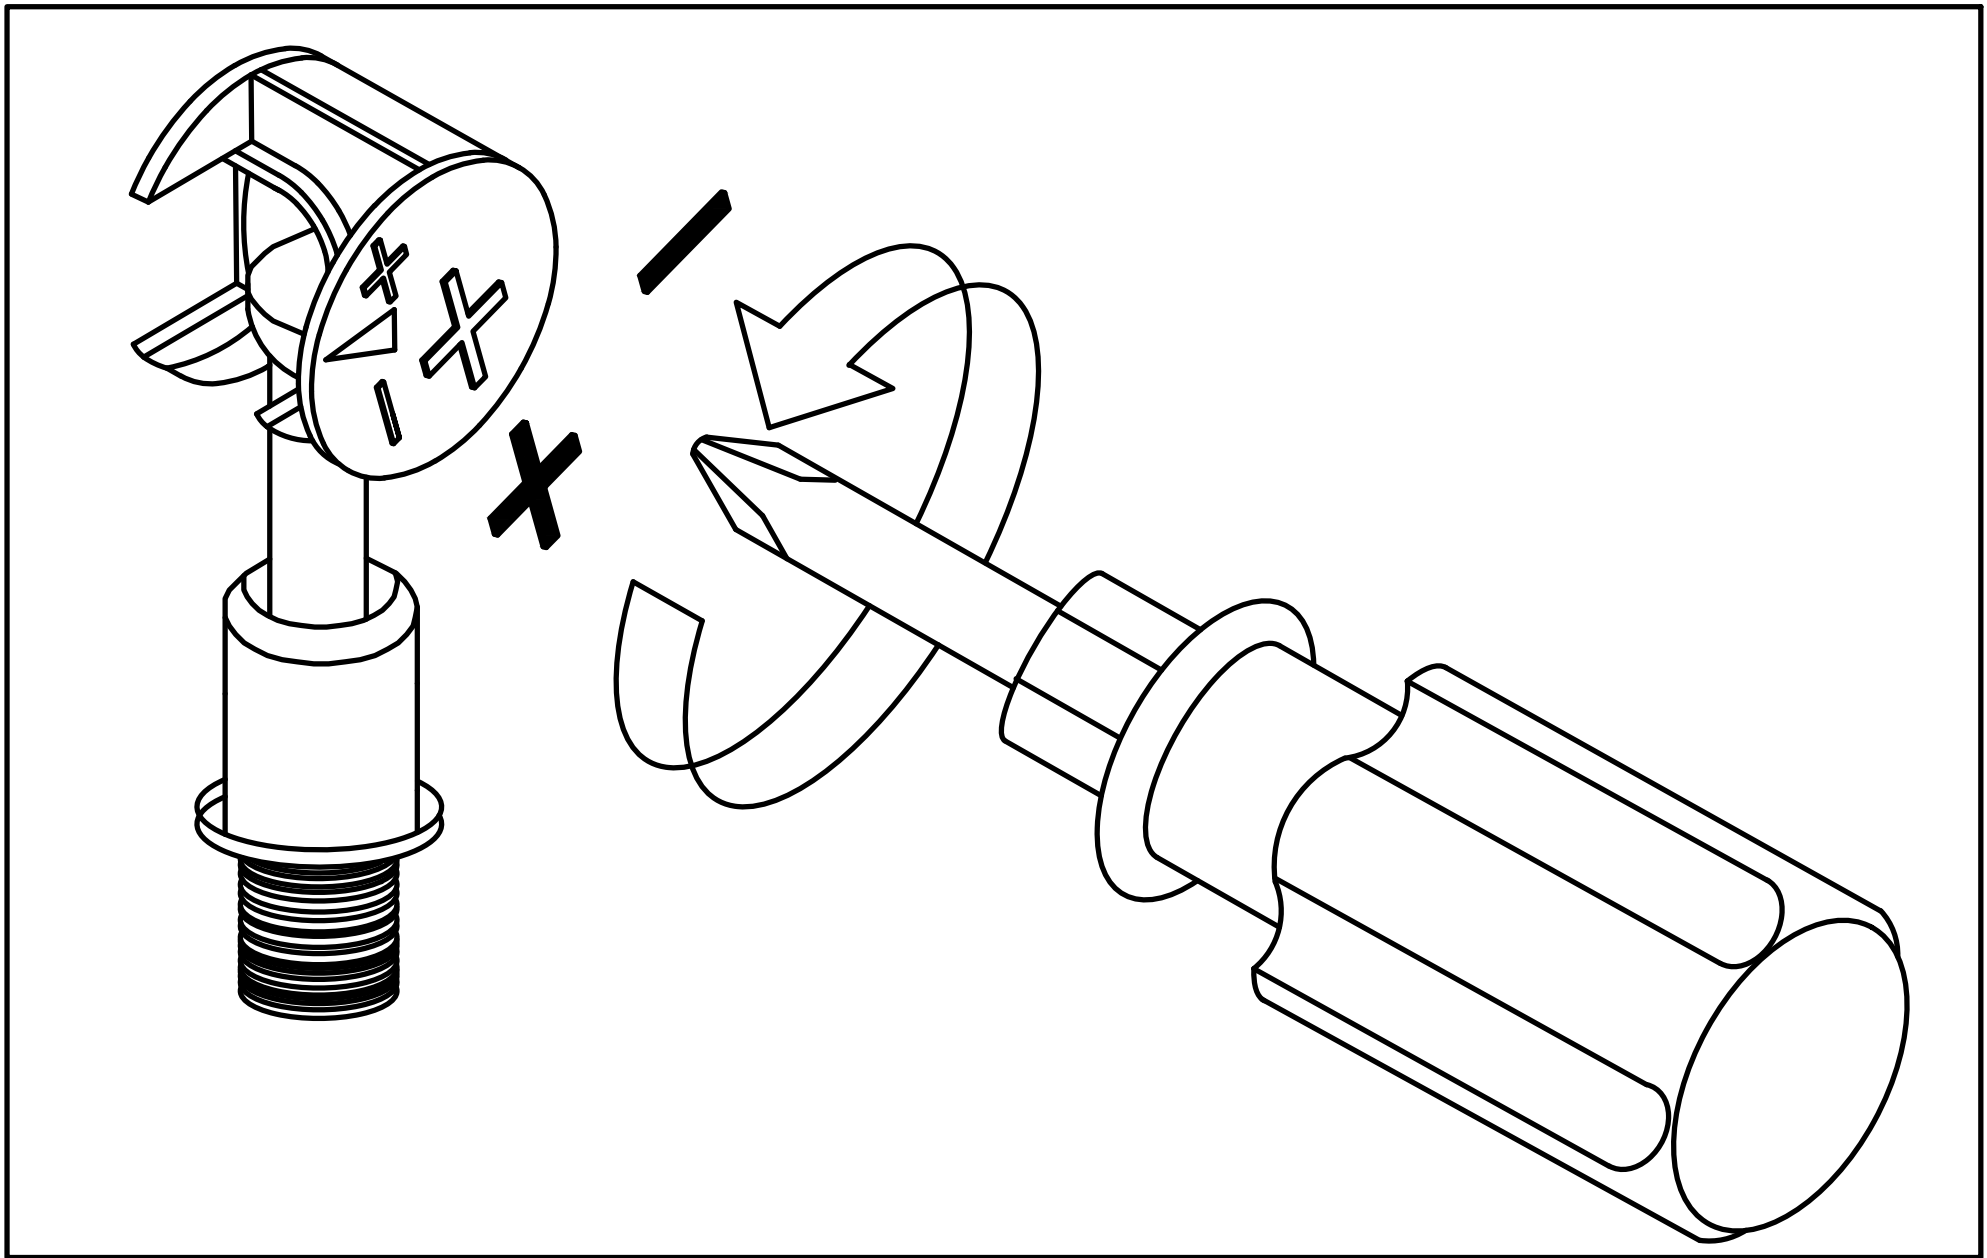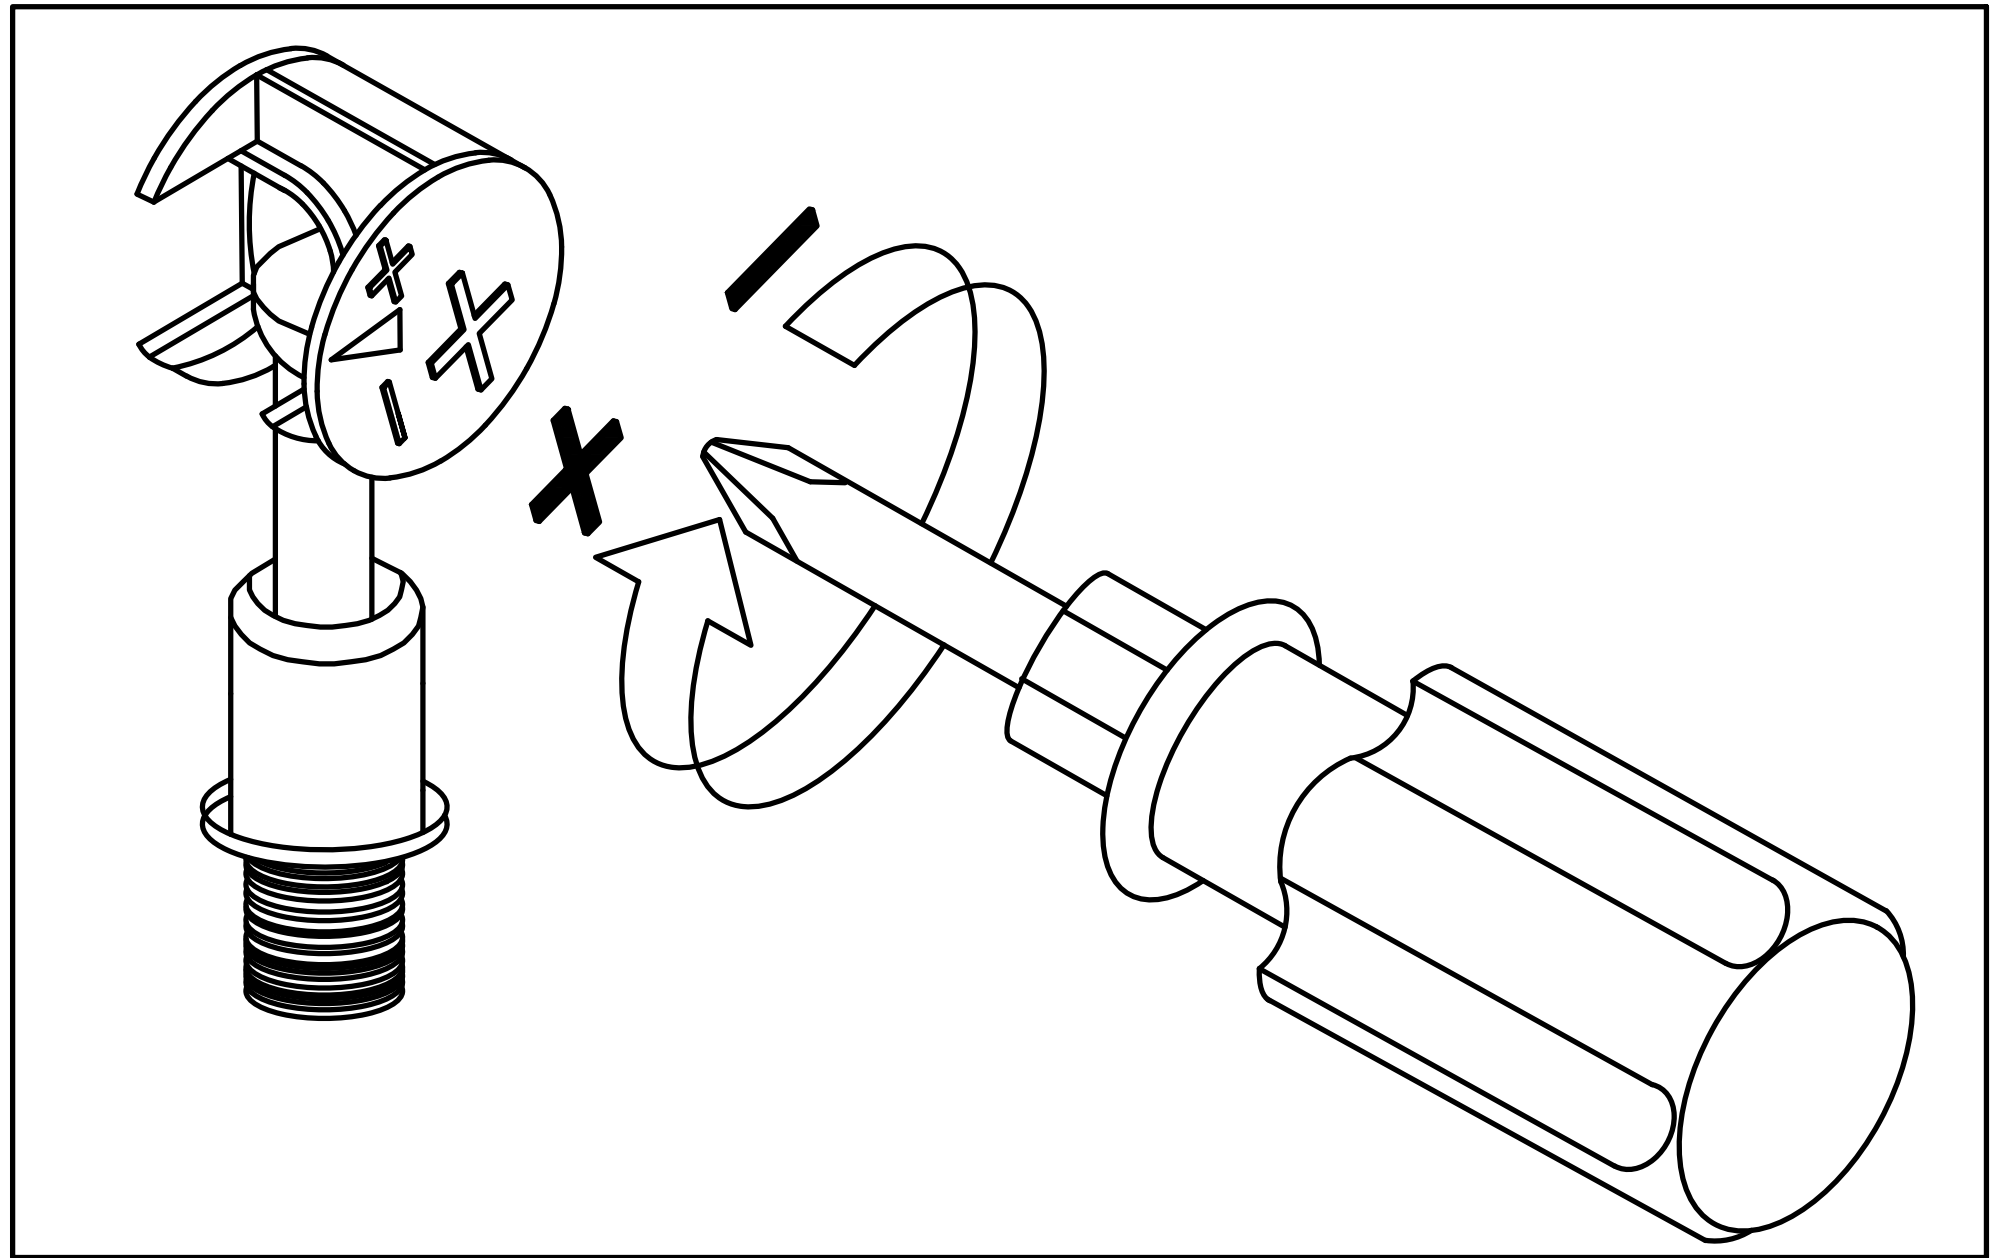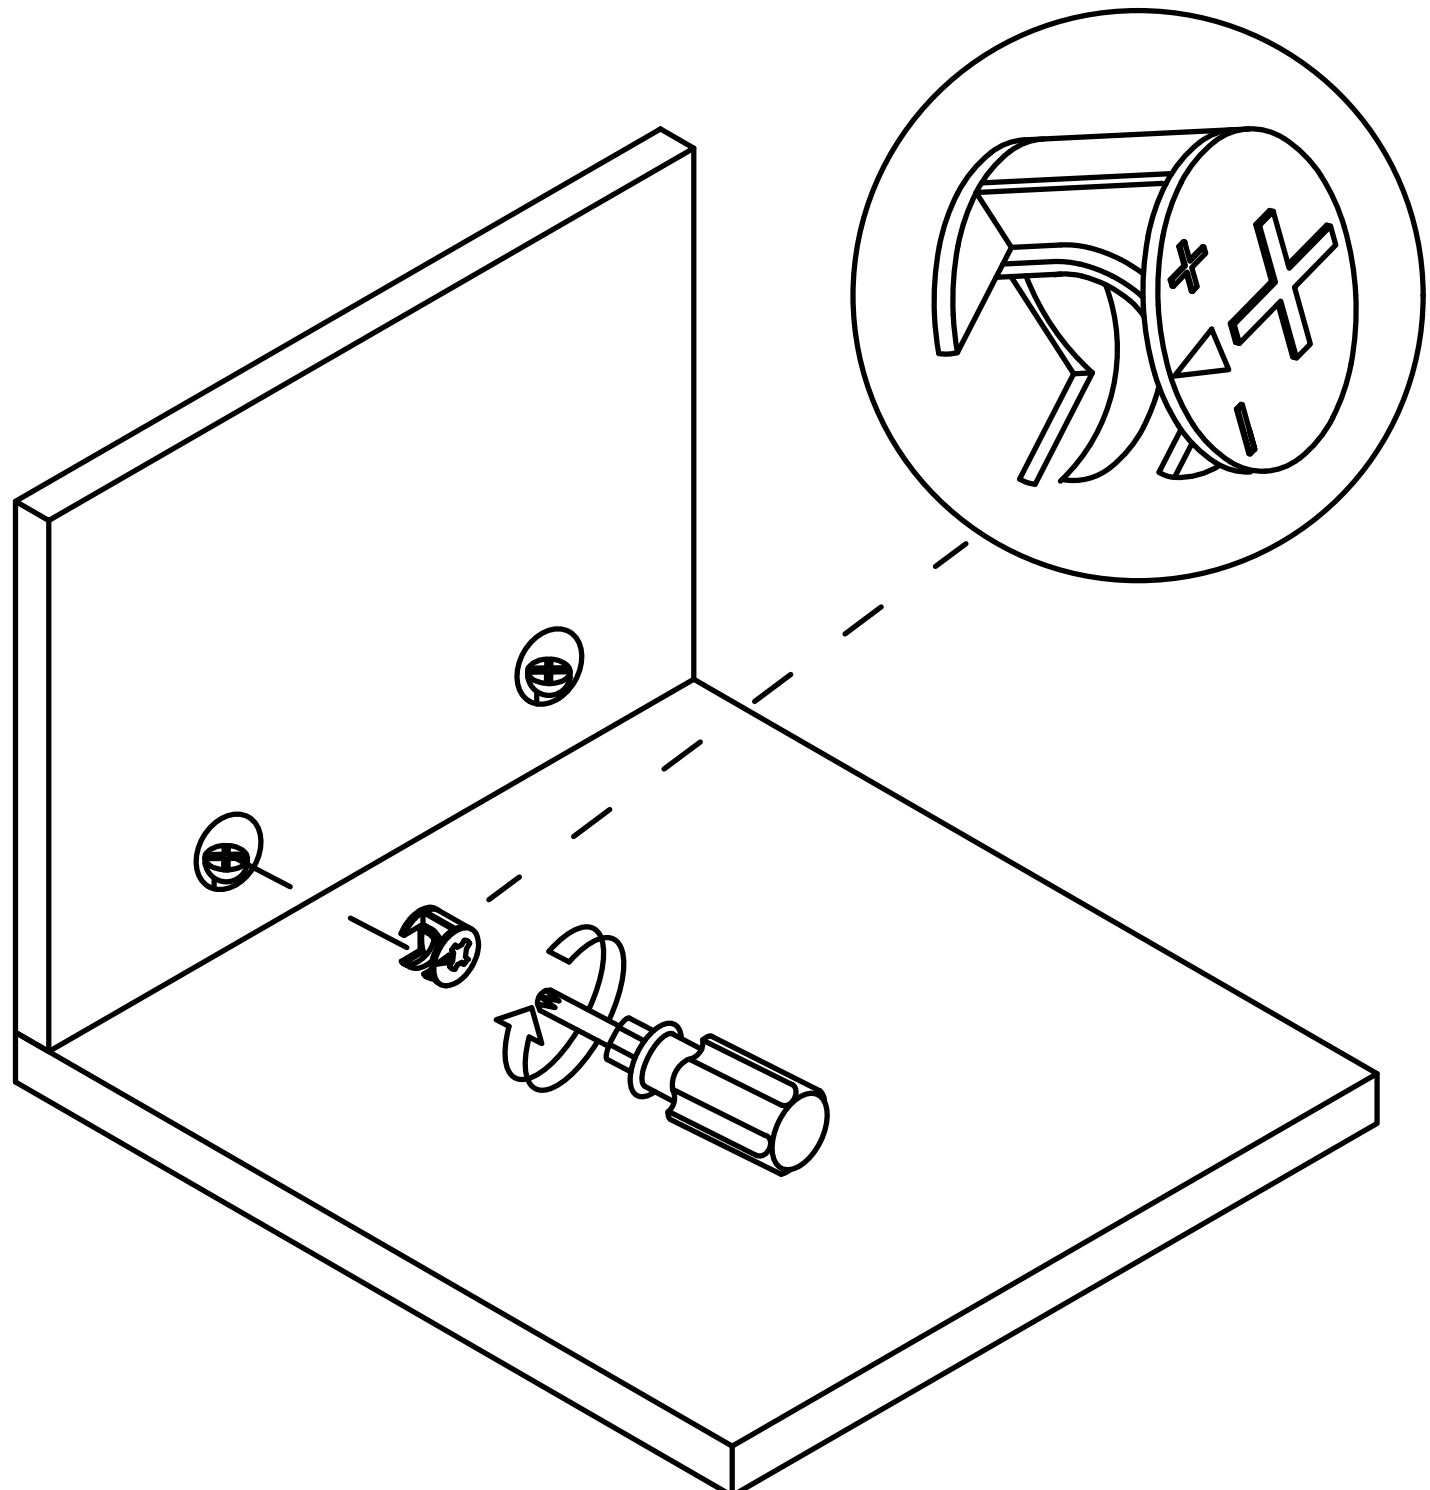

Use a screwdriver to lock in the direction of the "+" sign


Disassemble along the direction of "-" sign

Step 1

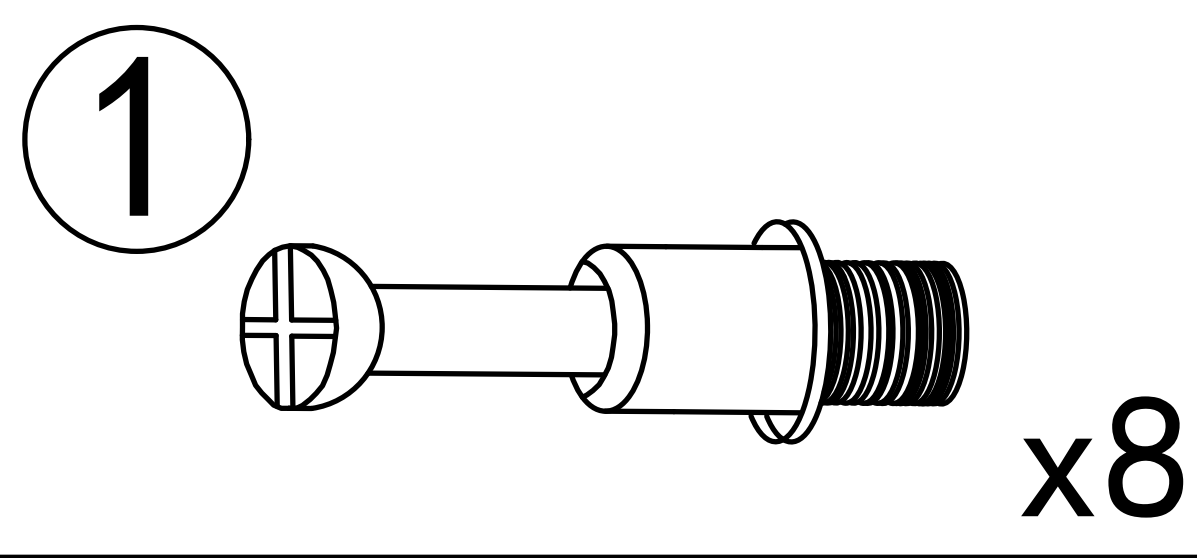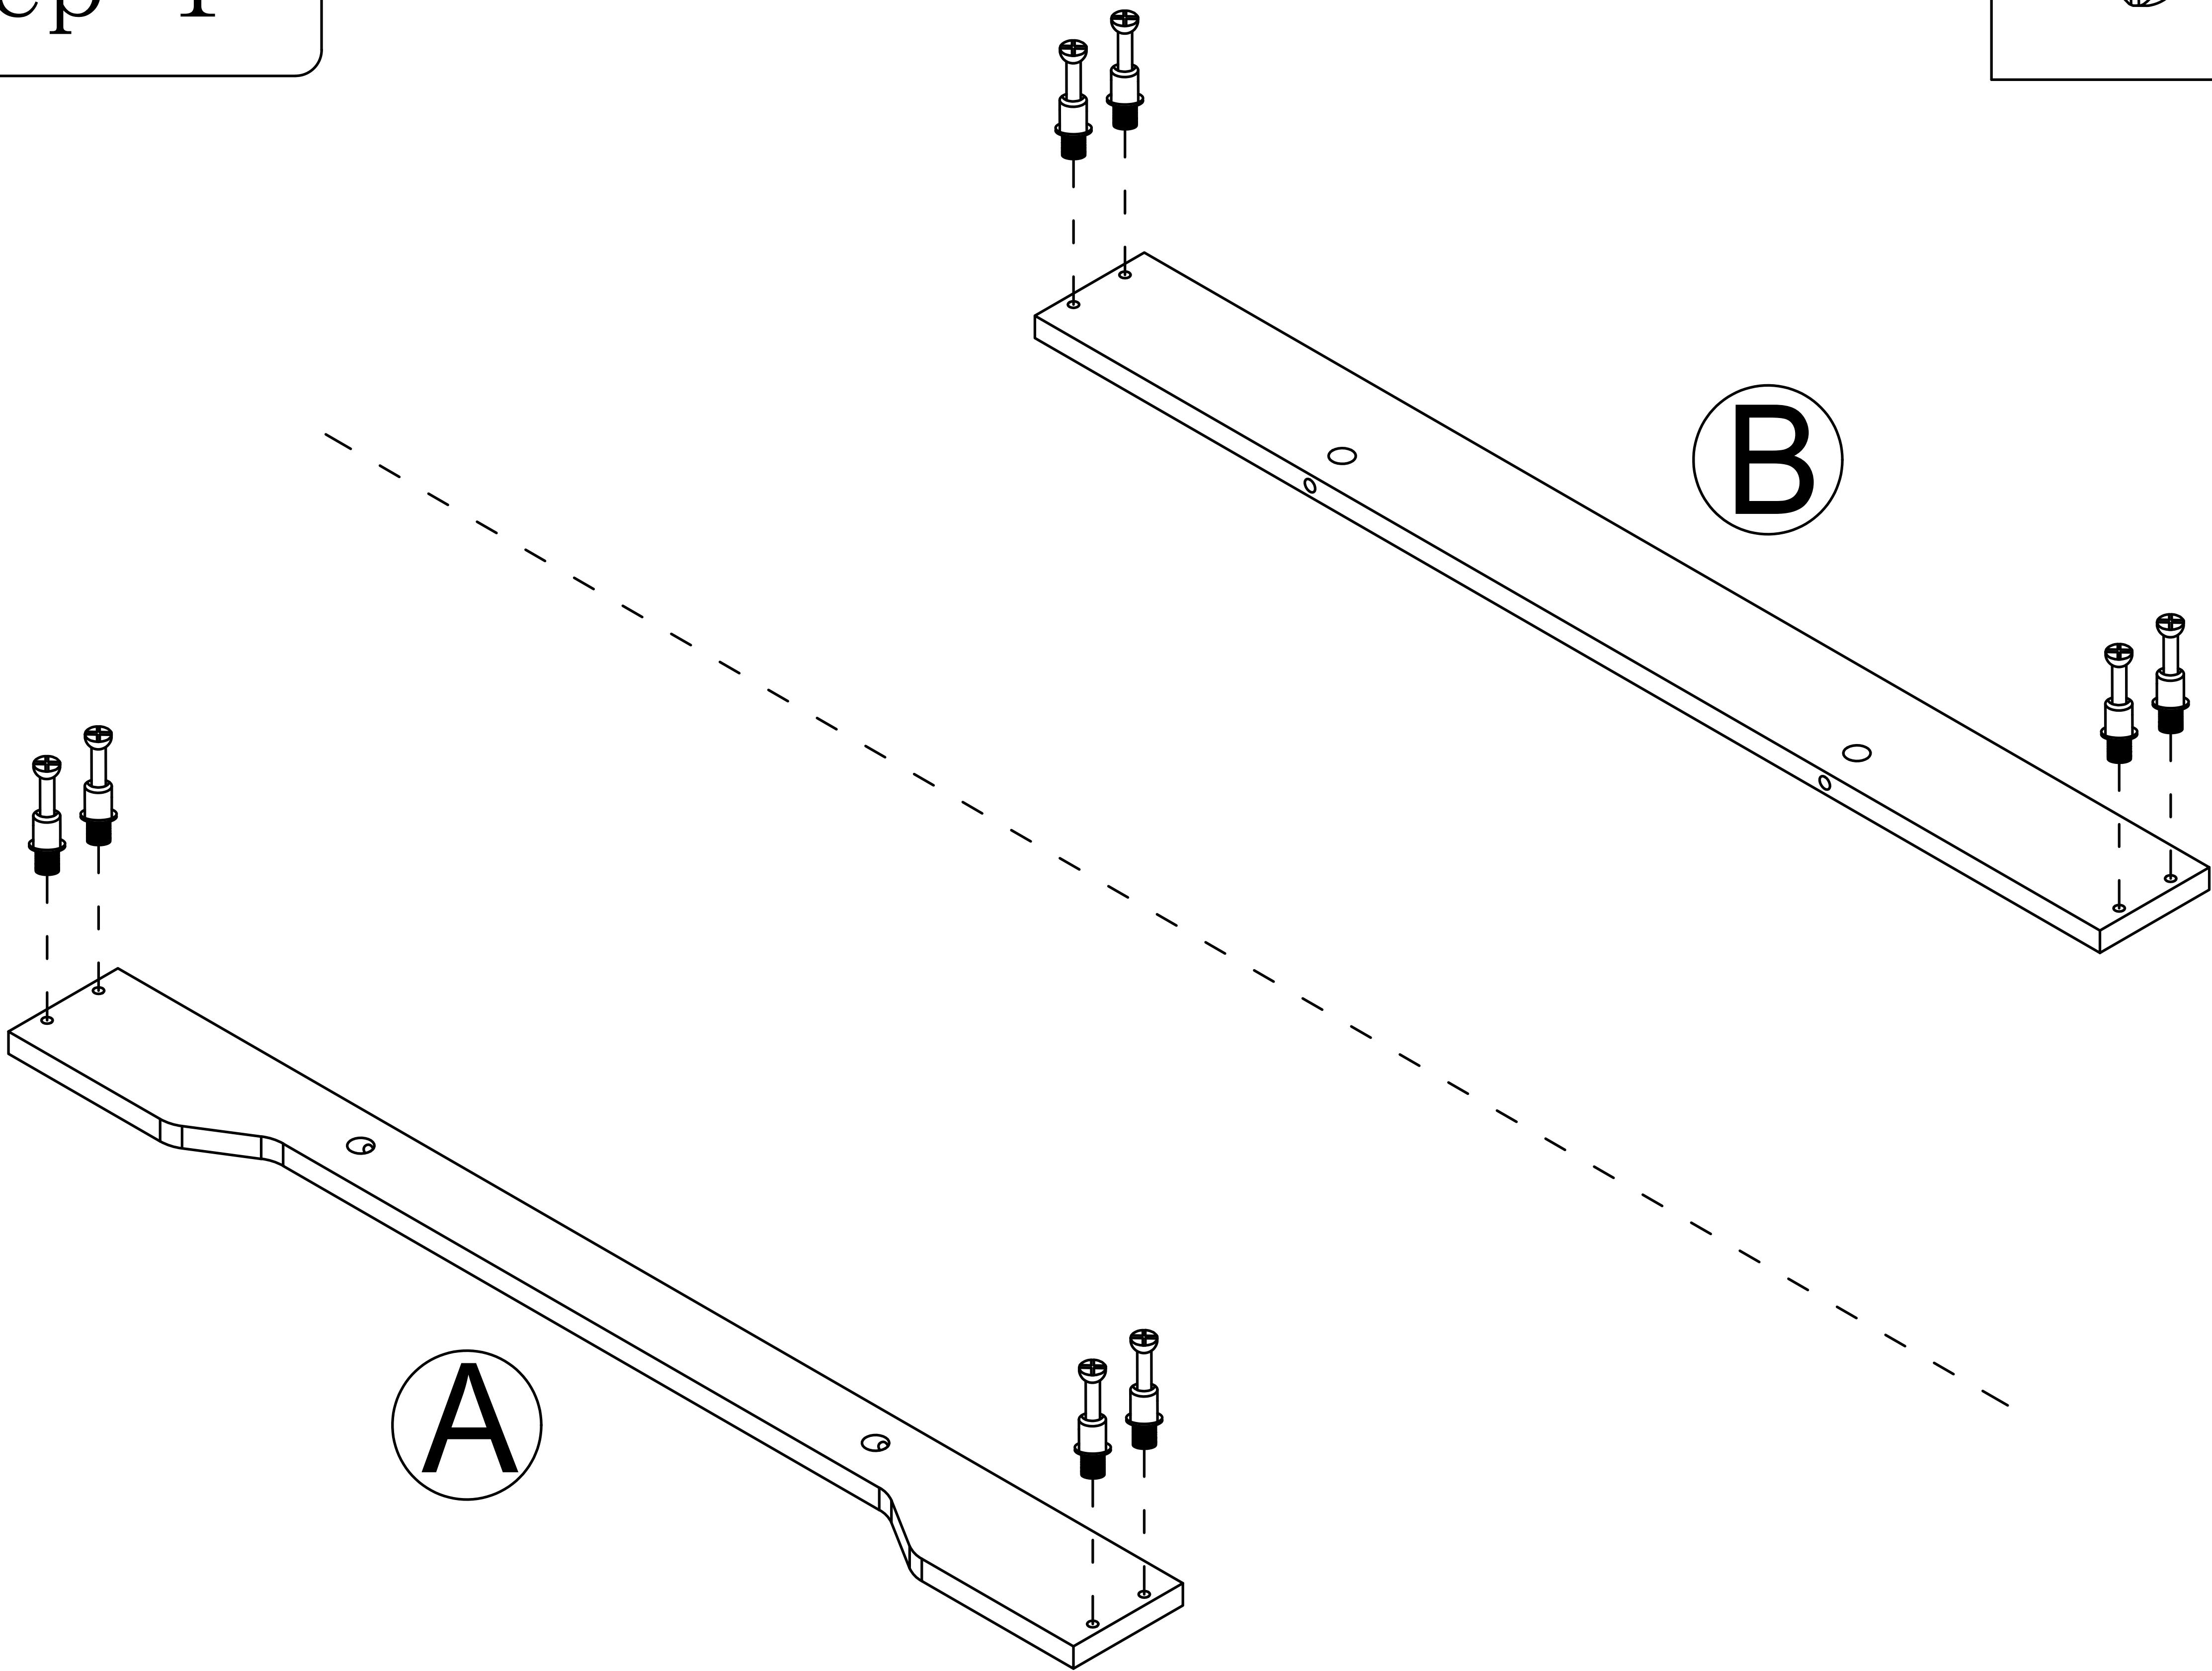


Step 2

2

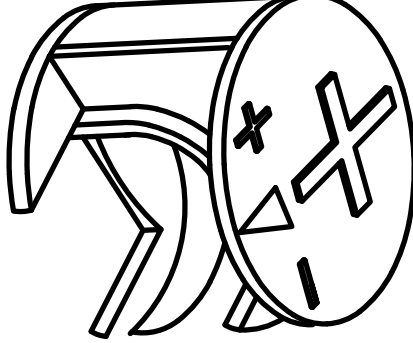


x8

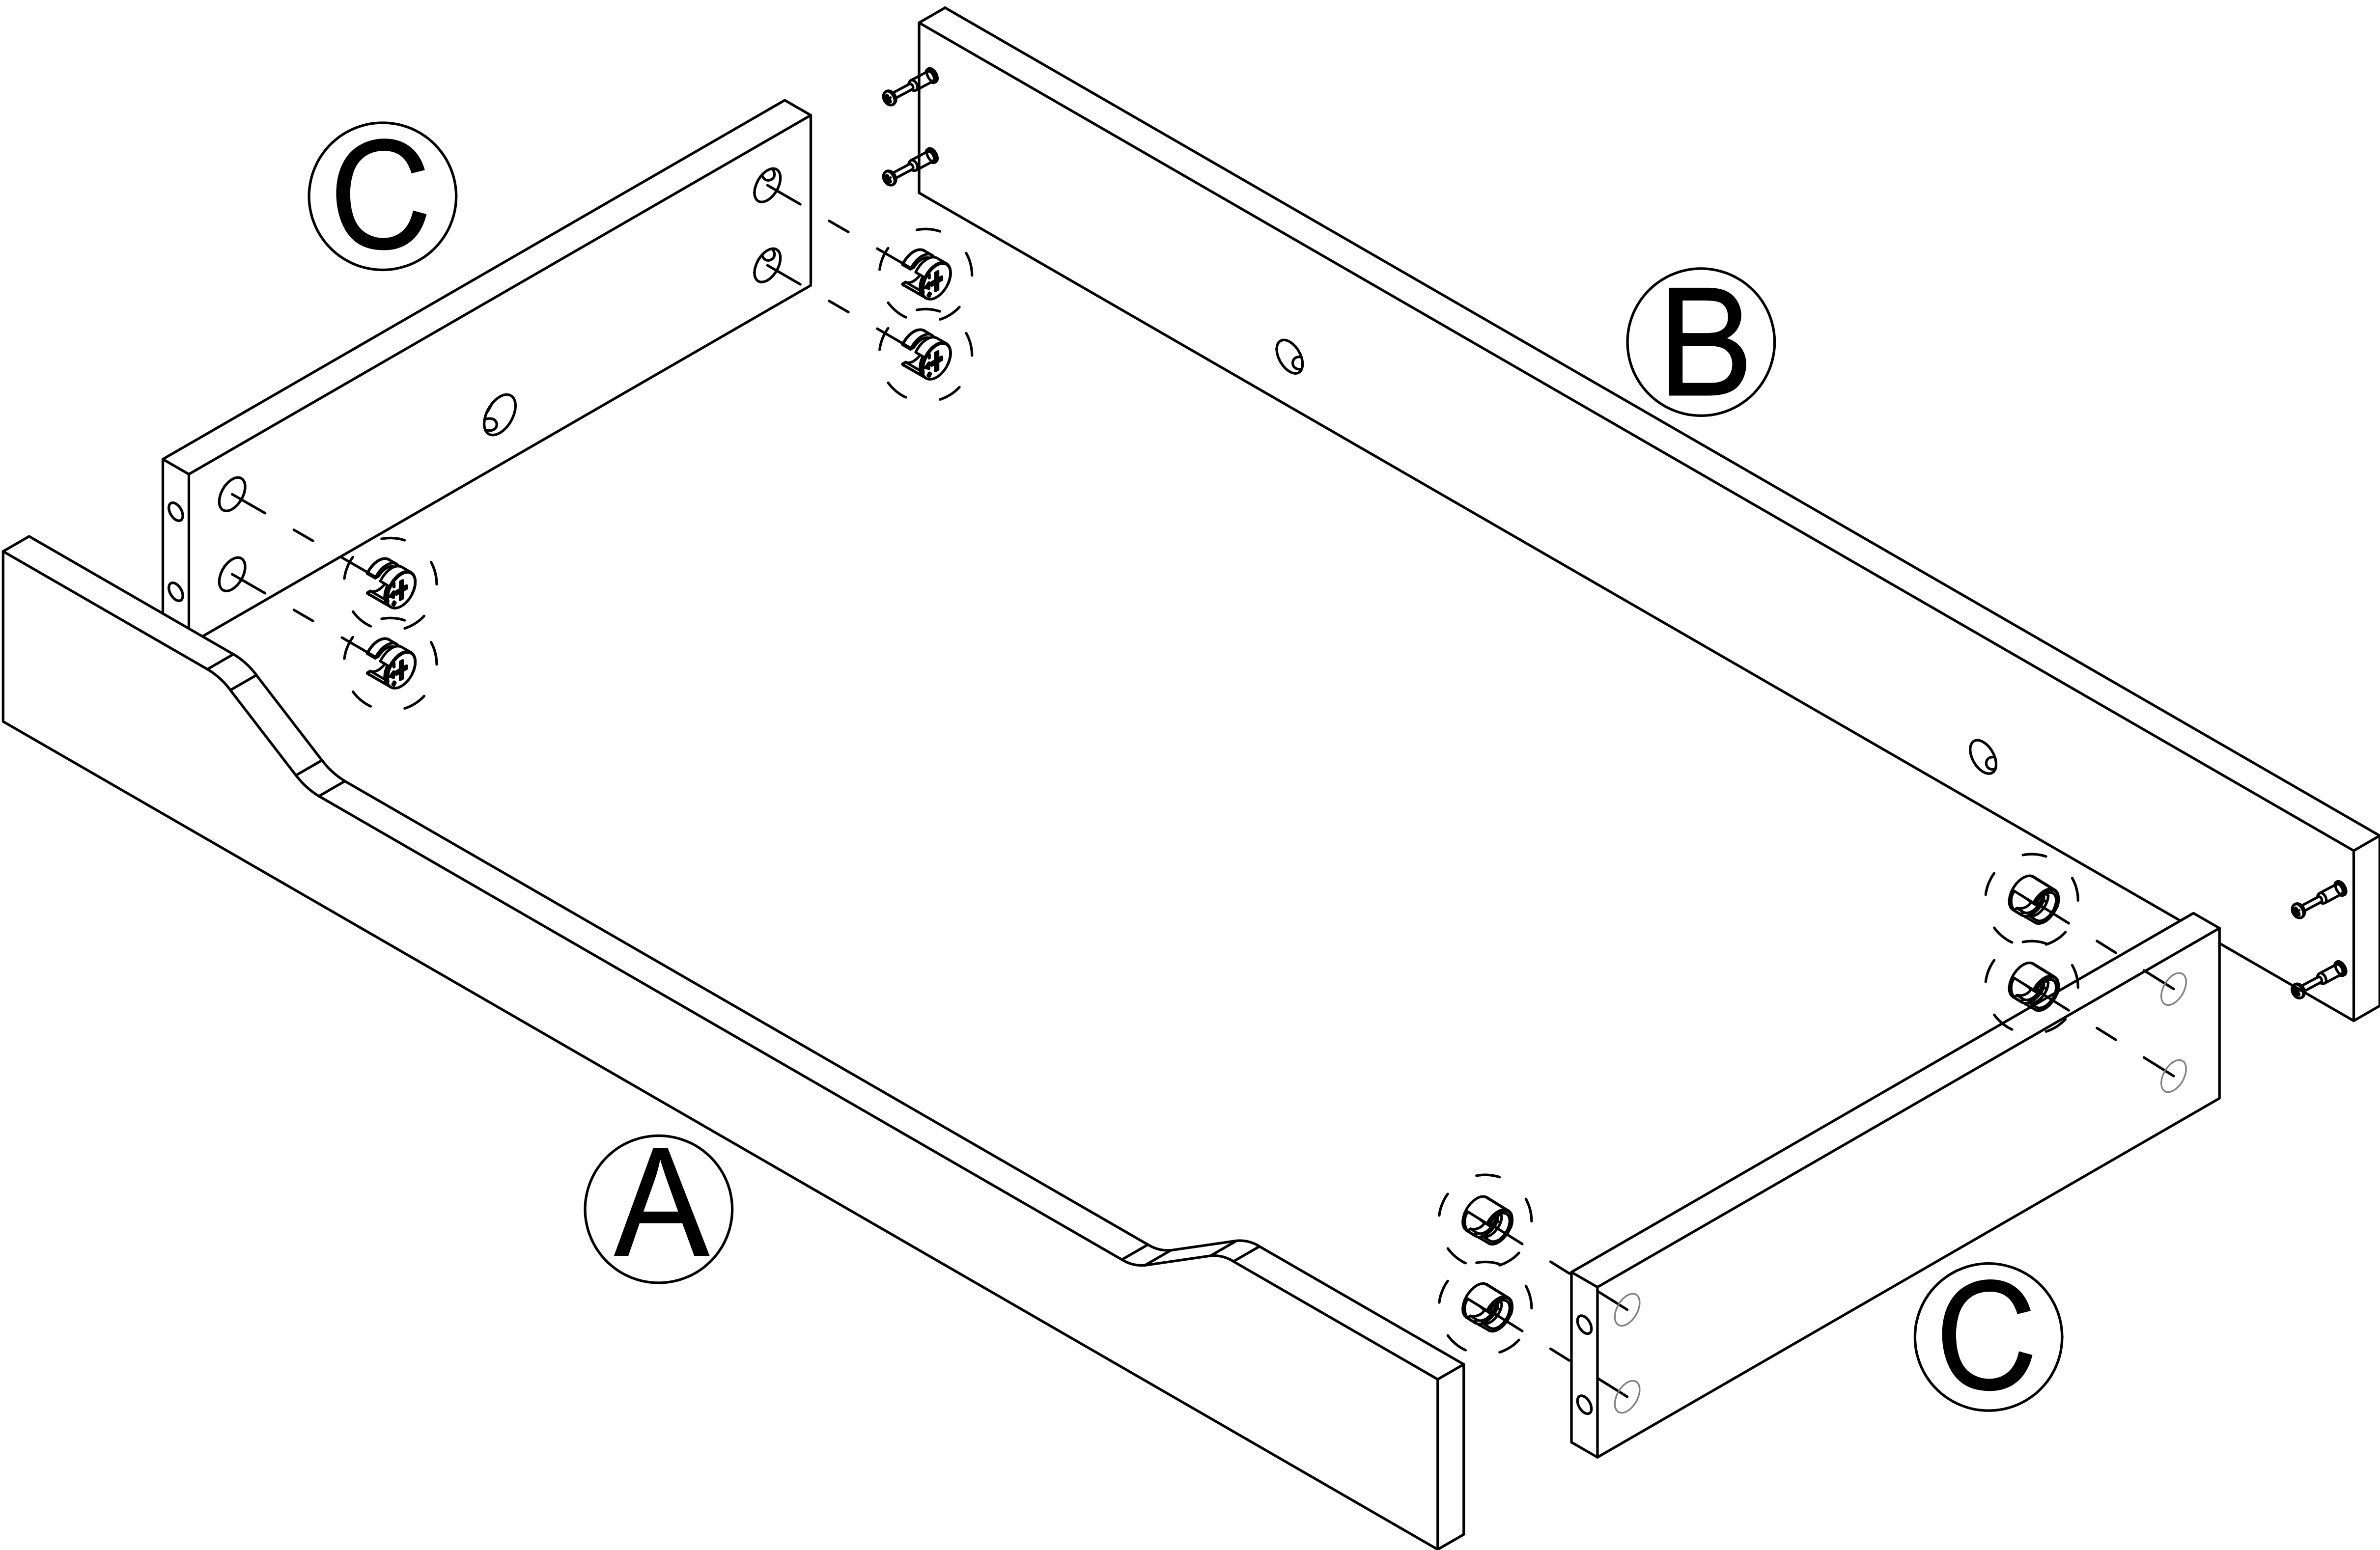


Step 3

1

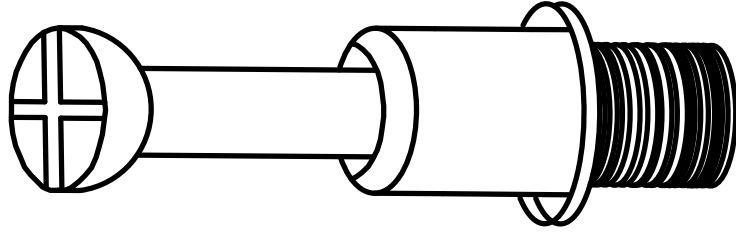


x6

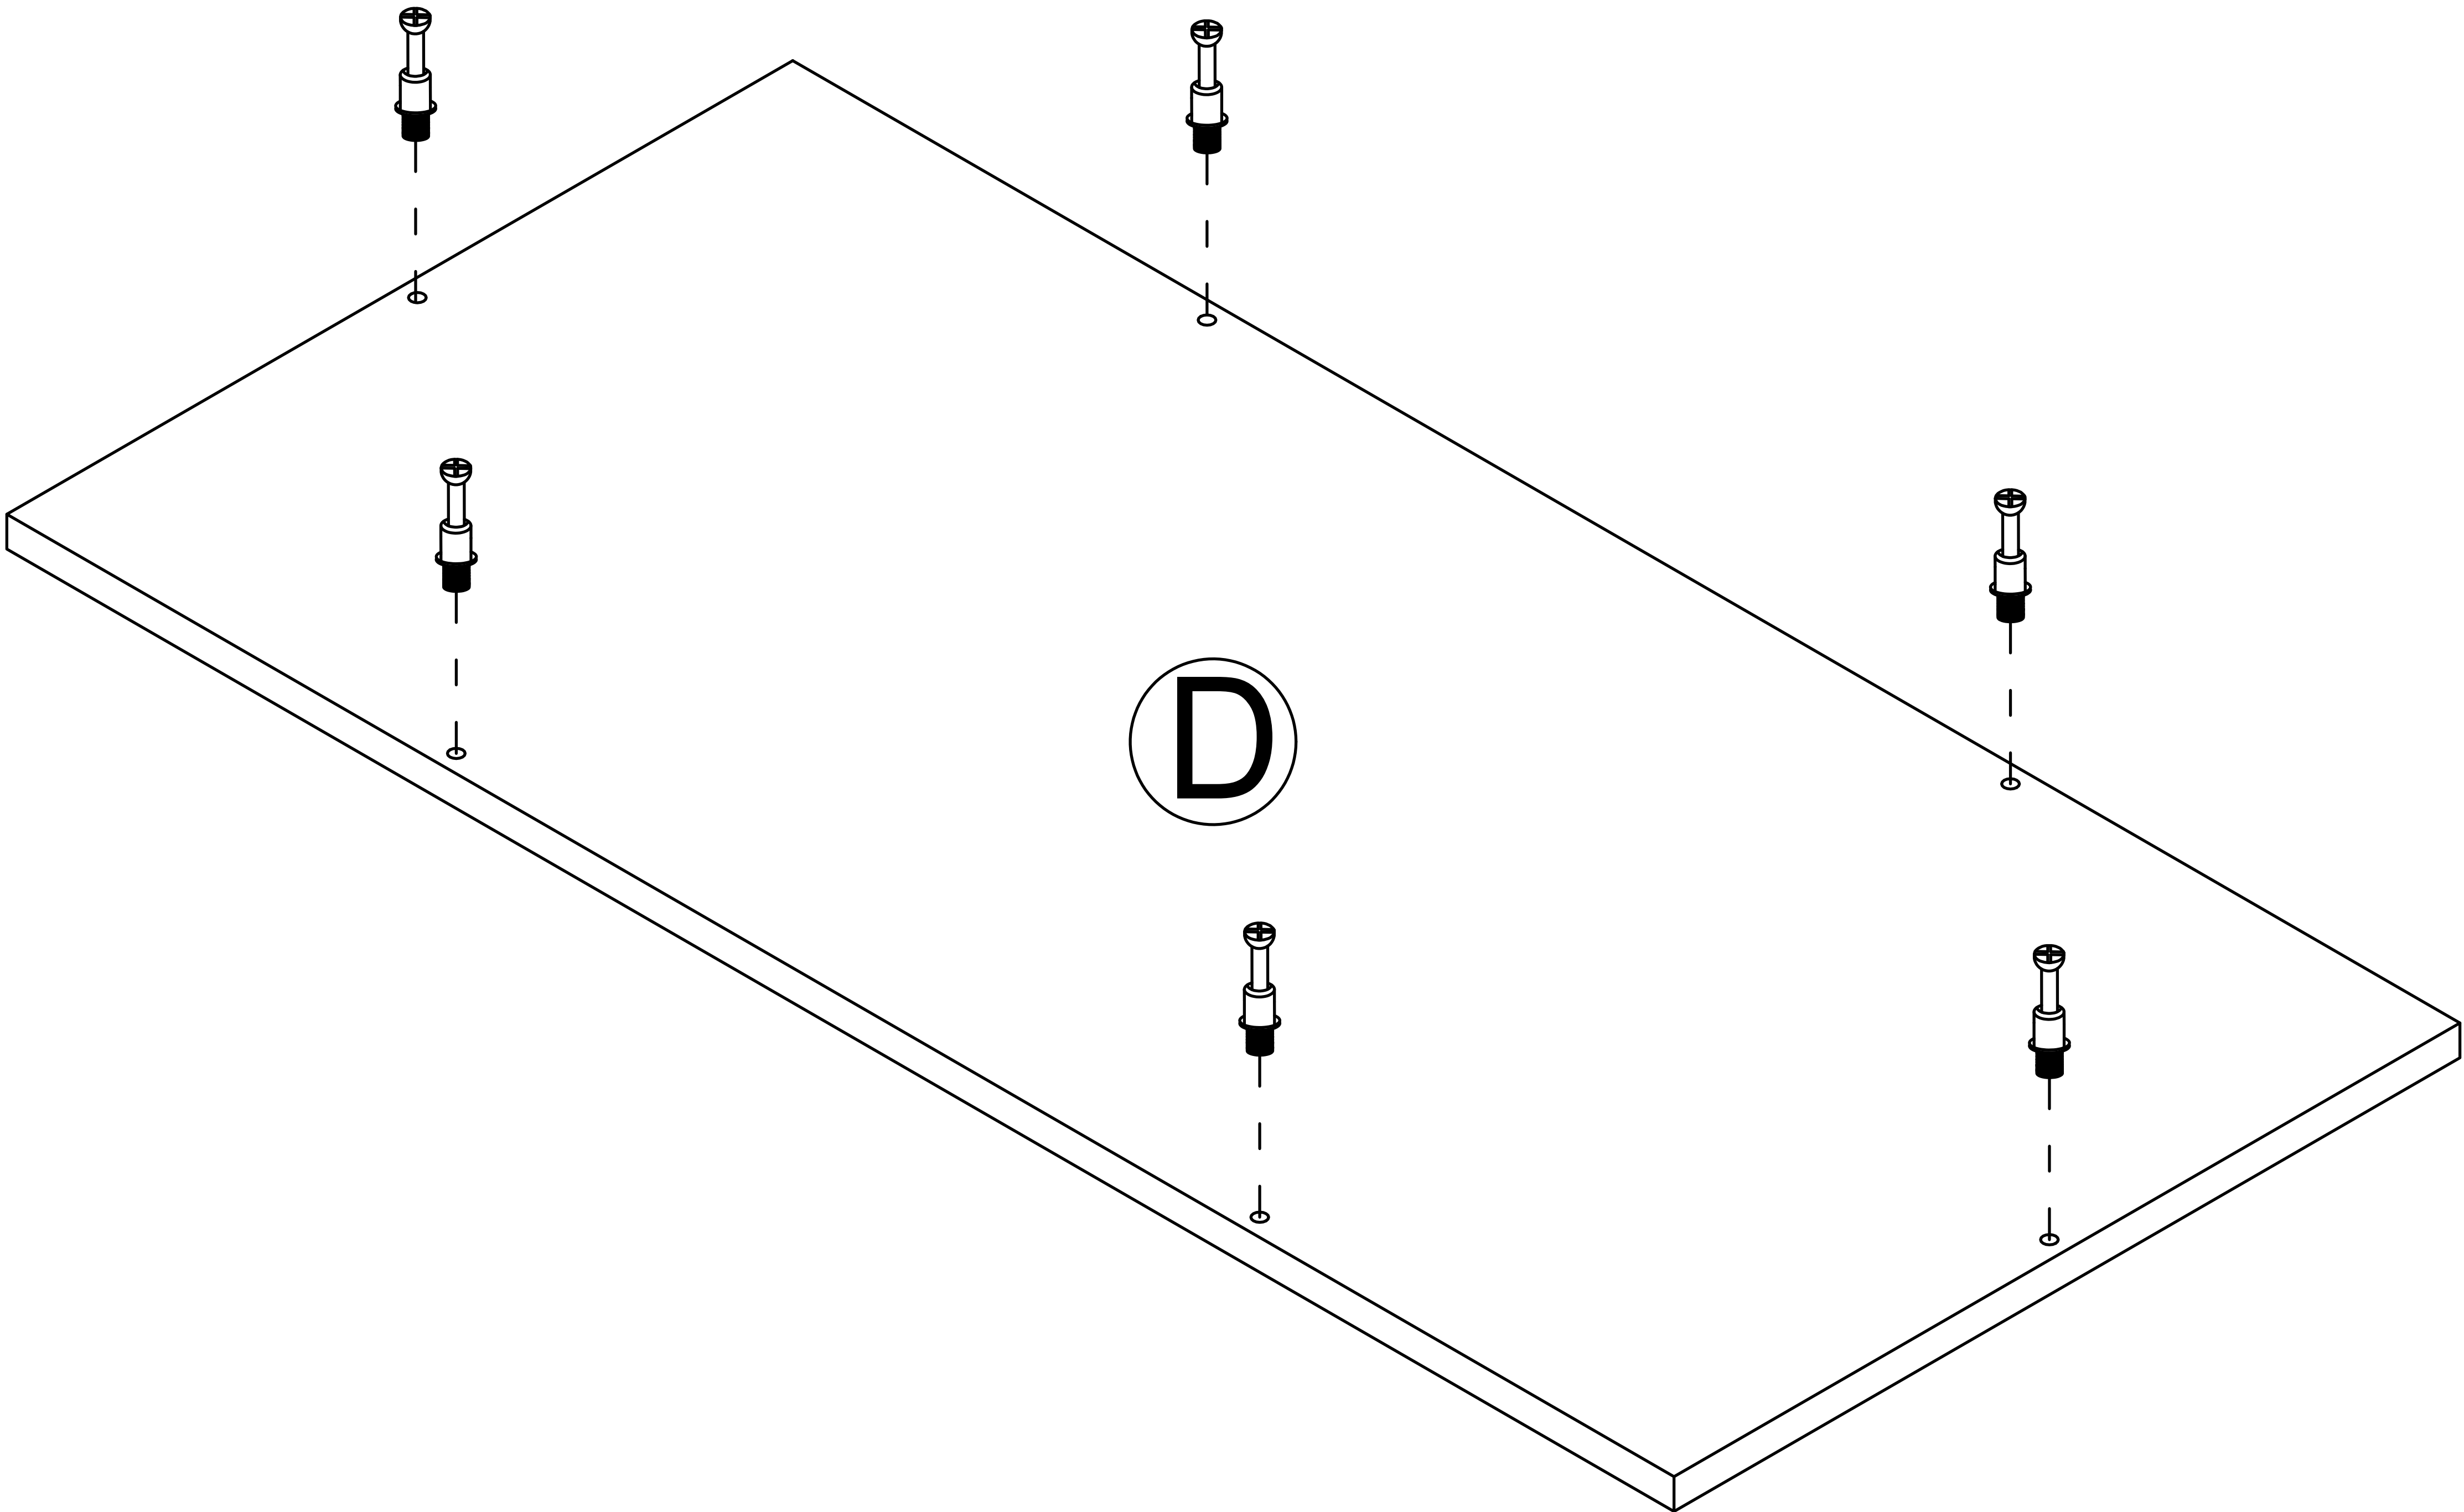


Step 4

2

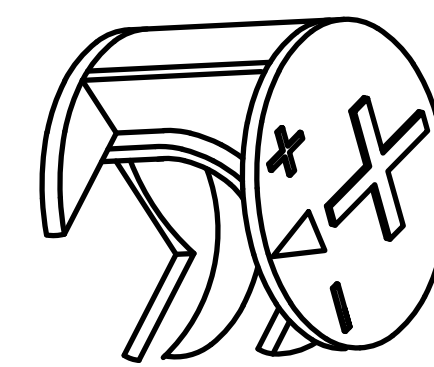


x6

Attention: There is a groove behind the D board in the position where the D board is installed

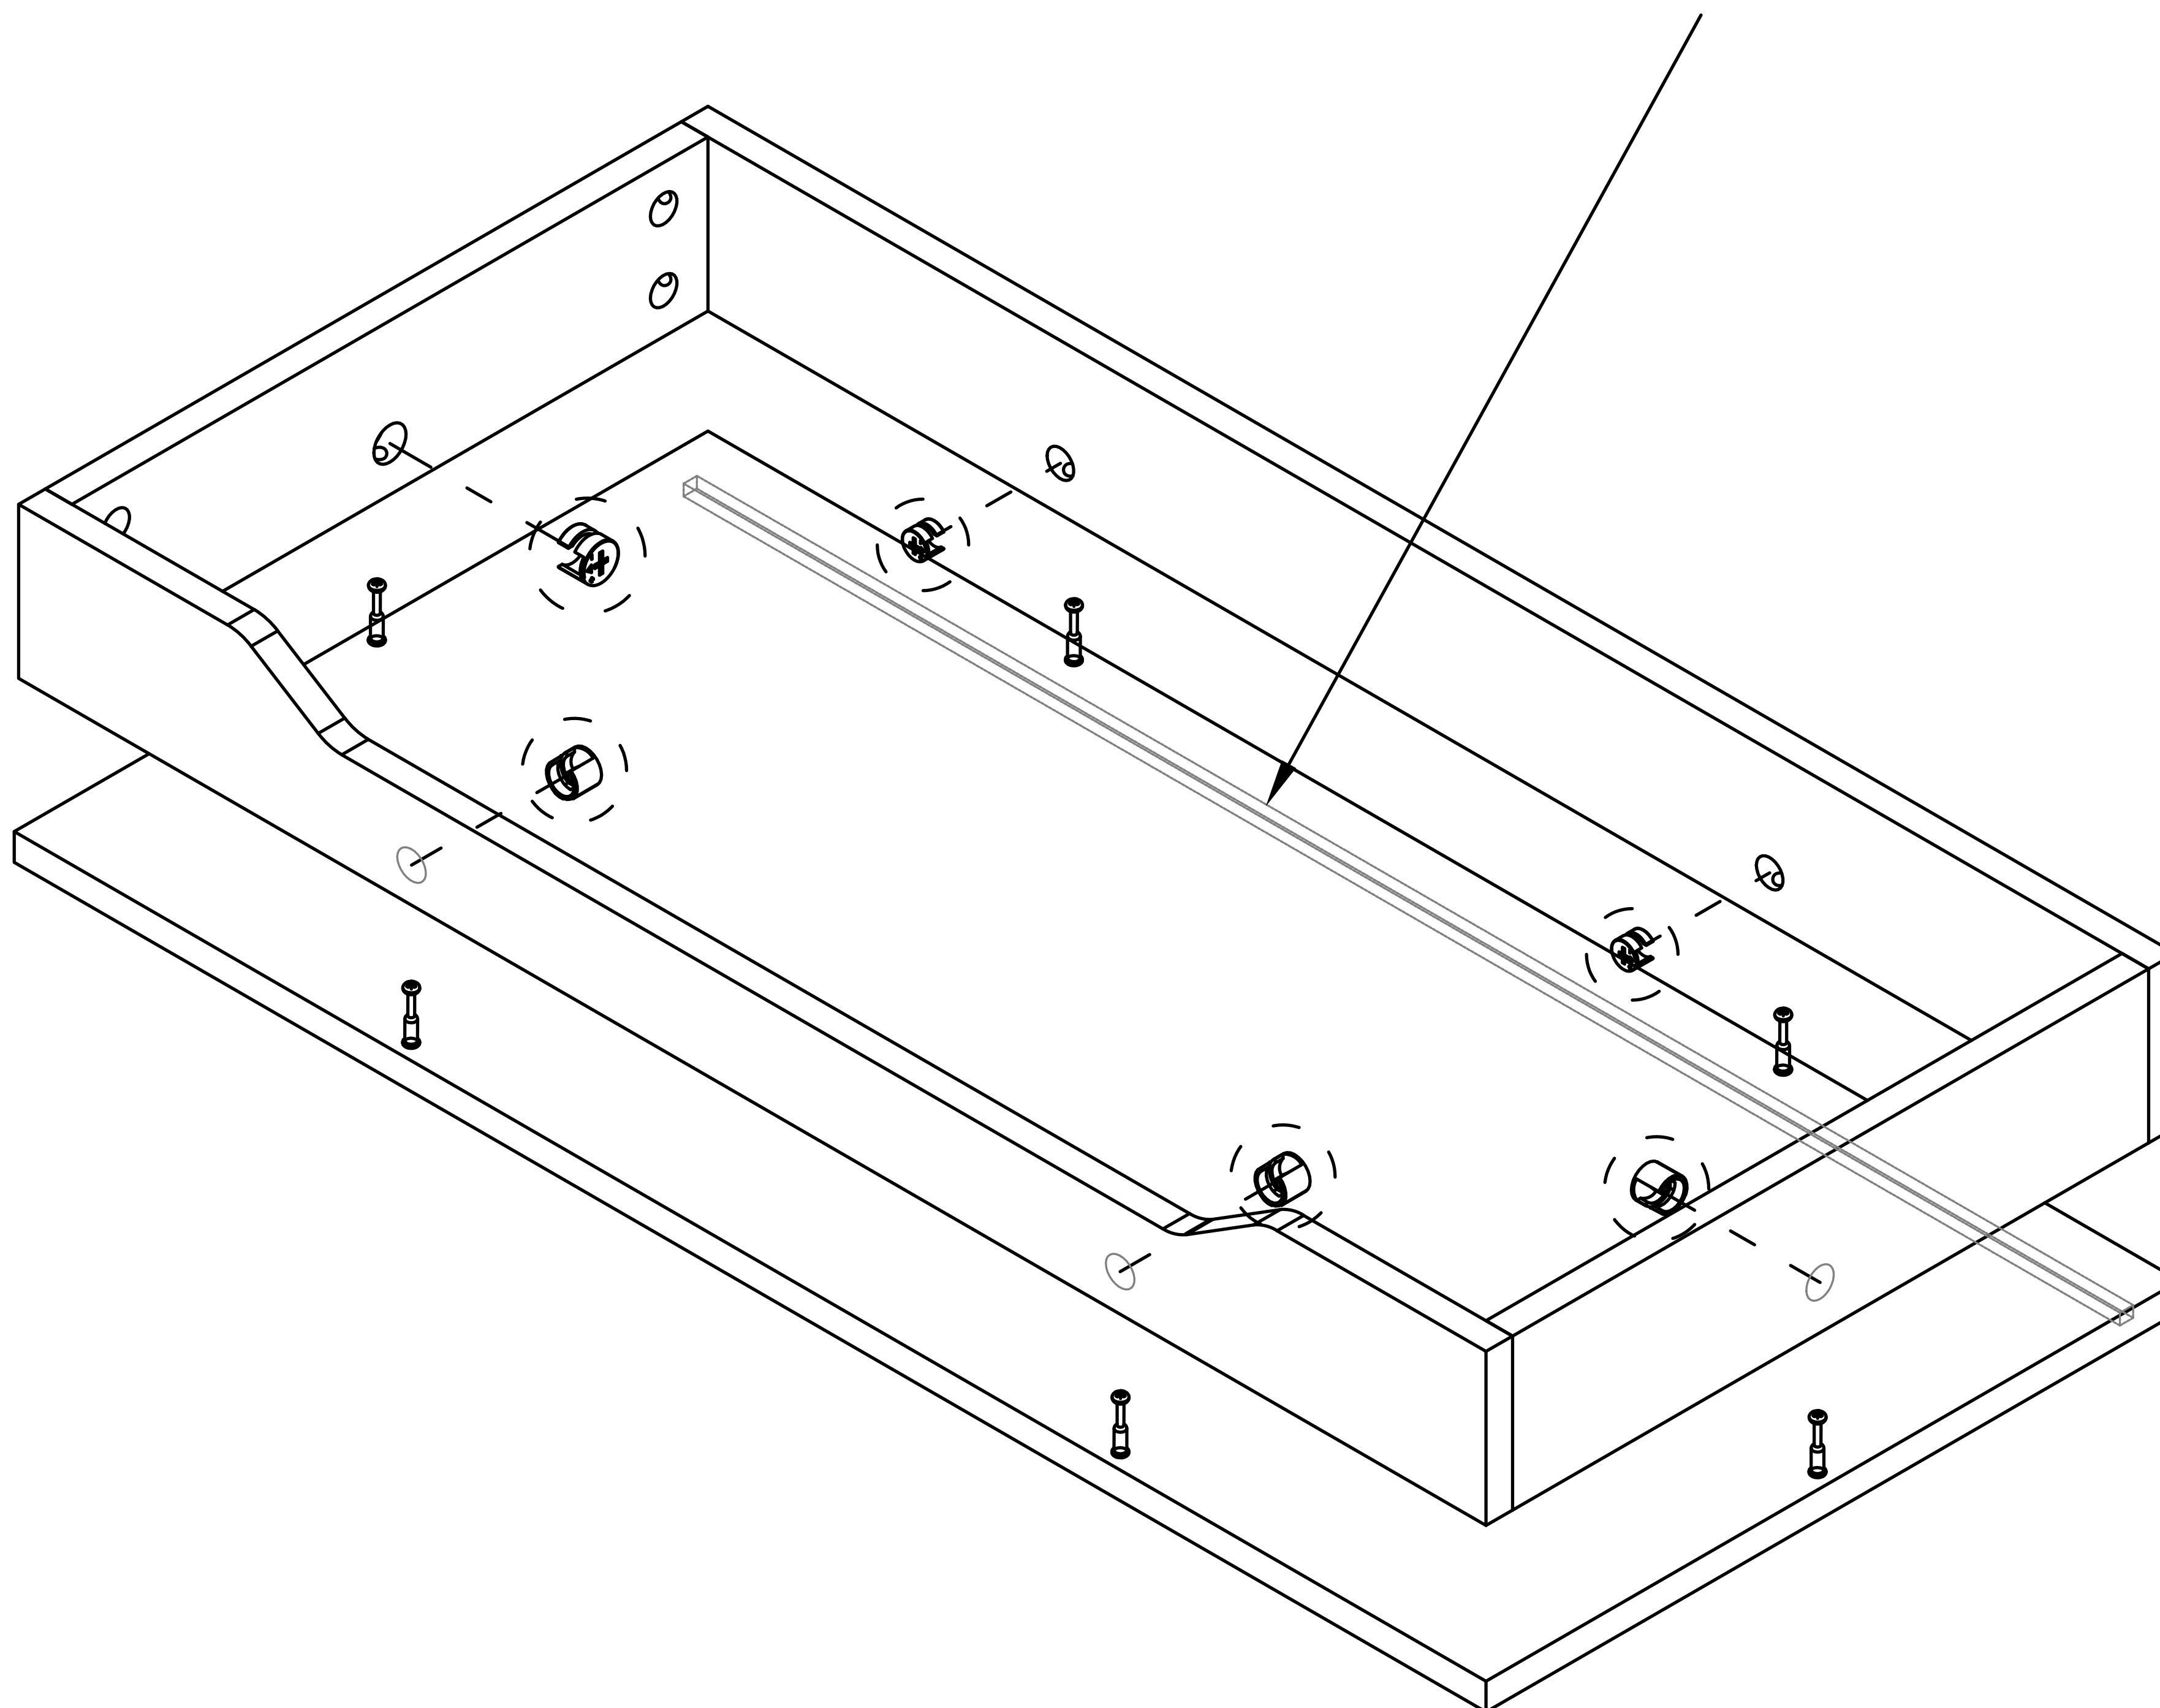


Step 5

3

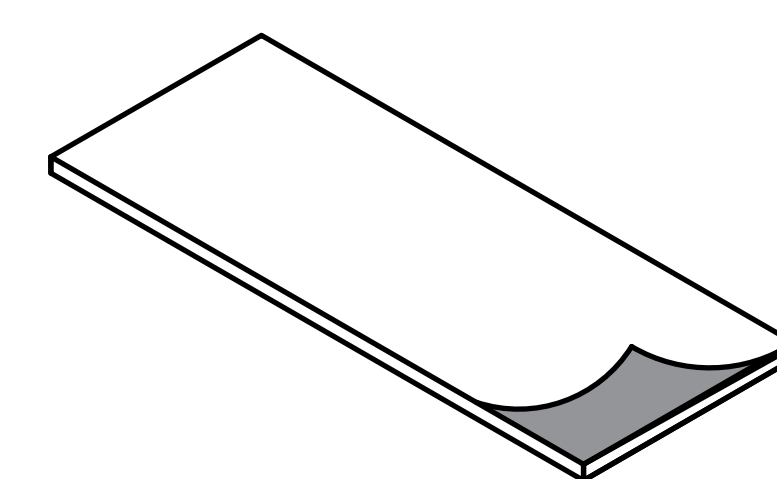



x4

Tear off release paper and stick the black foot pad on the board


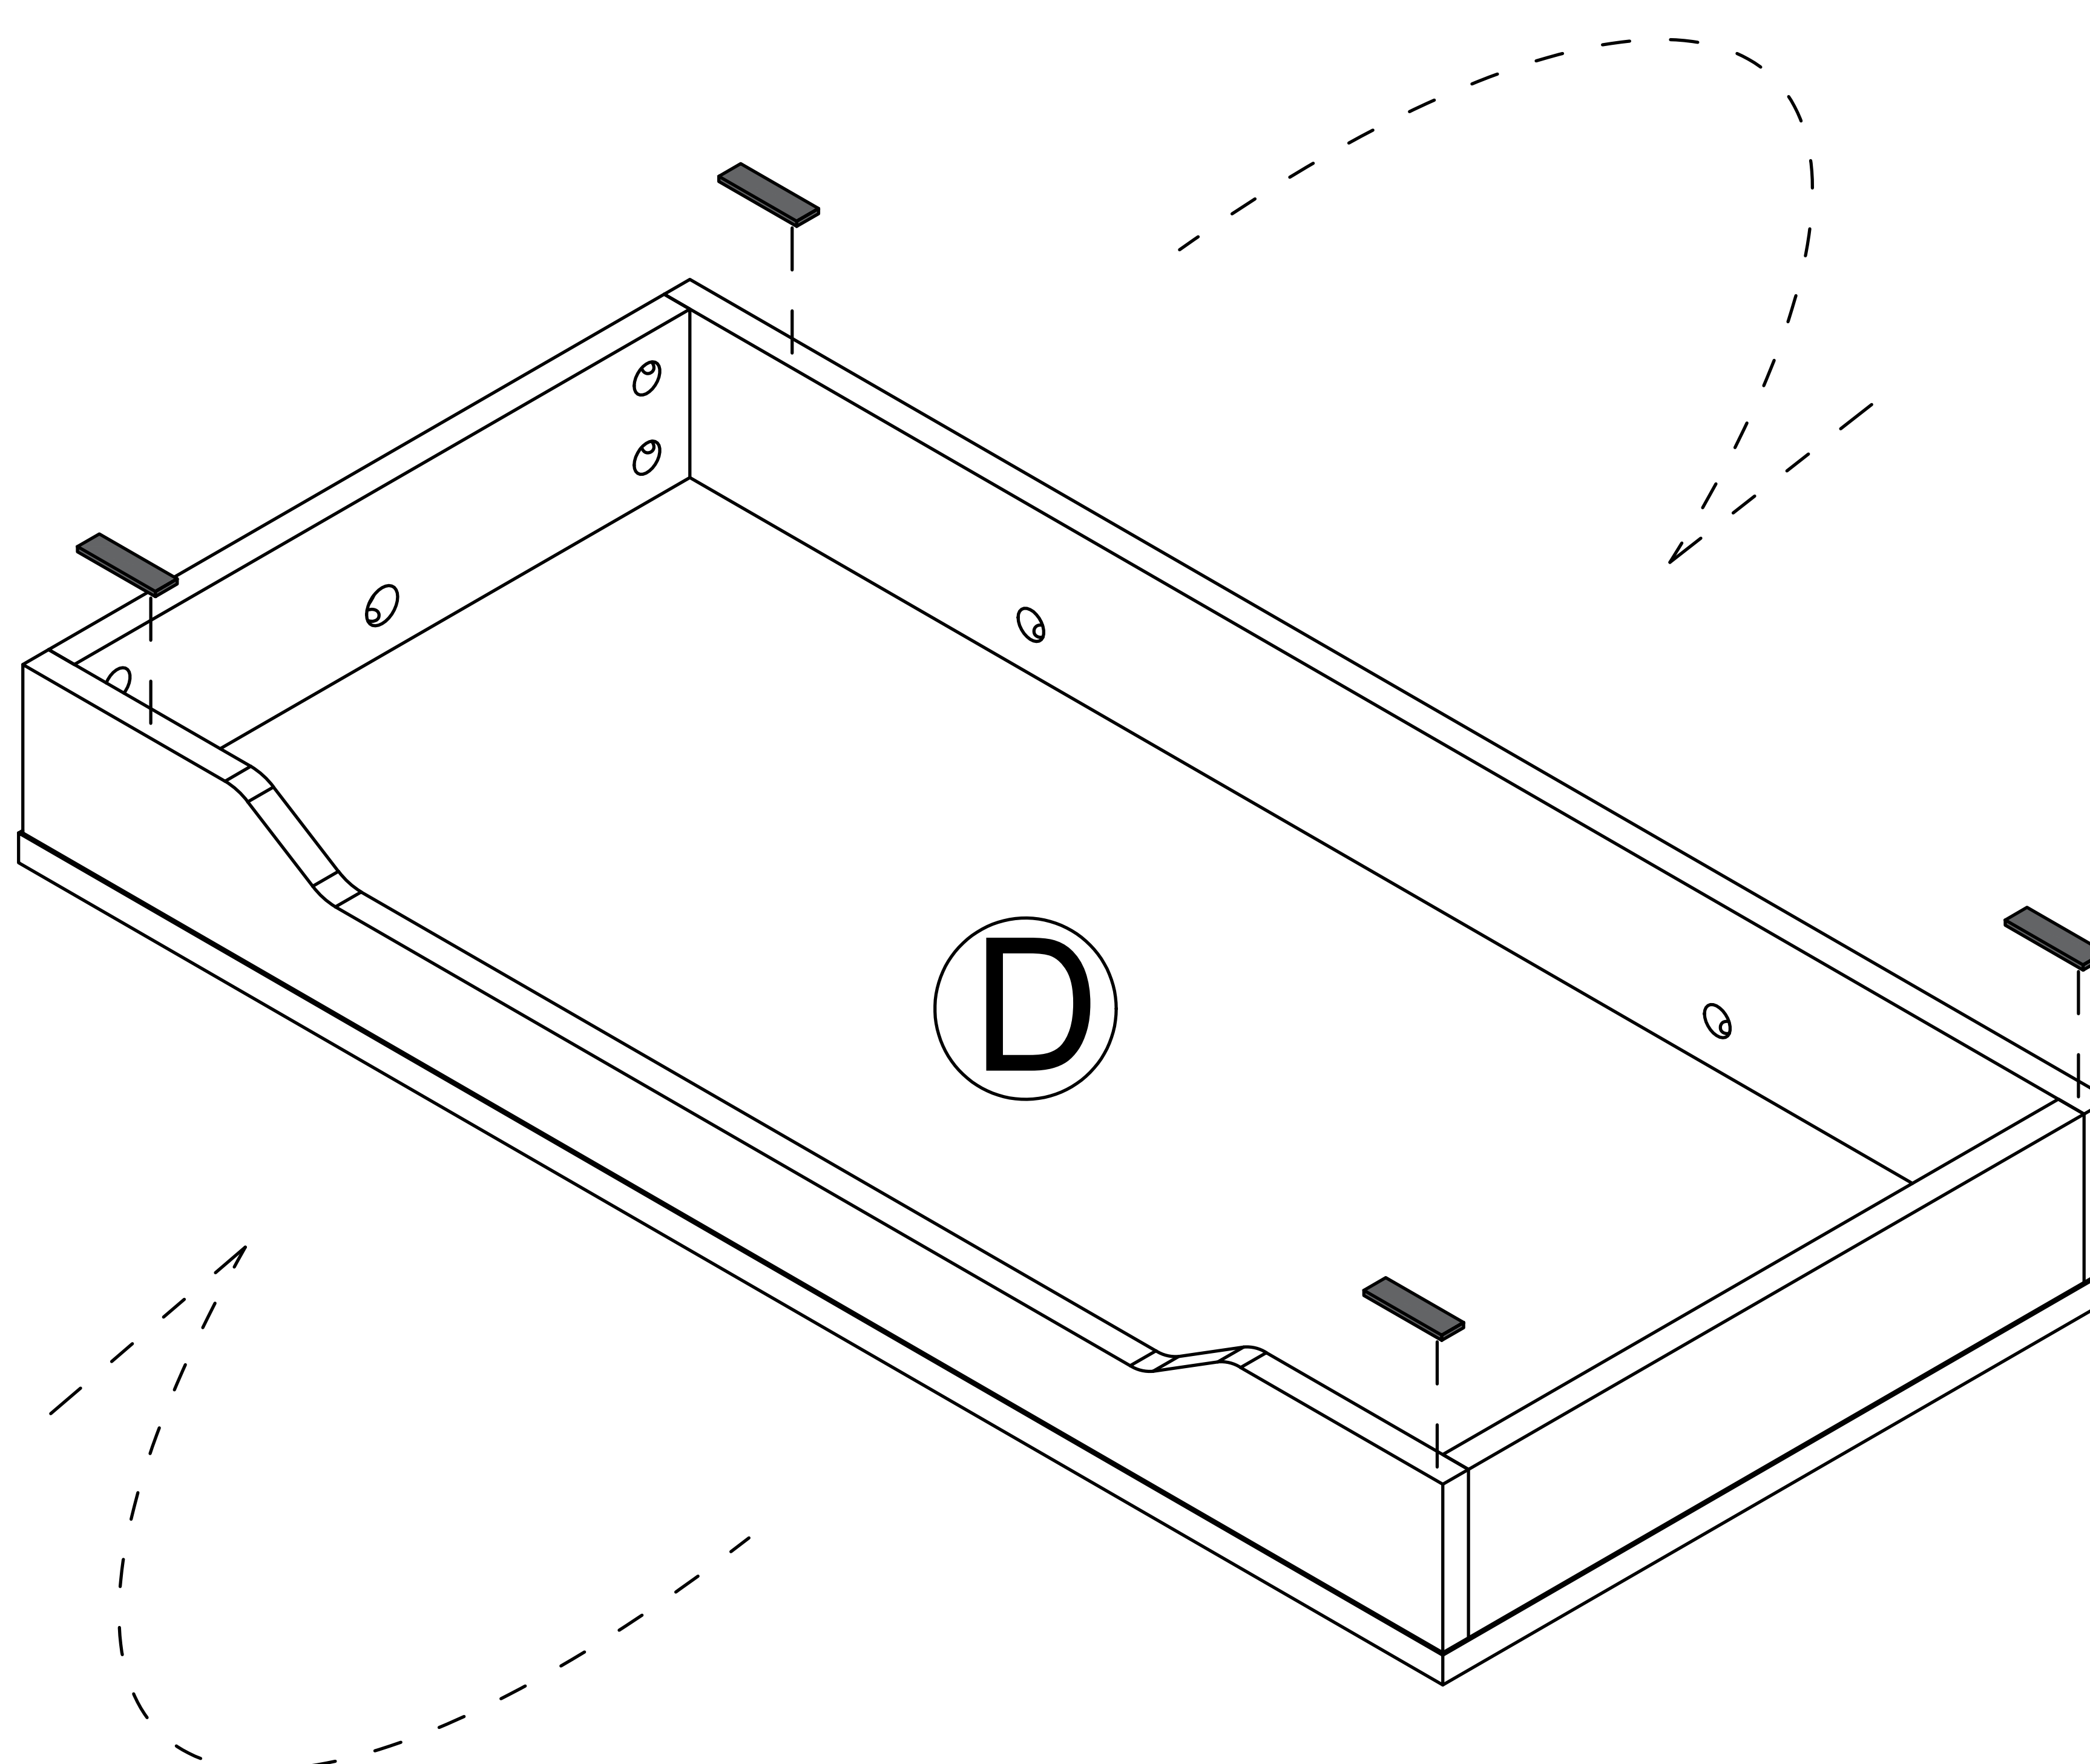


6


Step 6

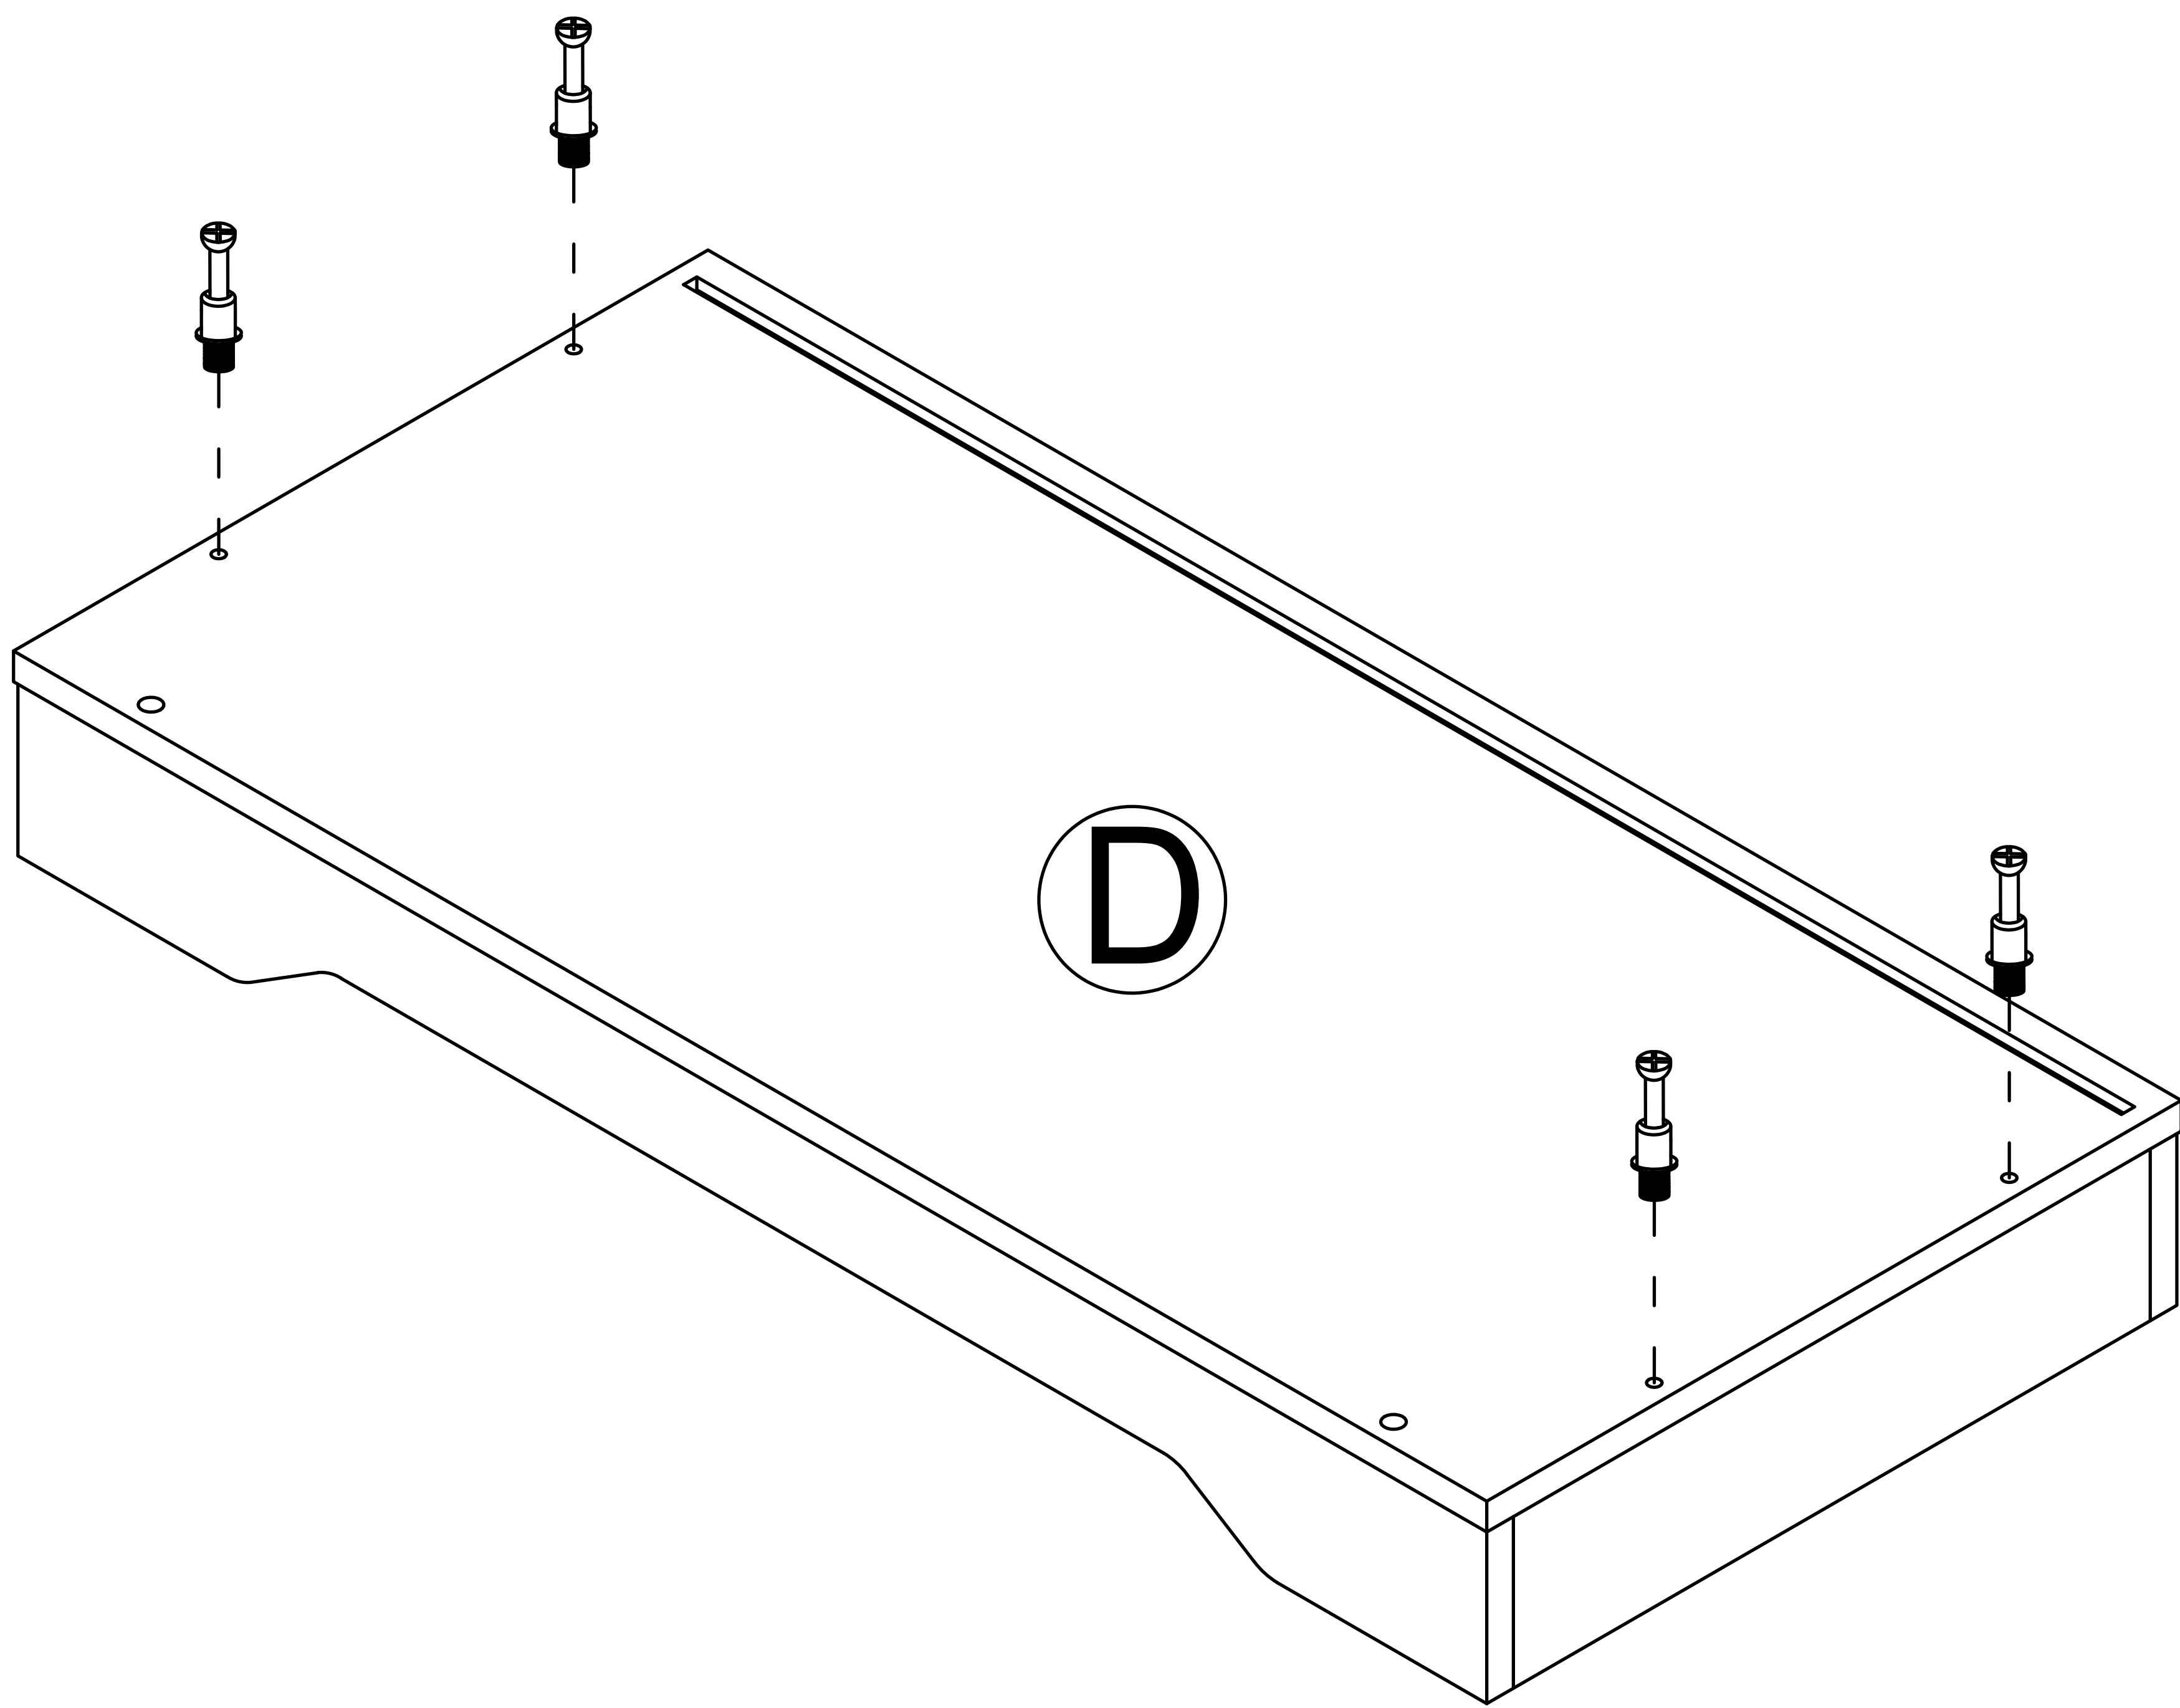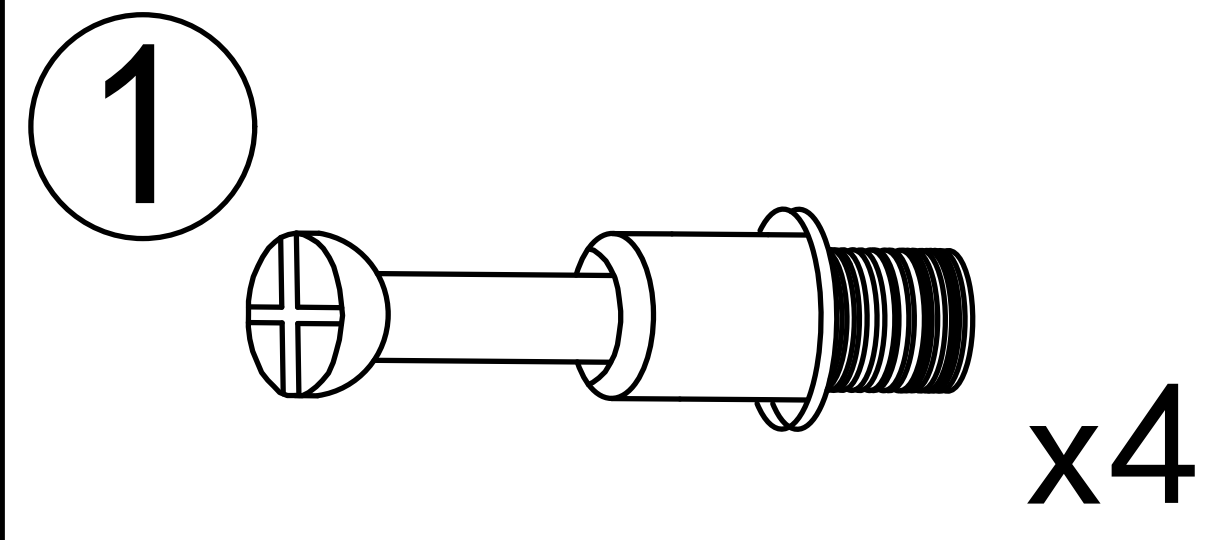


Step 7

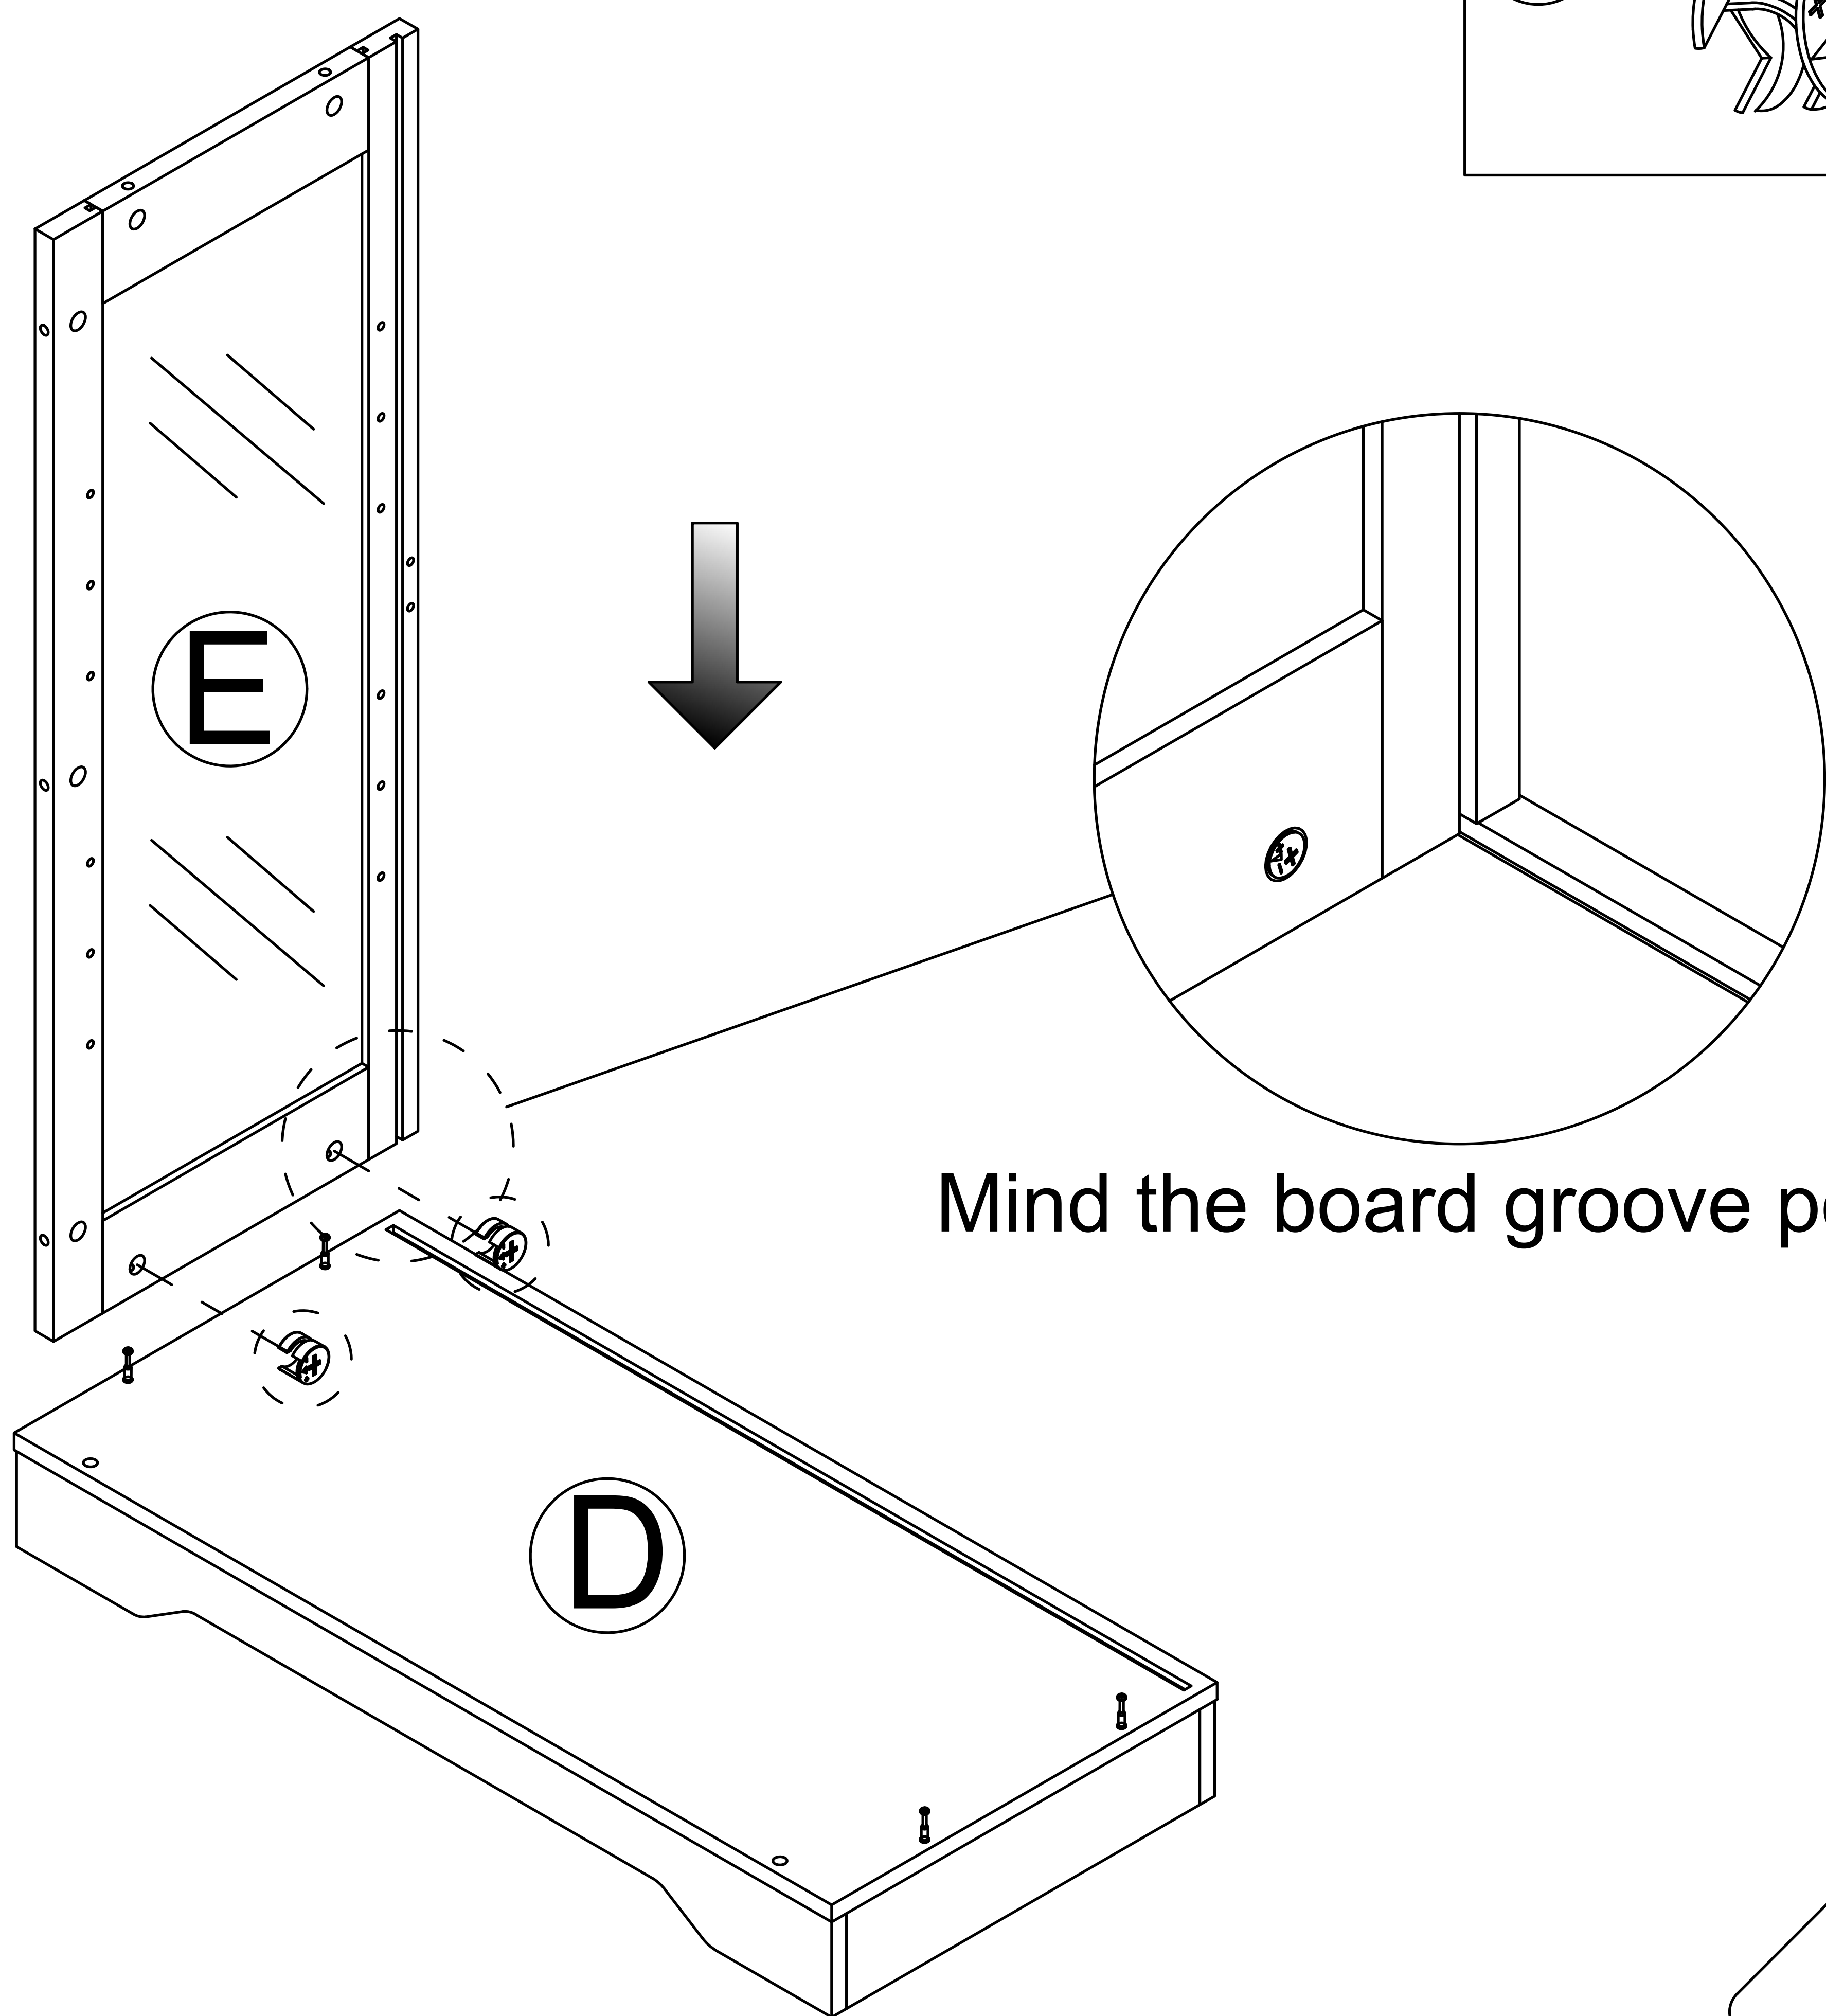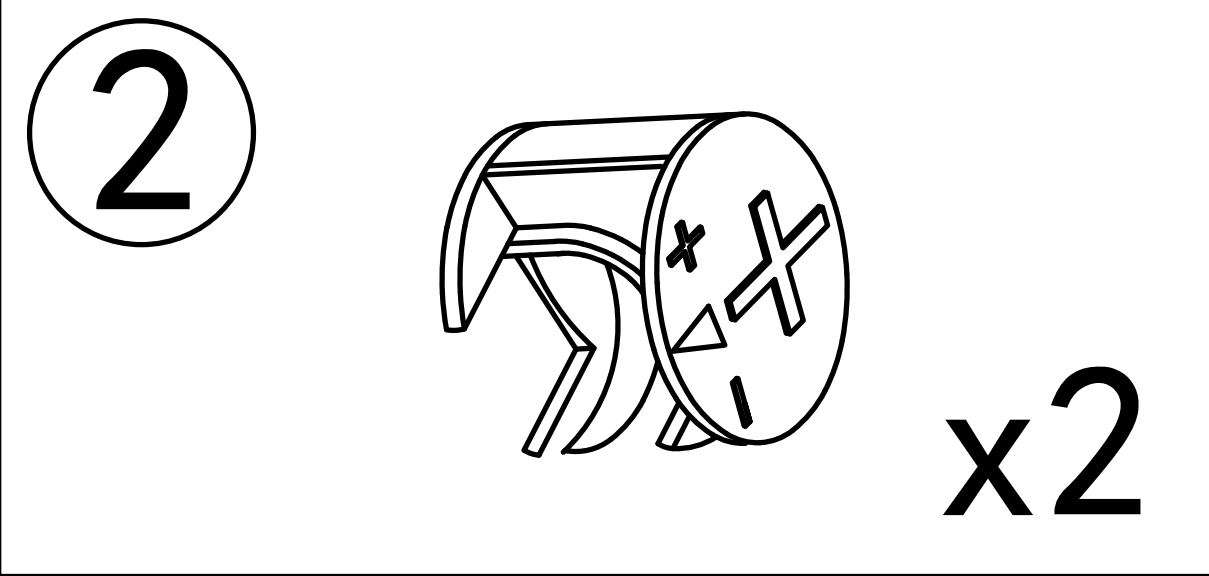



Step 8

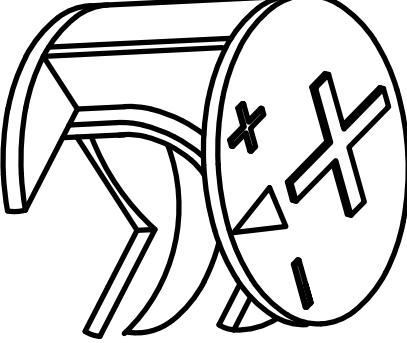2  x2

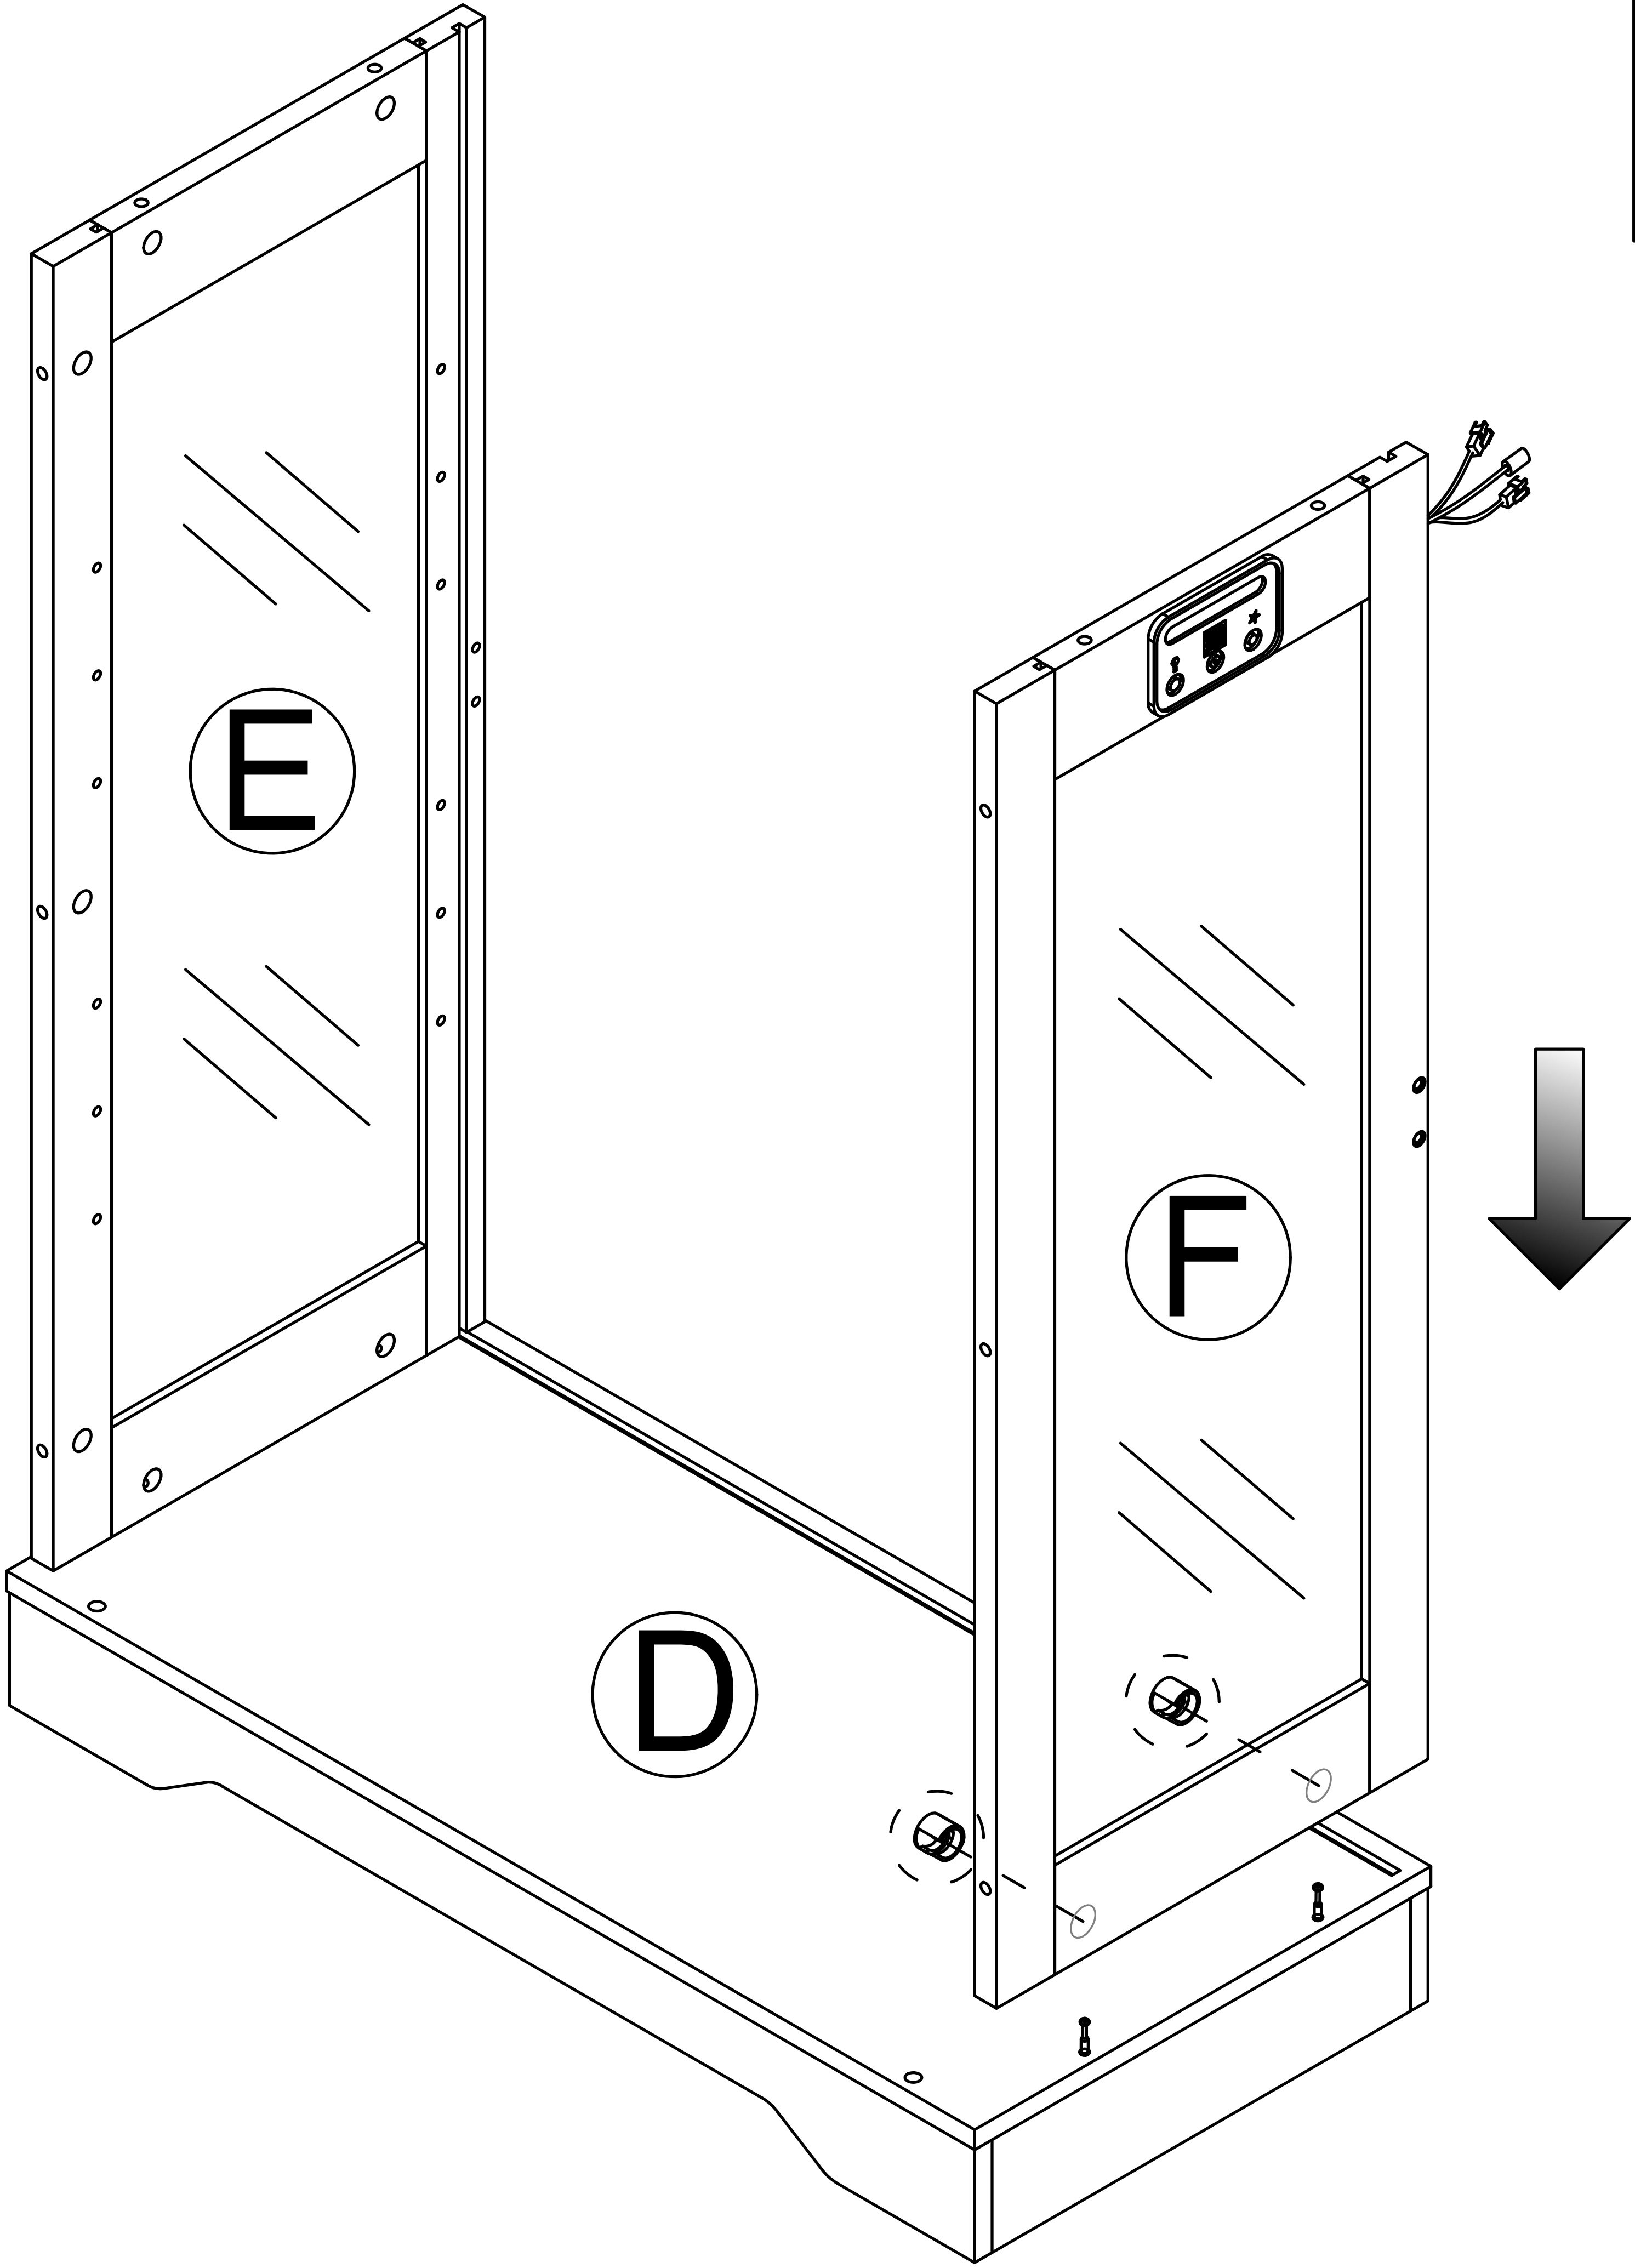


Step 9

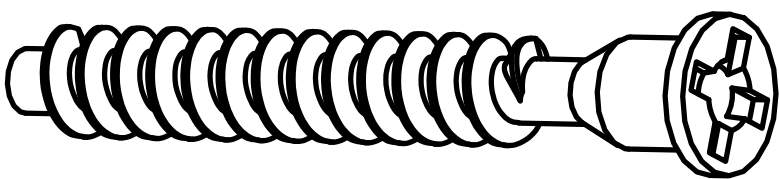
4  x4

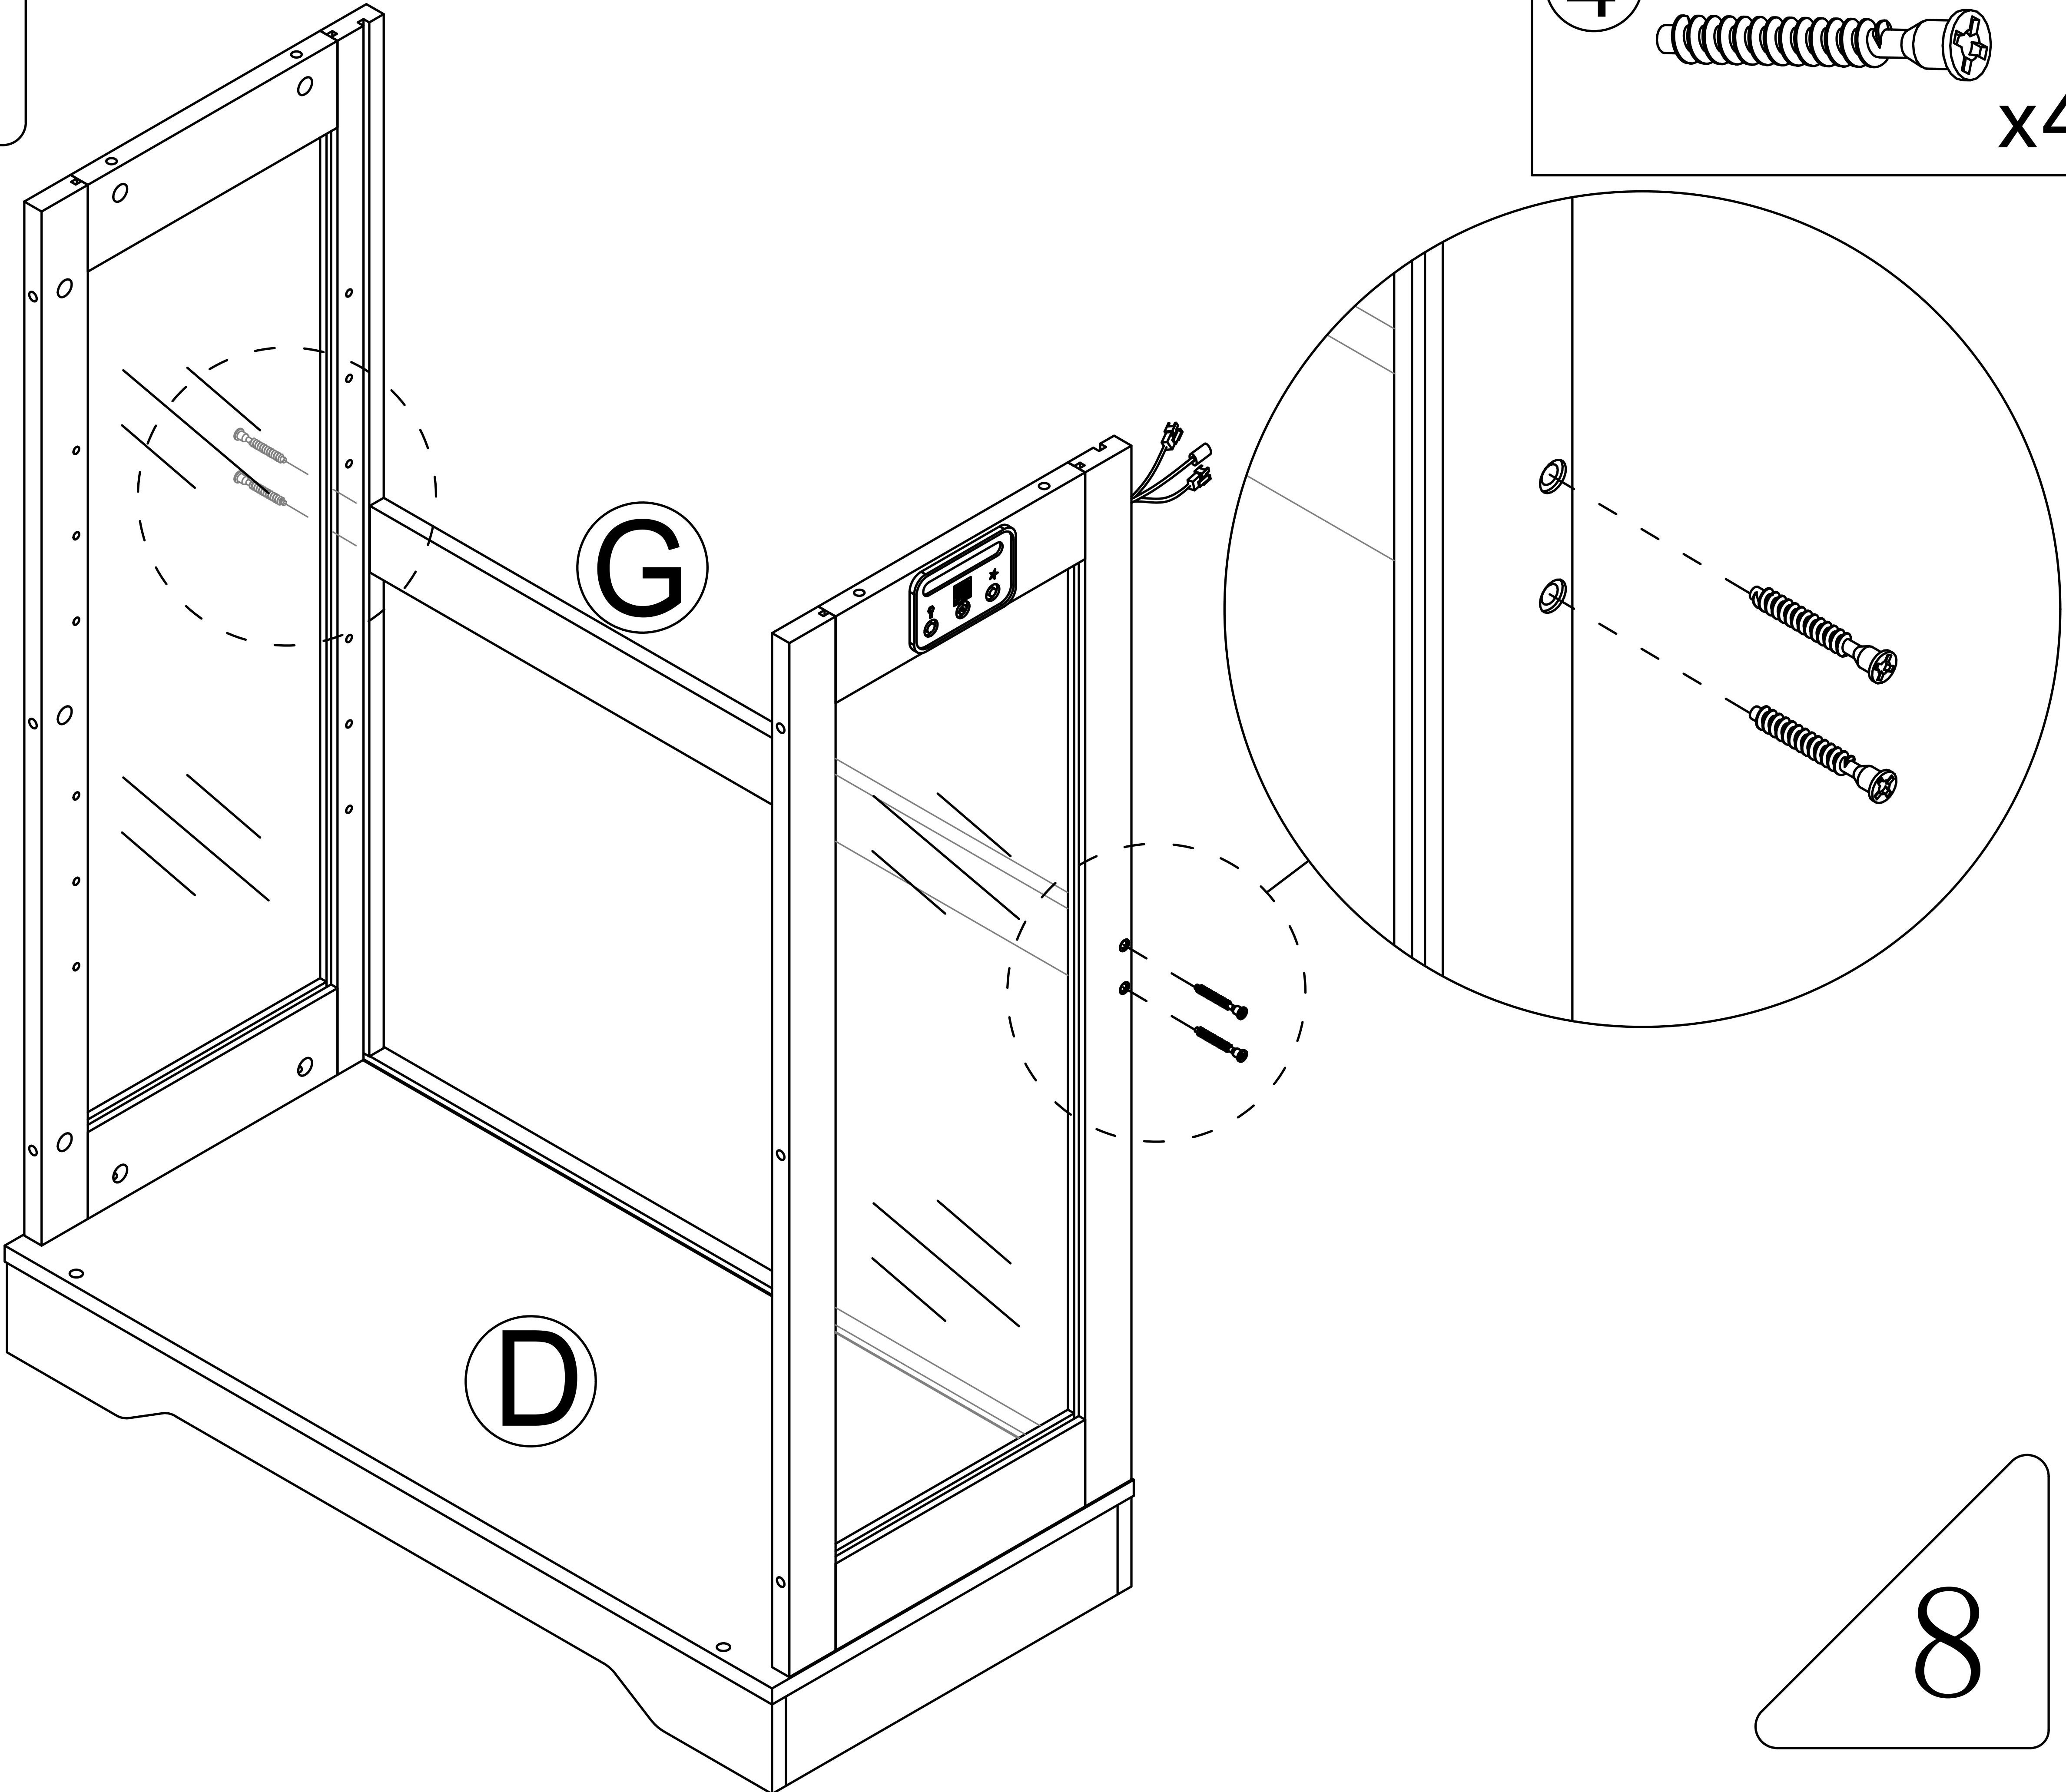

Step 10

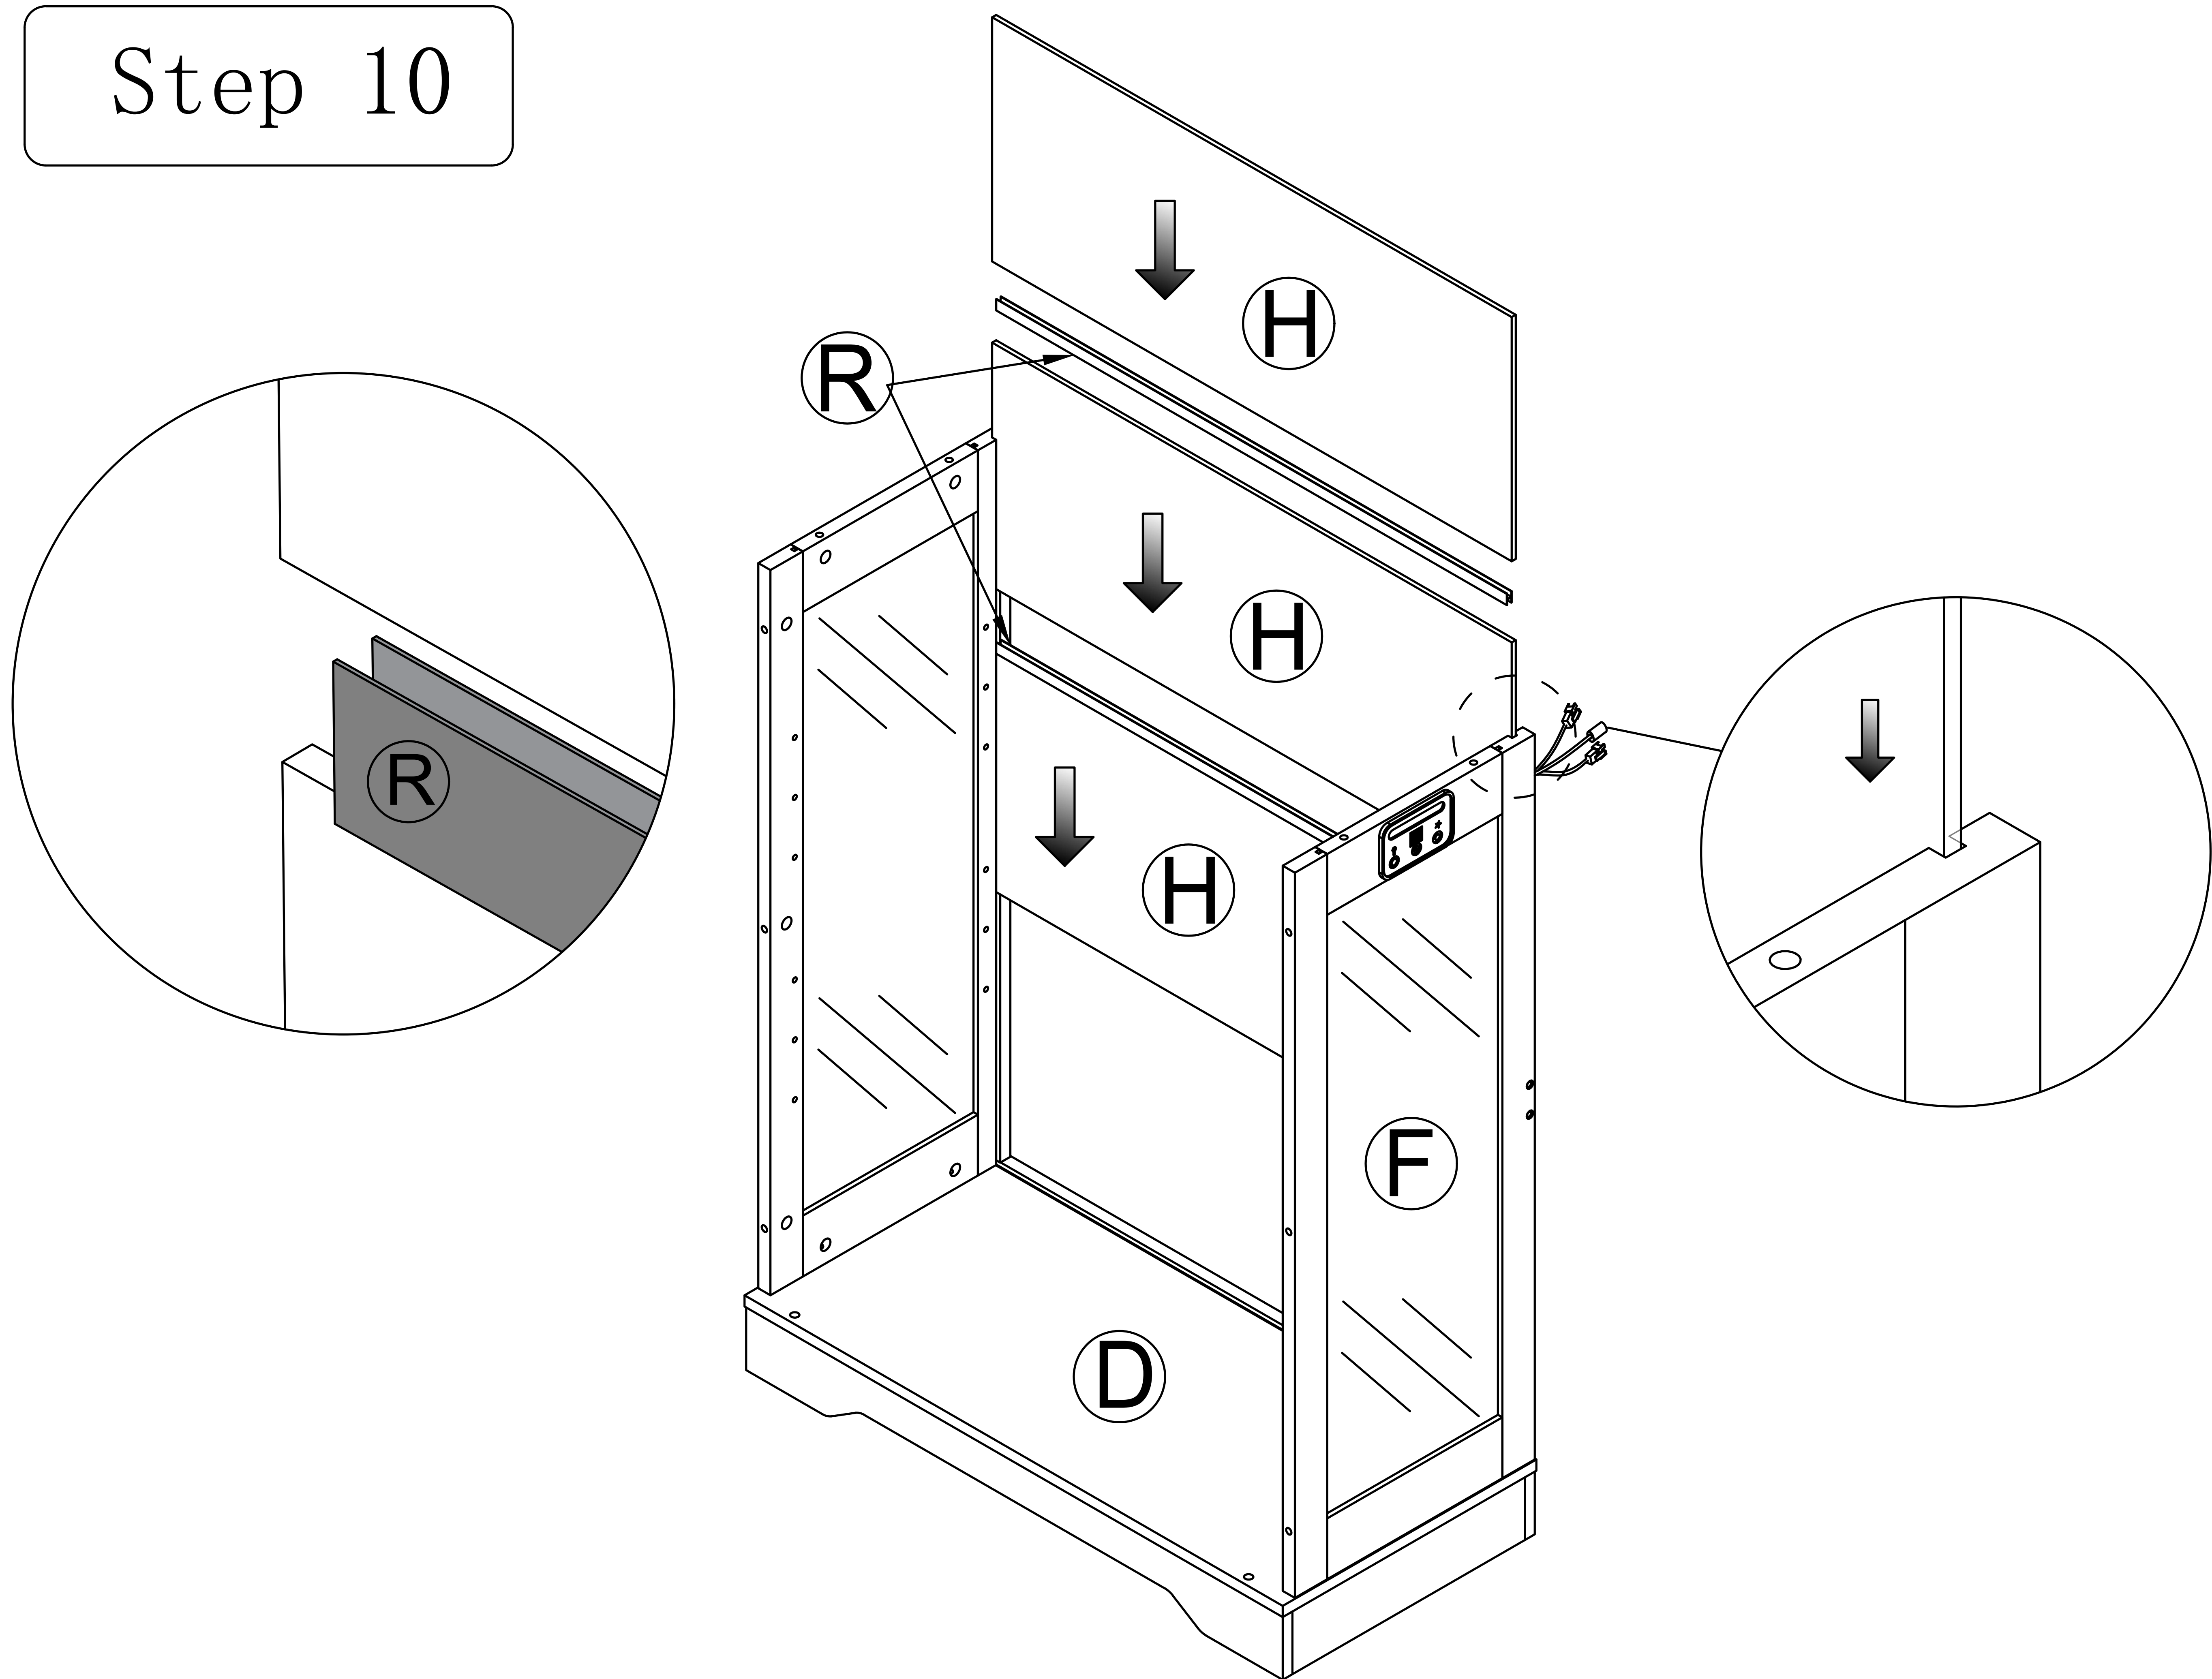


Step 11

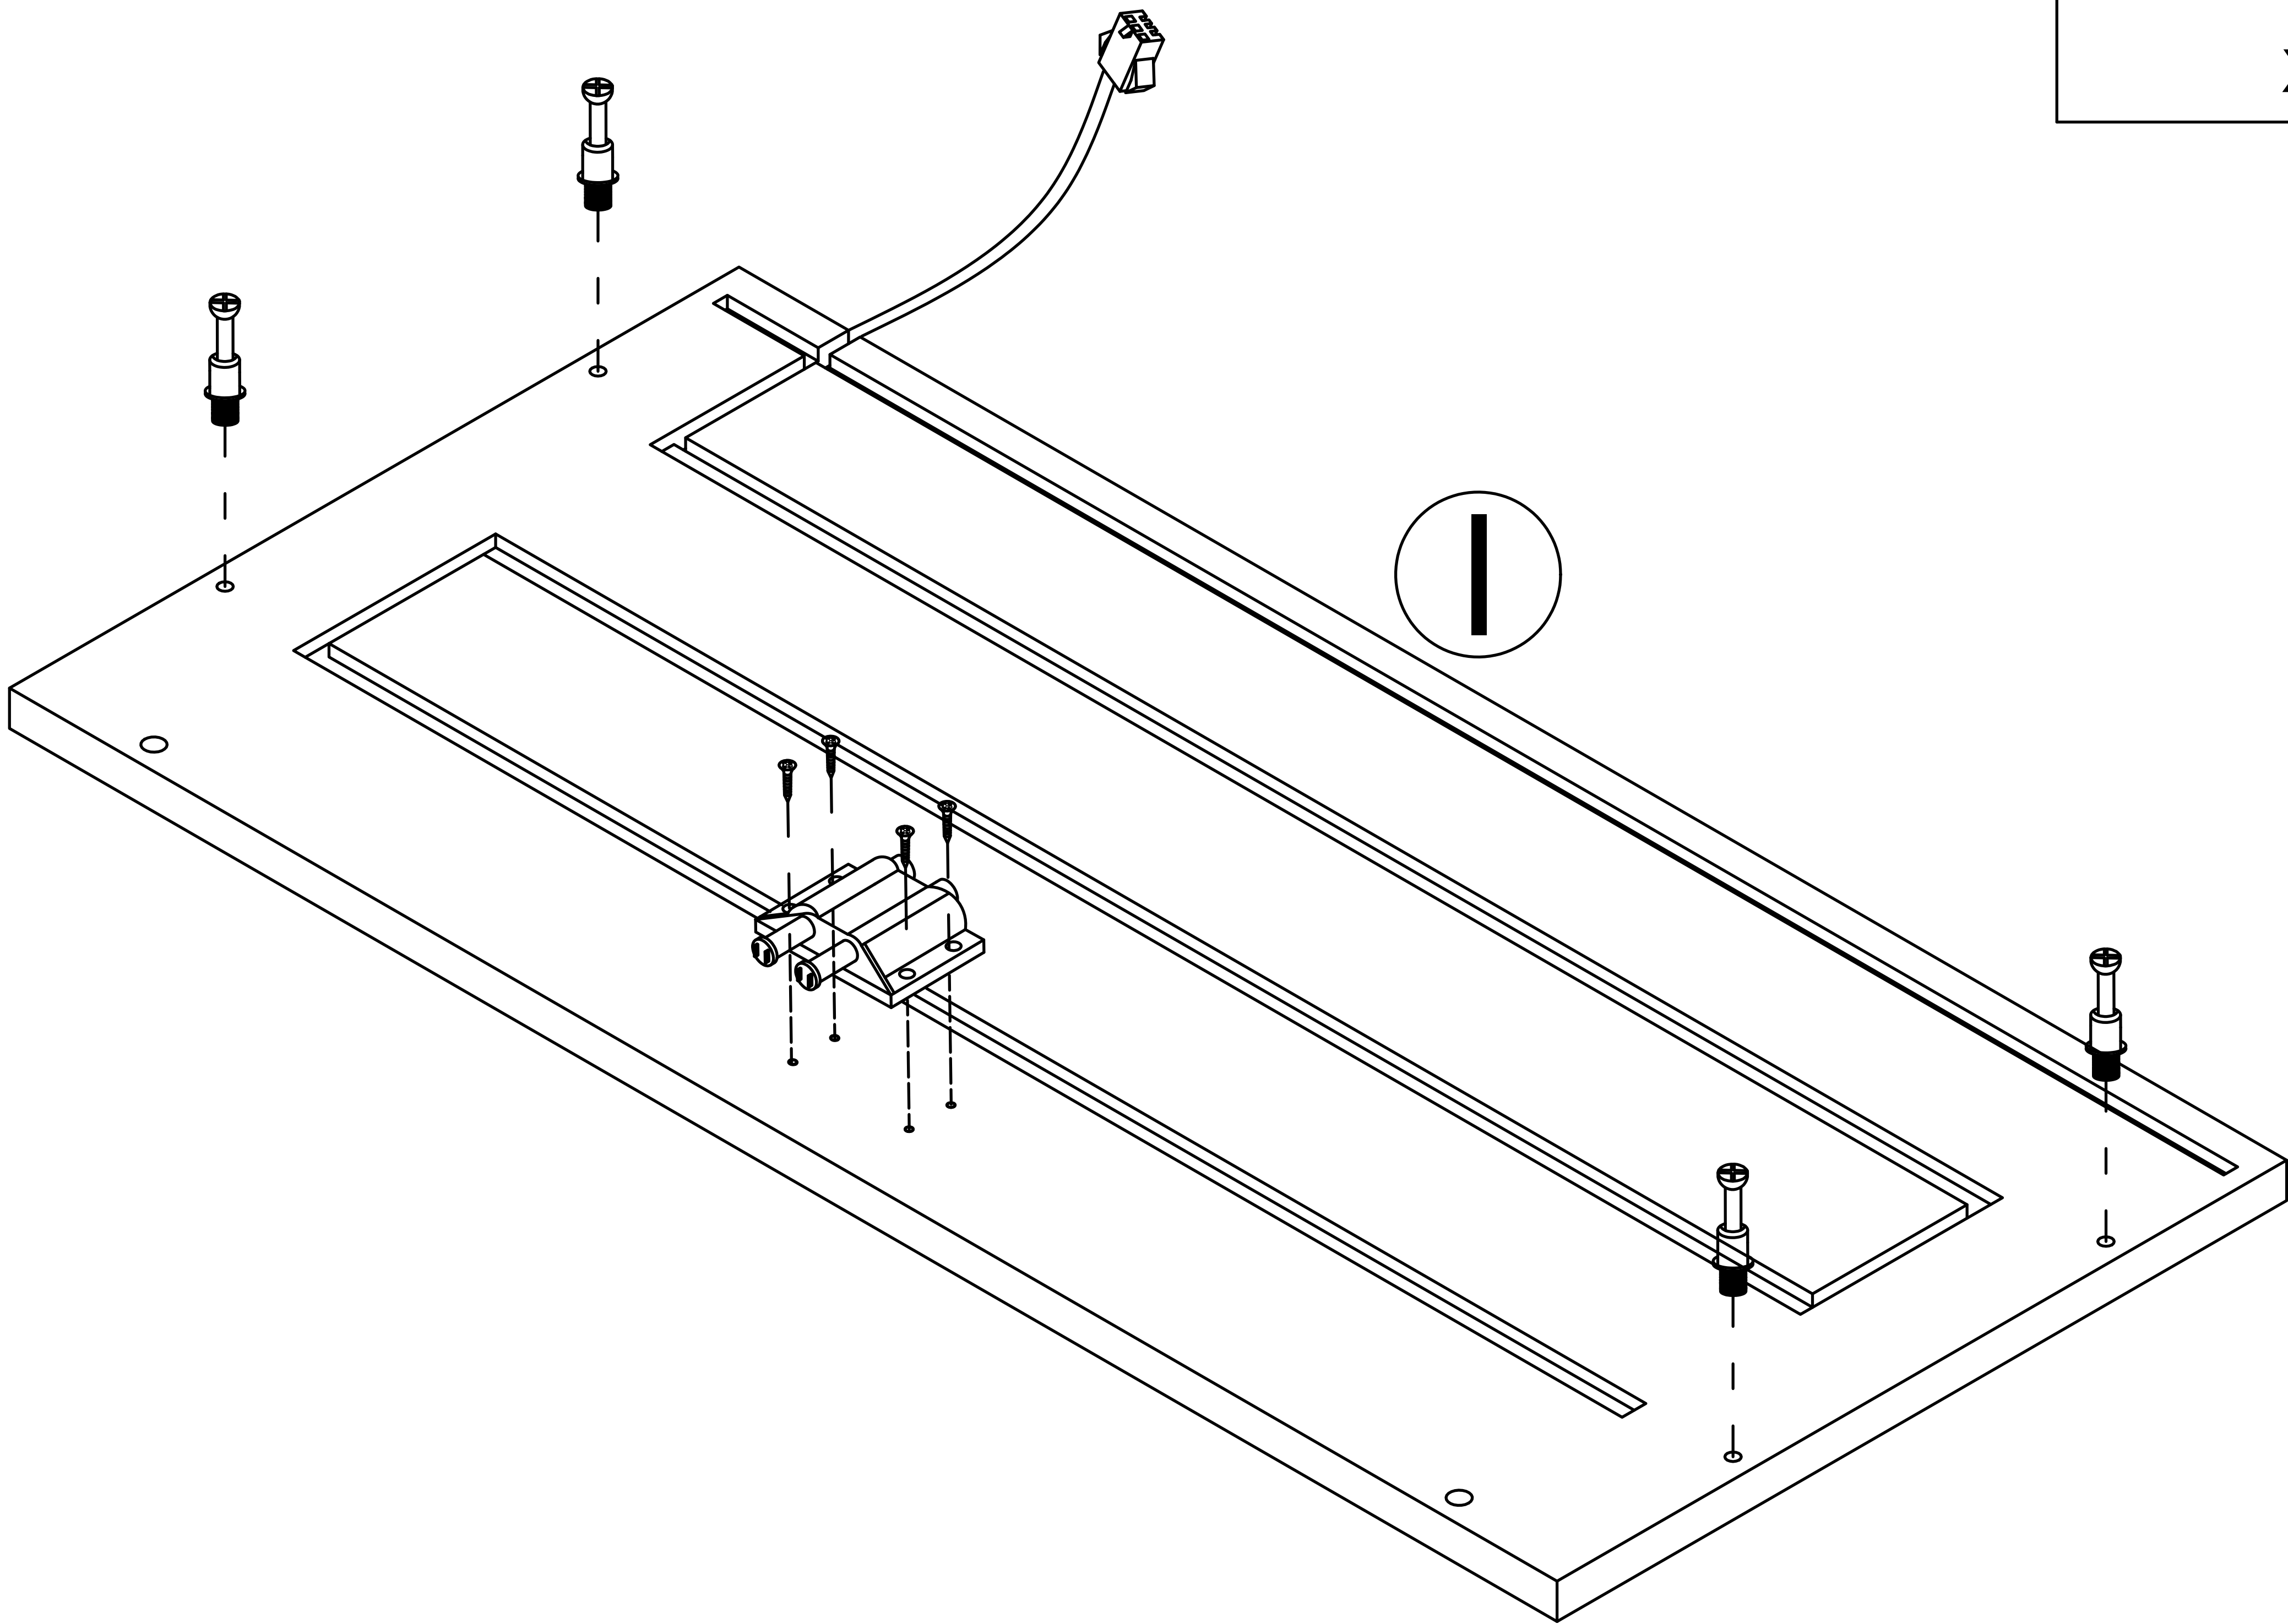


- | | | |
|---|--|----|
| ① | | x4 |
| ⑤ | | x1 |
| | | x4 |

Step 12

2

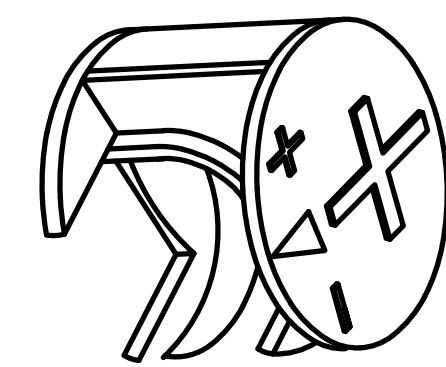


x4

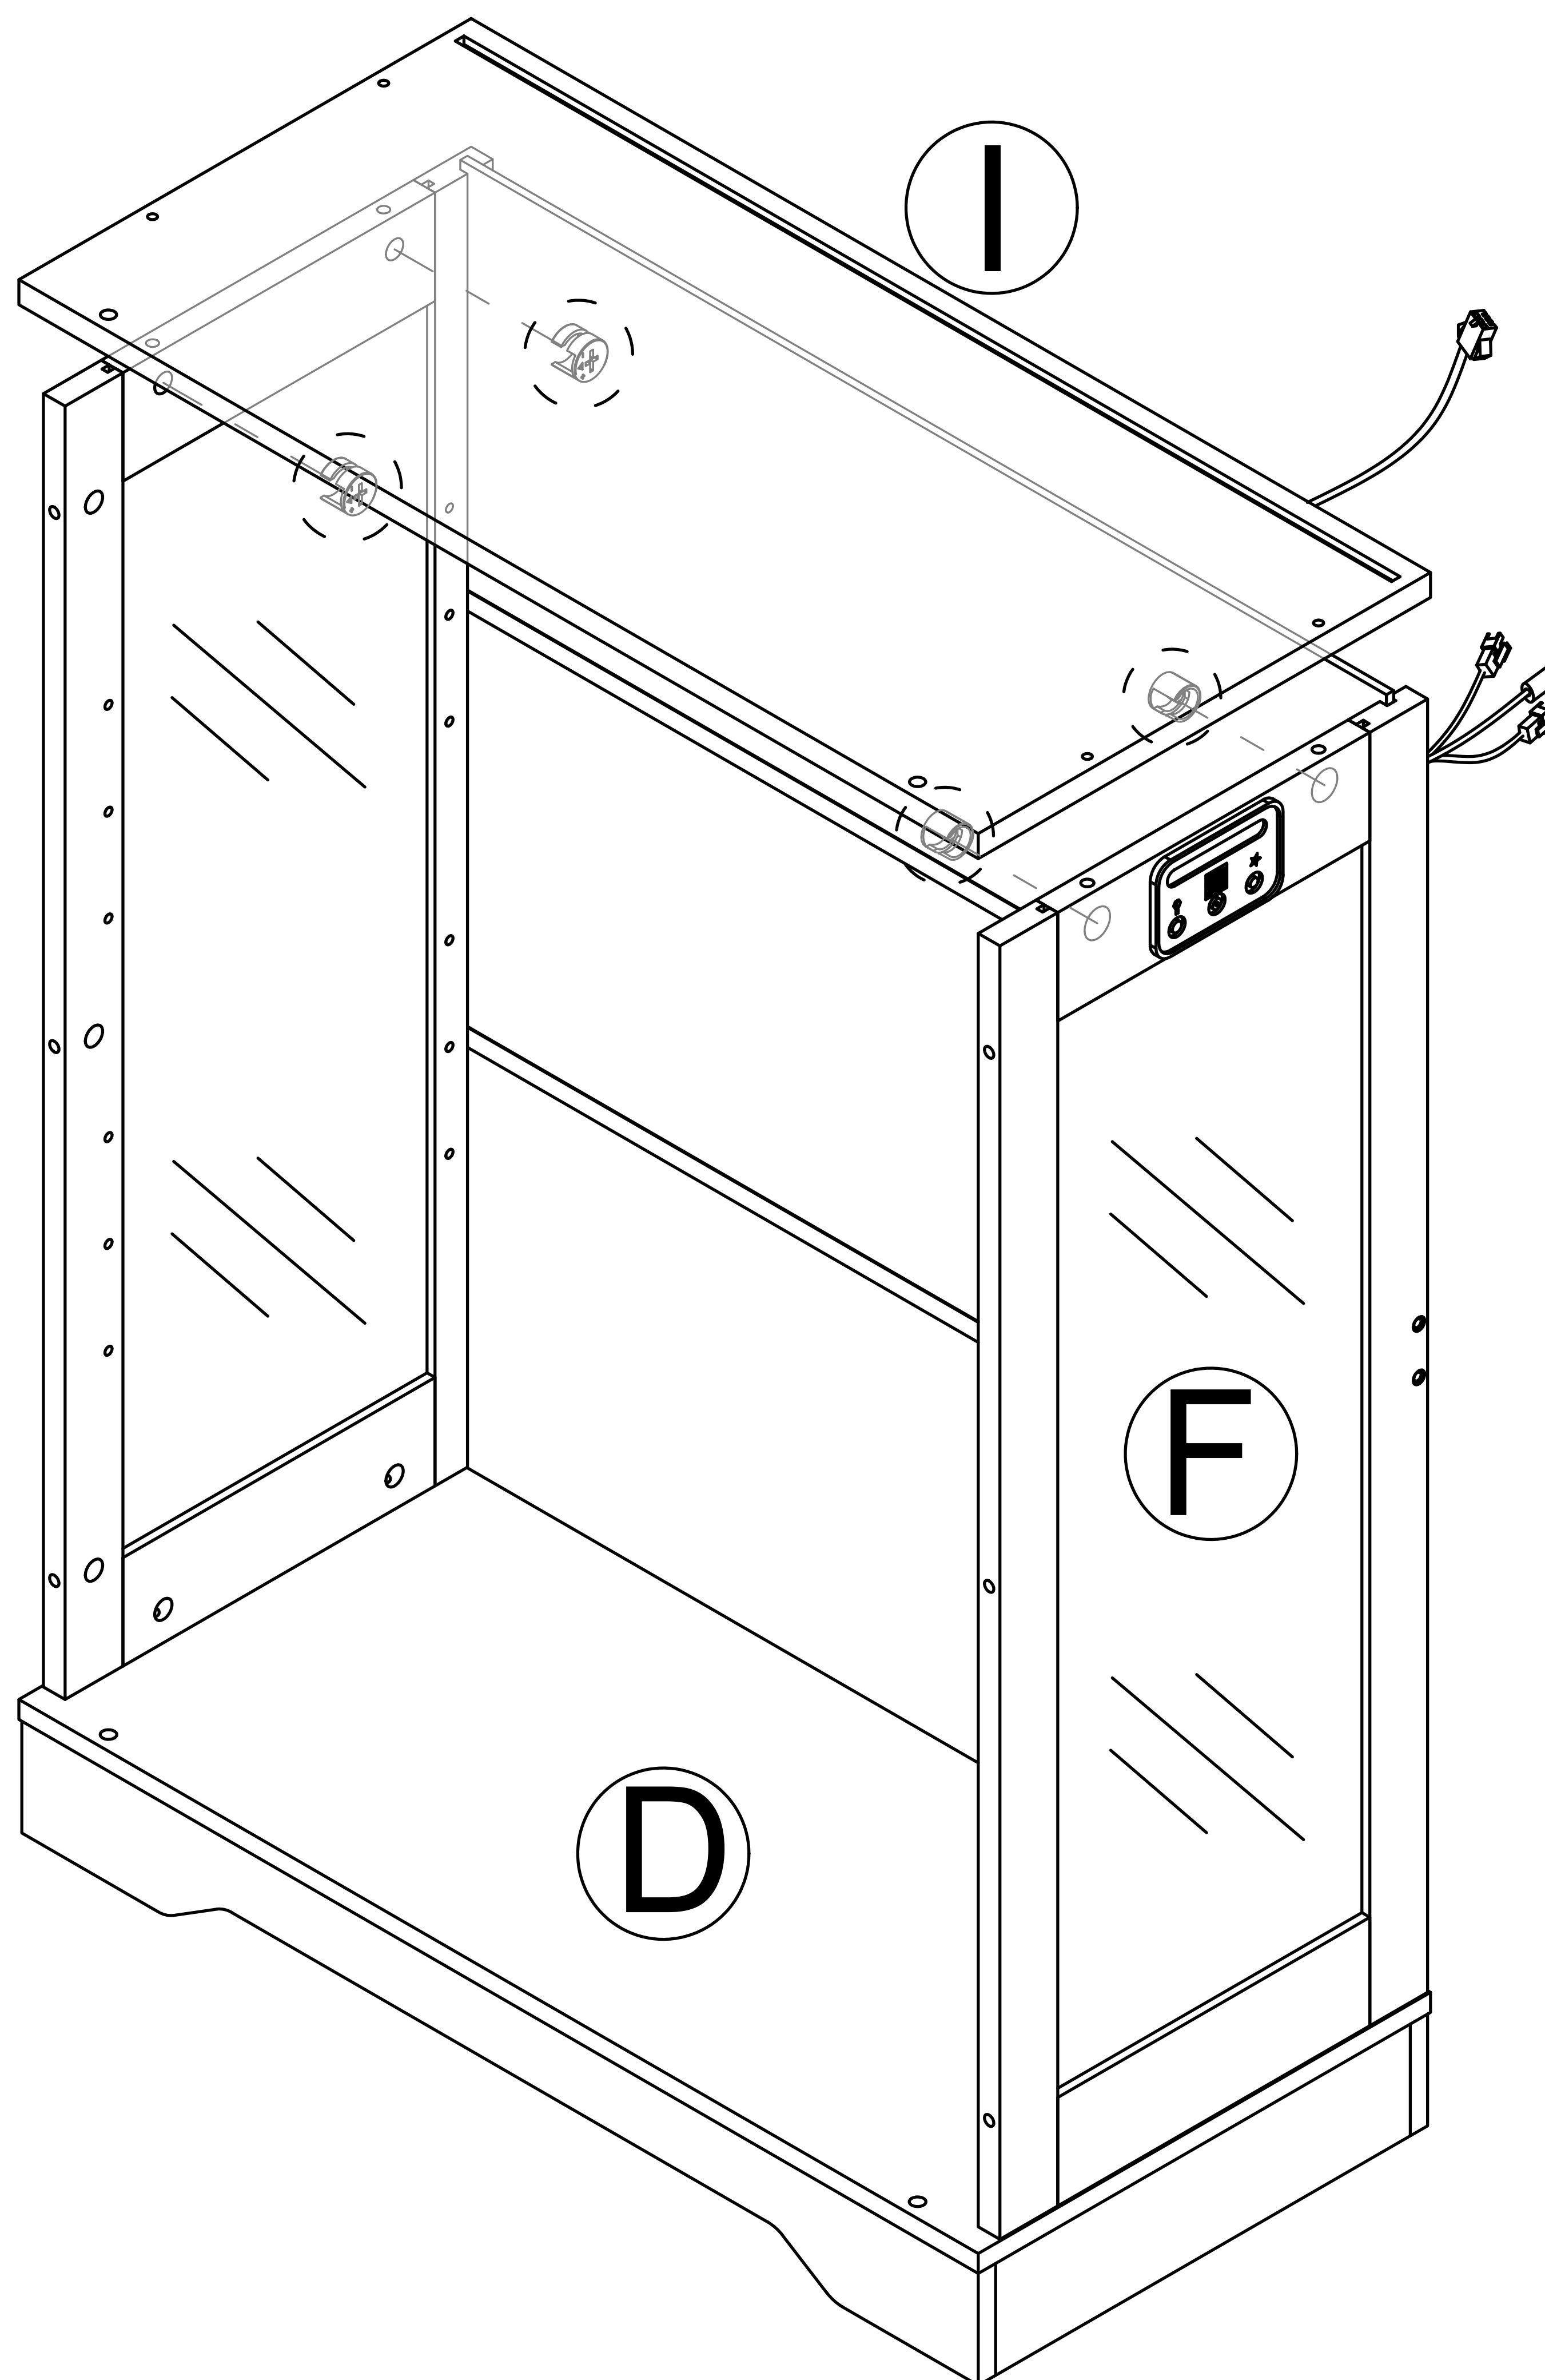


Step 13

1

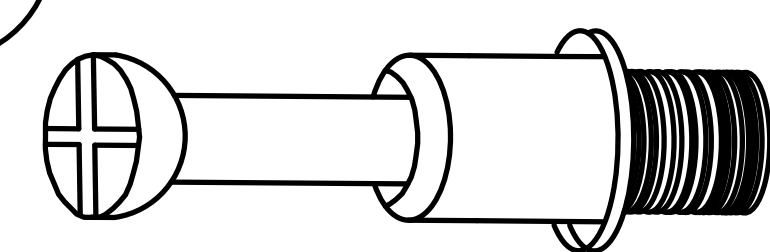


x4

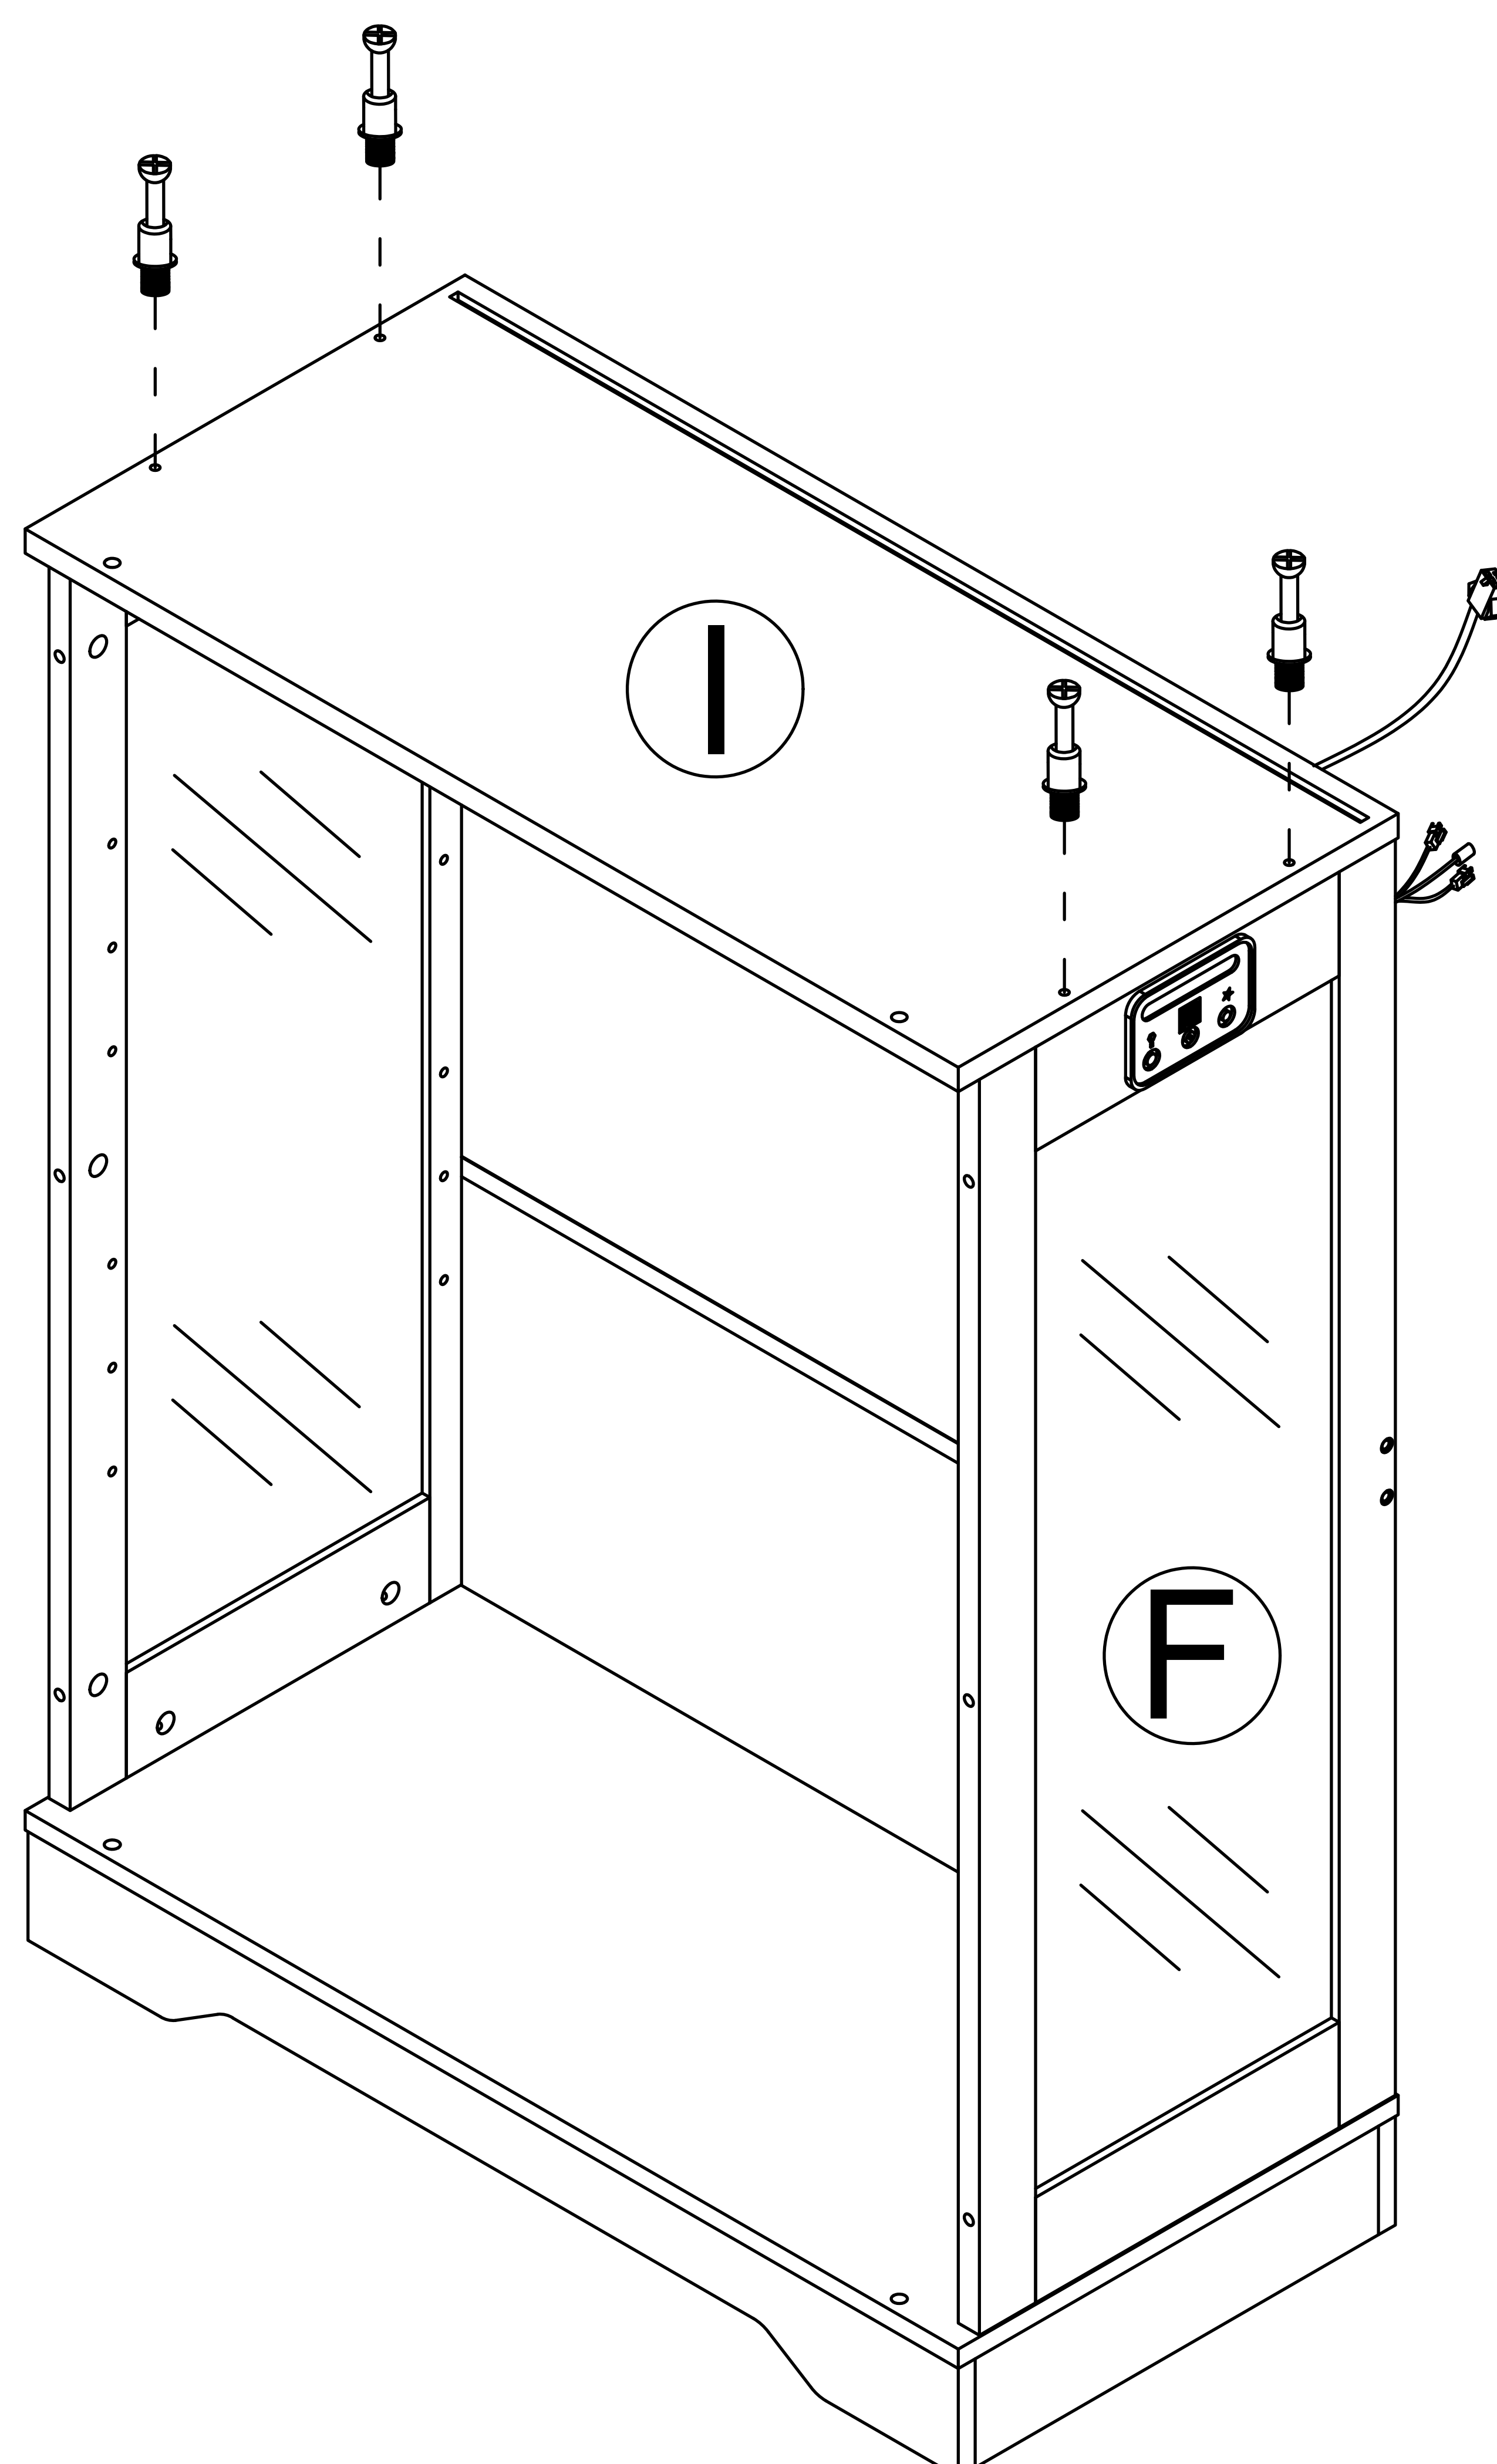


Step 14

2

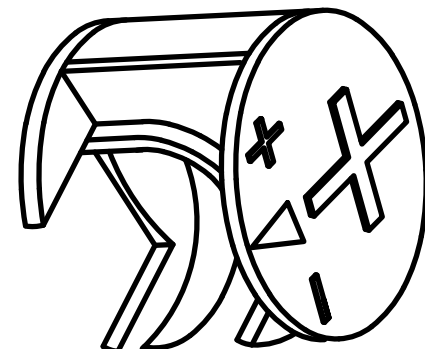



x2

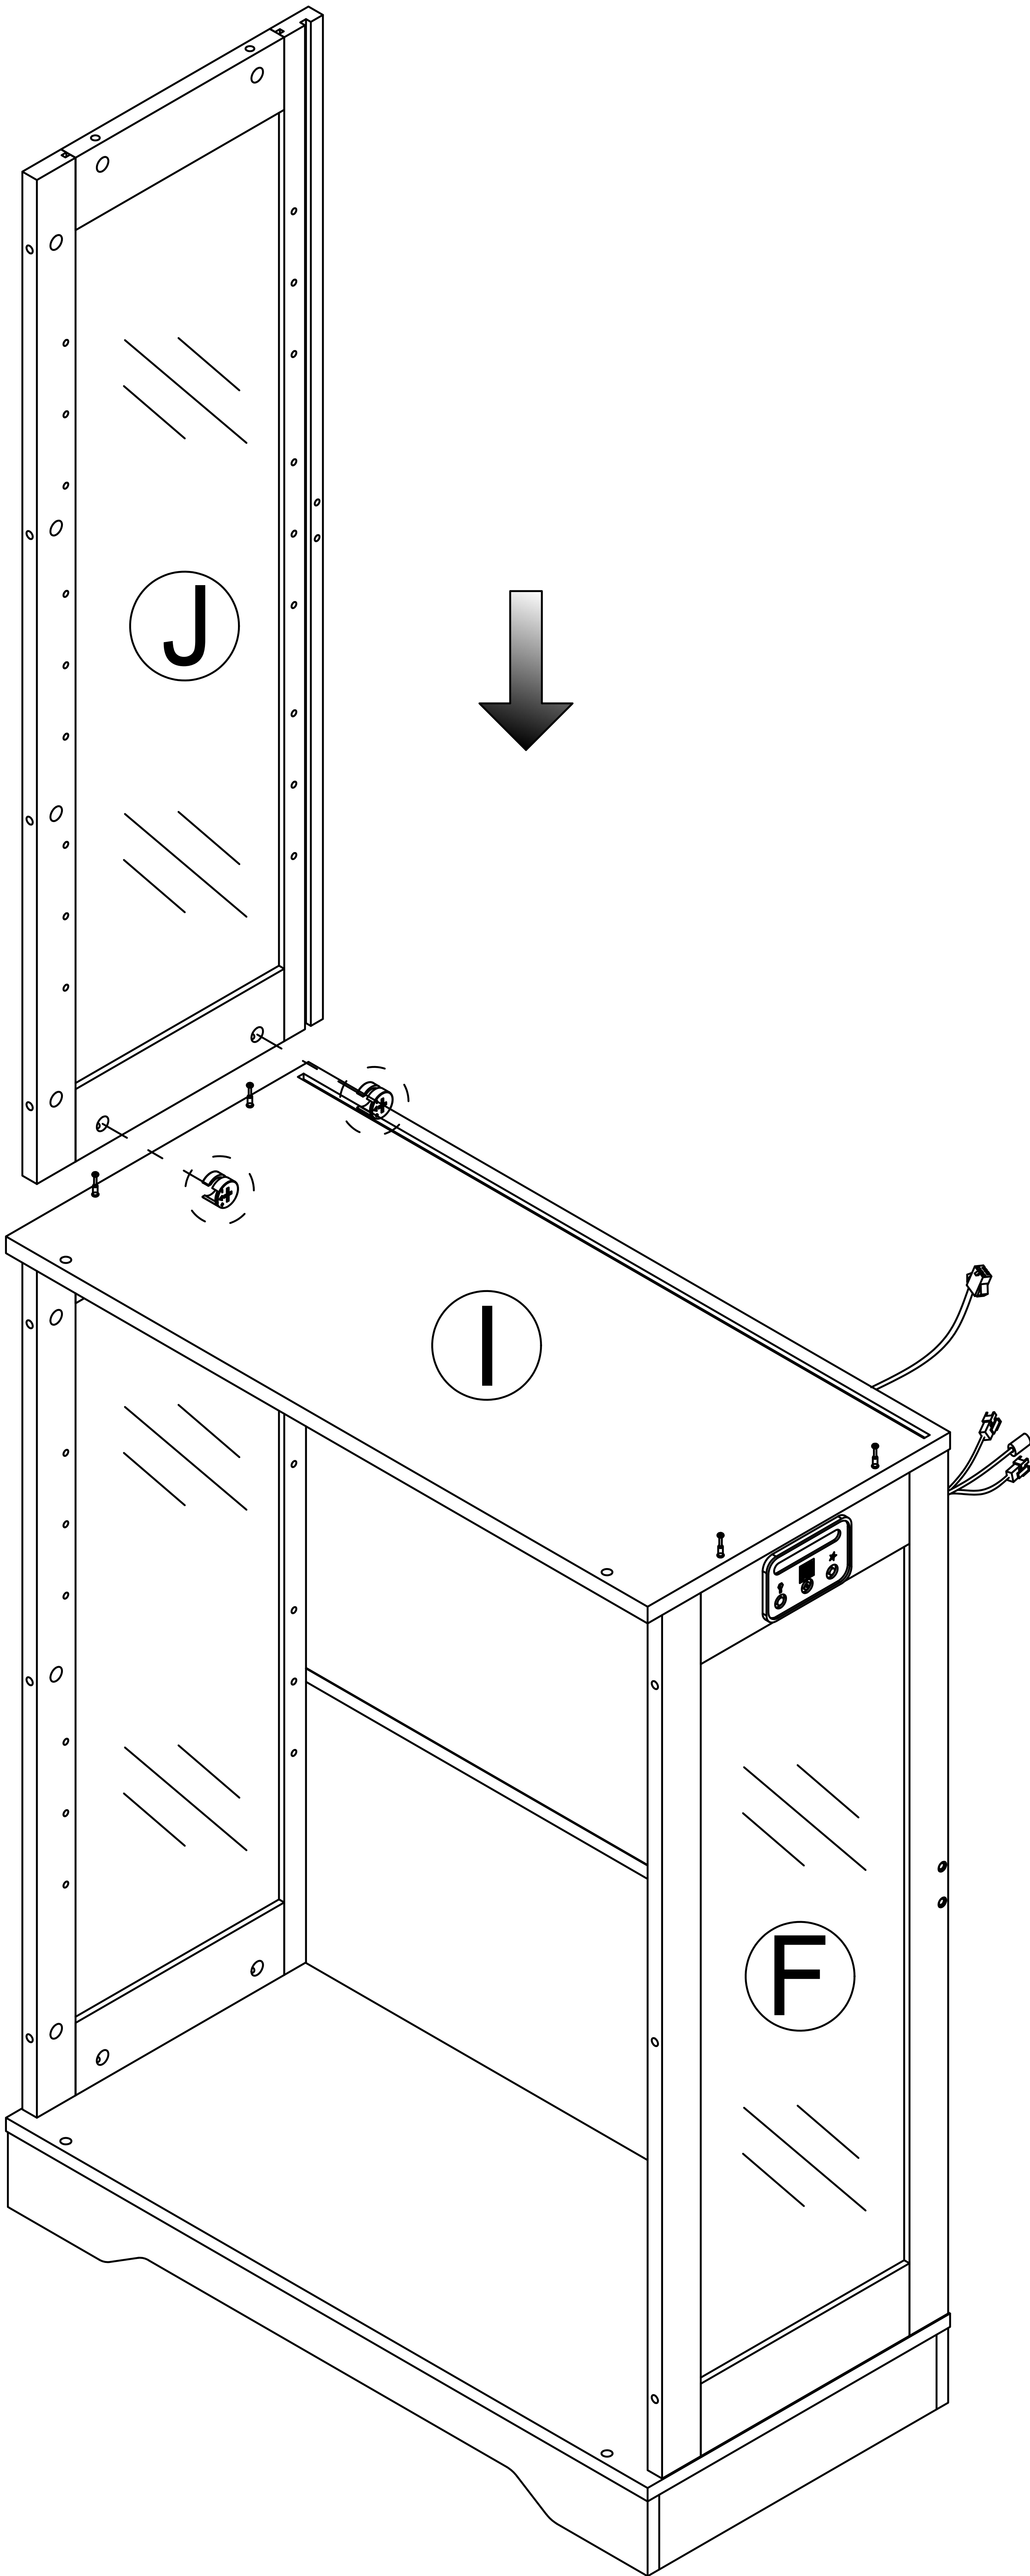

Step 15


2

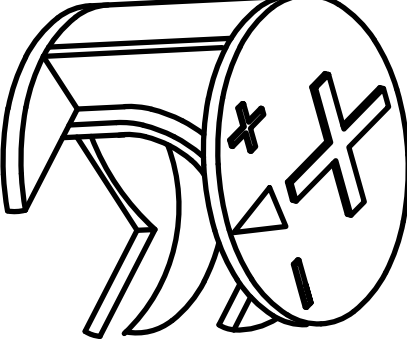 x2


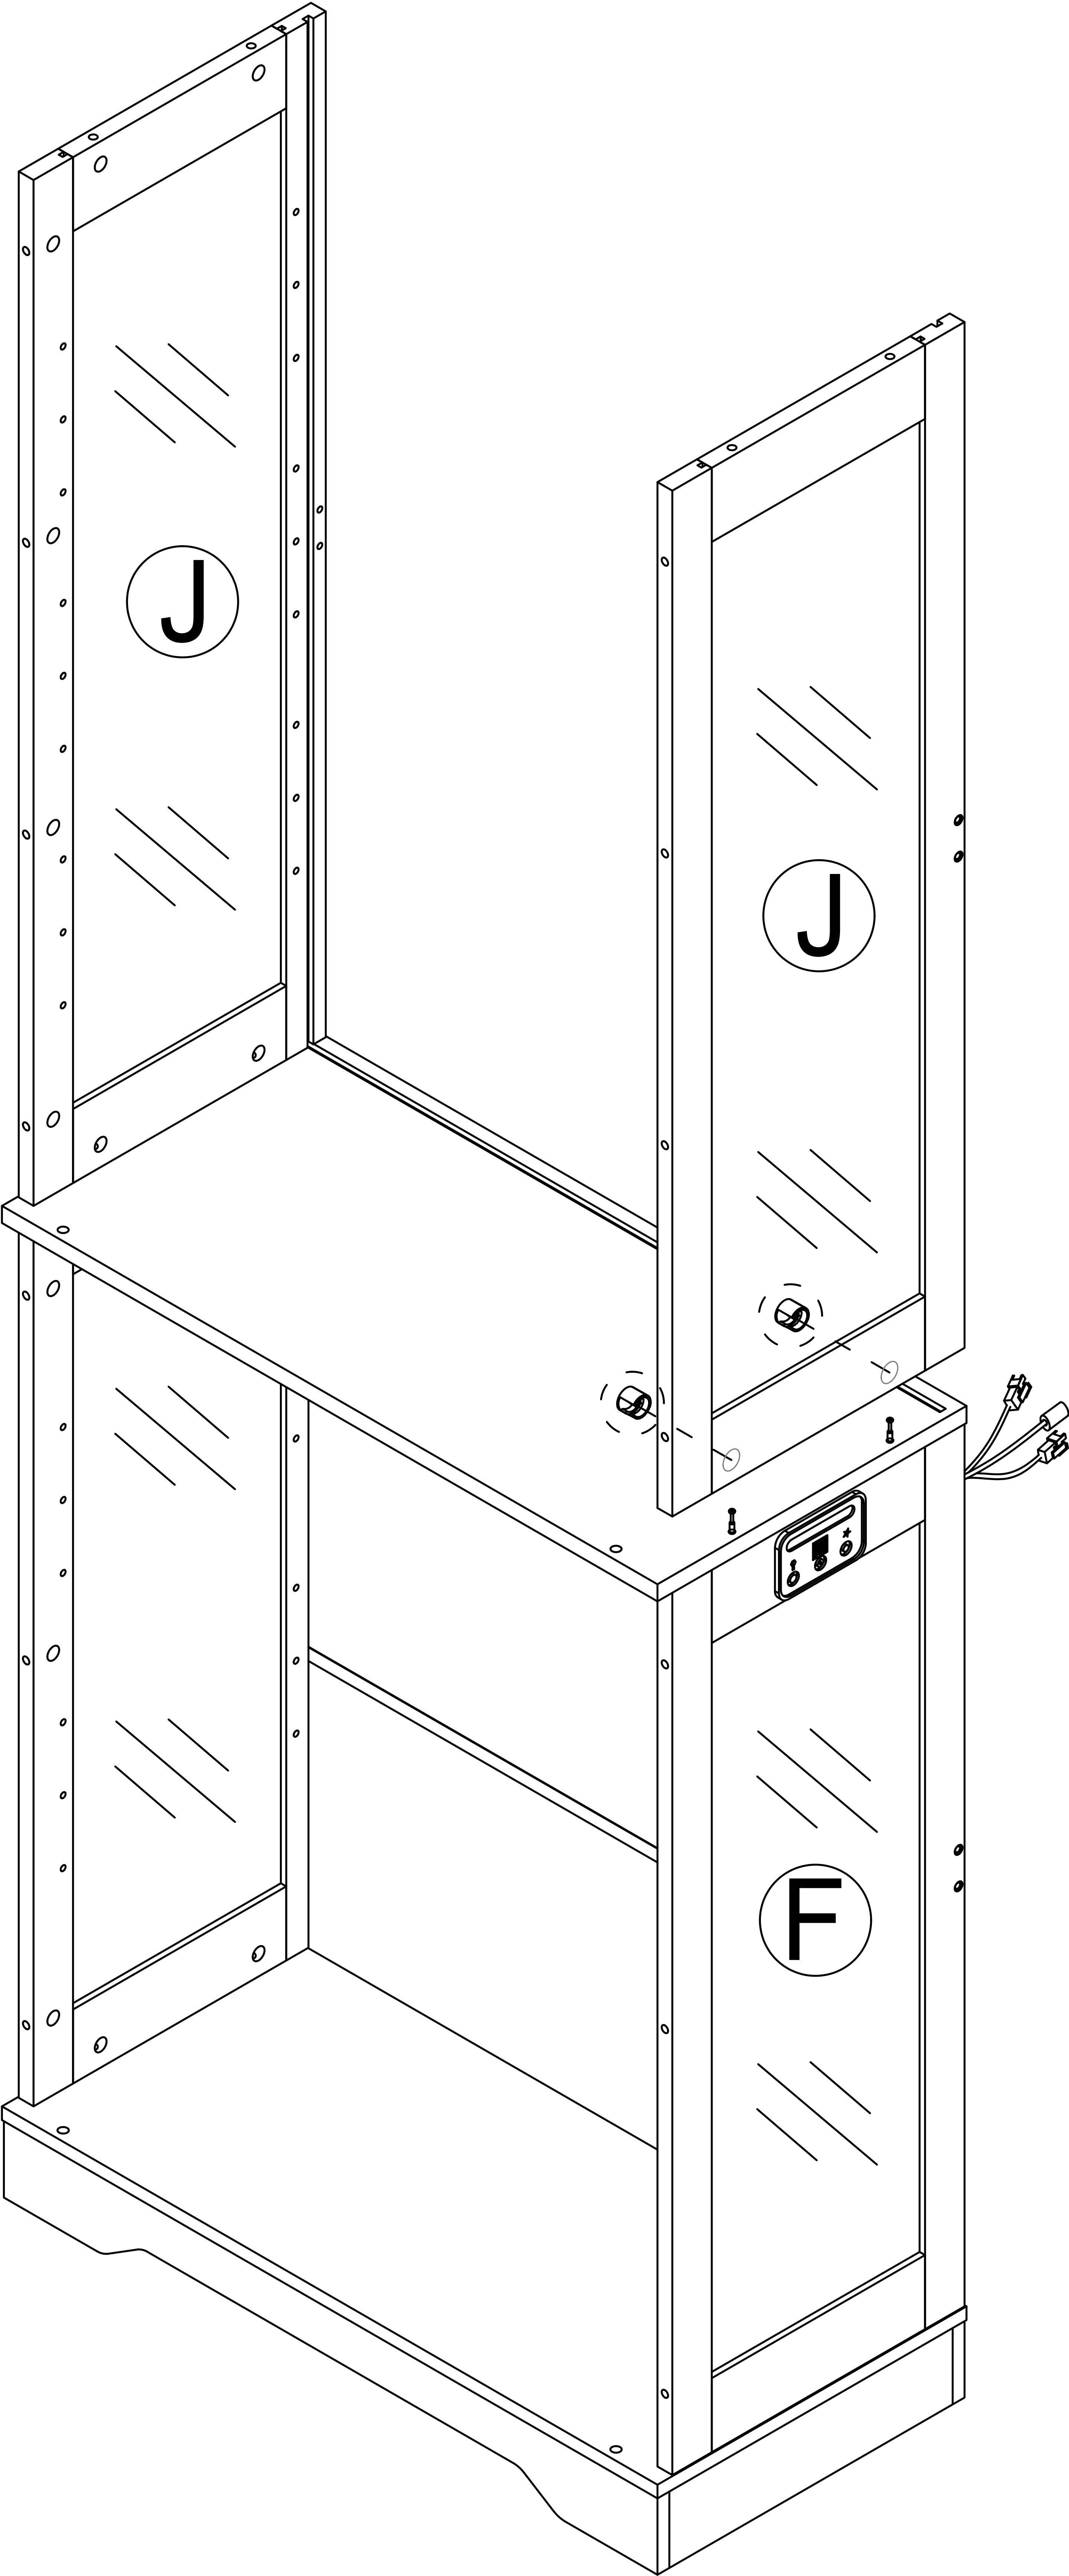


Step 16


4

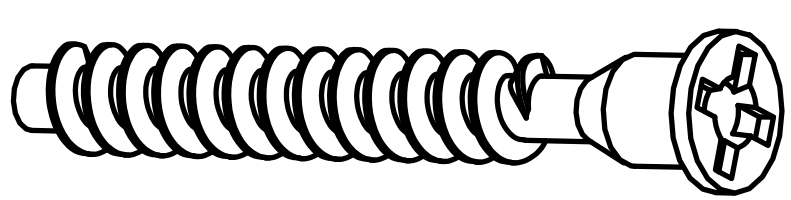



x4

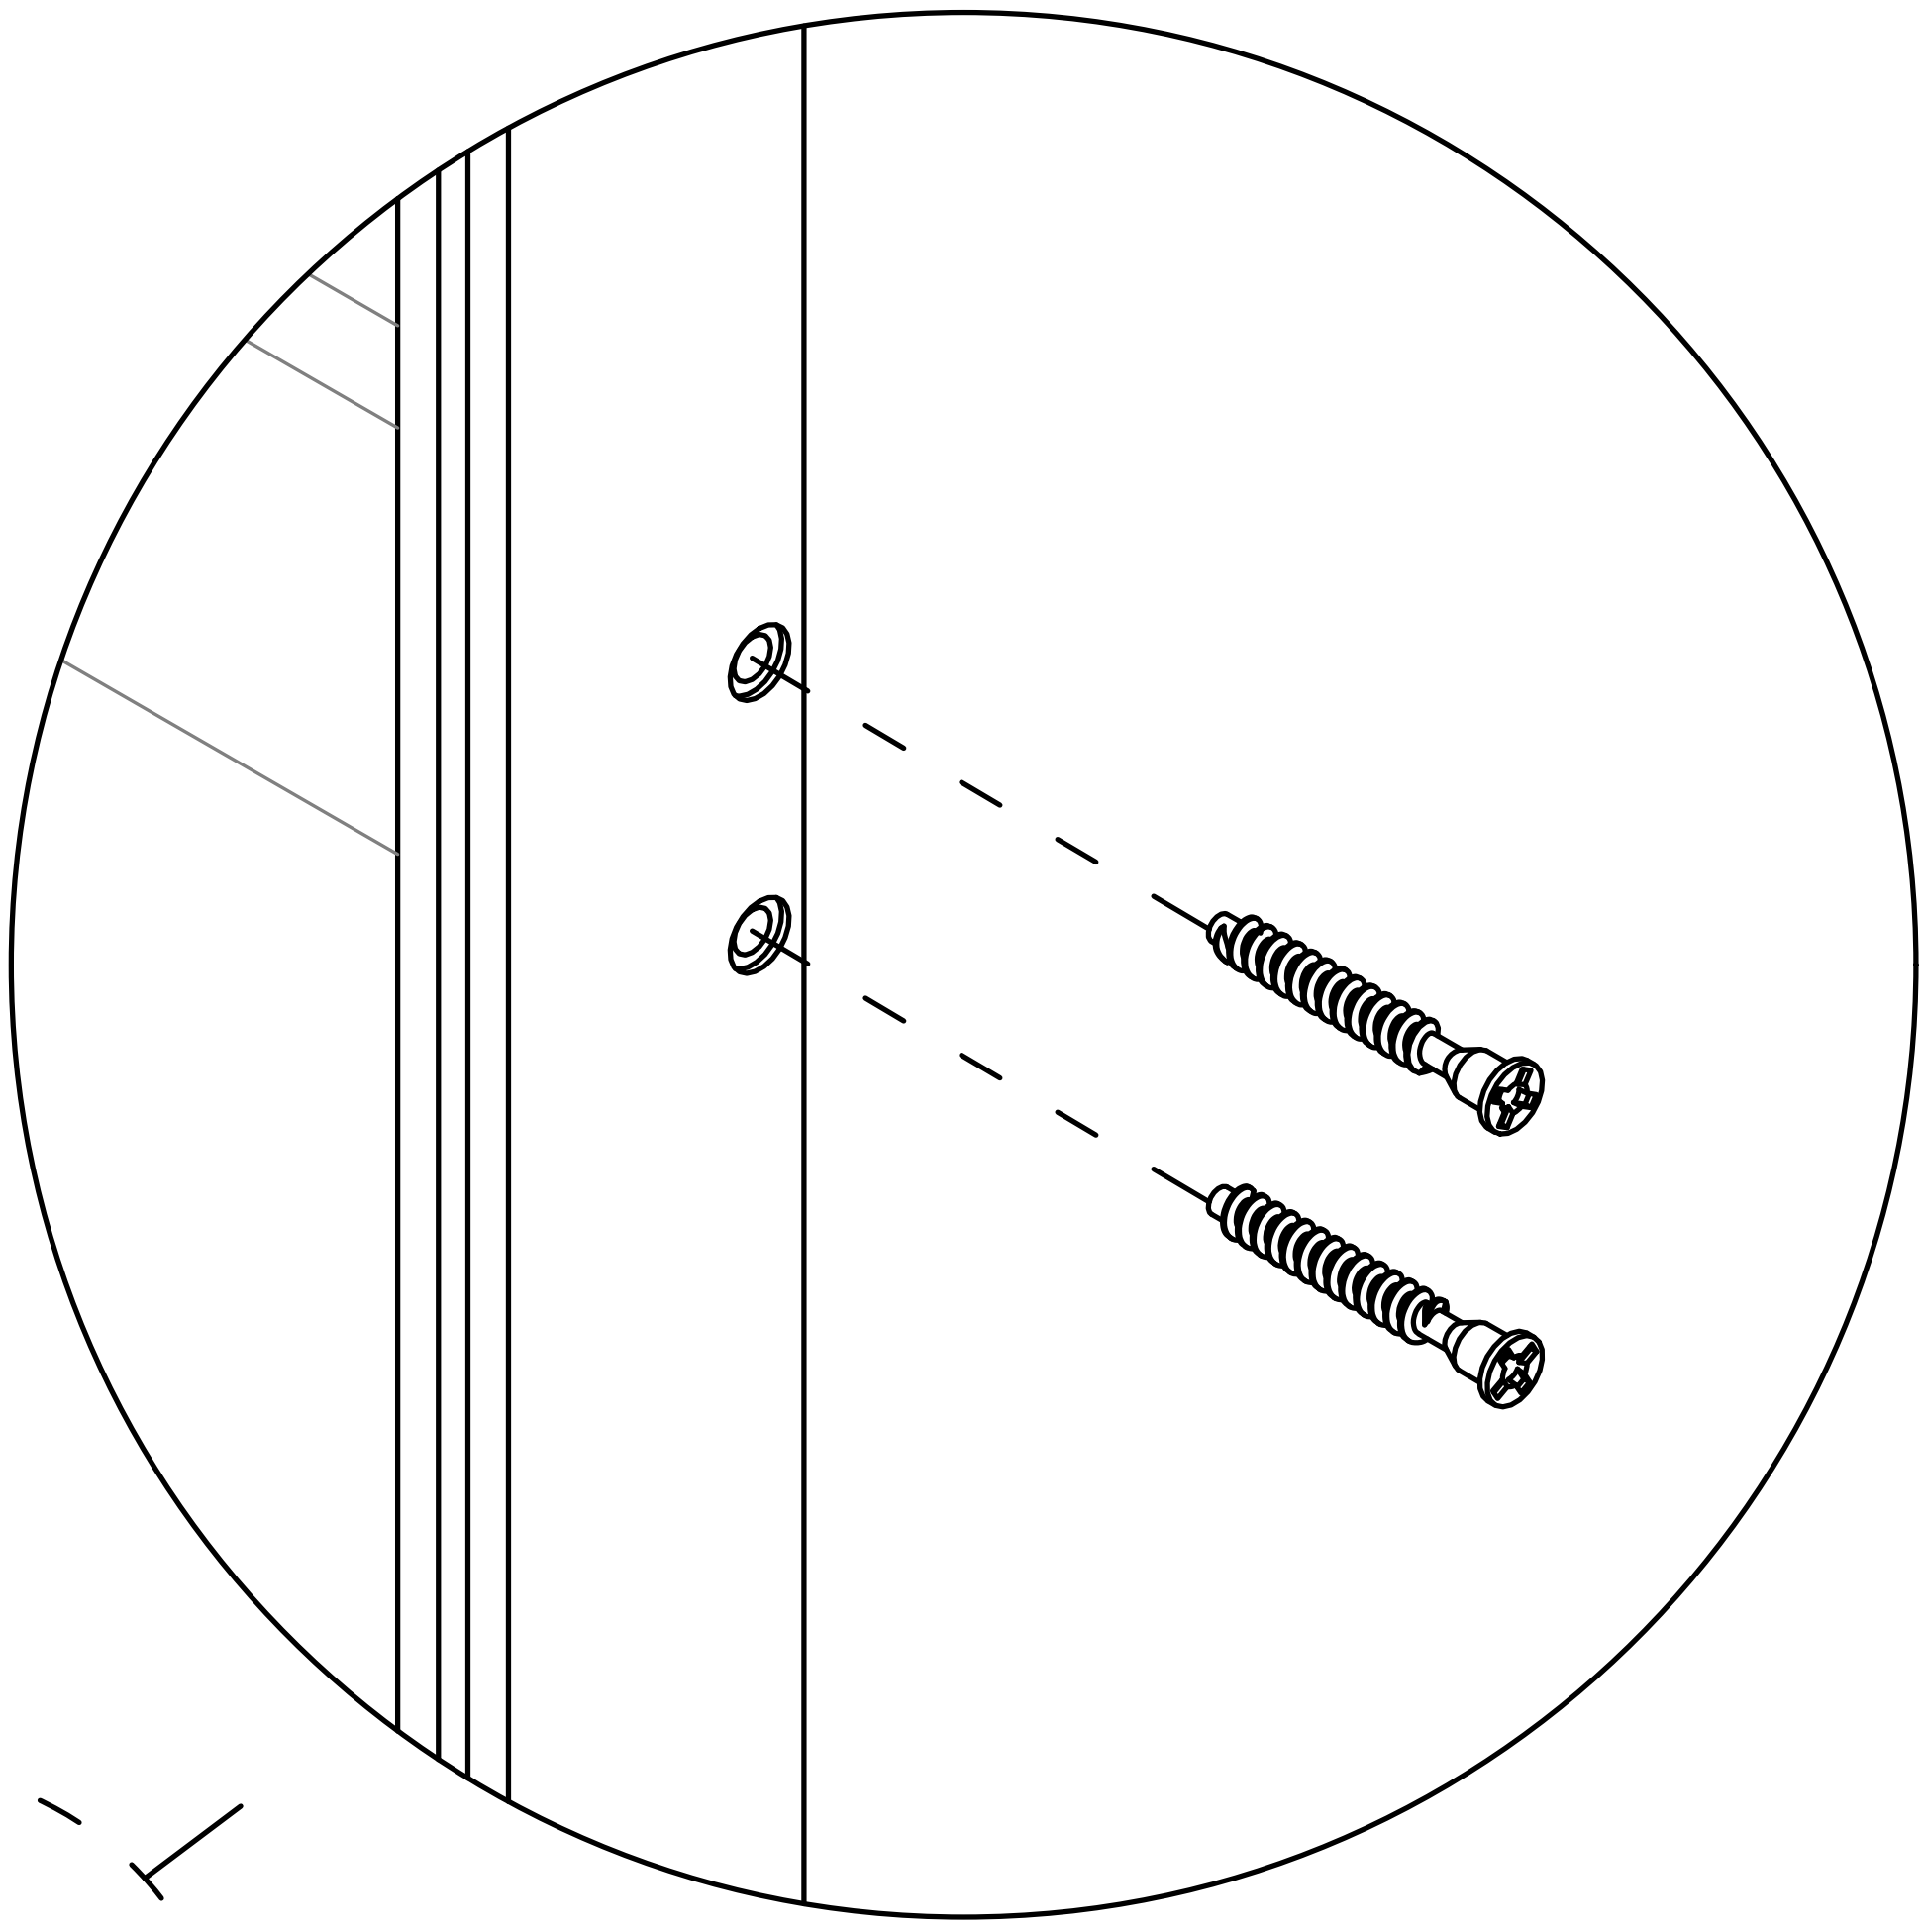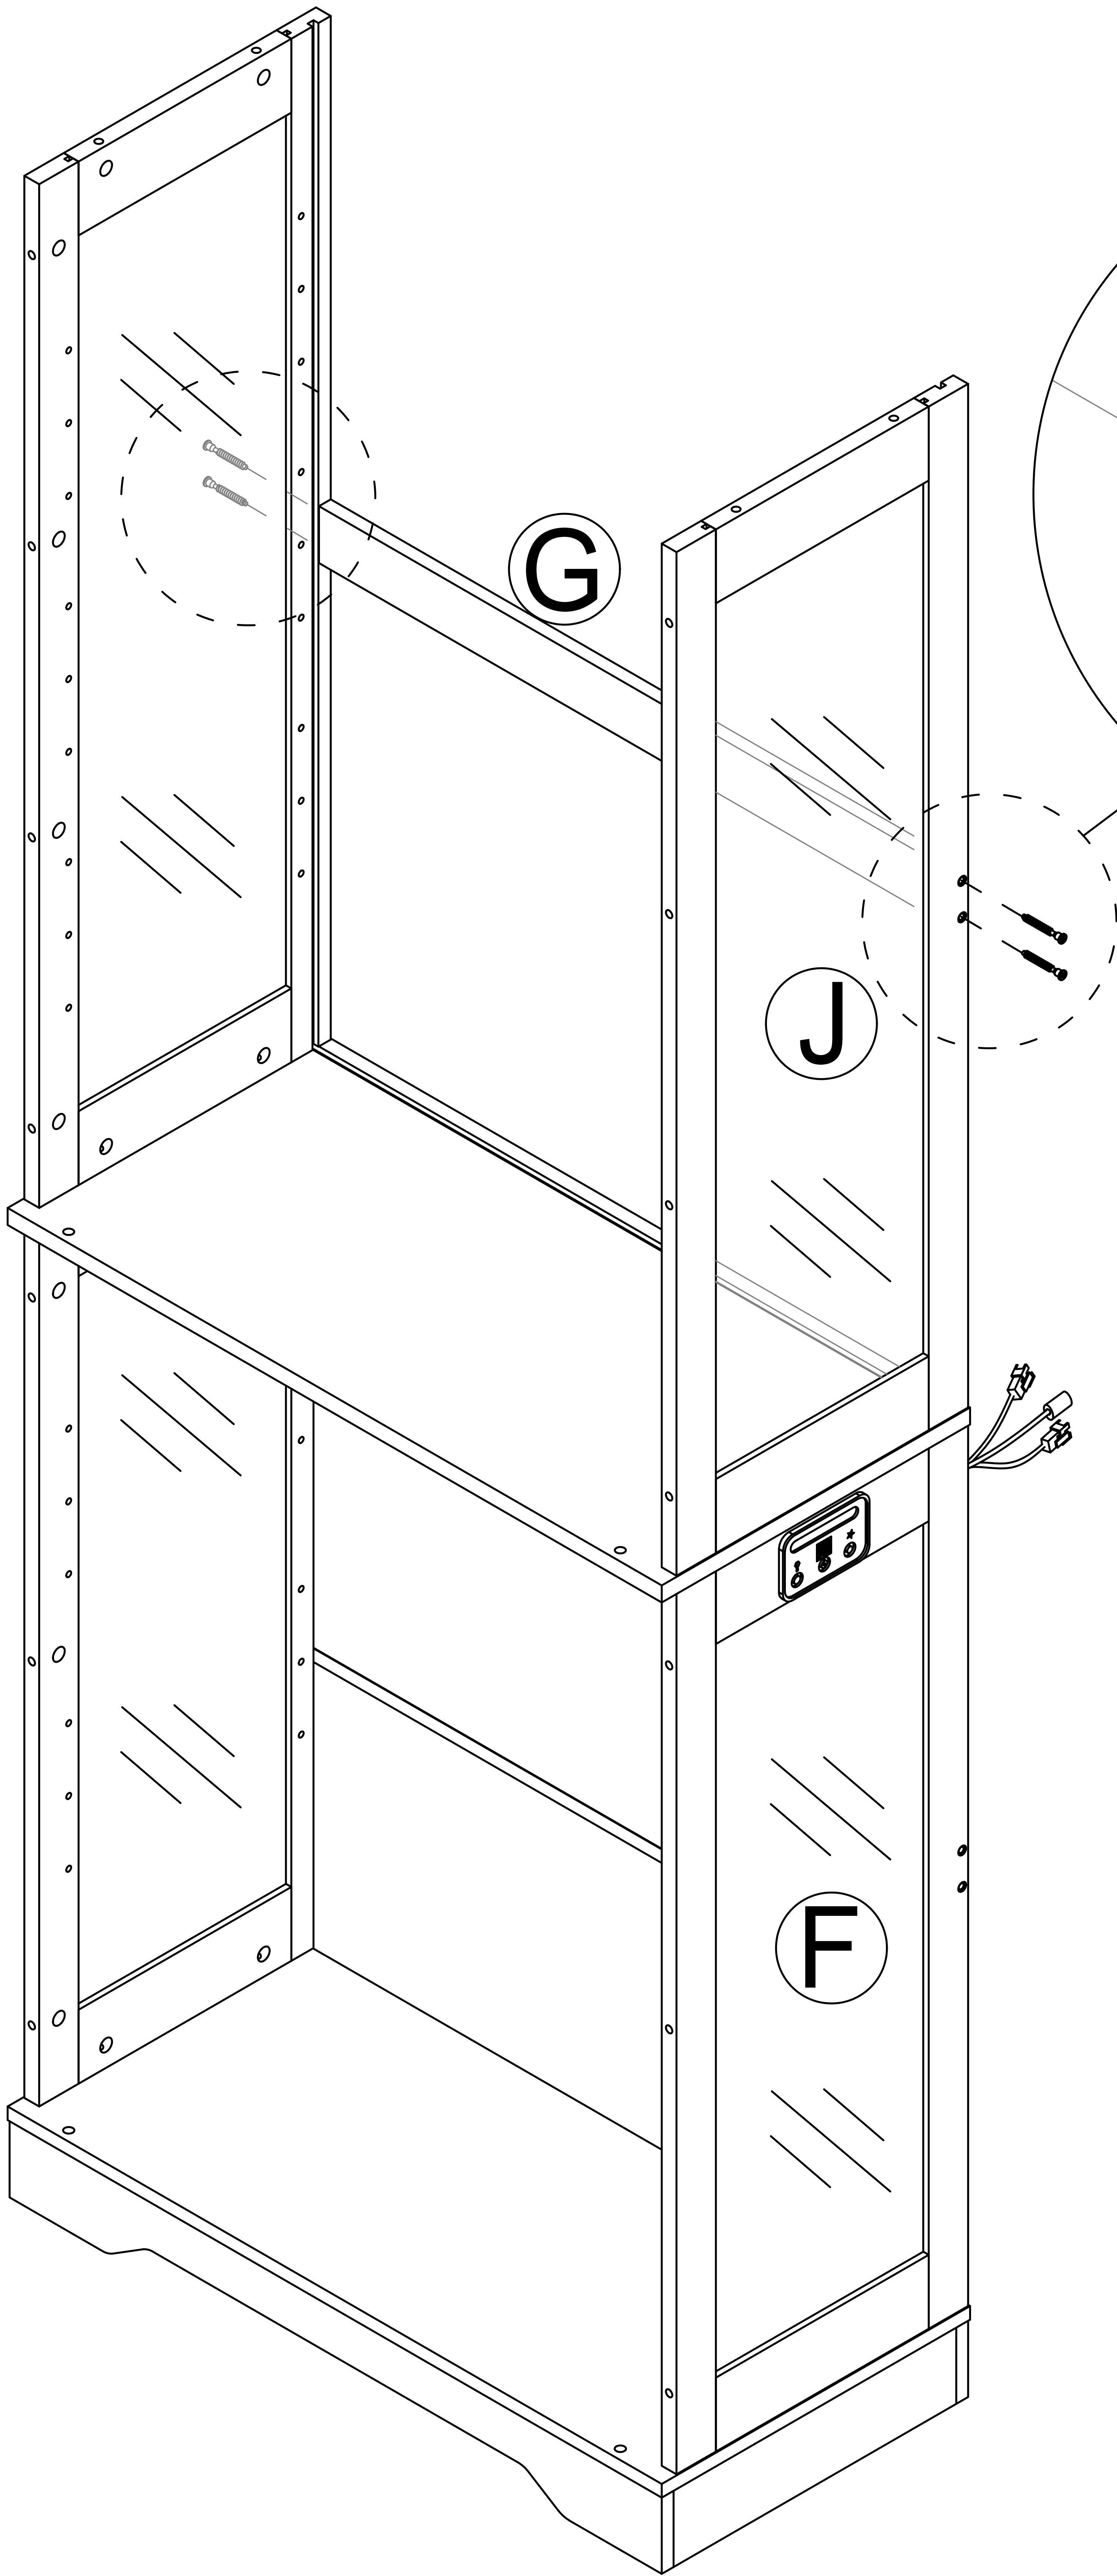



Step 17

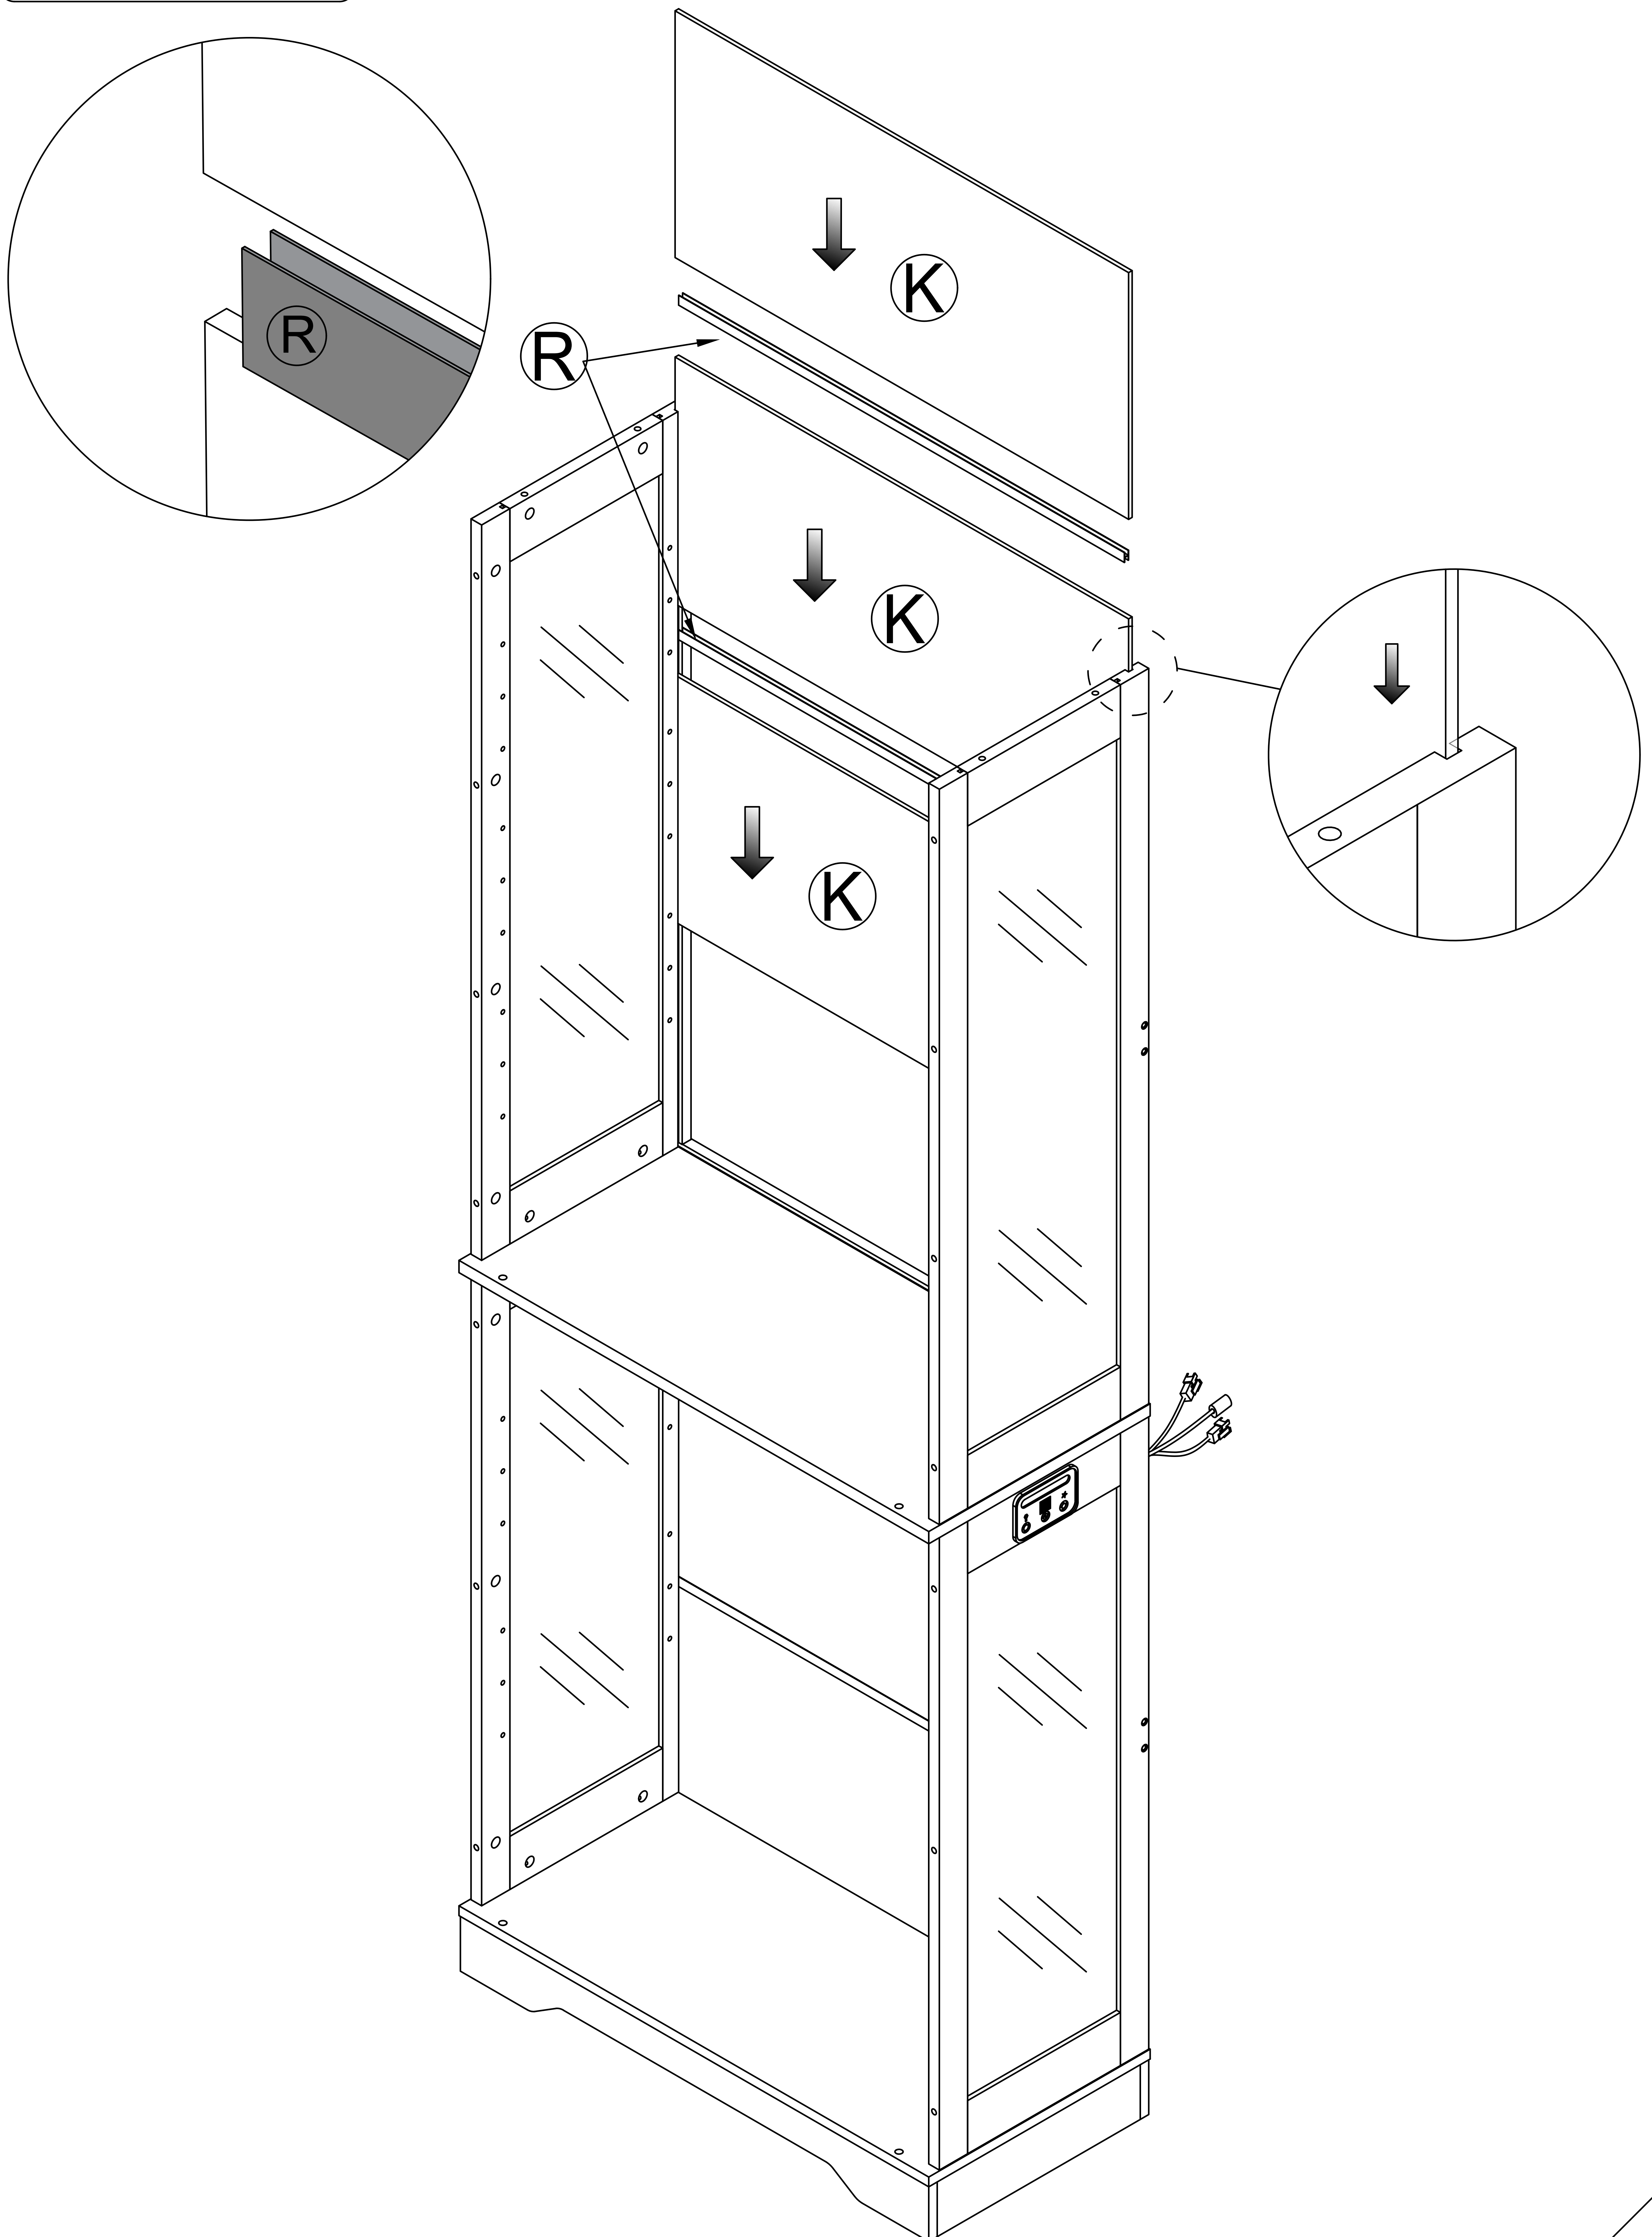

Step 18

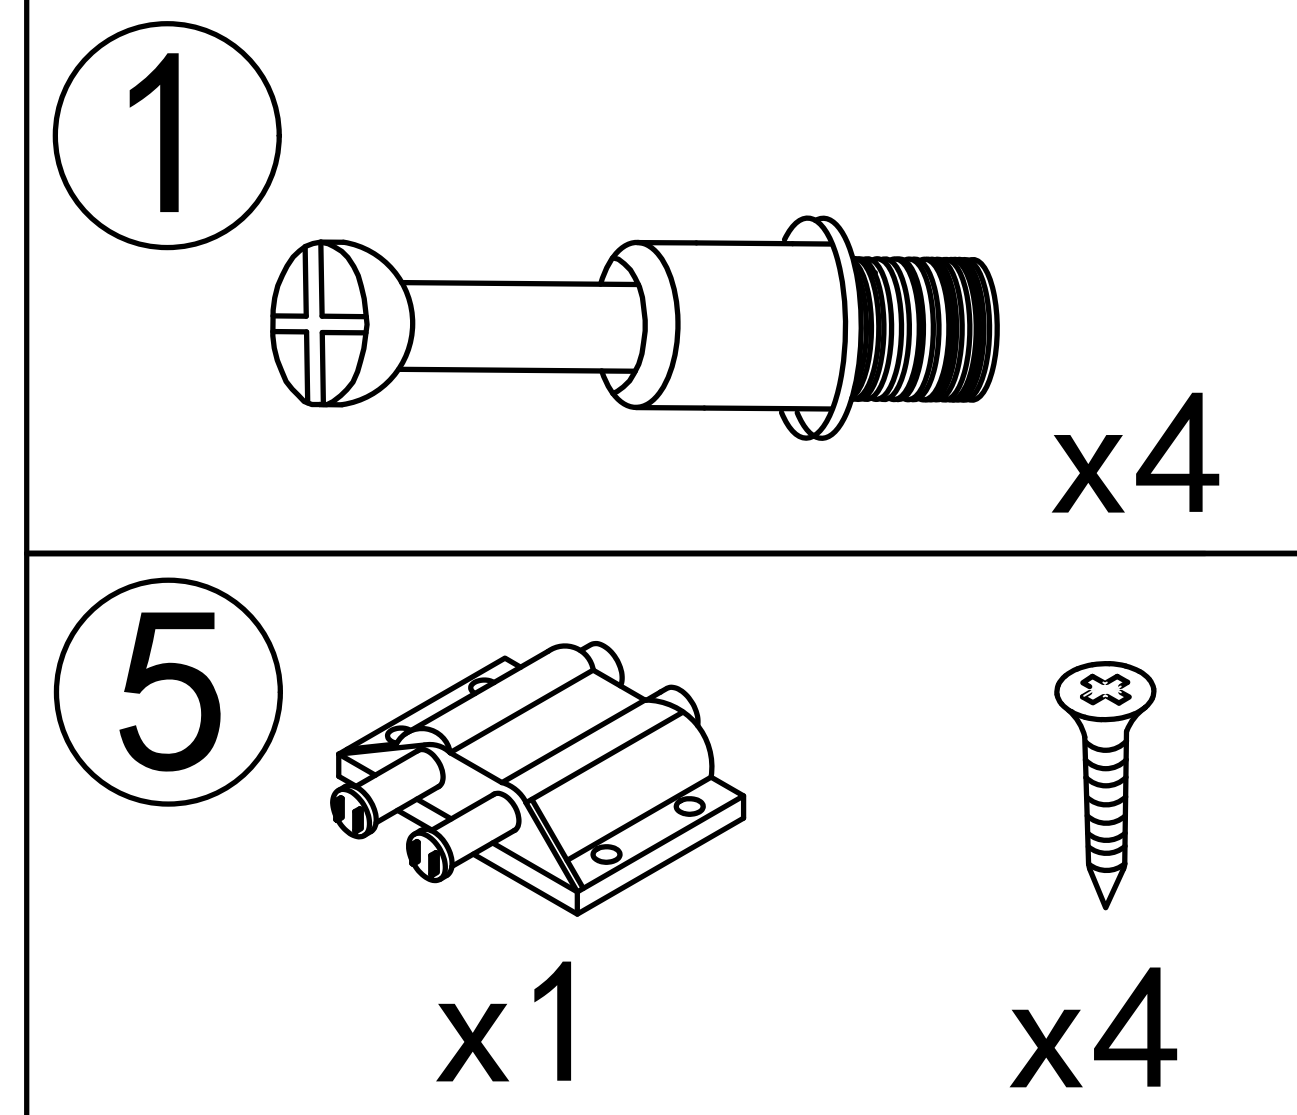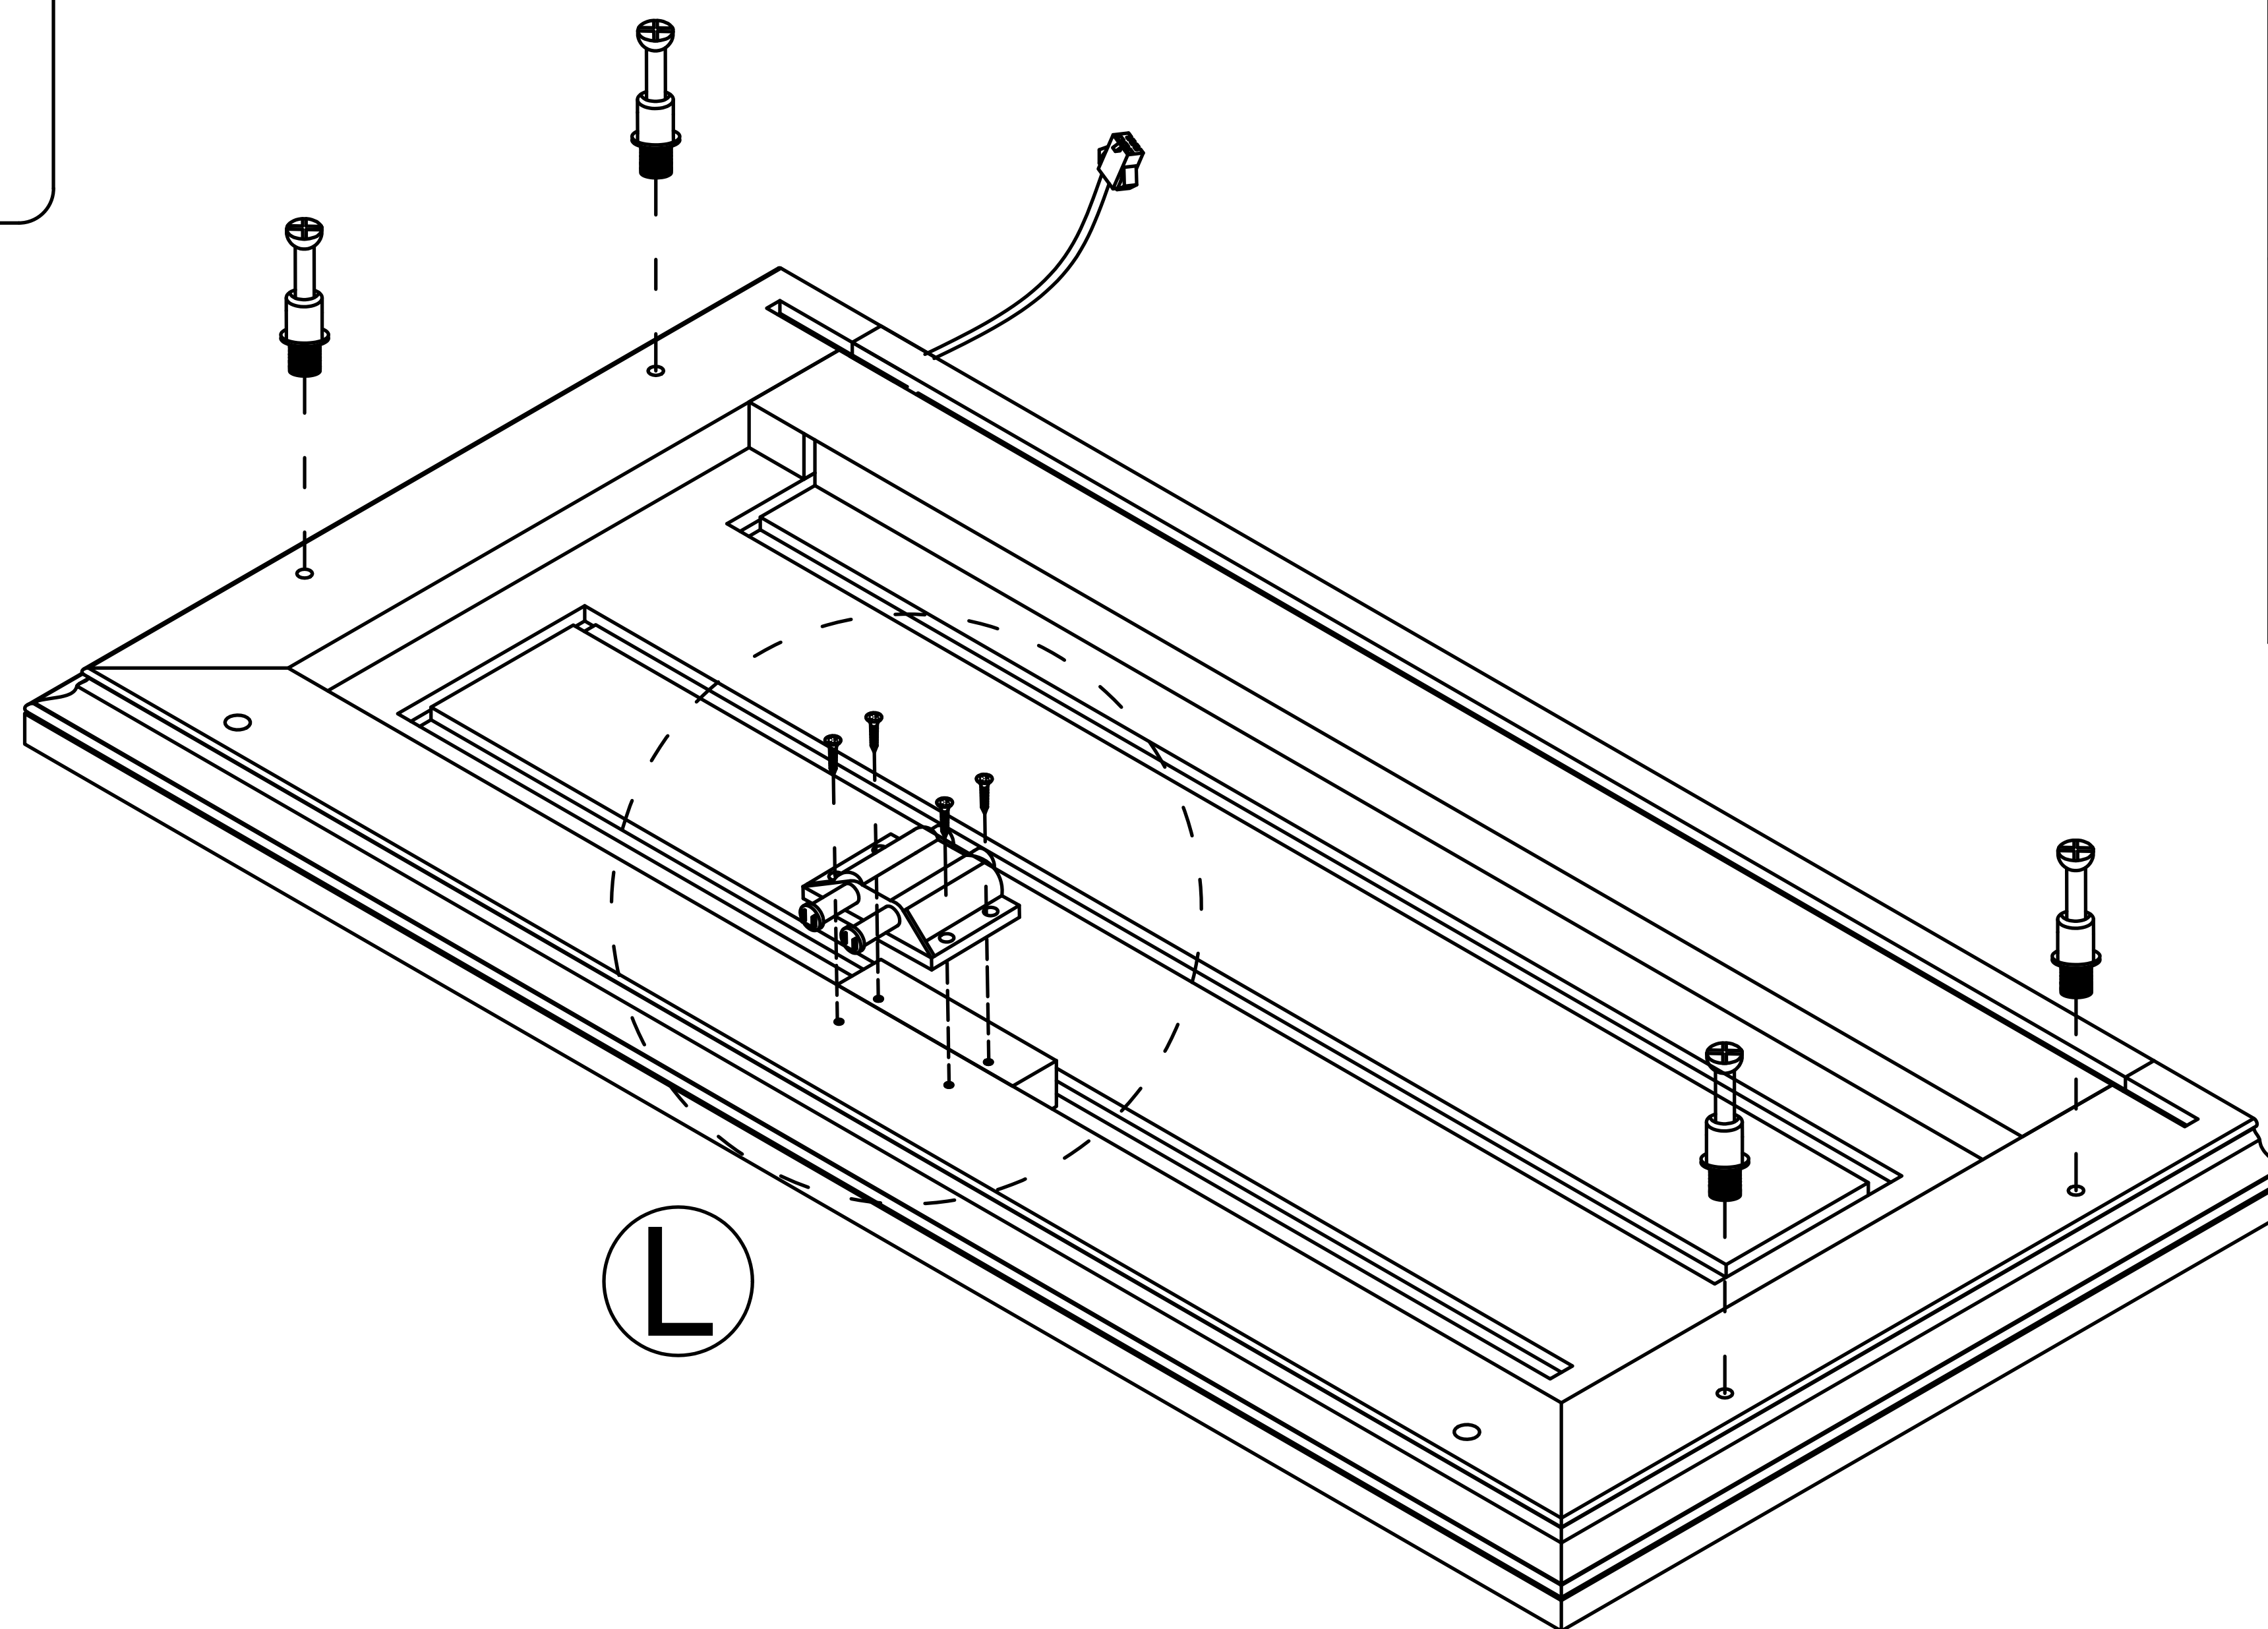


Step 19

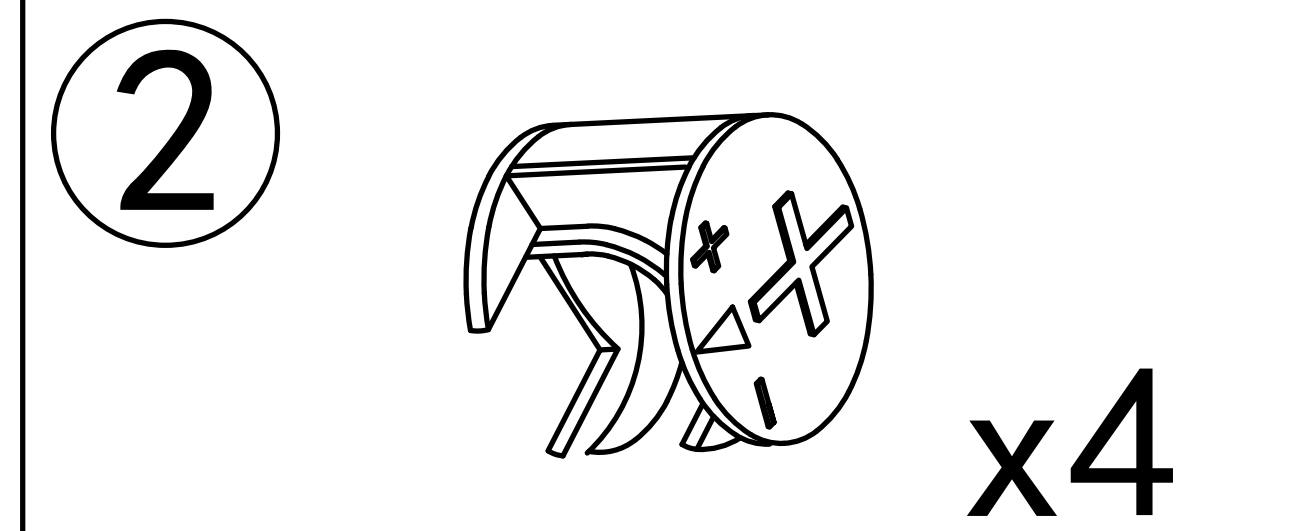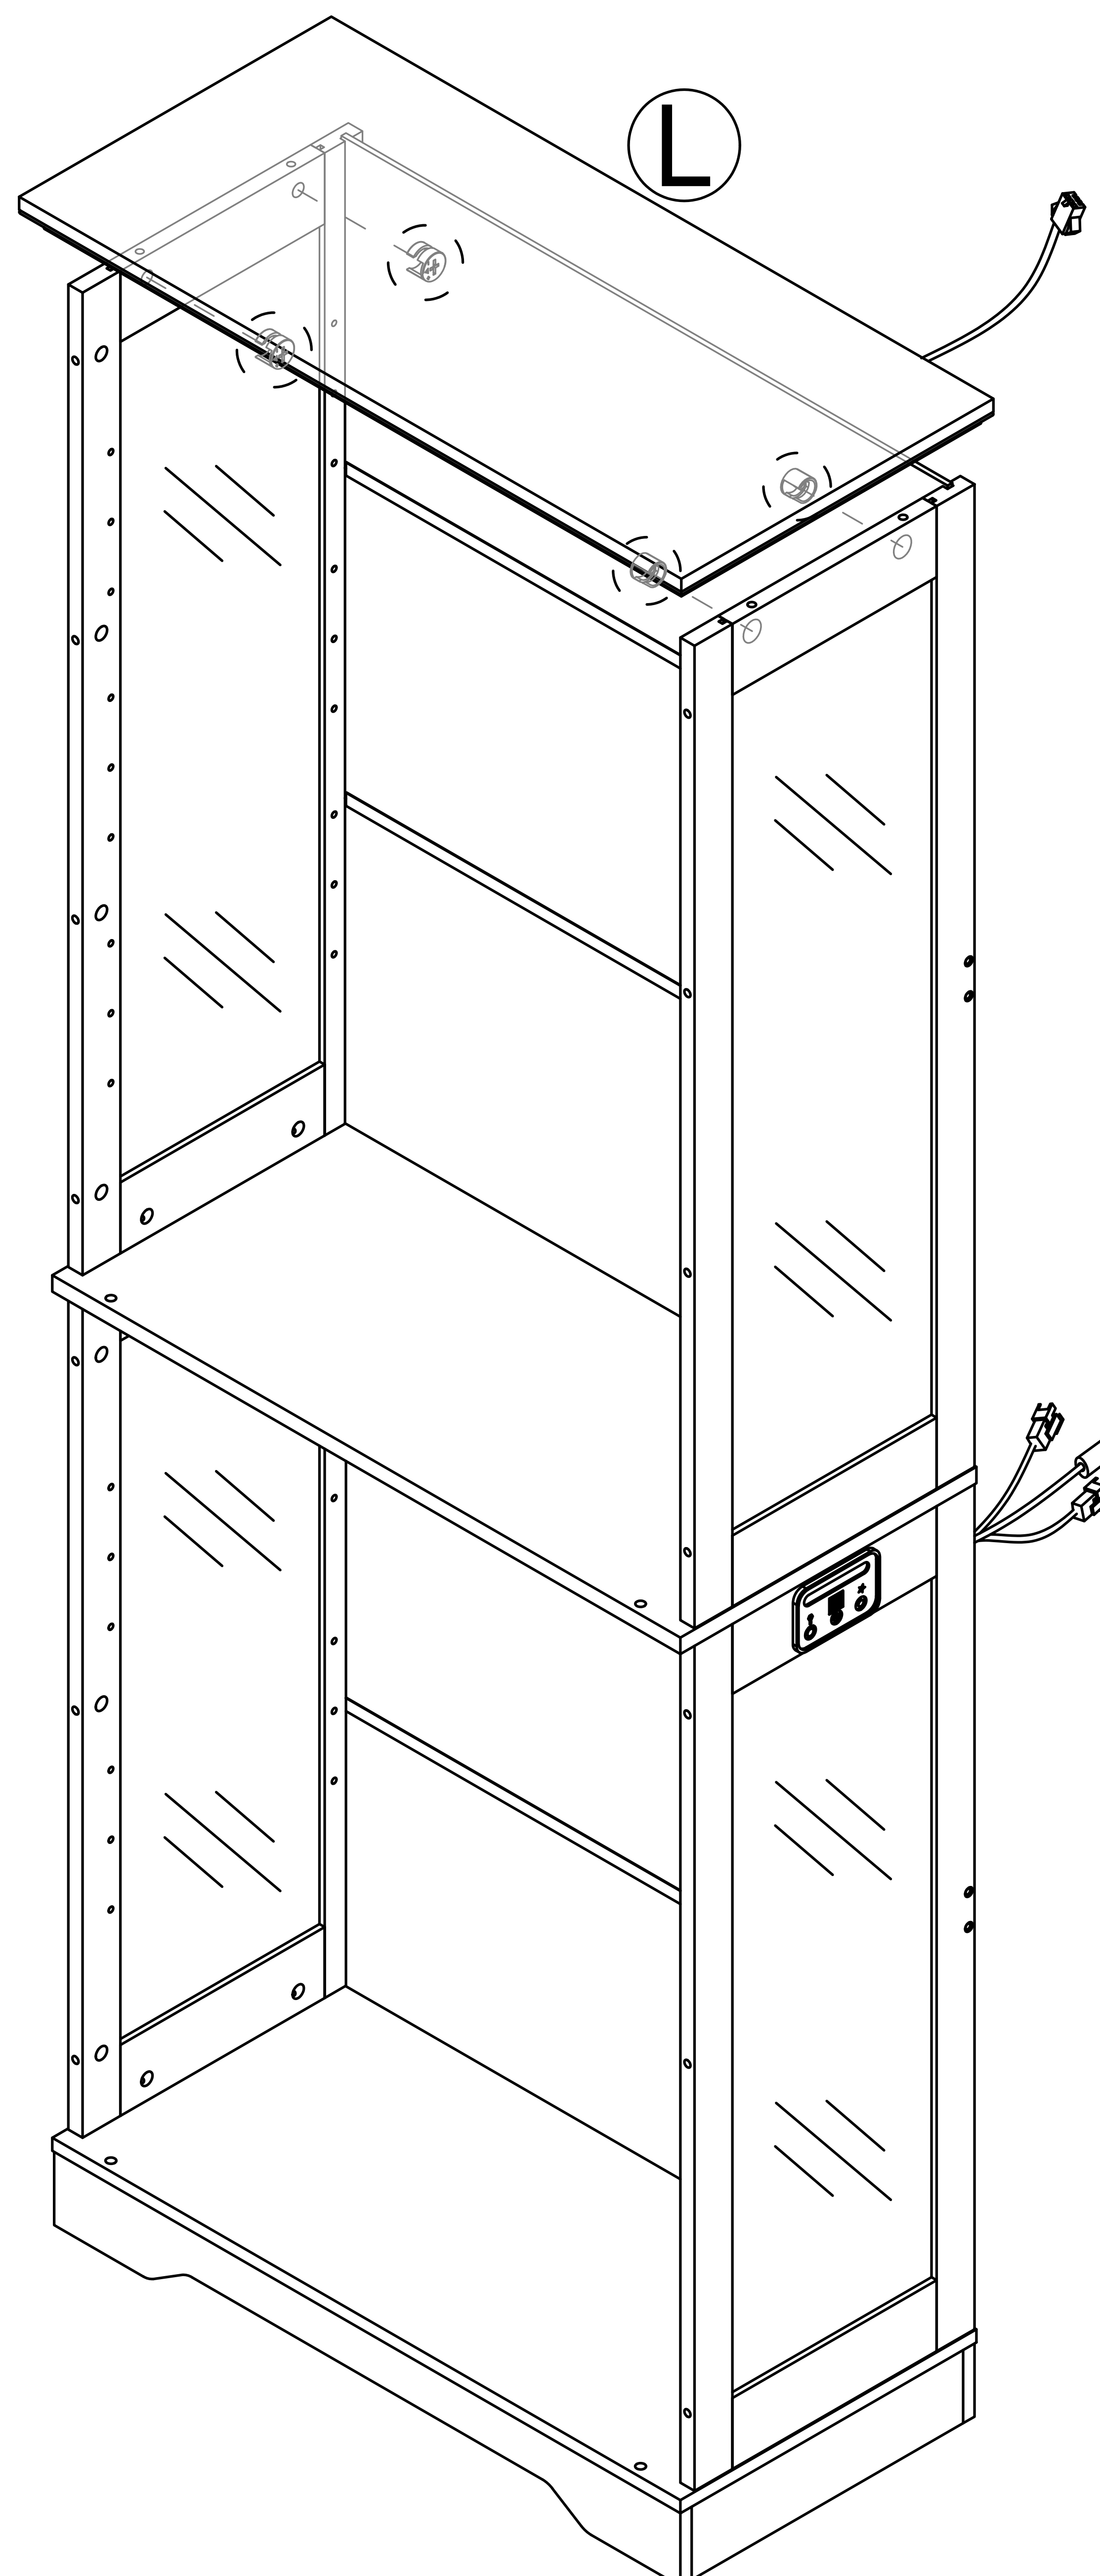


Step 20


6

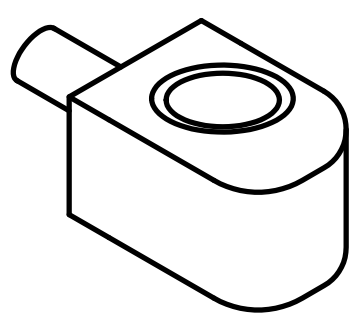



x20

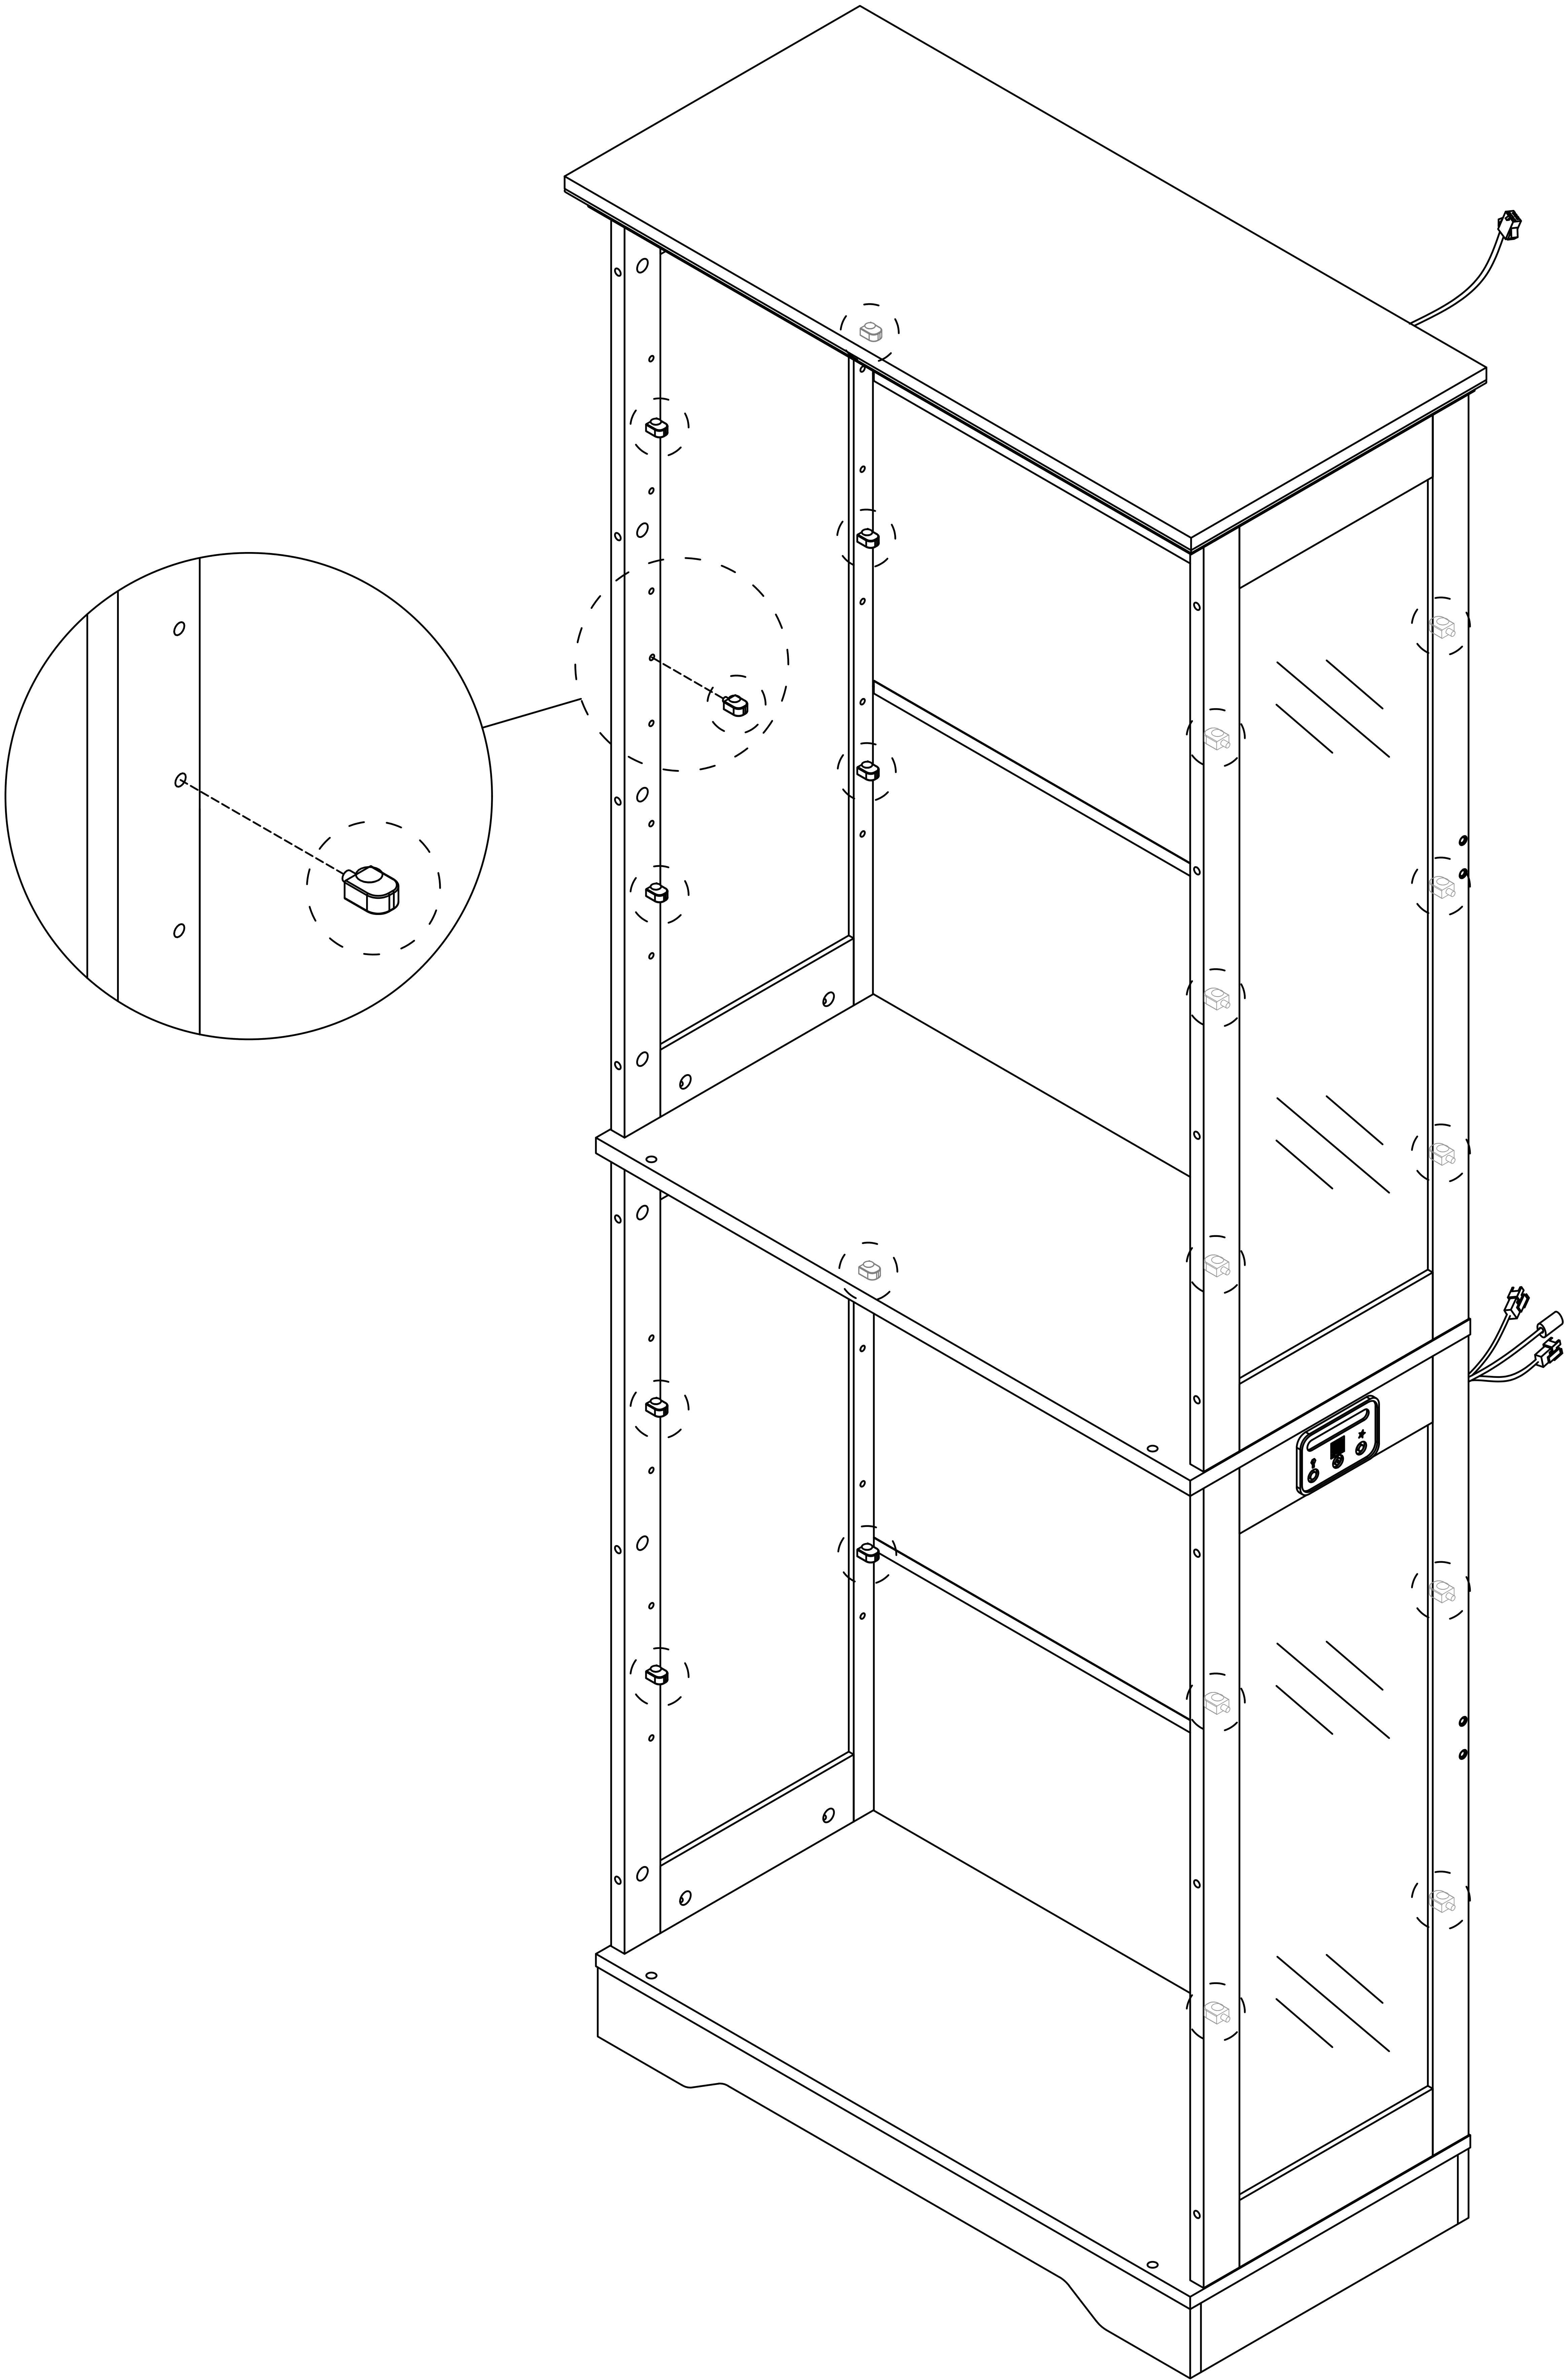

Step 21


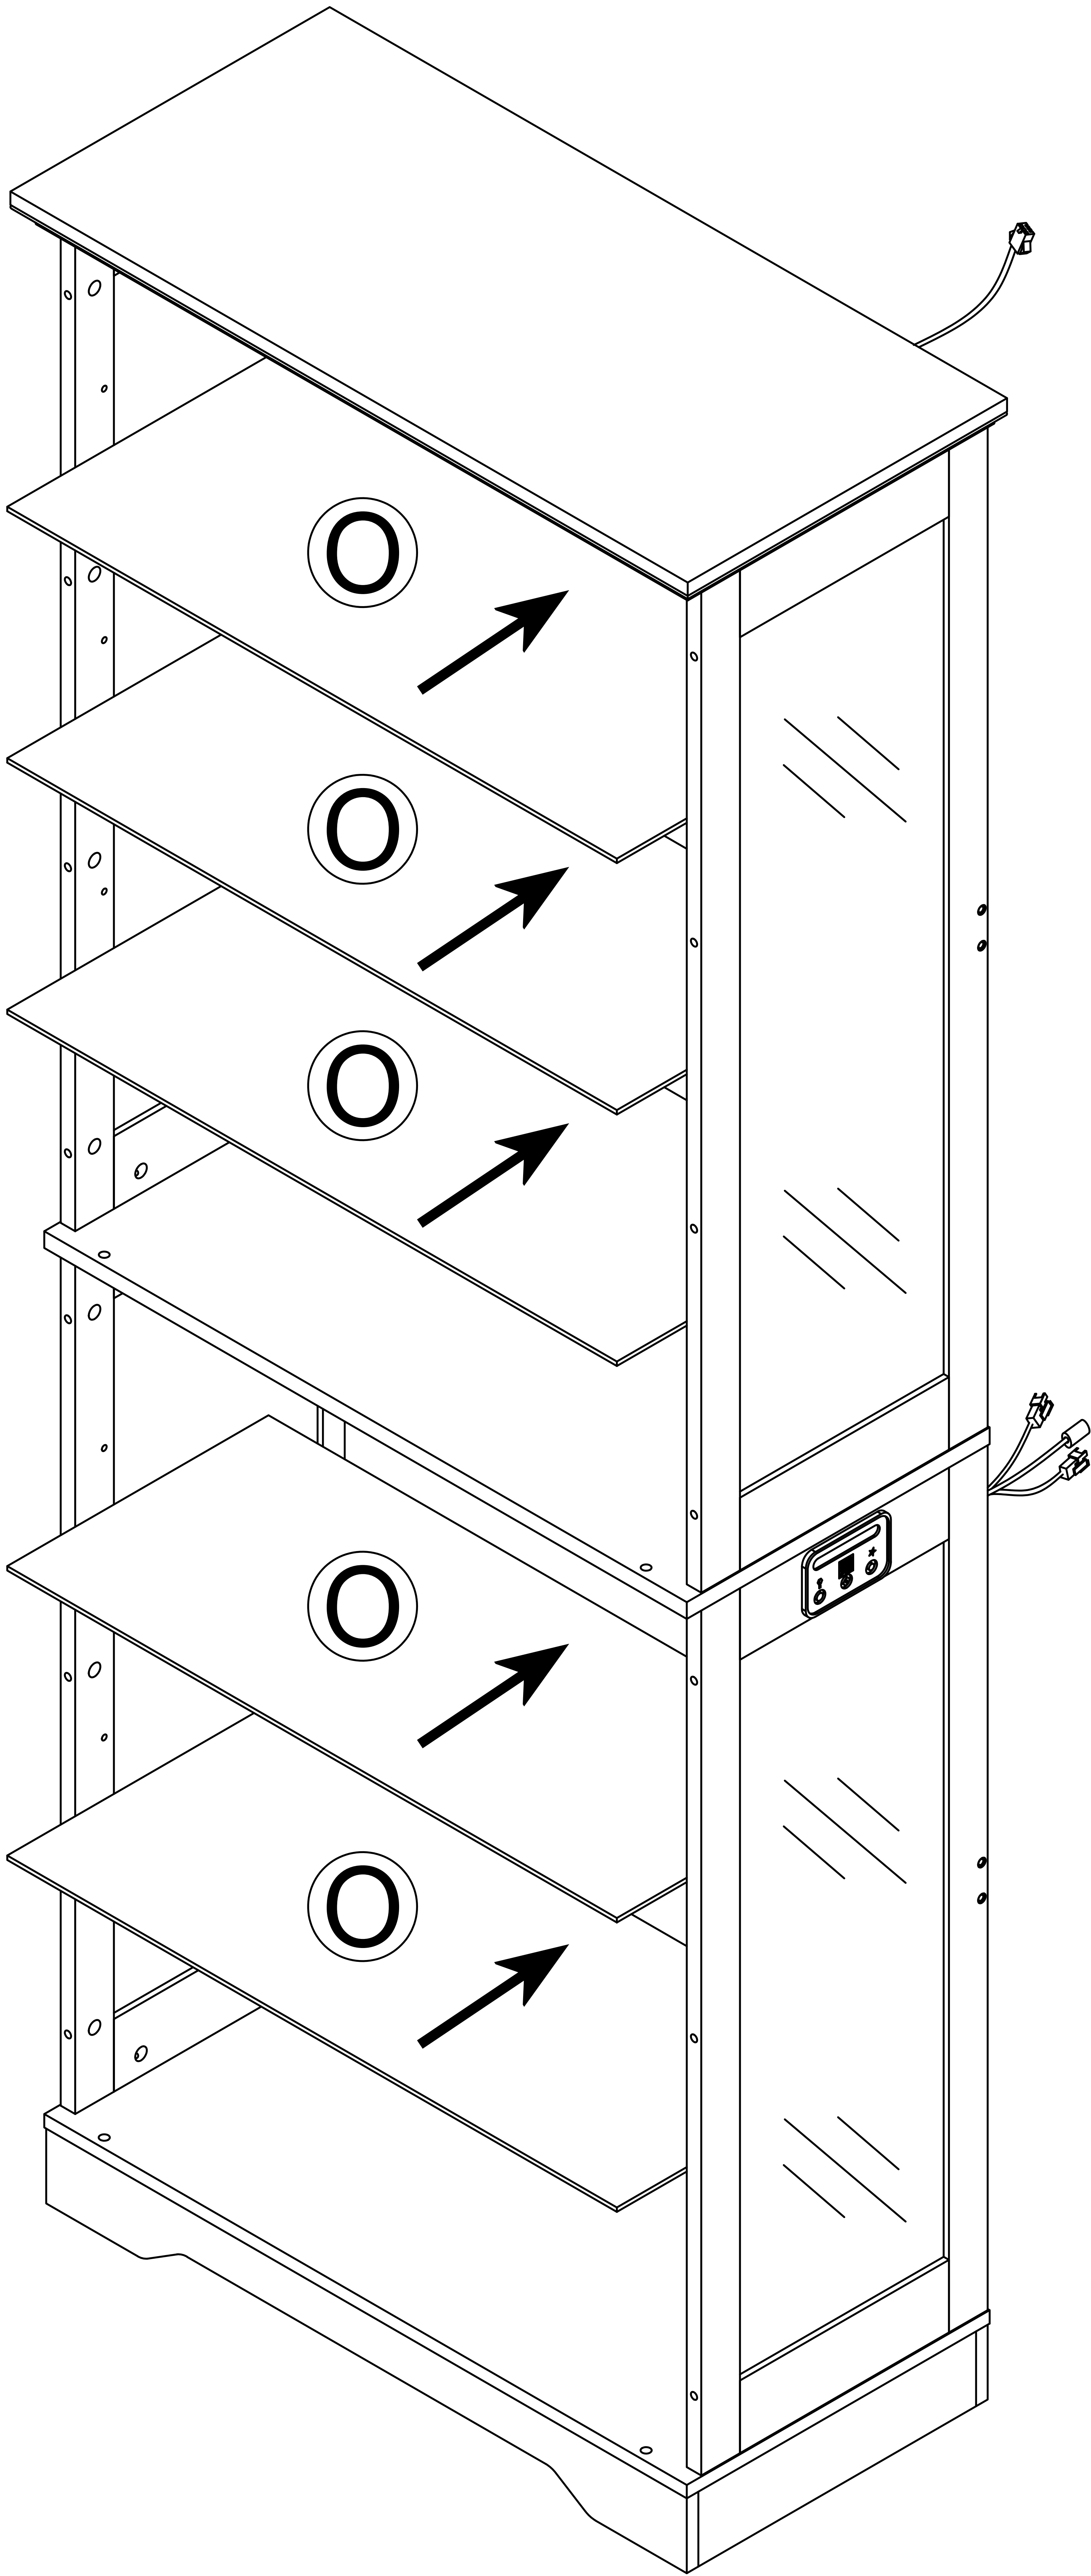


Step 22

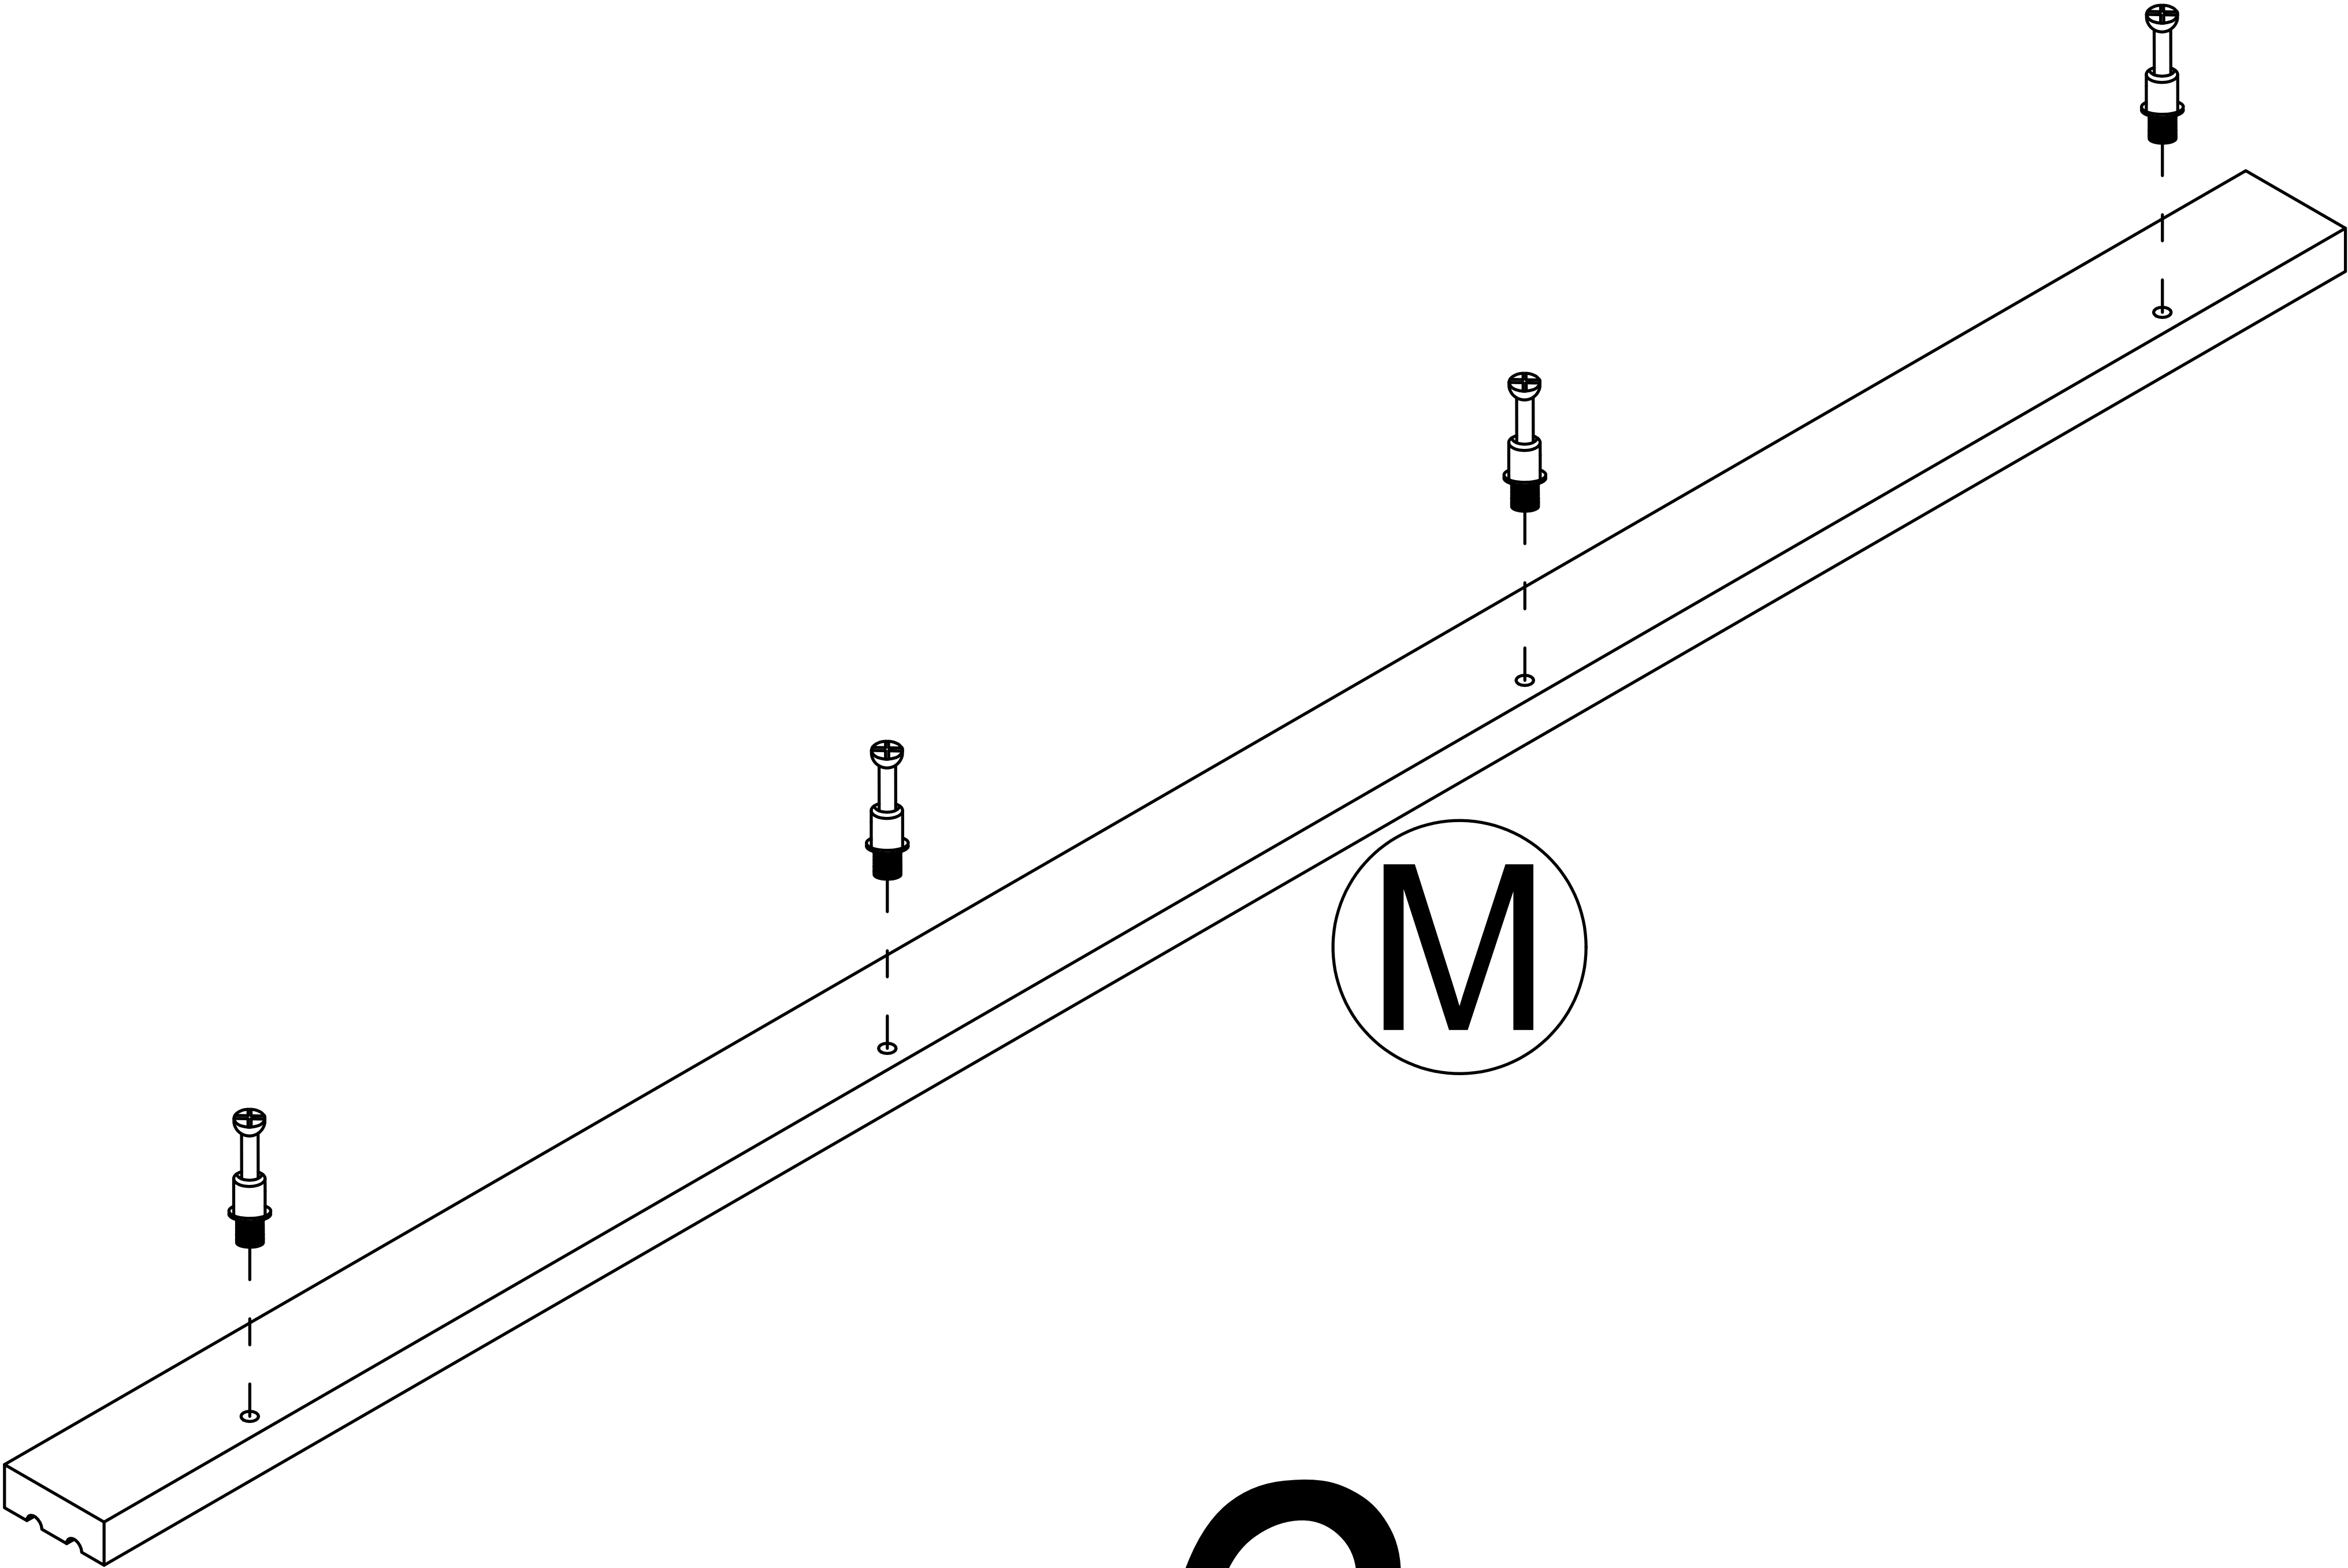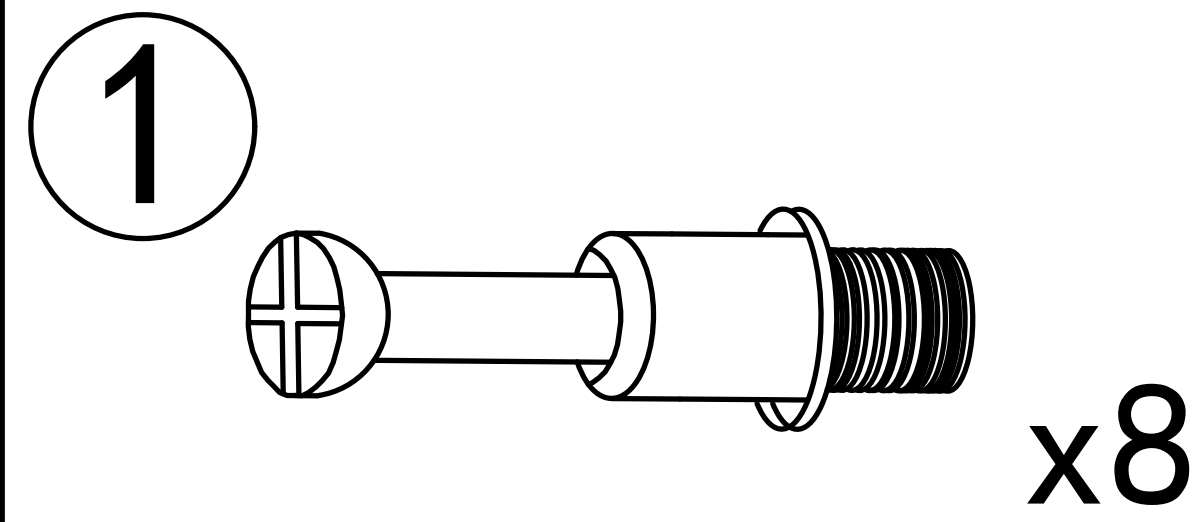

x2


Step 23

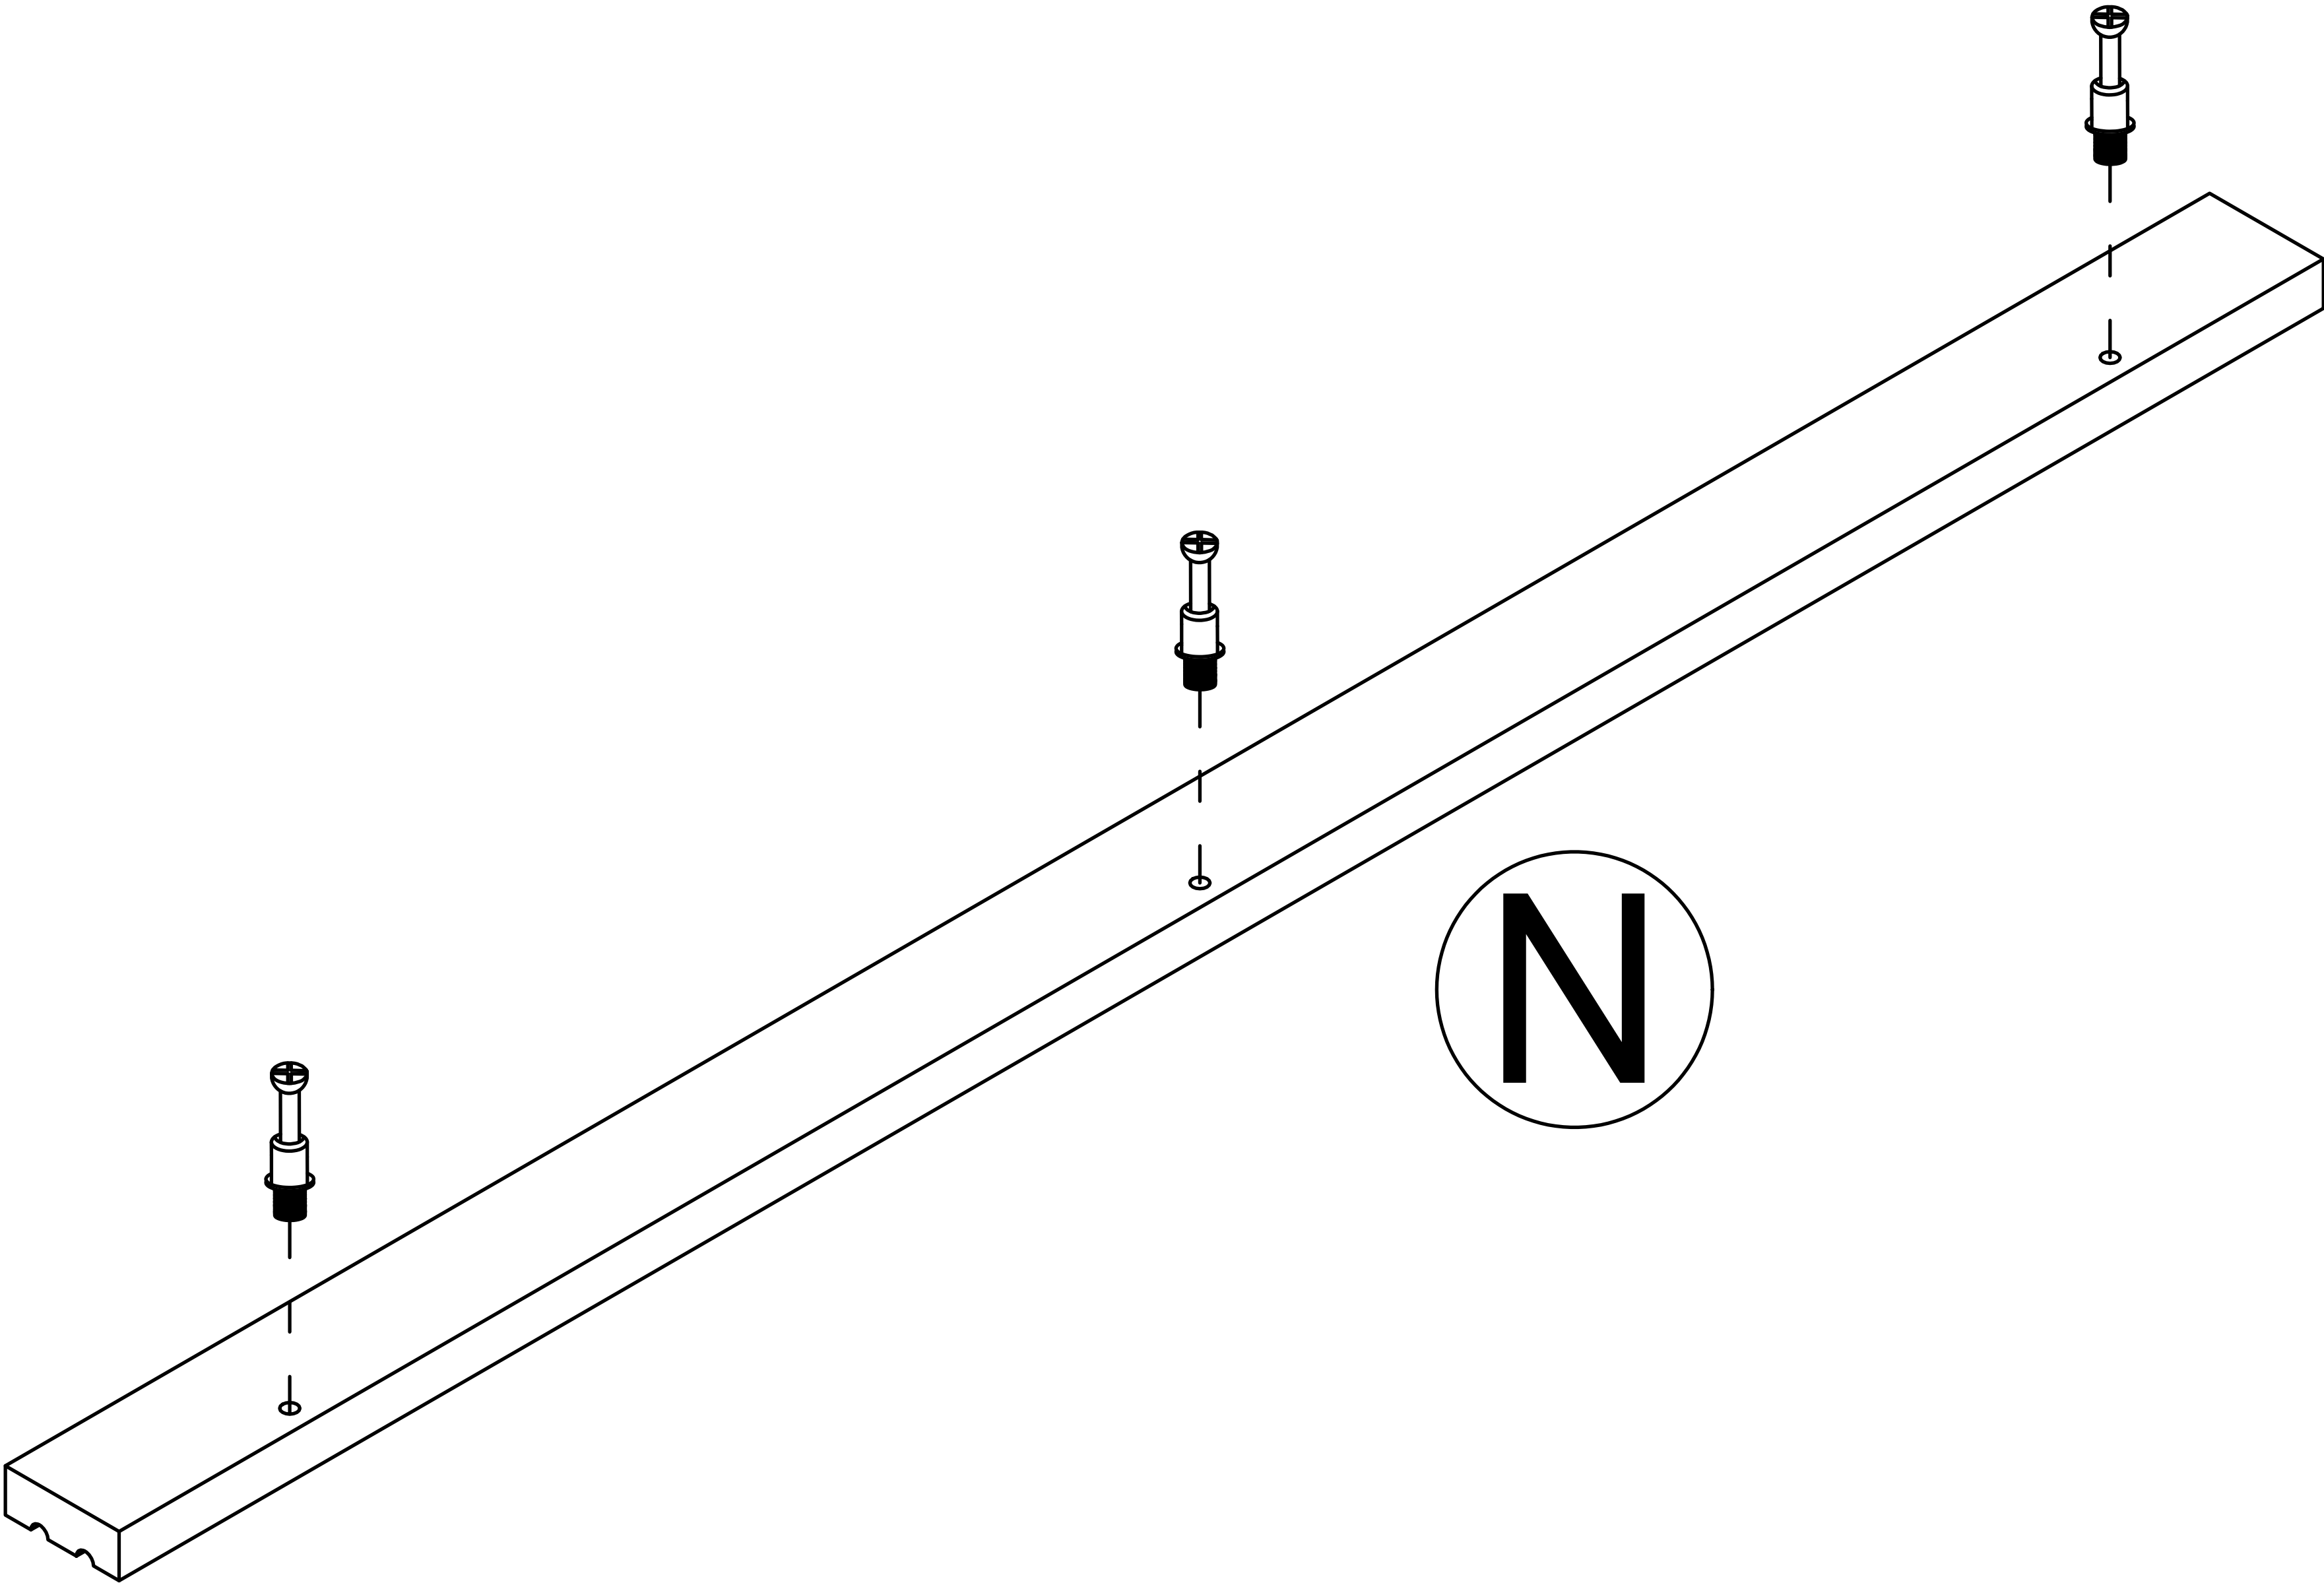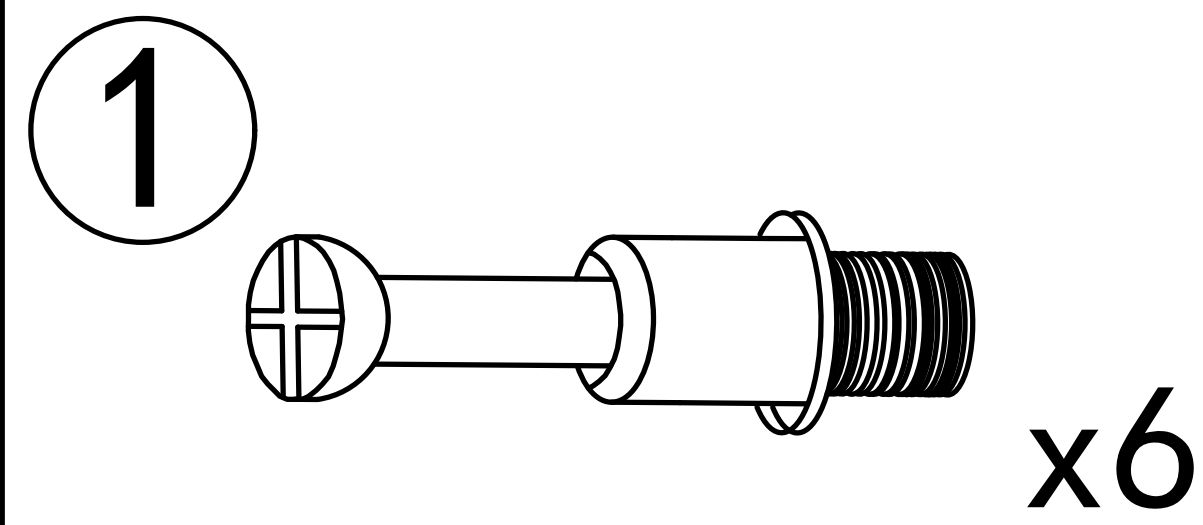


x2

Step 24

2

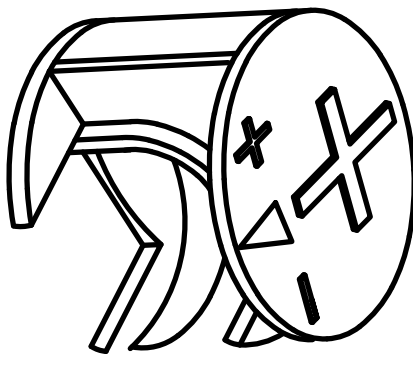


x6

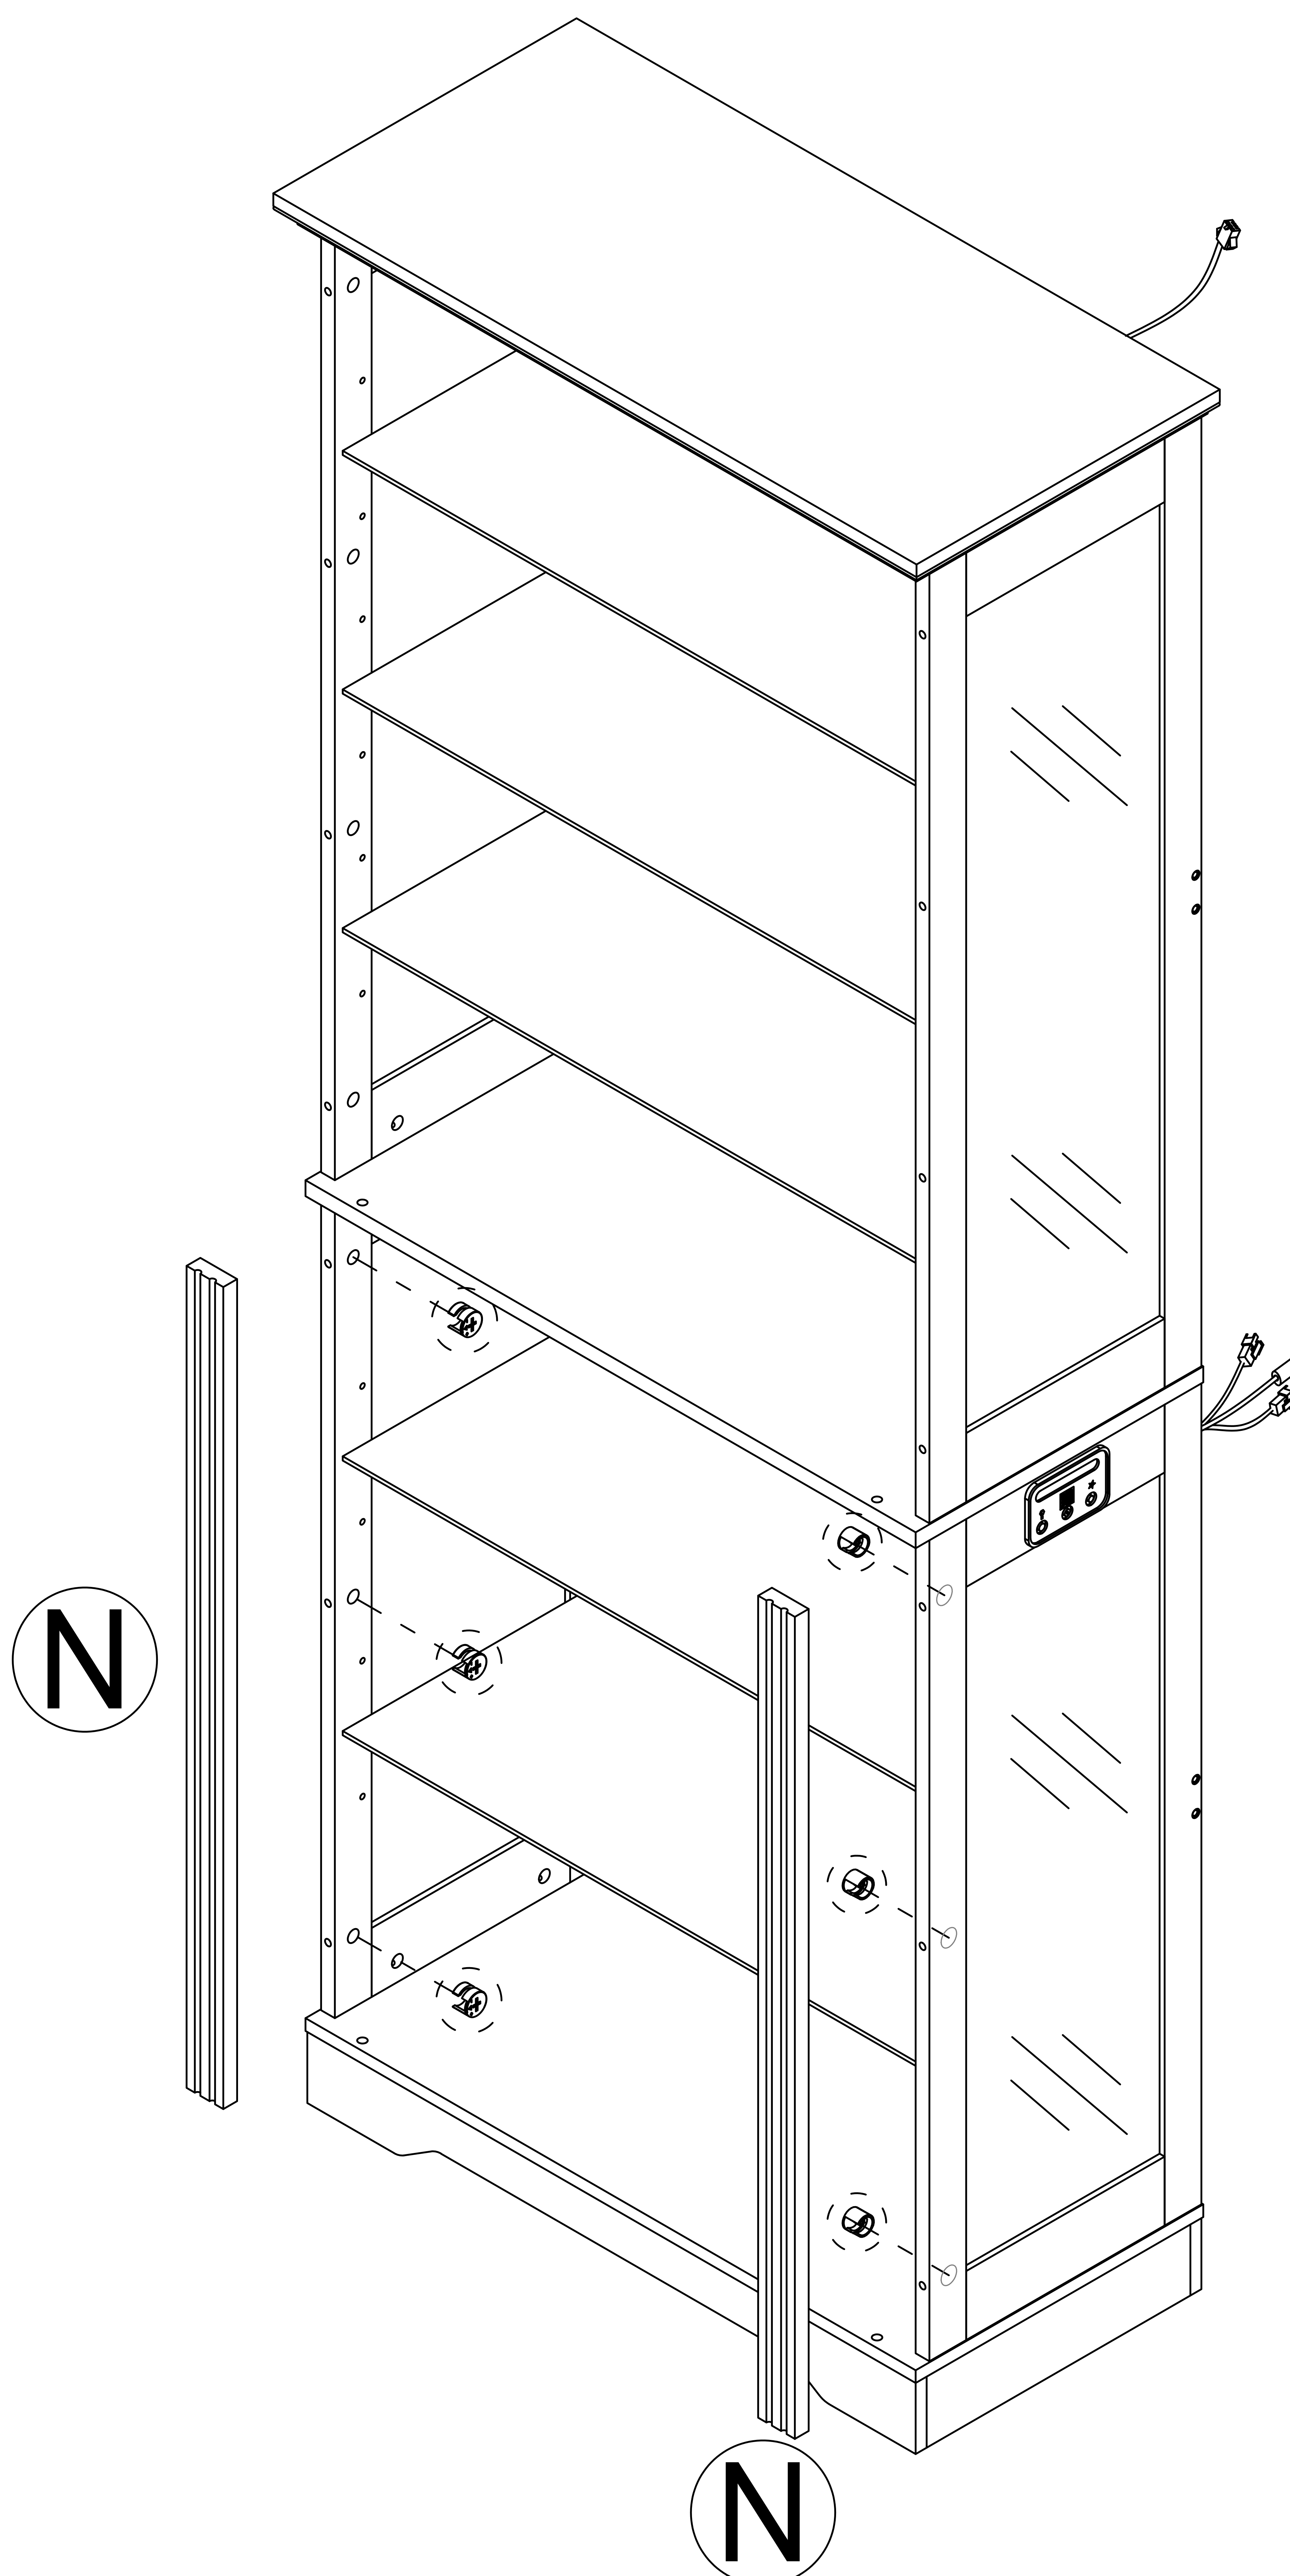


Step 25


2

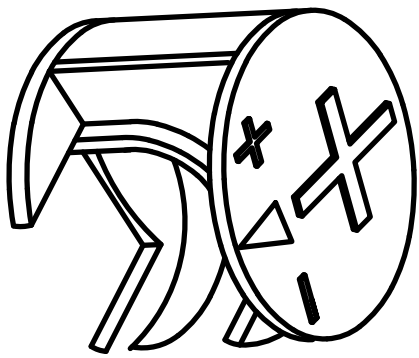




x8

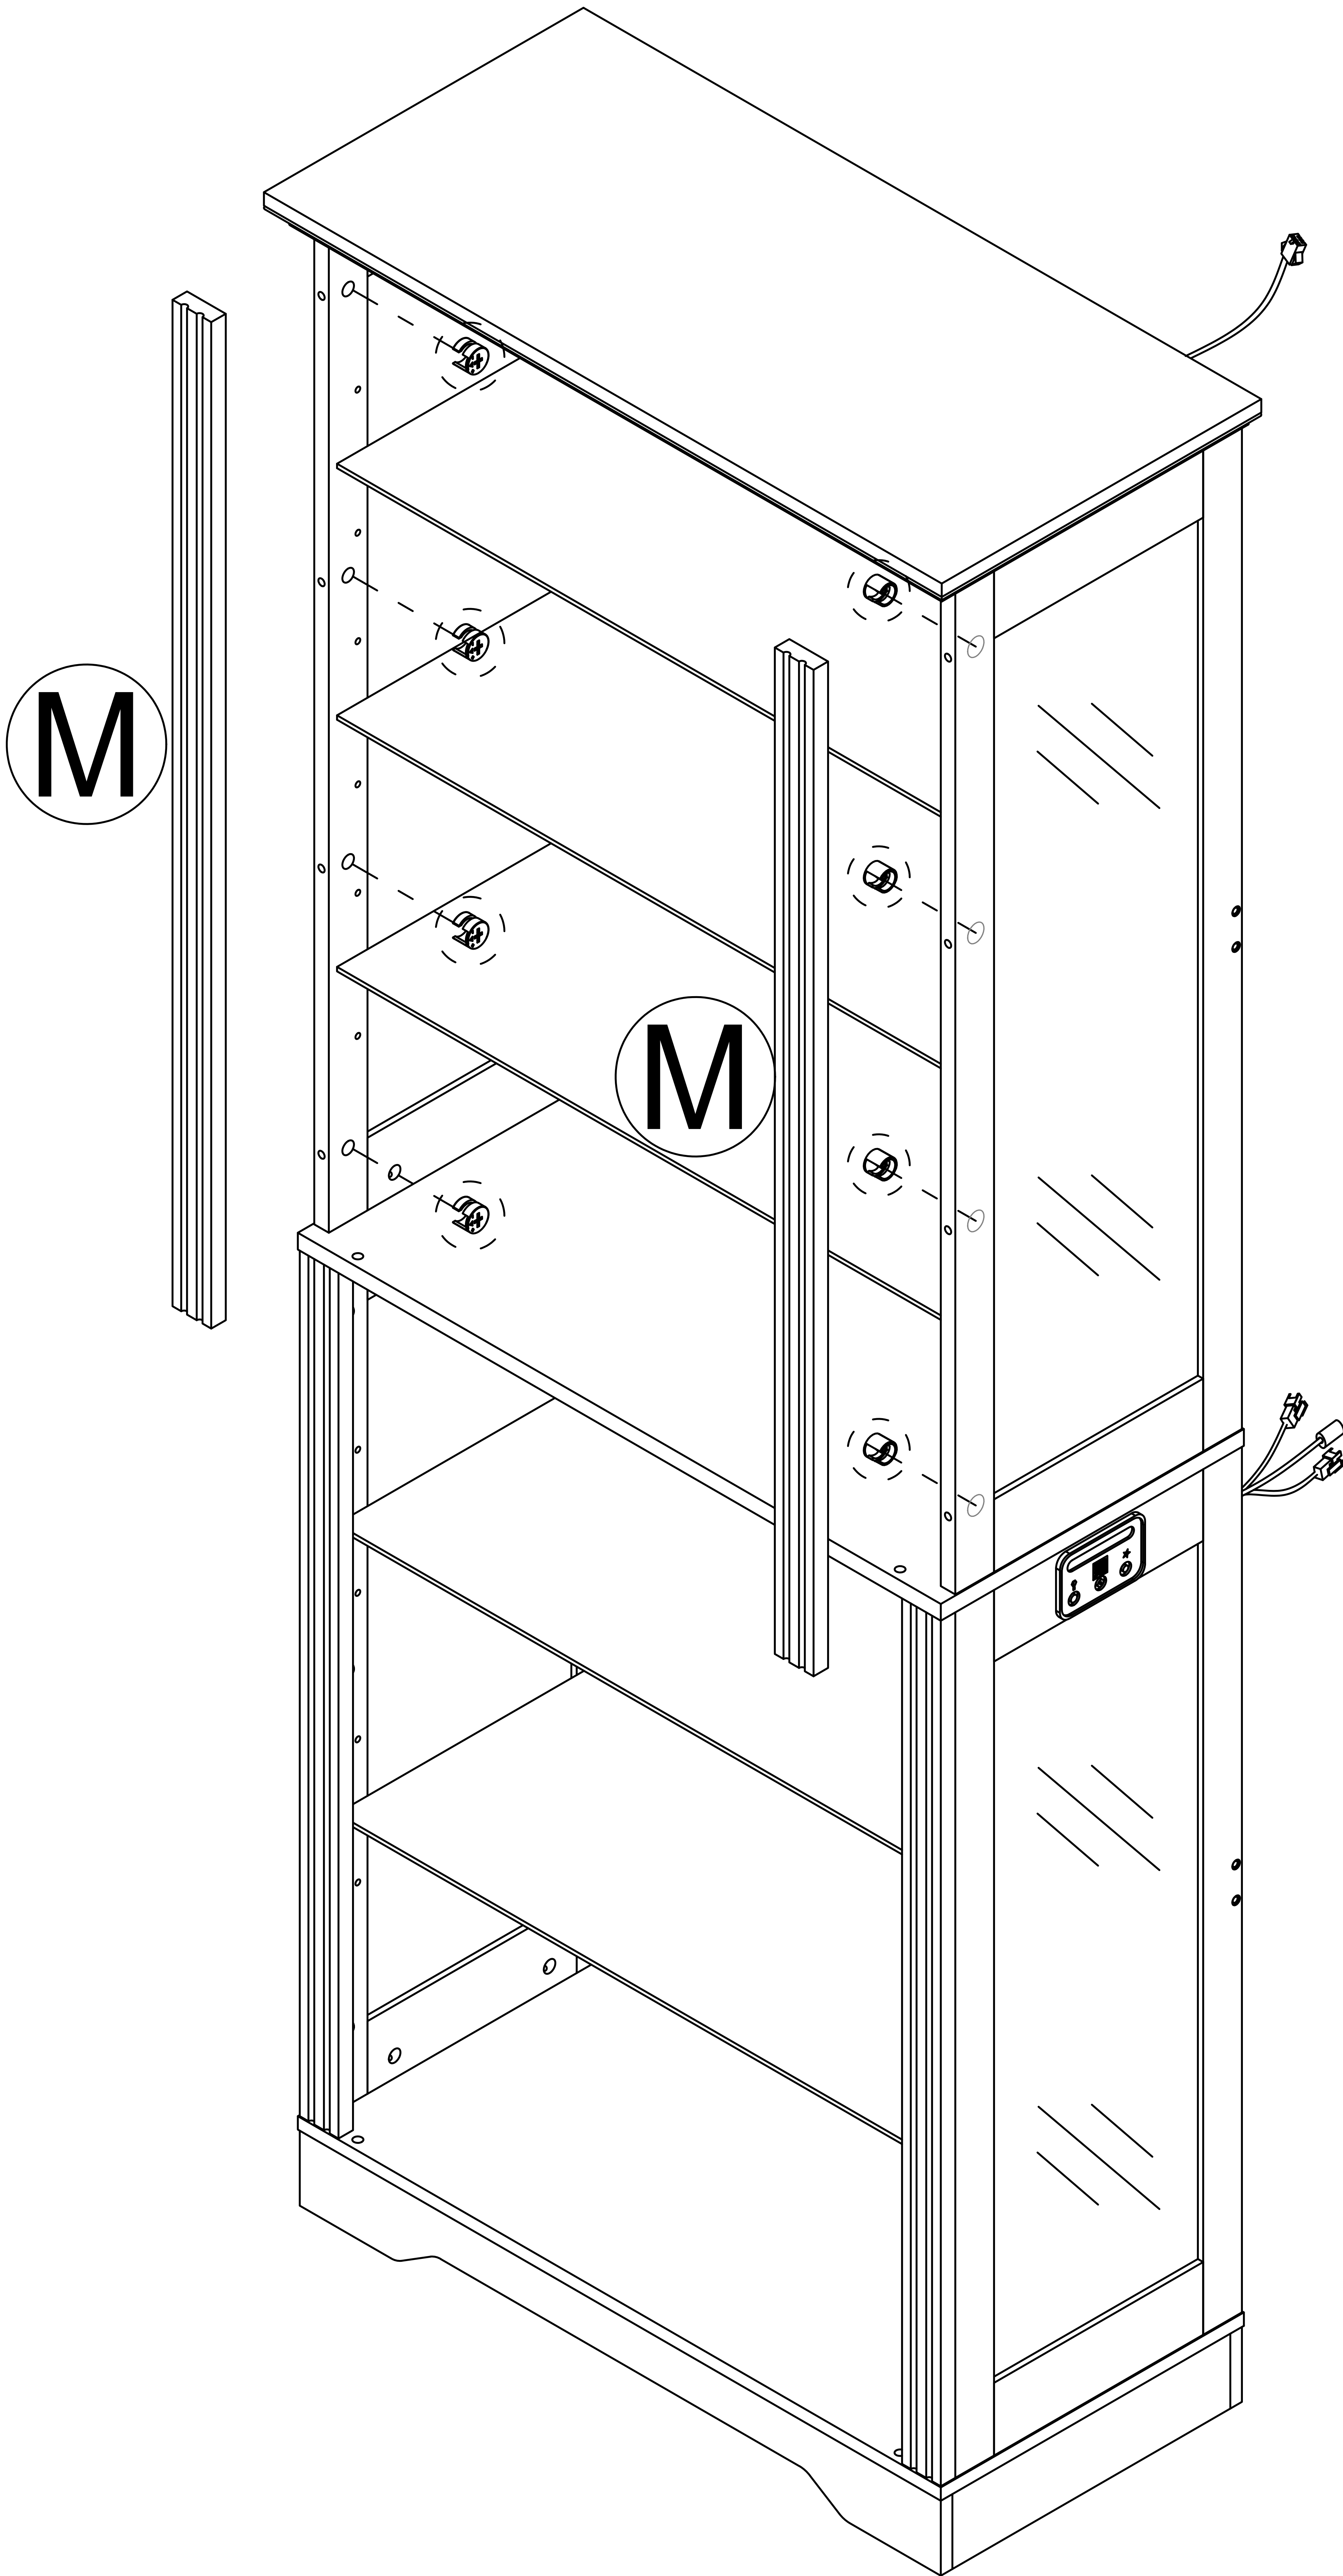

Step 26

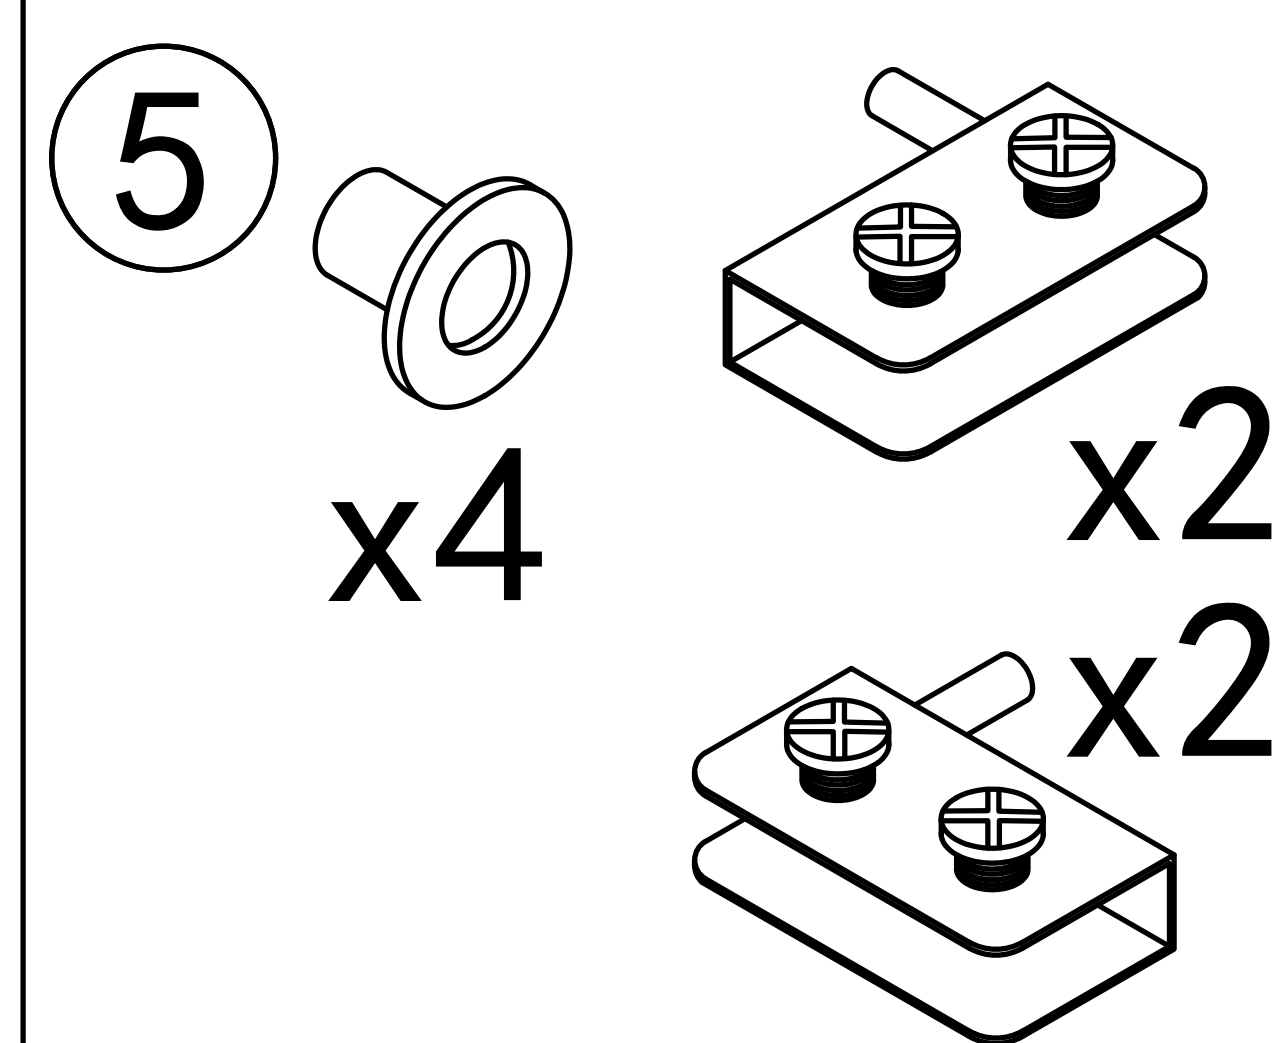


First, loosen the screws.

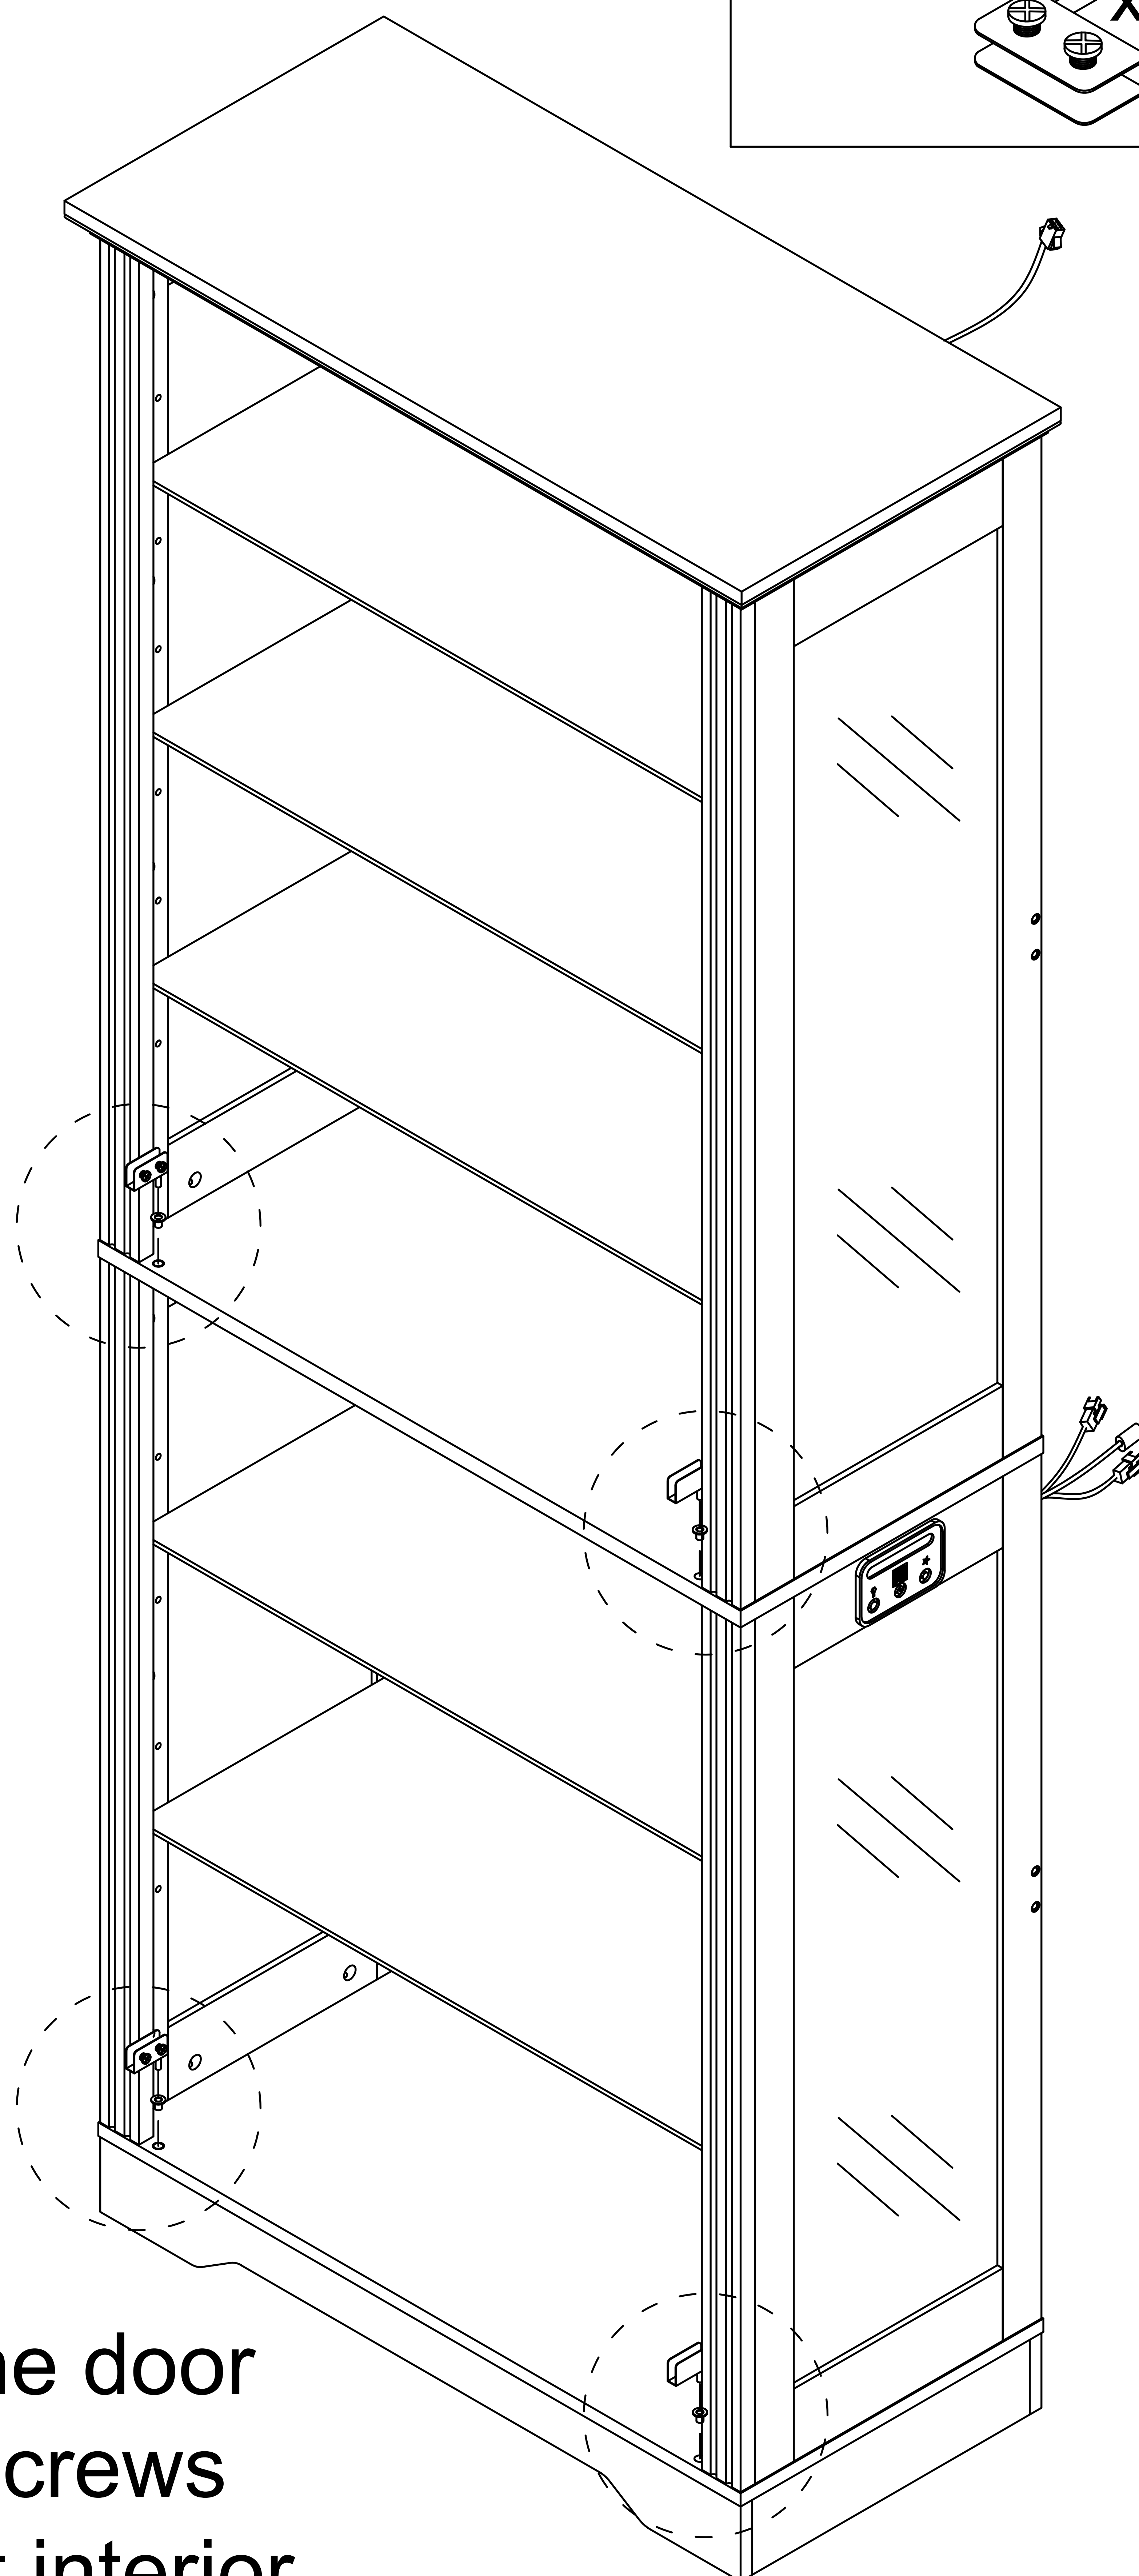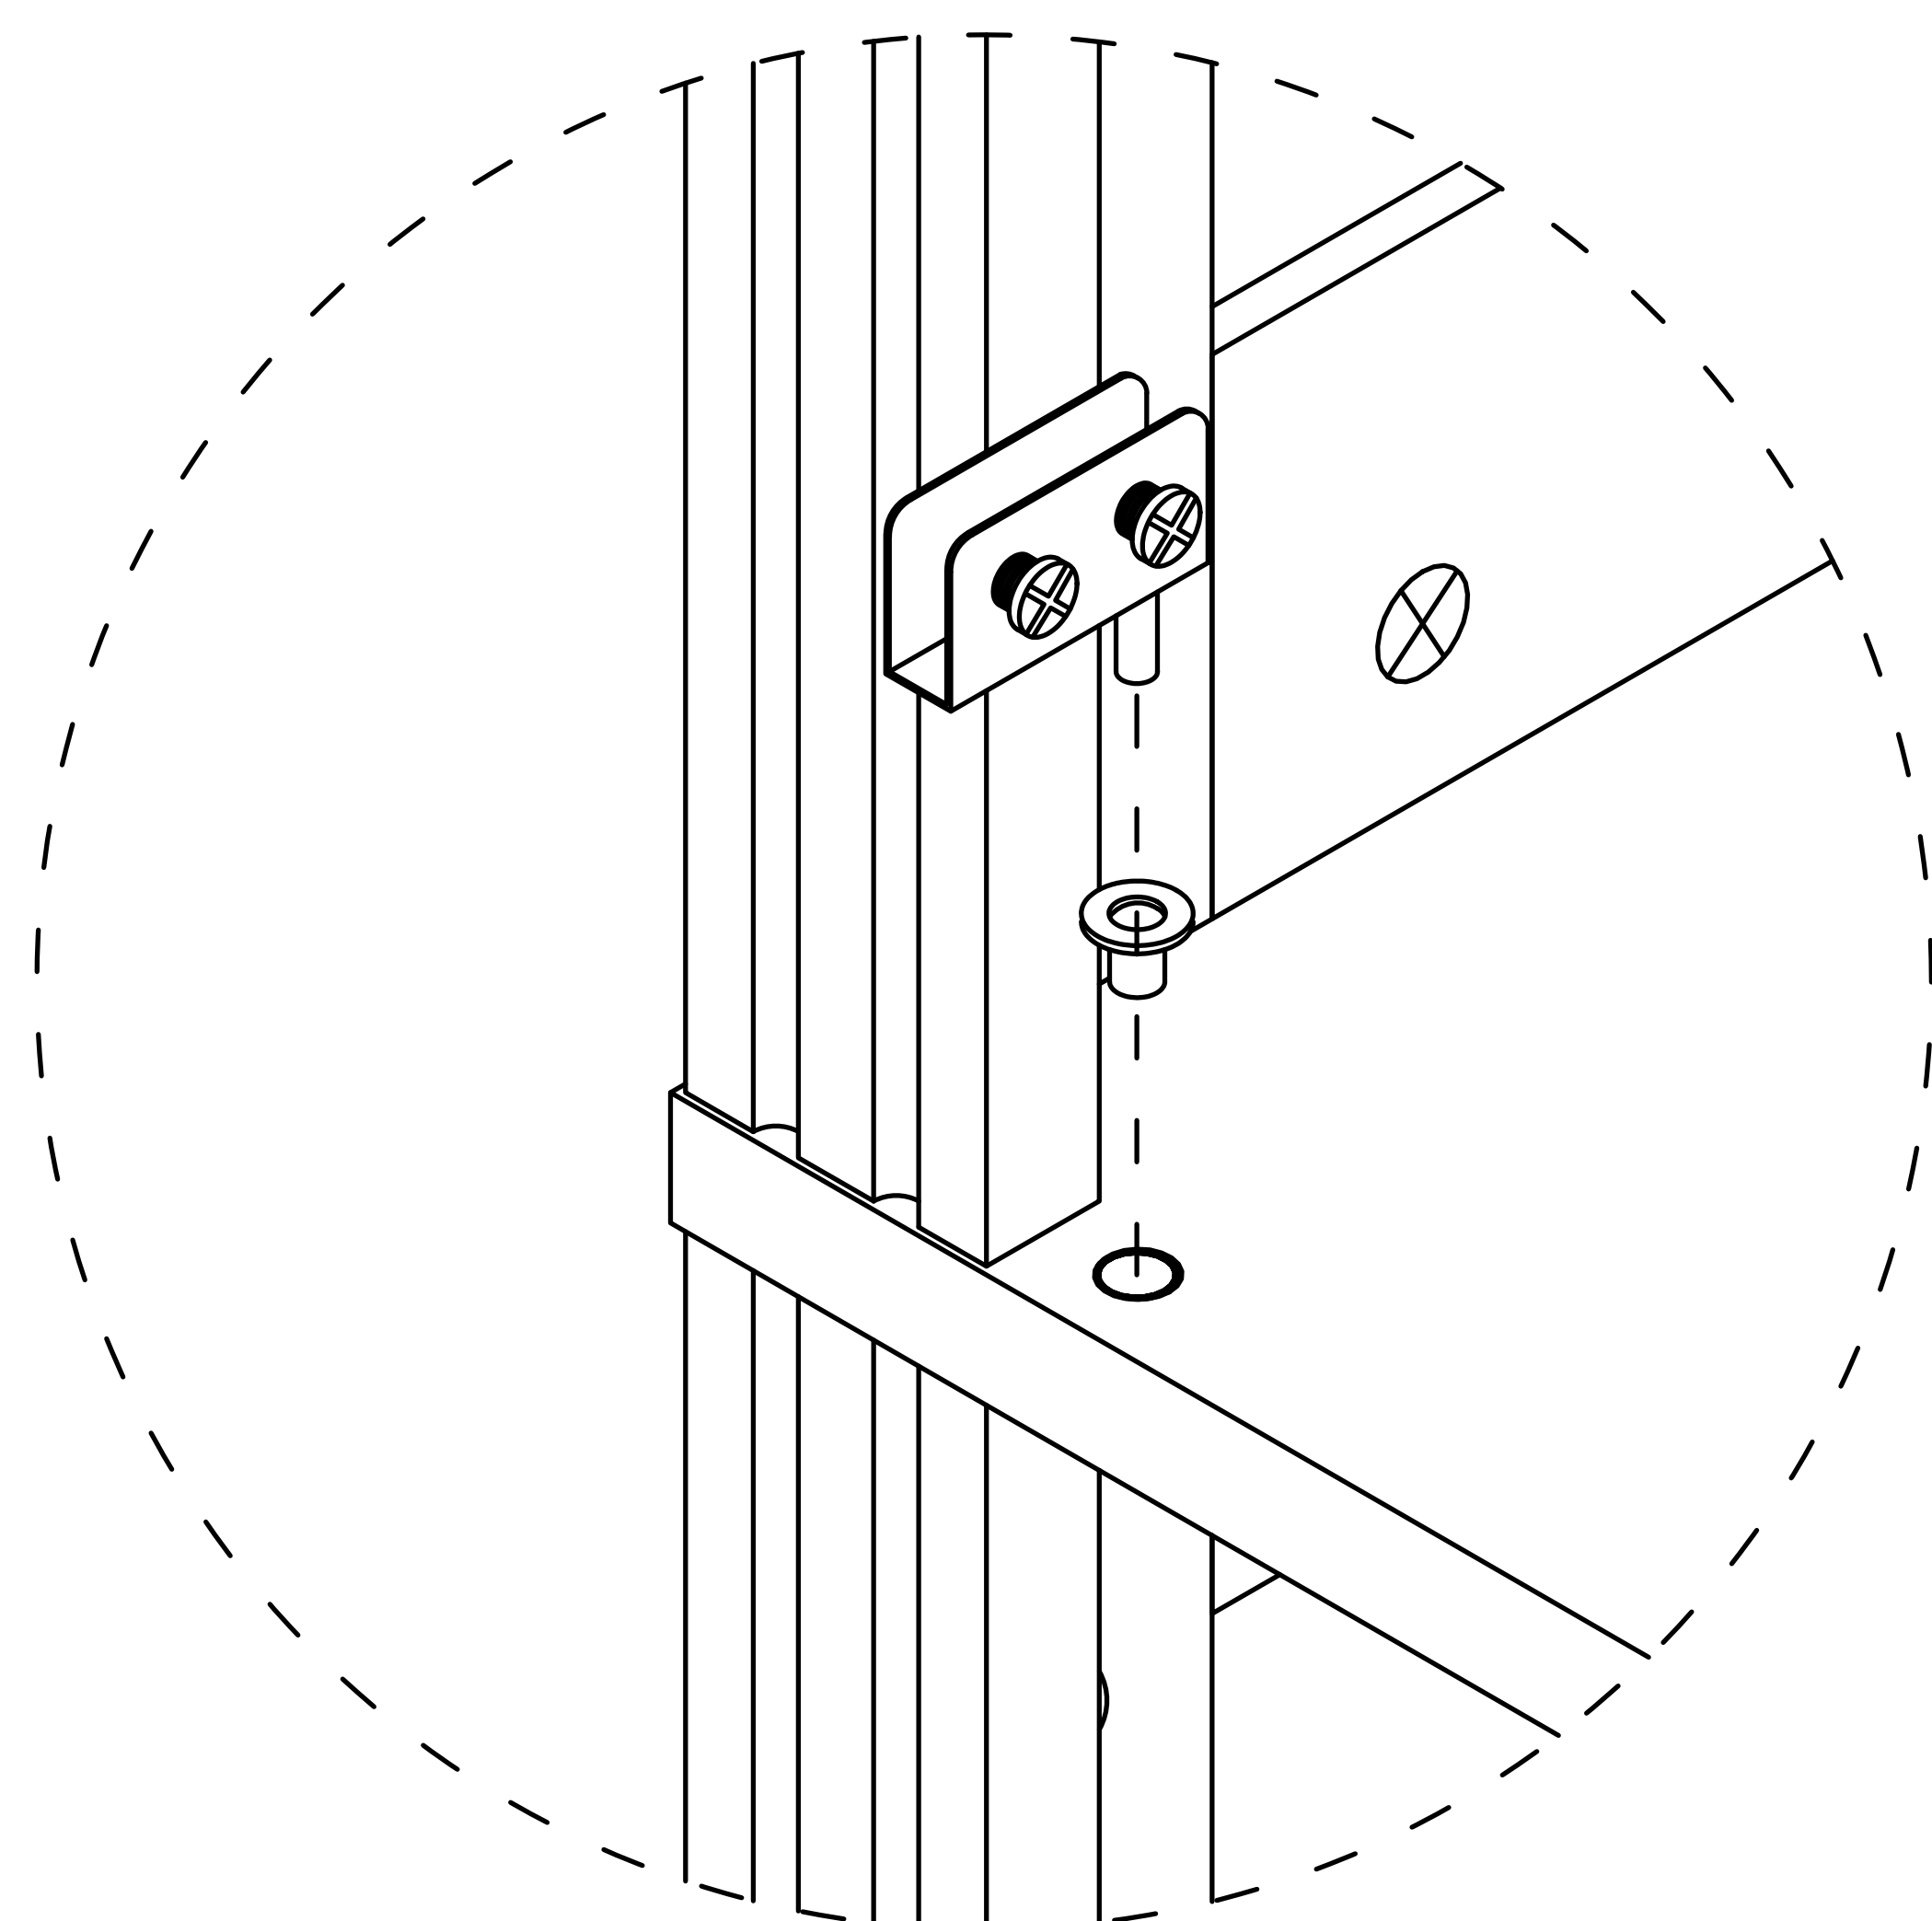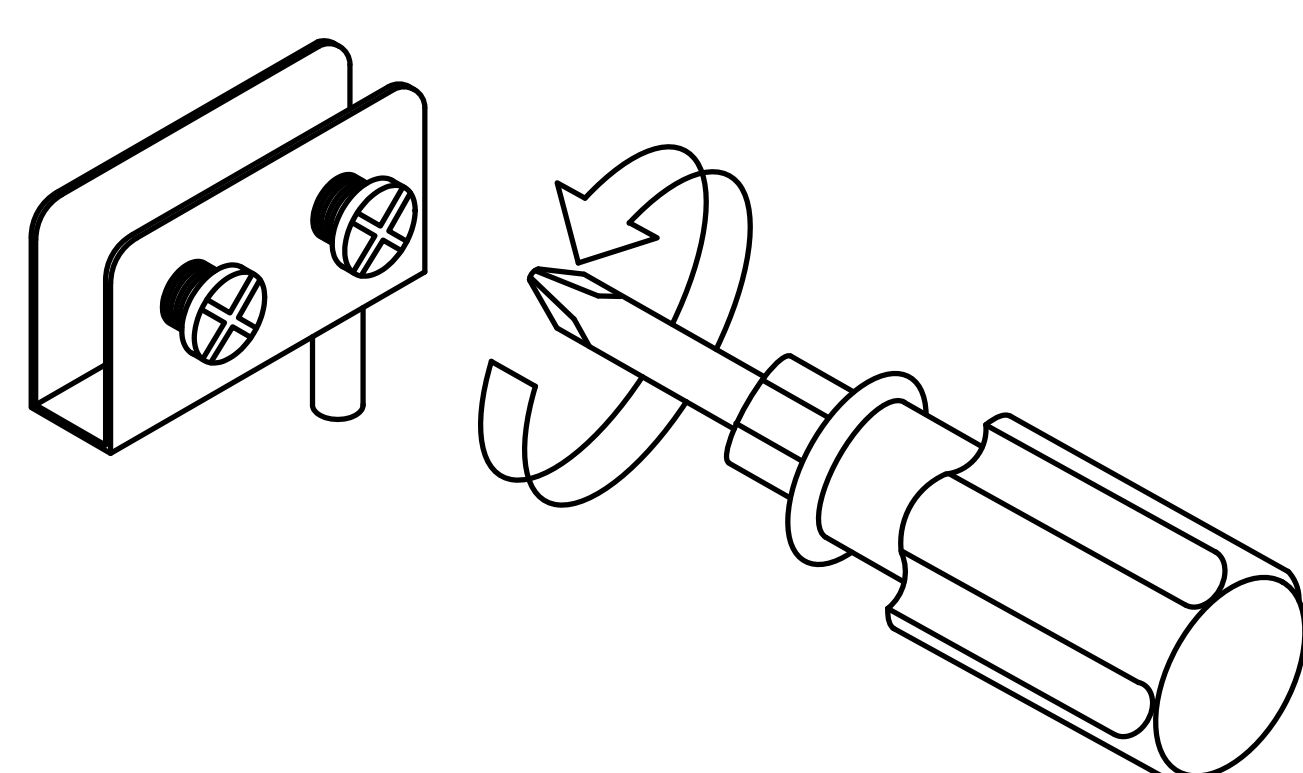


Note the orientation of the door hinge: the end with the screws faces toward the cabinet interior.

Step 27


First, loosen the screws.

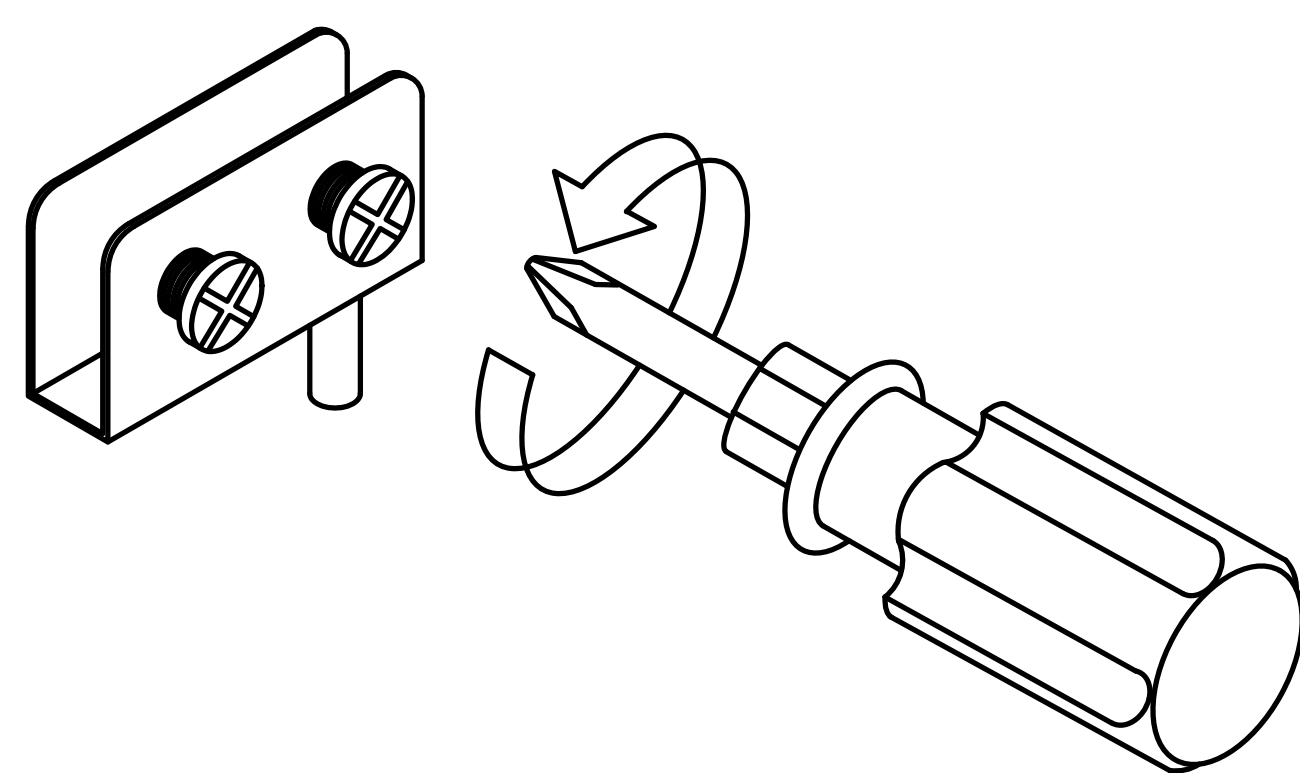

5




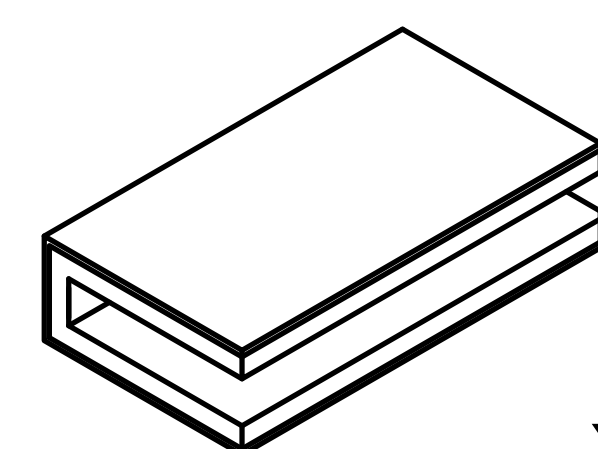


x1


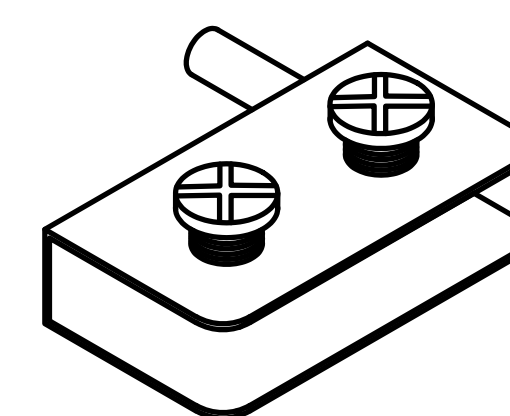


x1

1. Take out the white pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

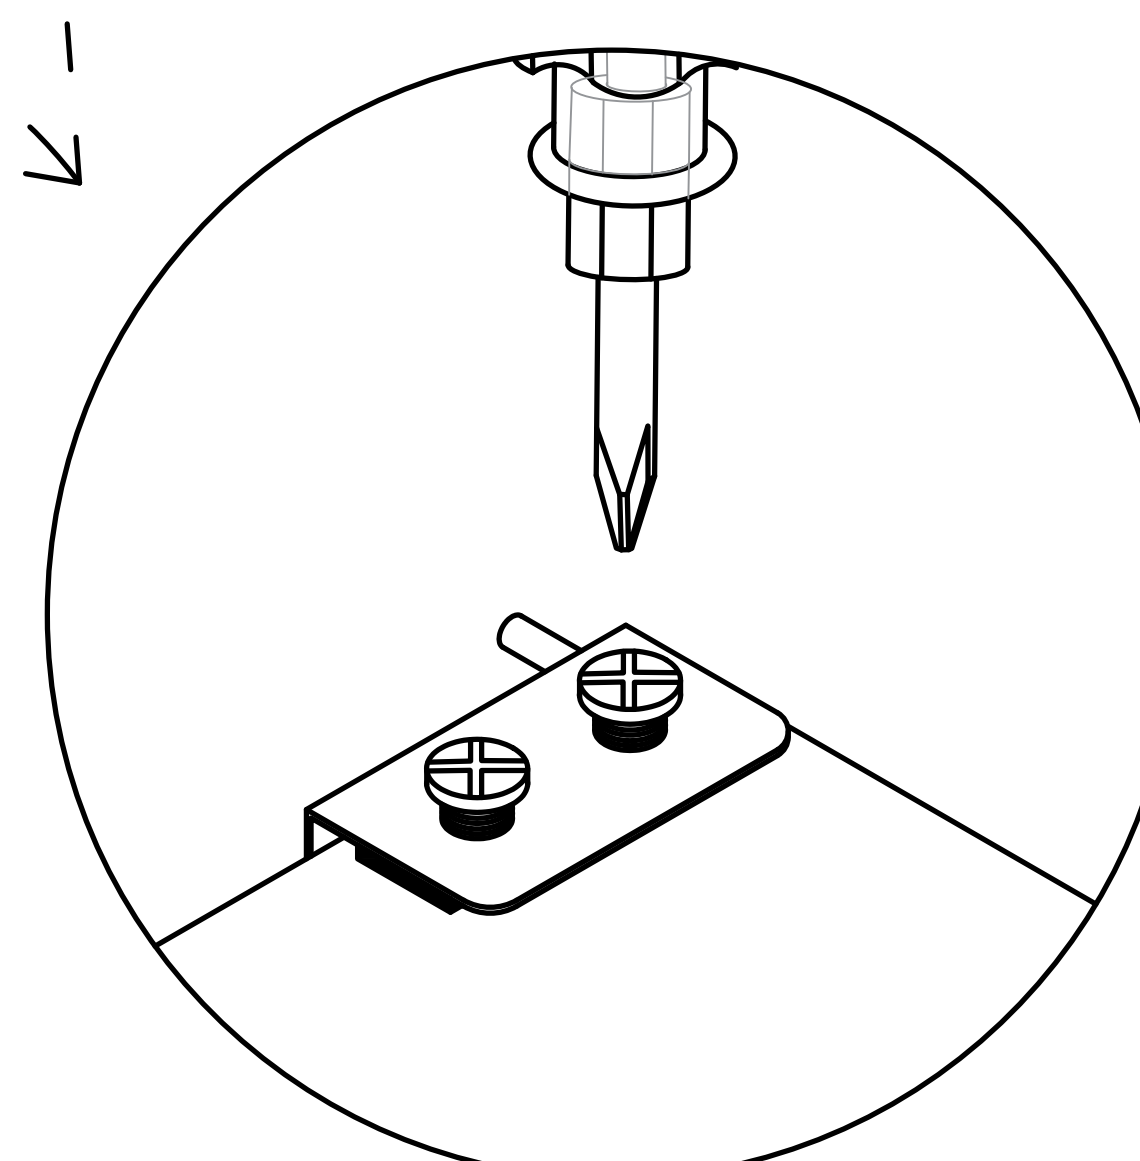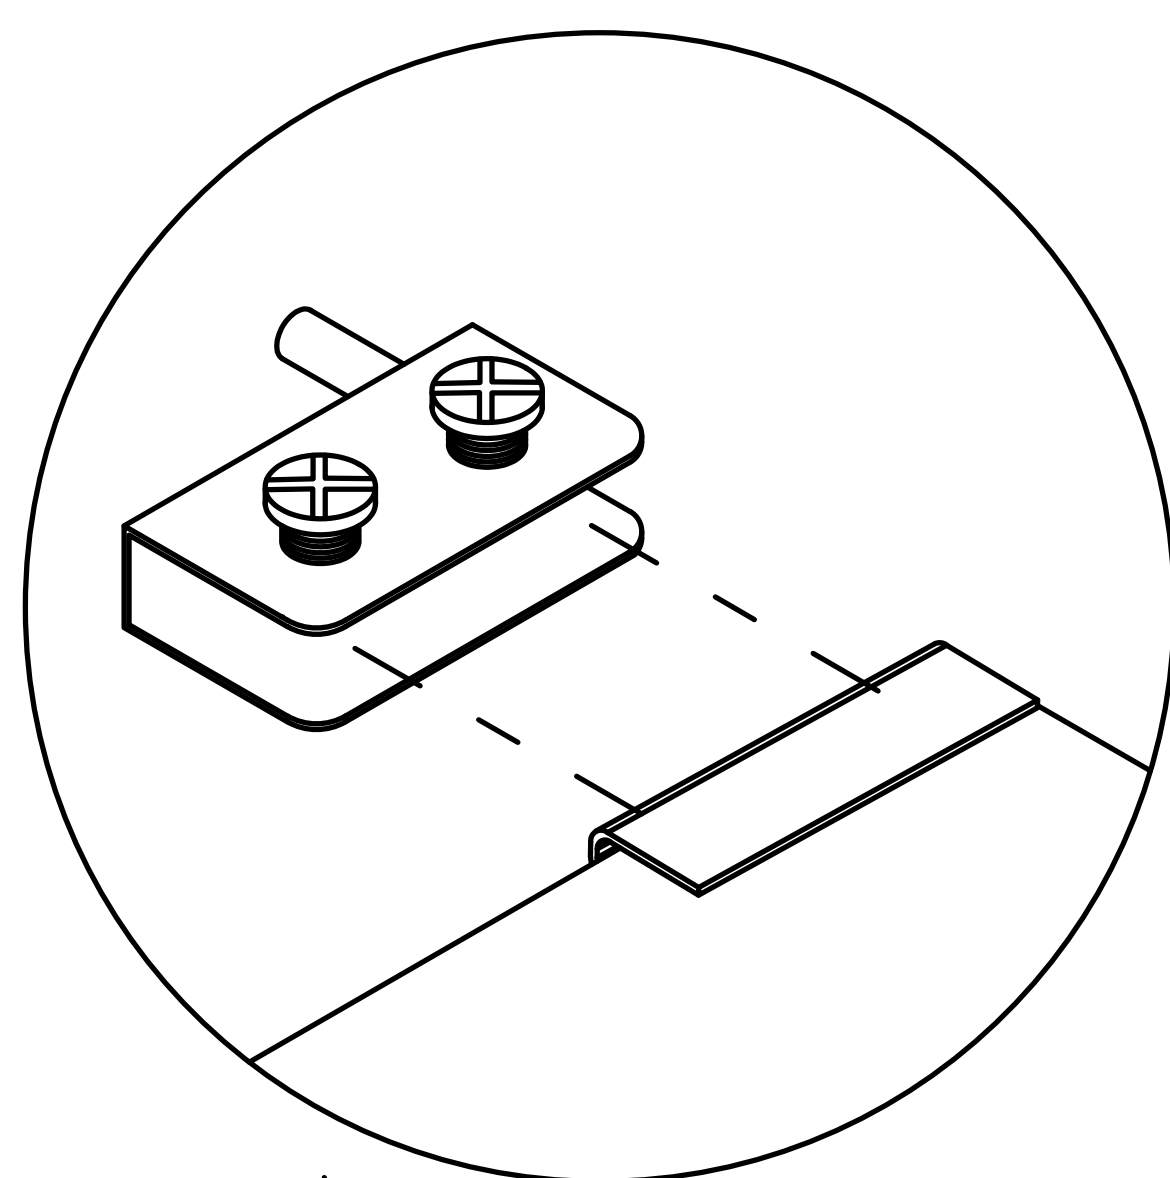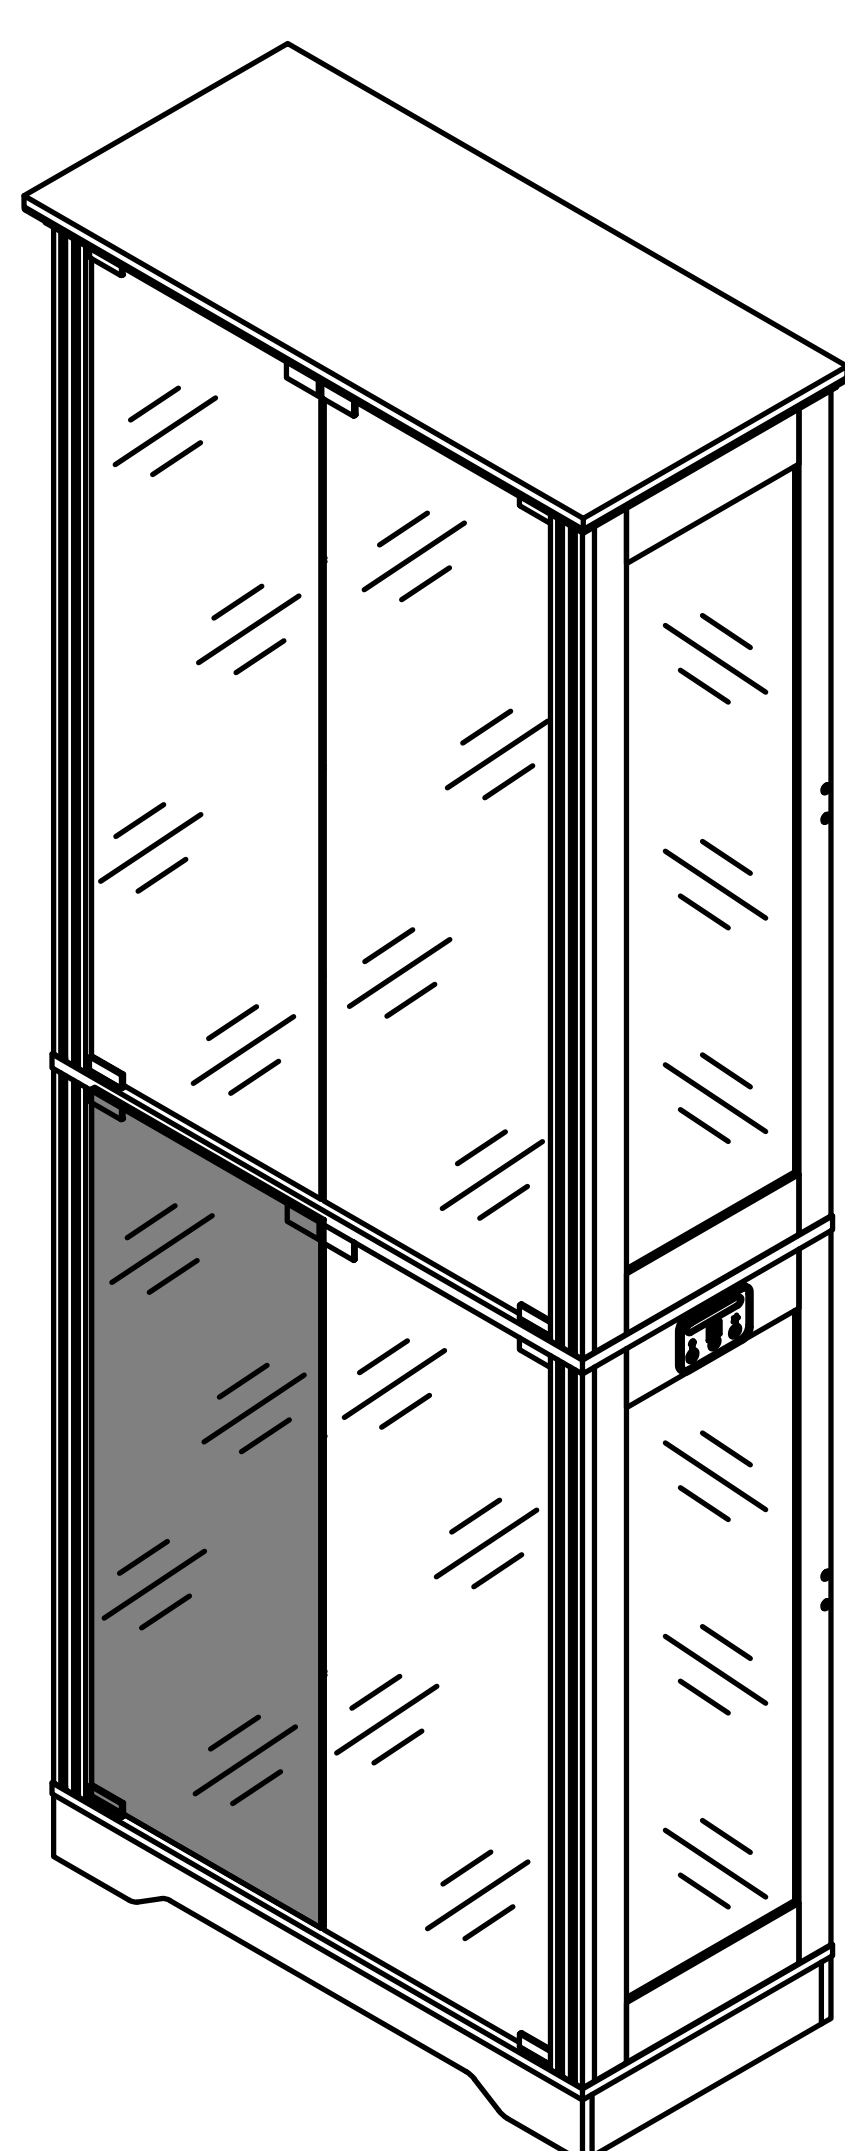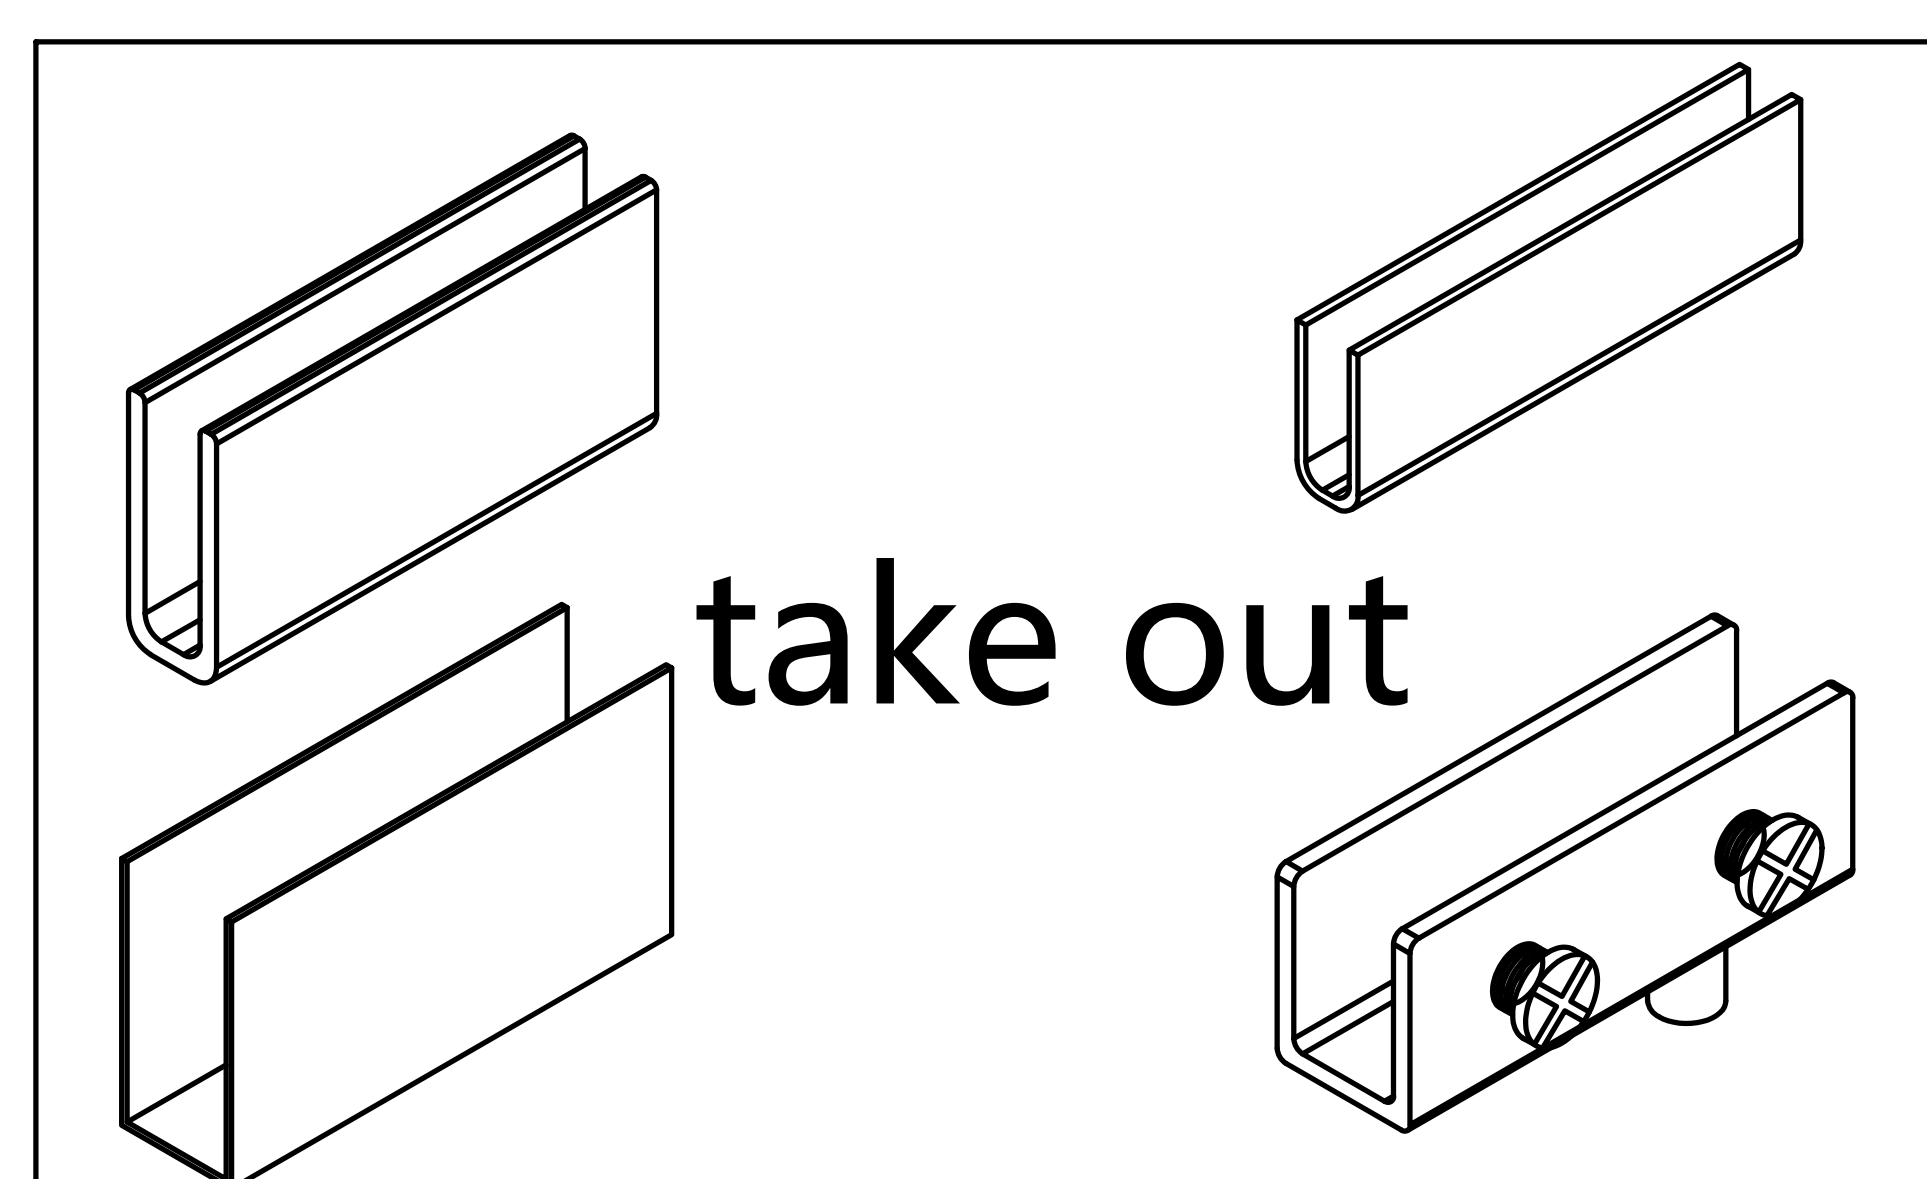


Locking screw

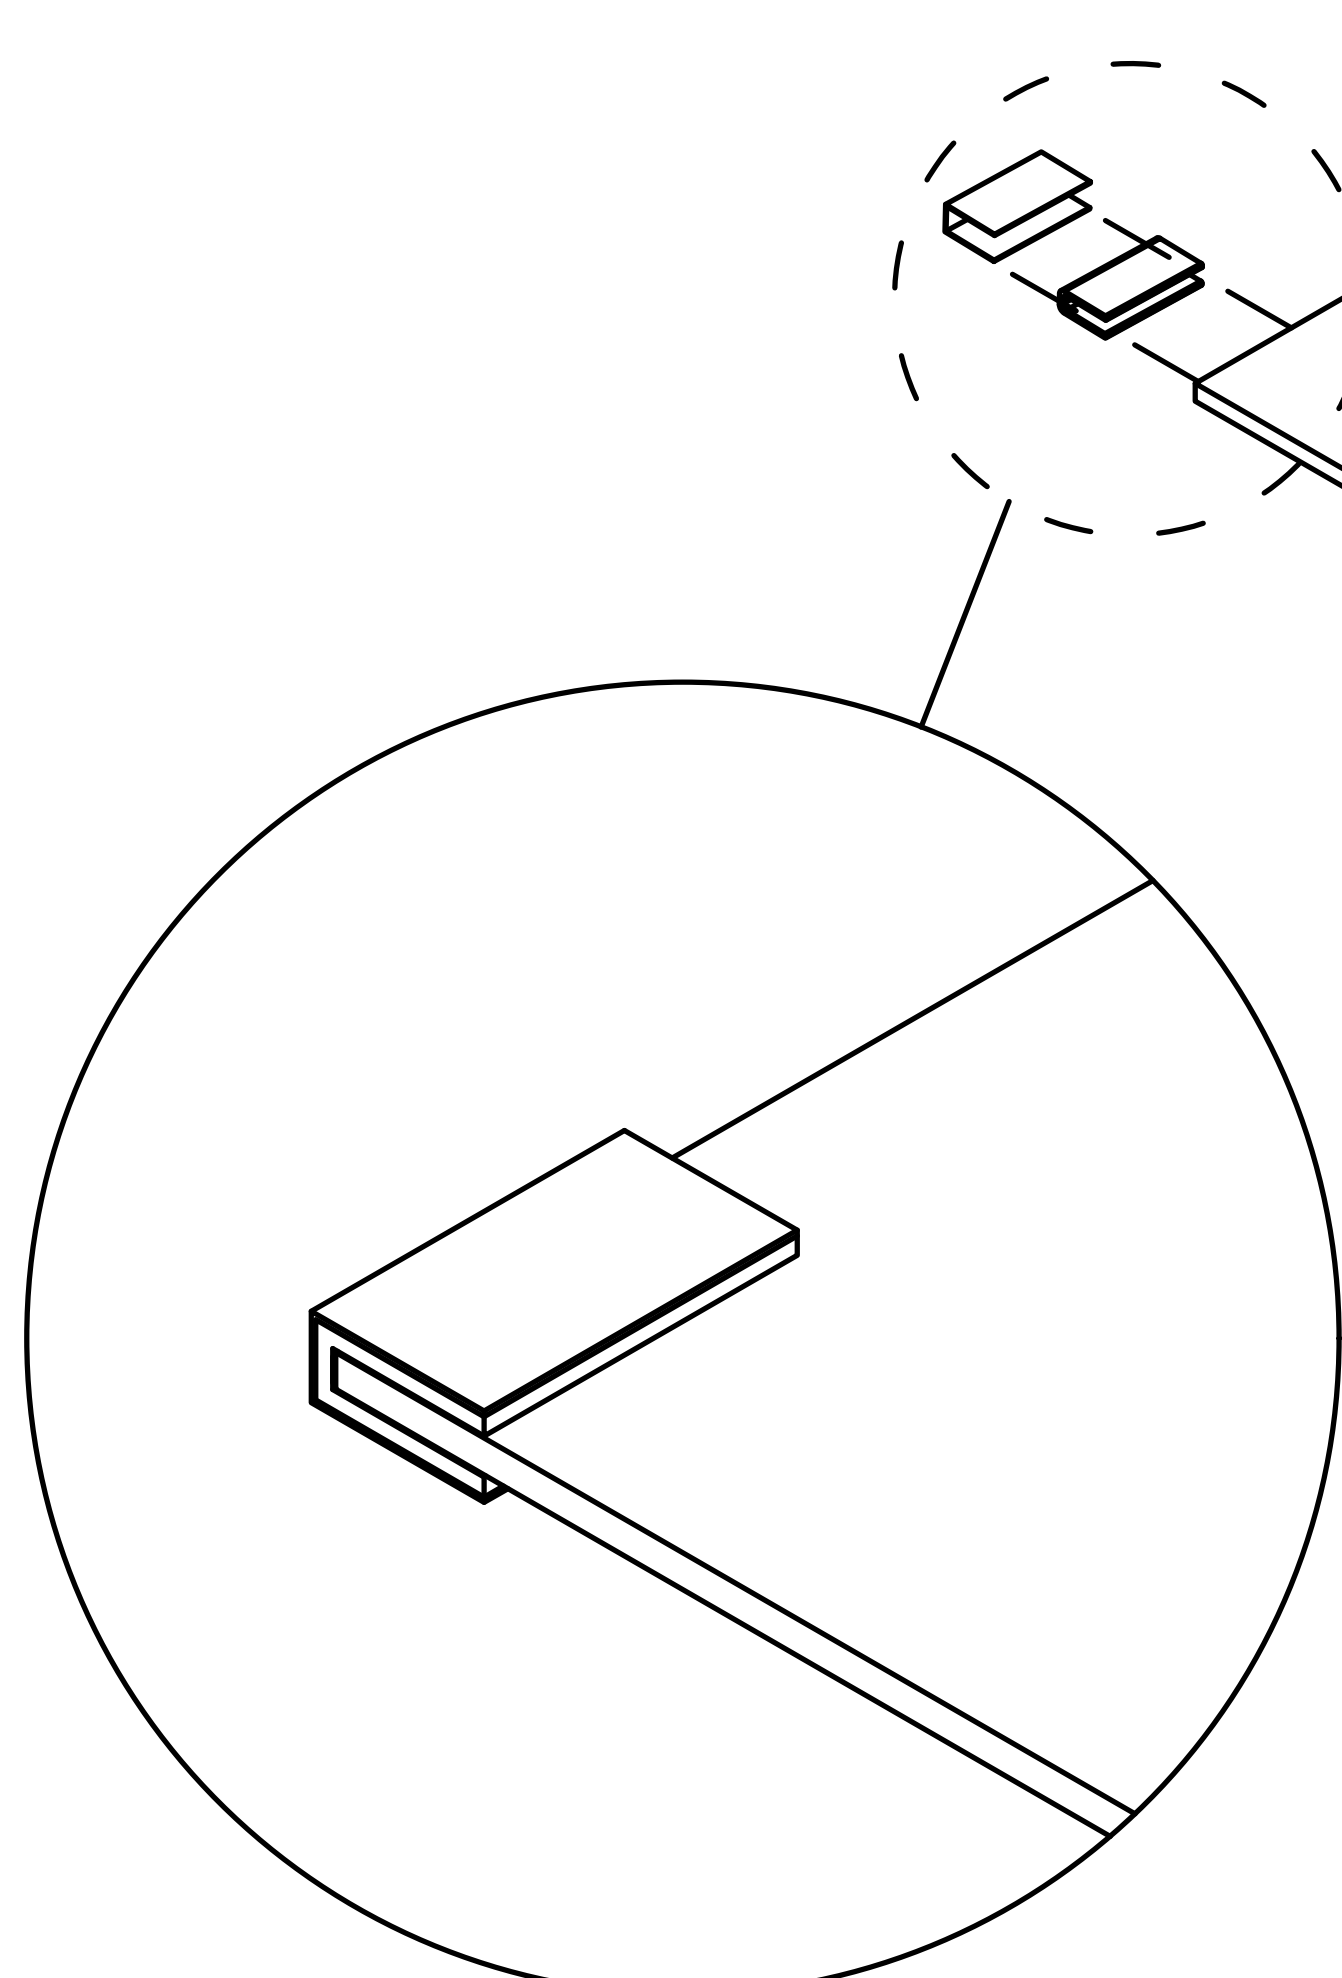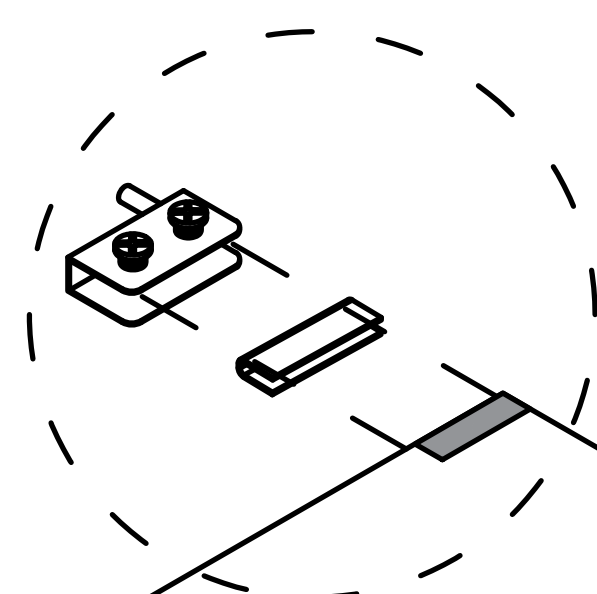


If you feel loose, please pinch the accessory before installation

Step 28


First, loosen the screws.

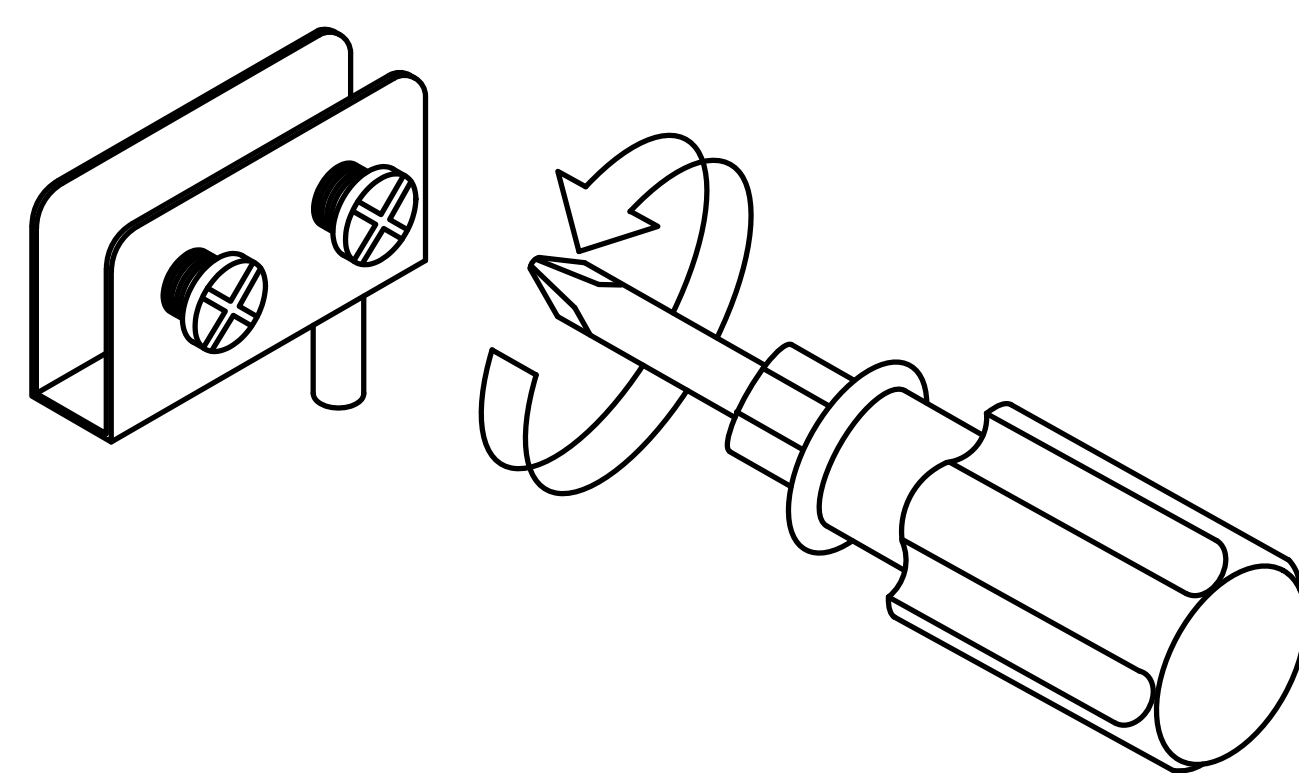

5


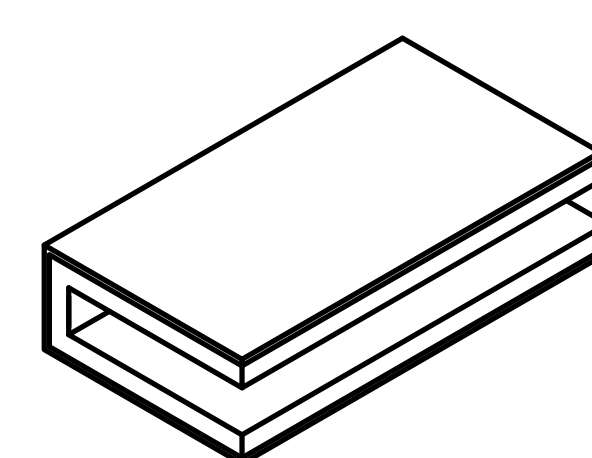


x1





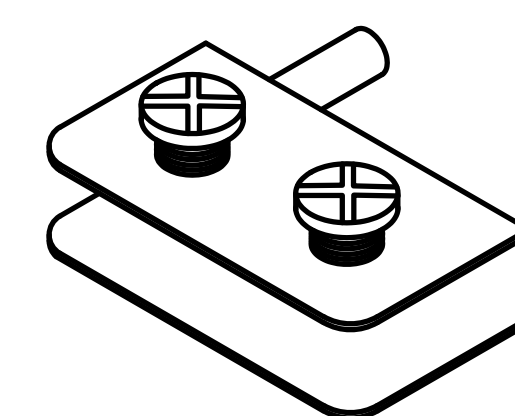


x1

1. Take out the white pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

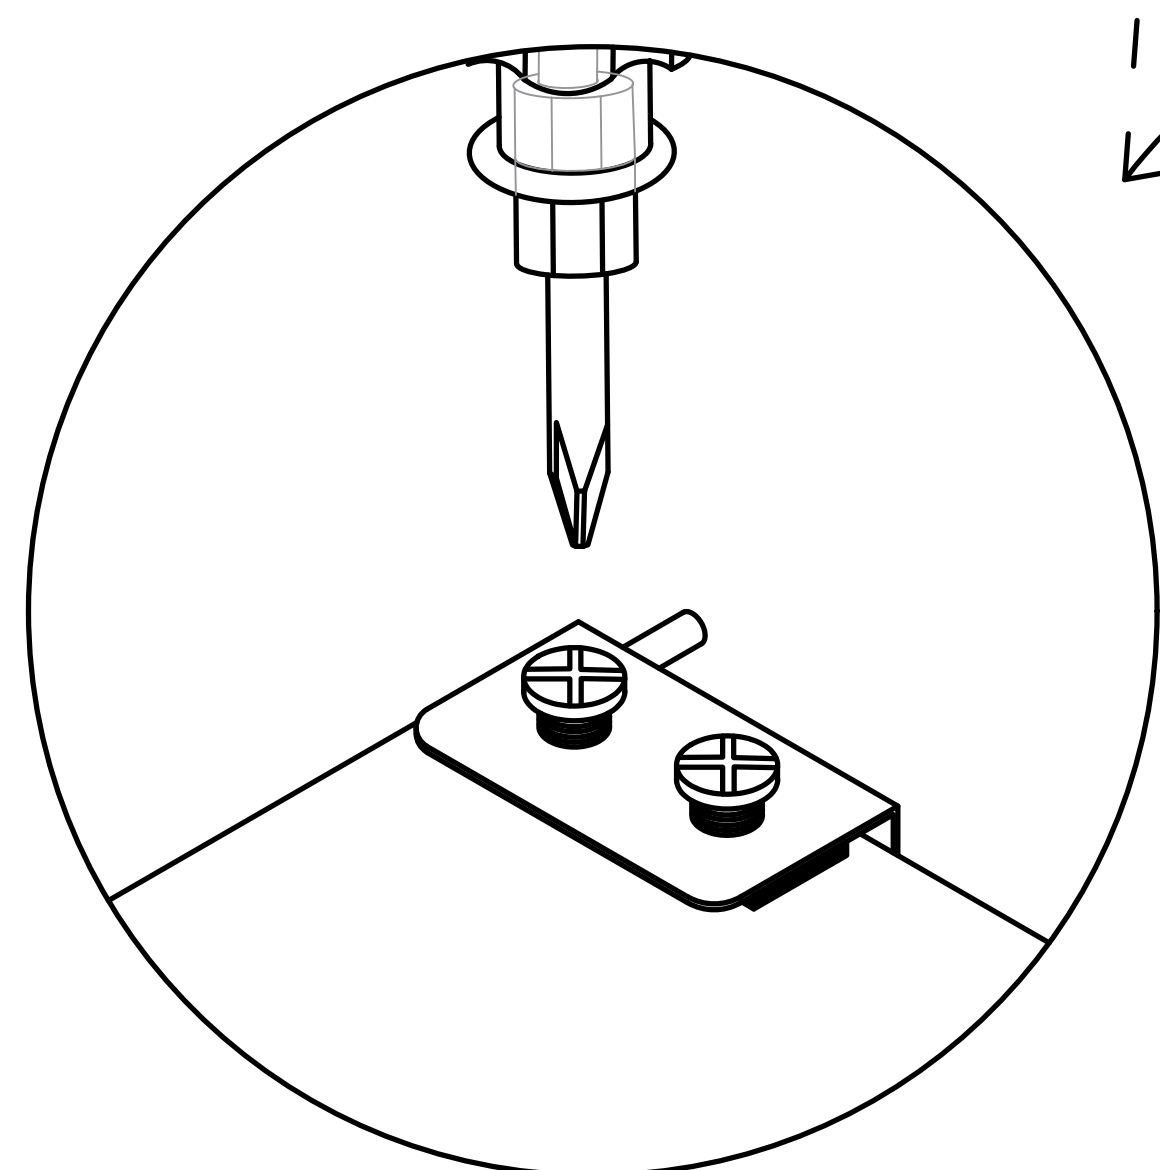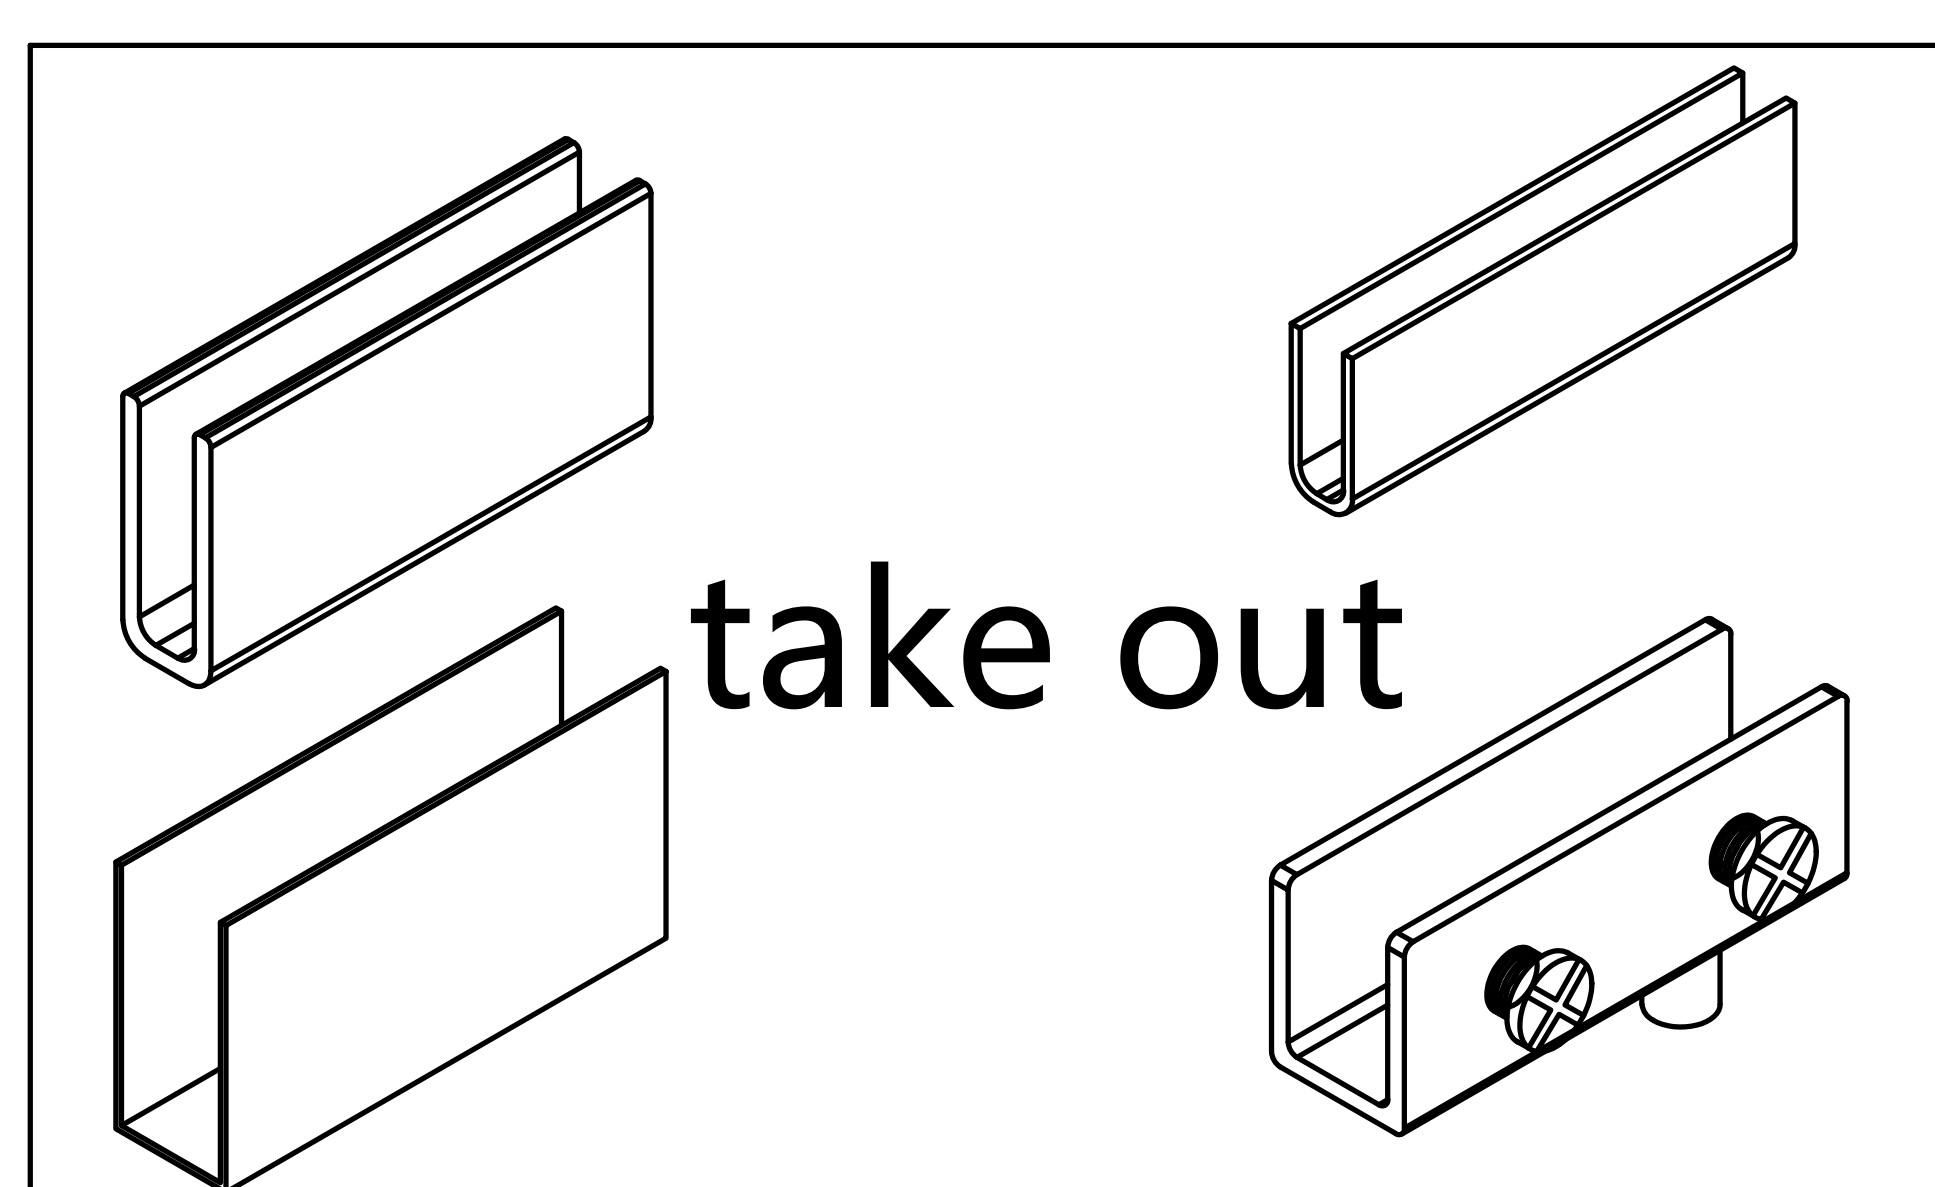

Locking screw

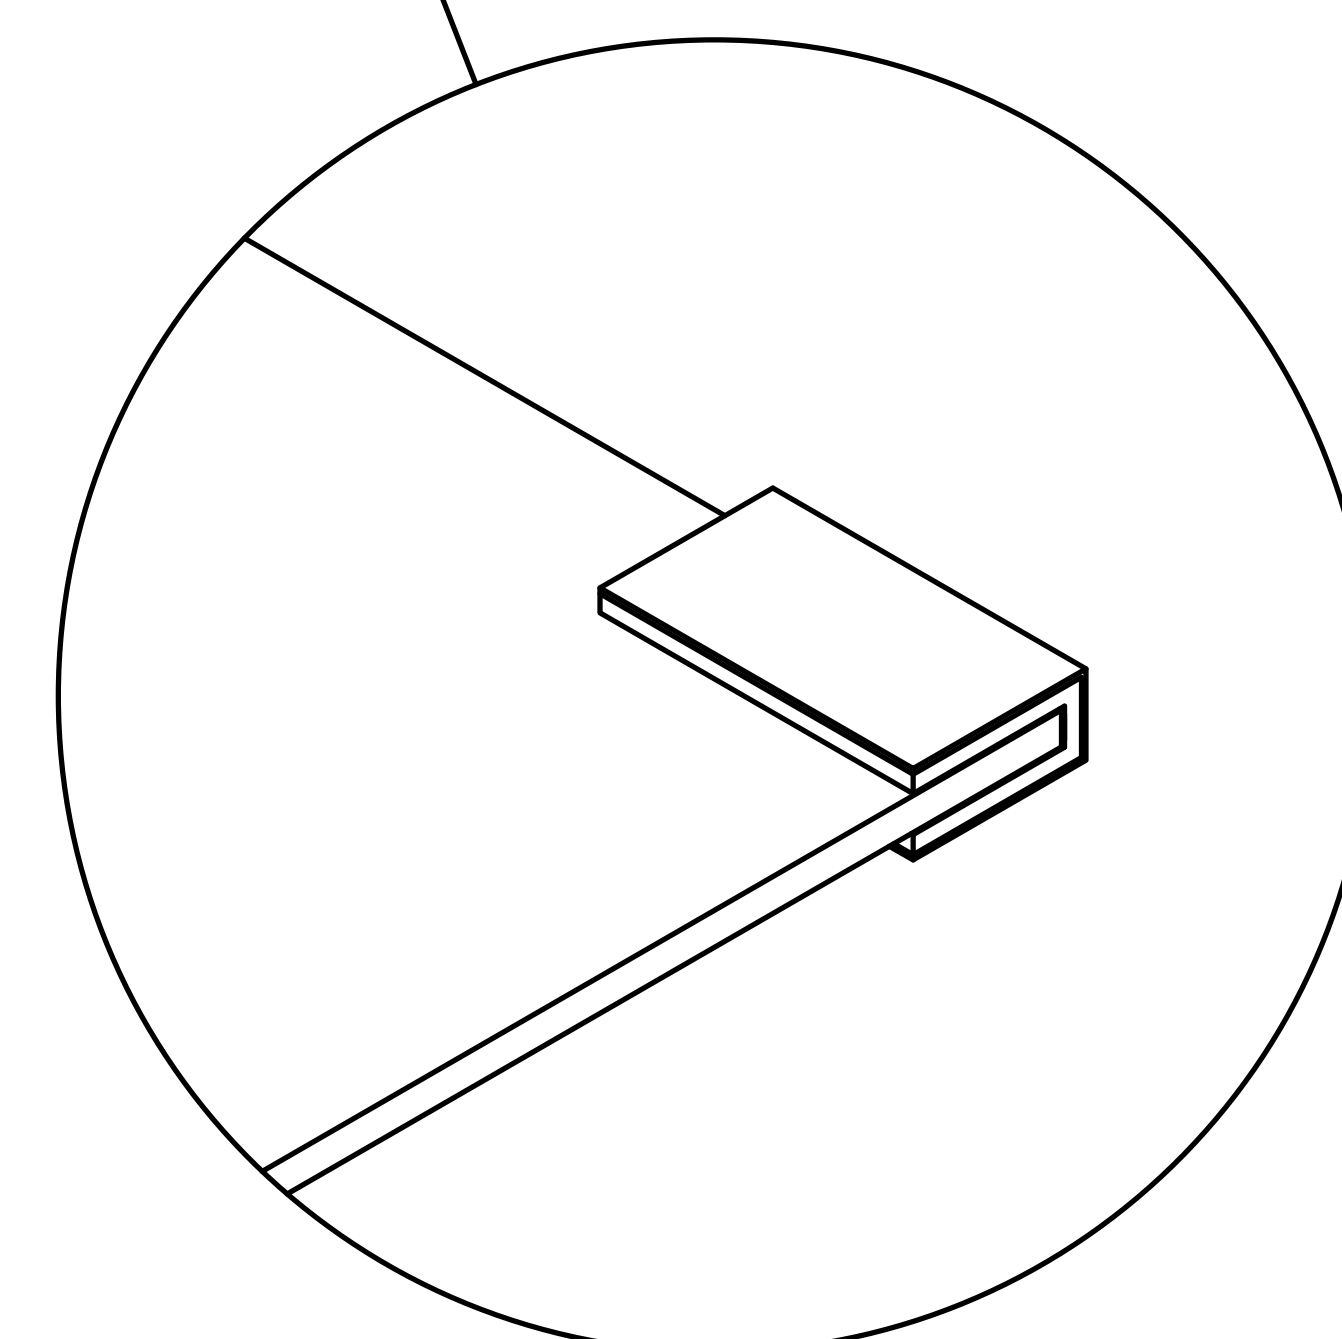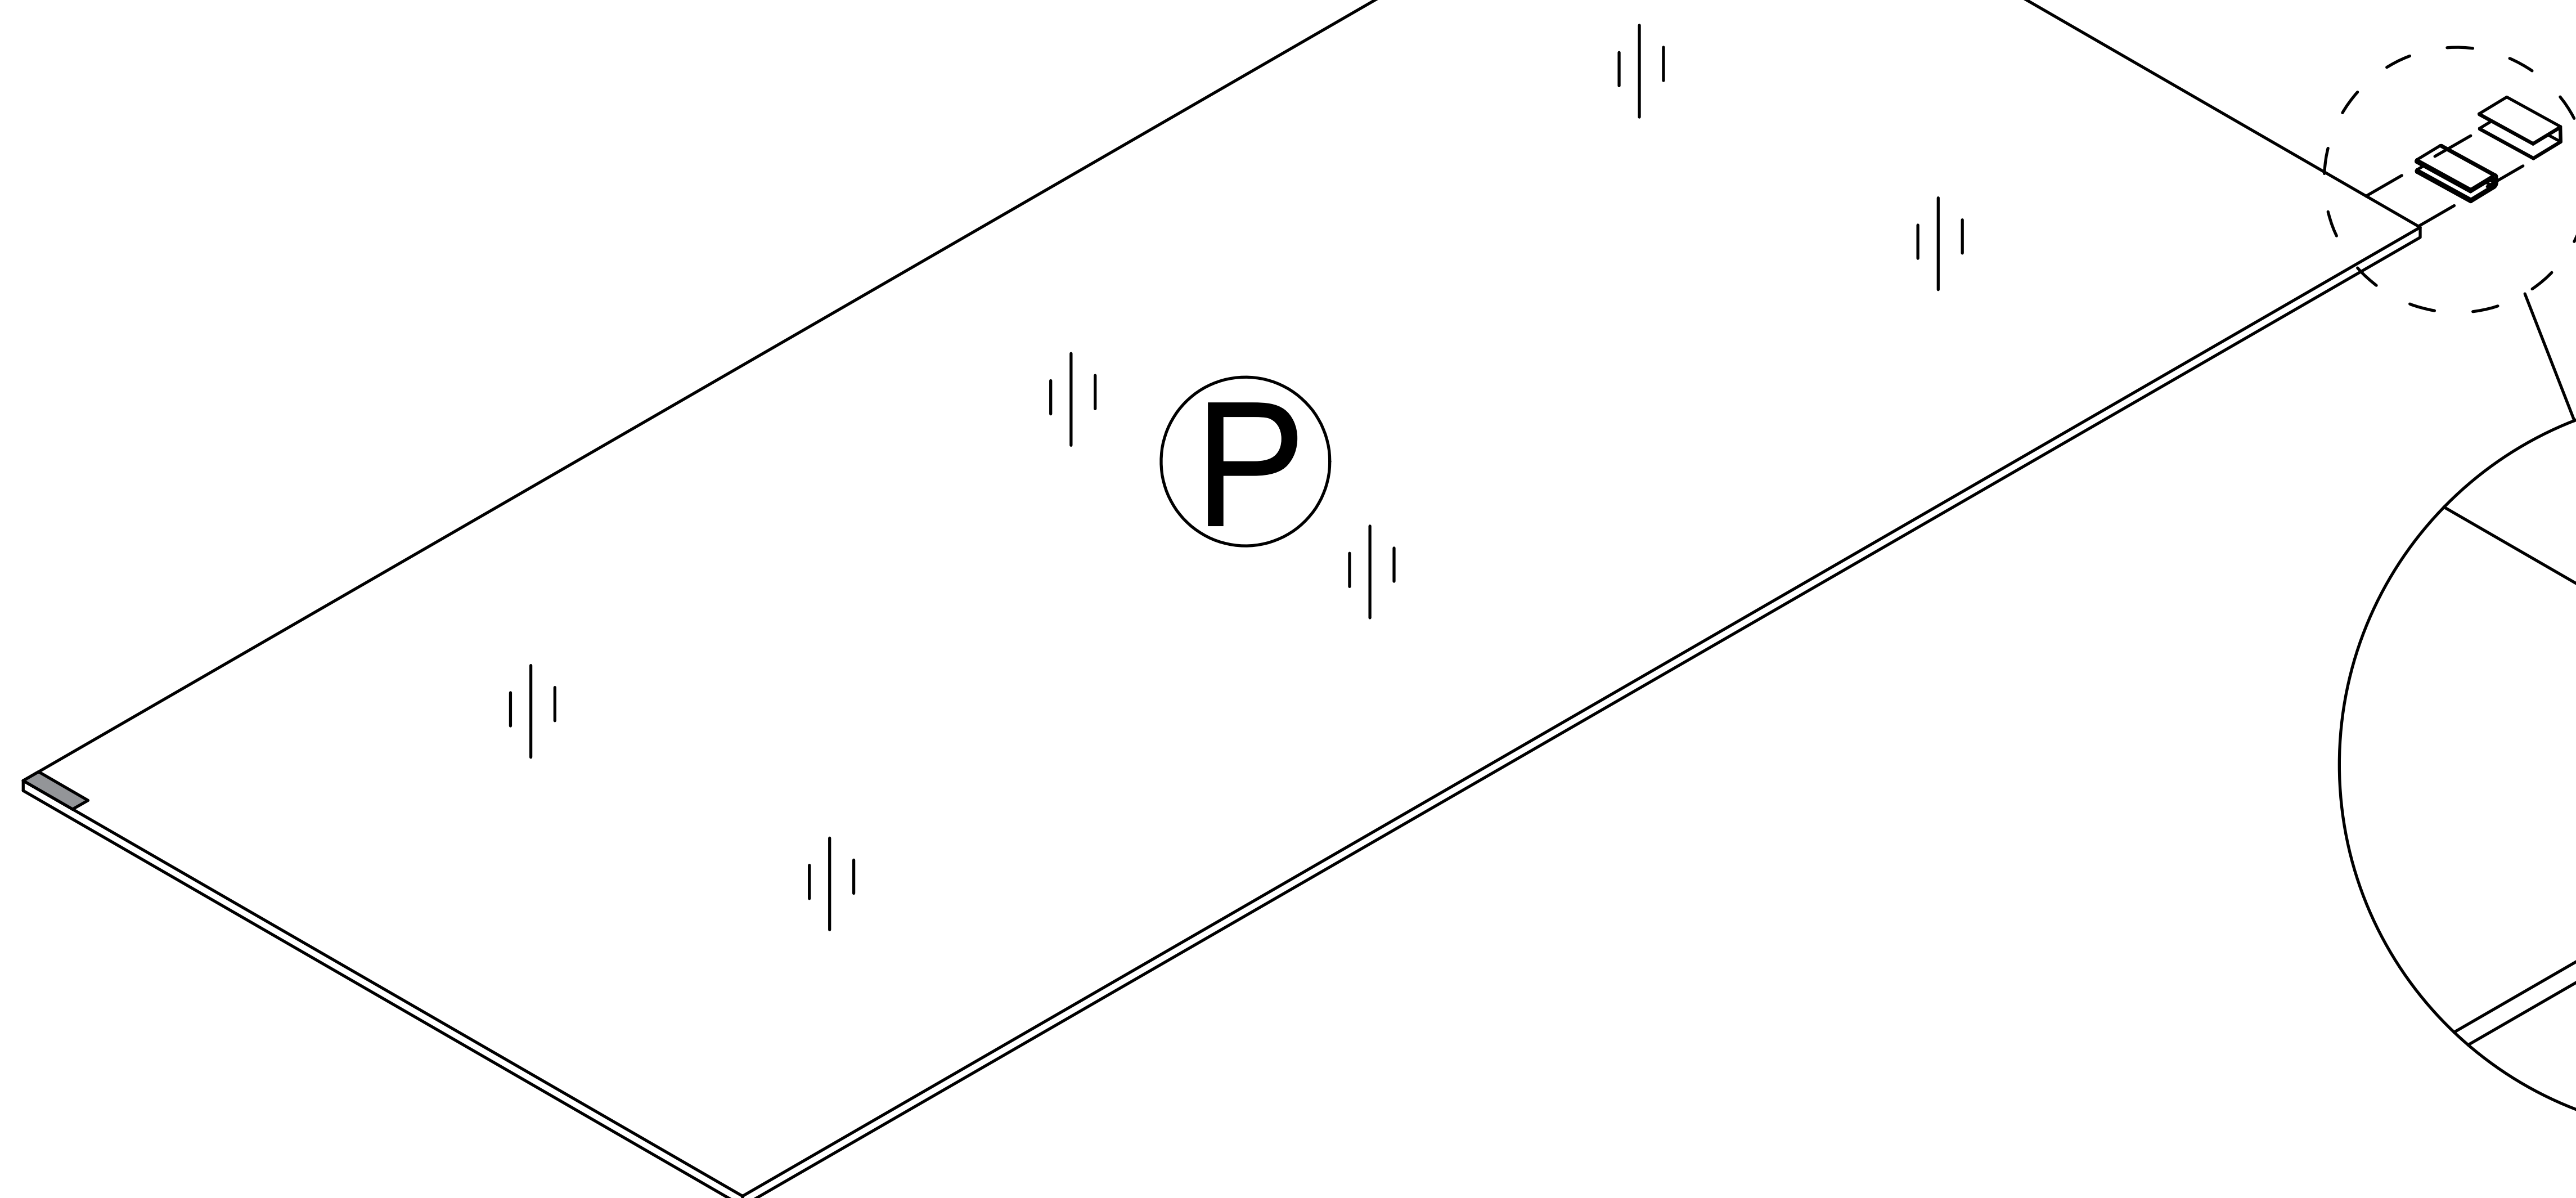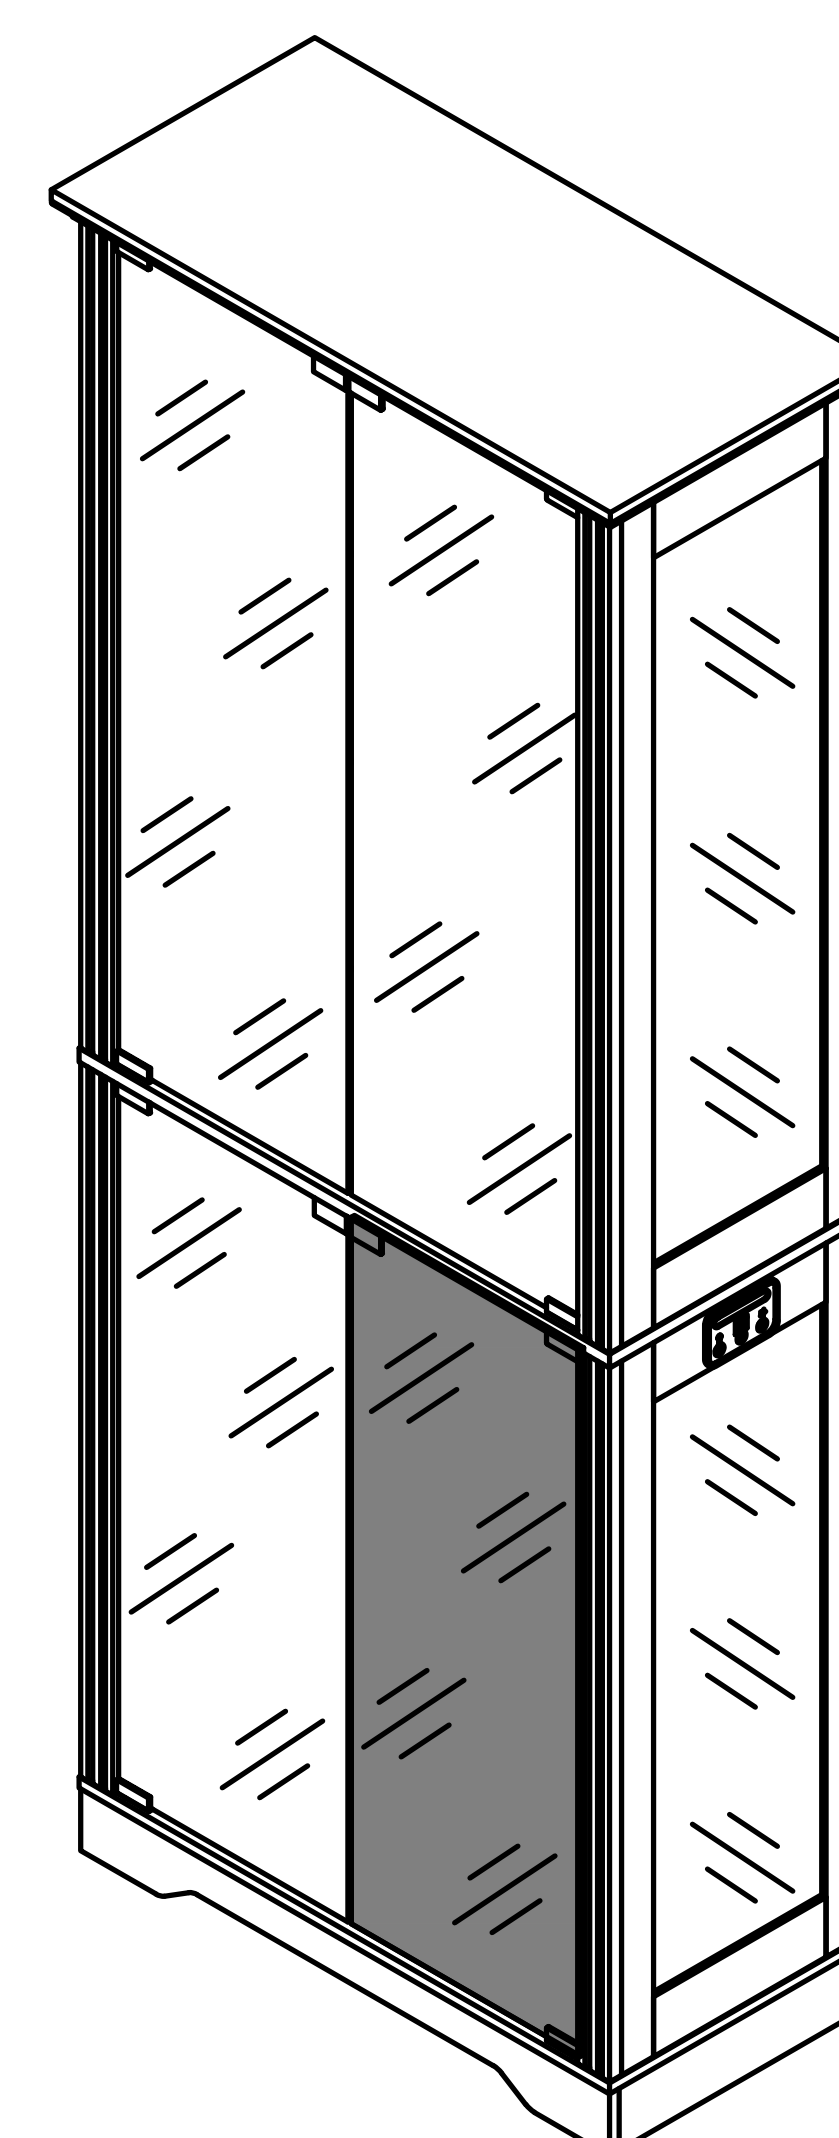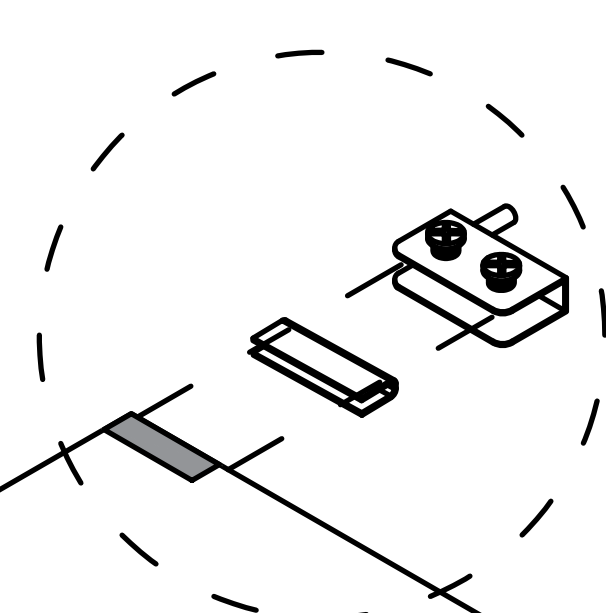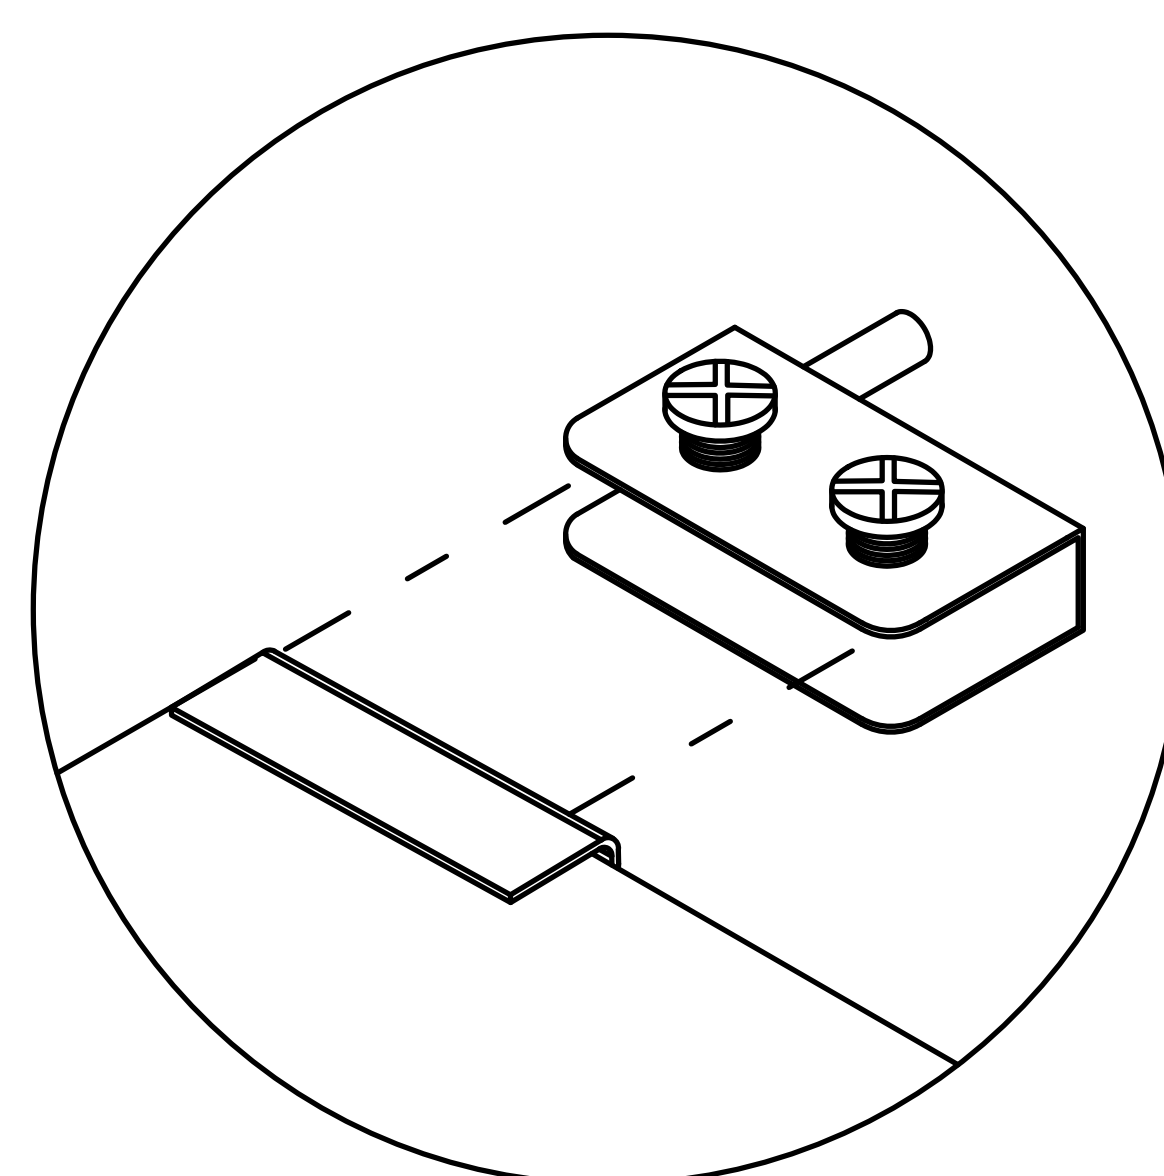


If you feel loose, please pinch the accessory before installation

Step 29


Pay attention to the direction of
the door hinge during installation

5




x2


When installing a glass door, it is recommended to
have two people install it to avoid the glass door
colliding or hitting oneself.

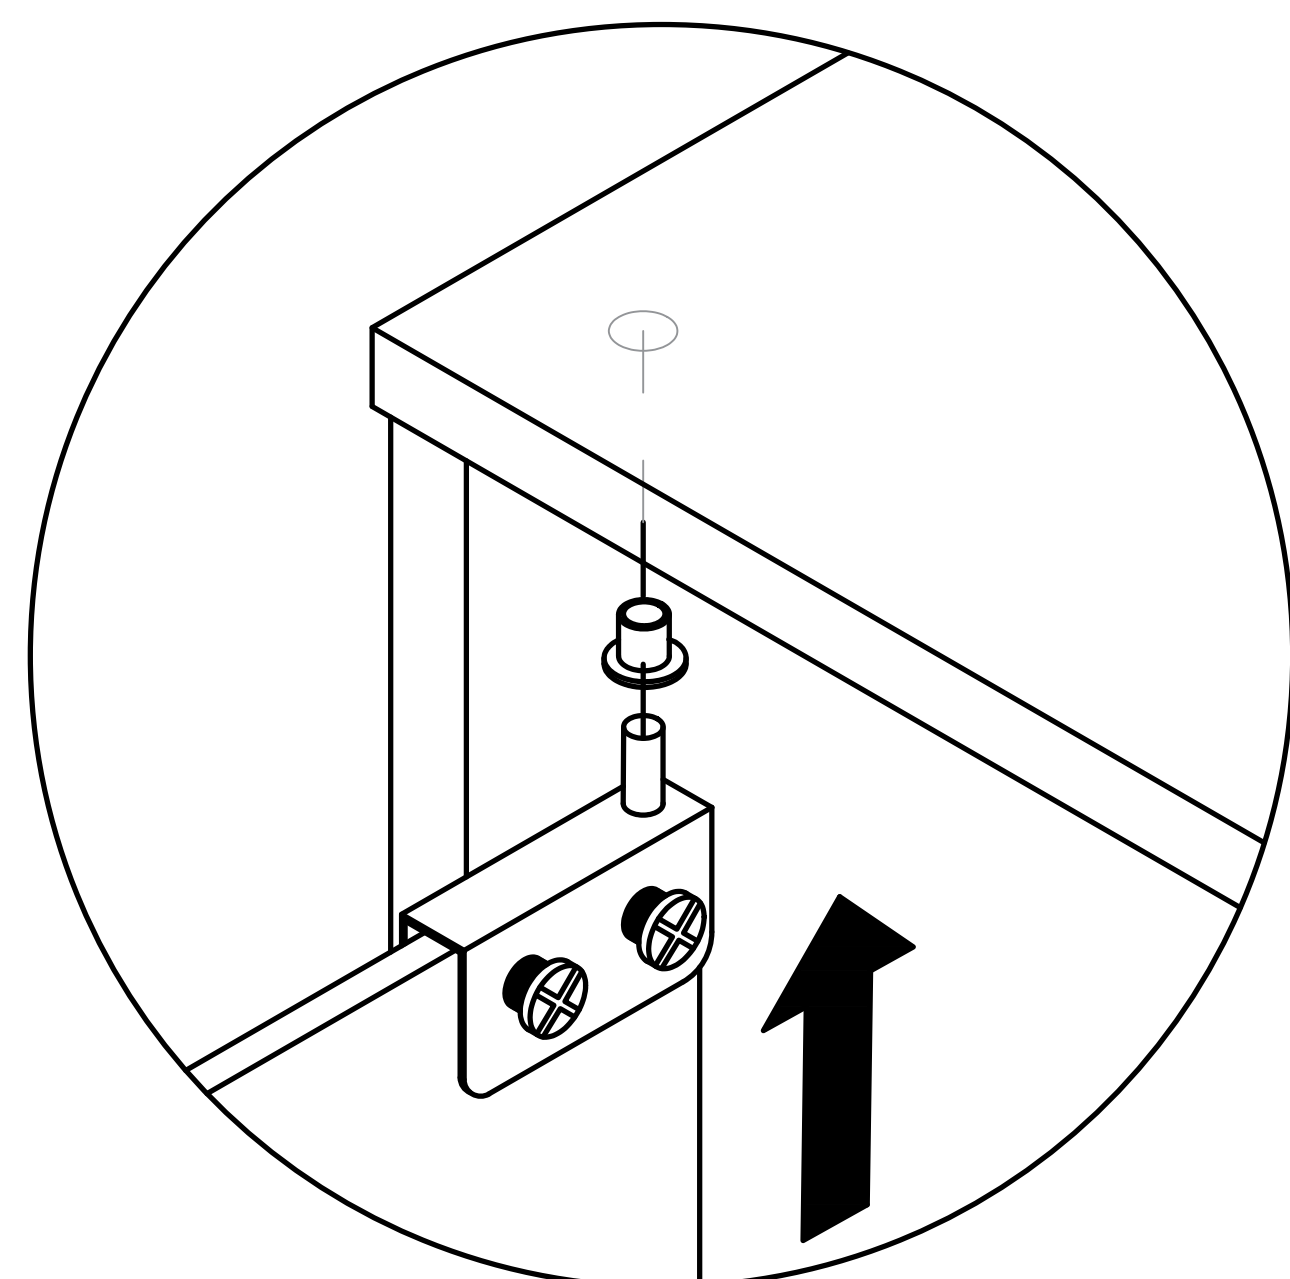

first

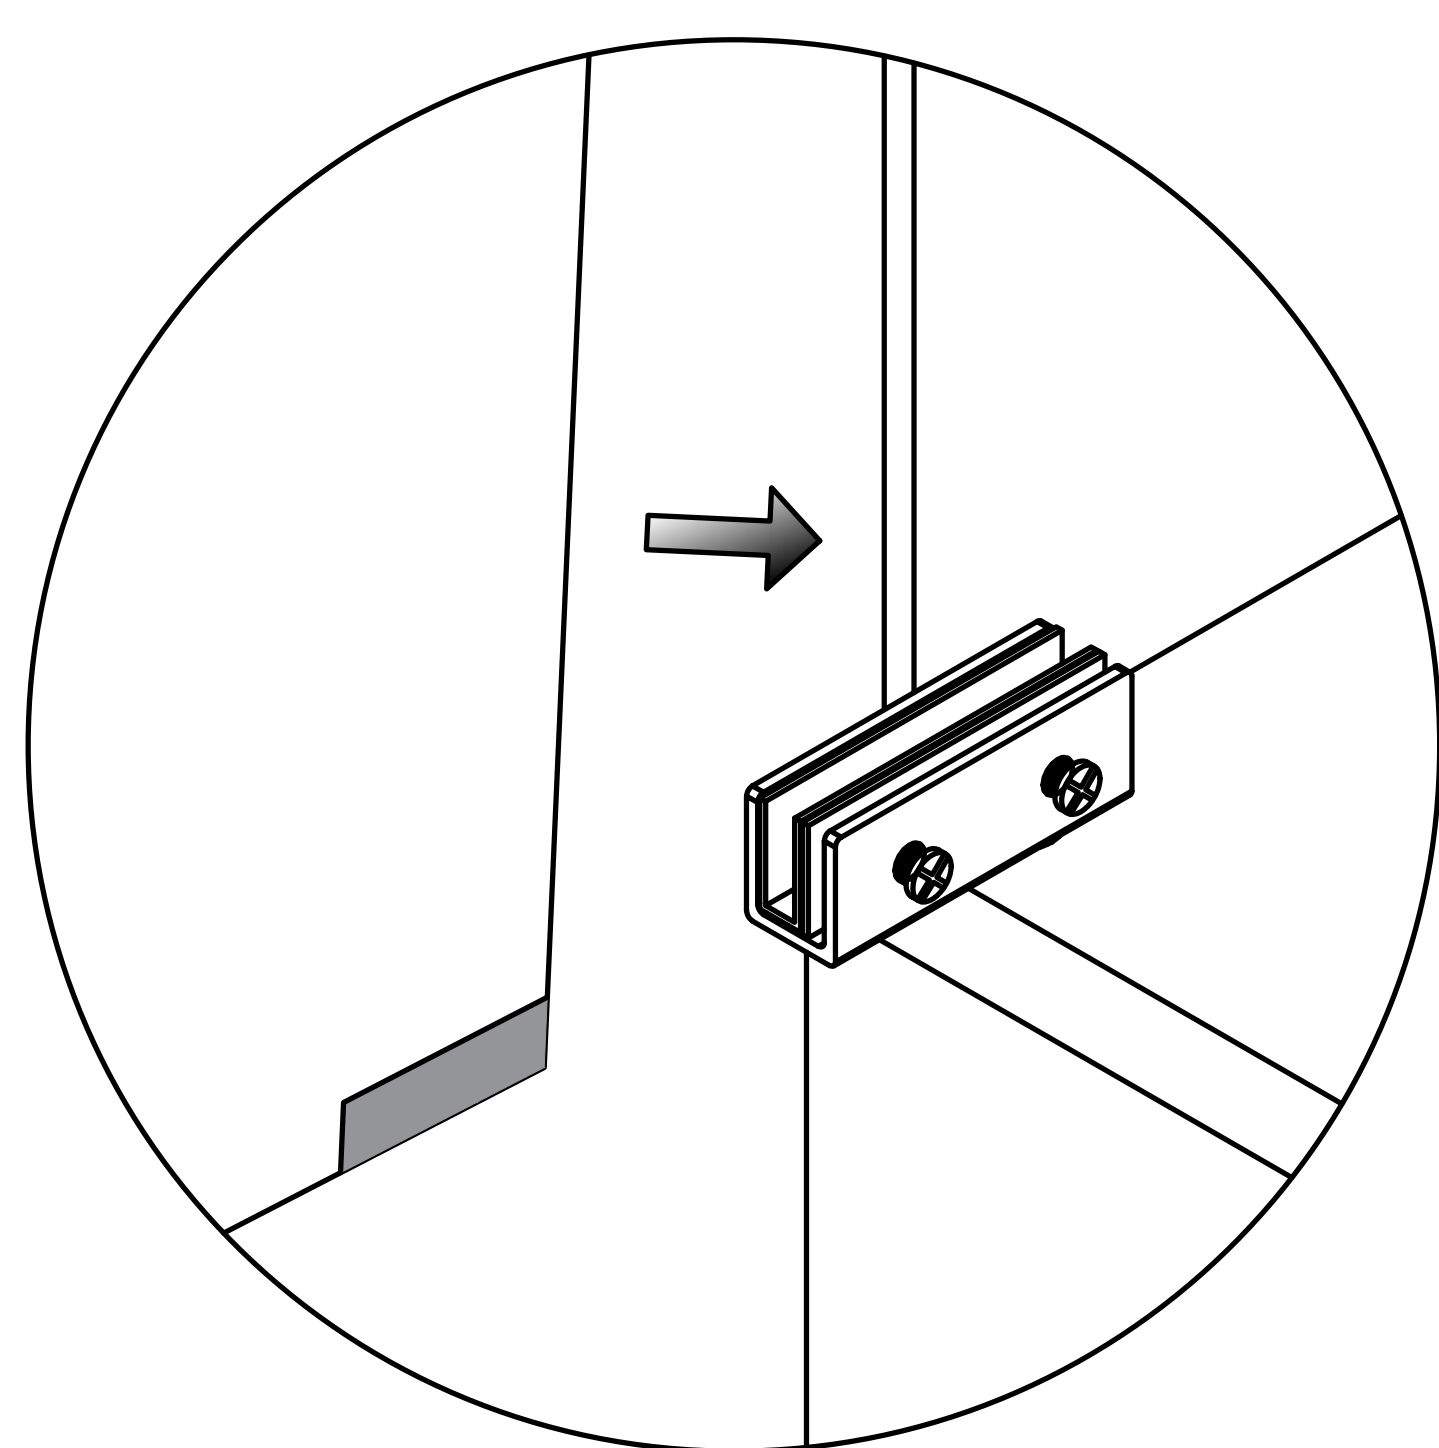


Remove white pad

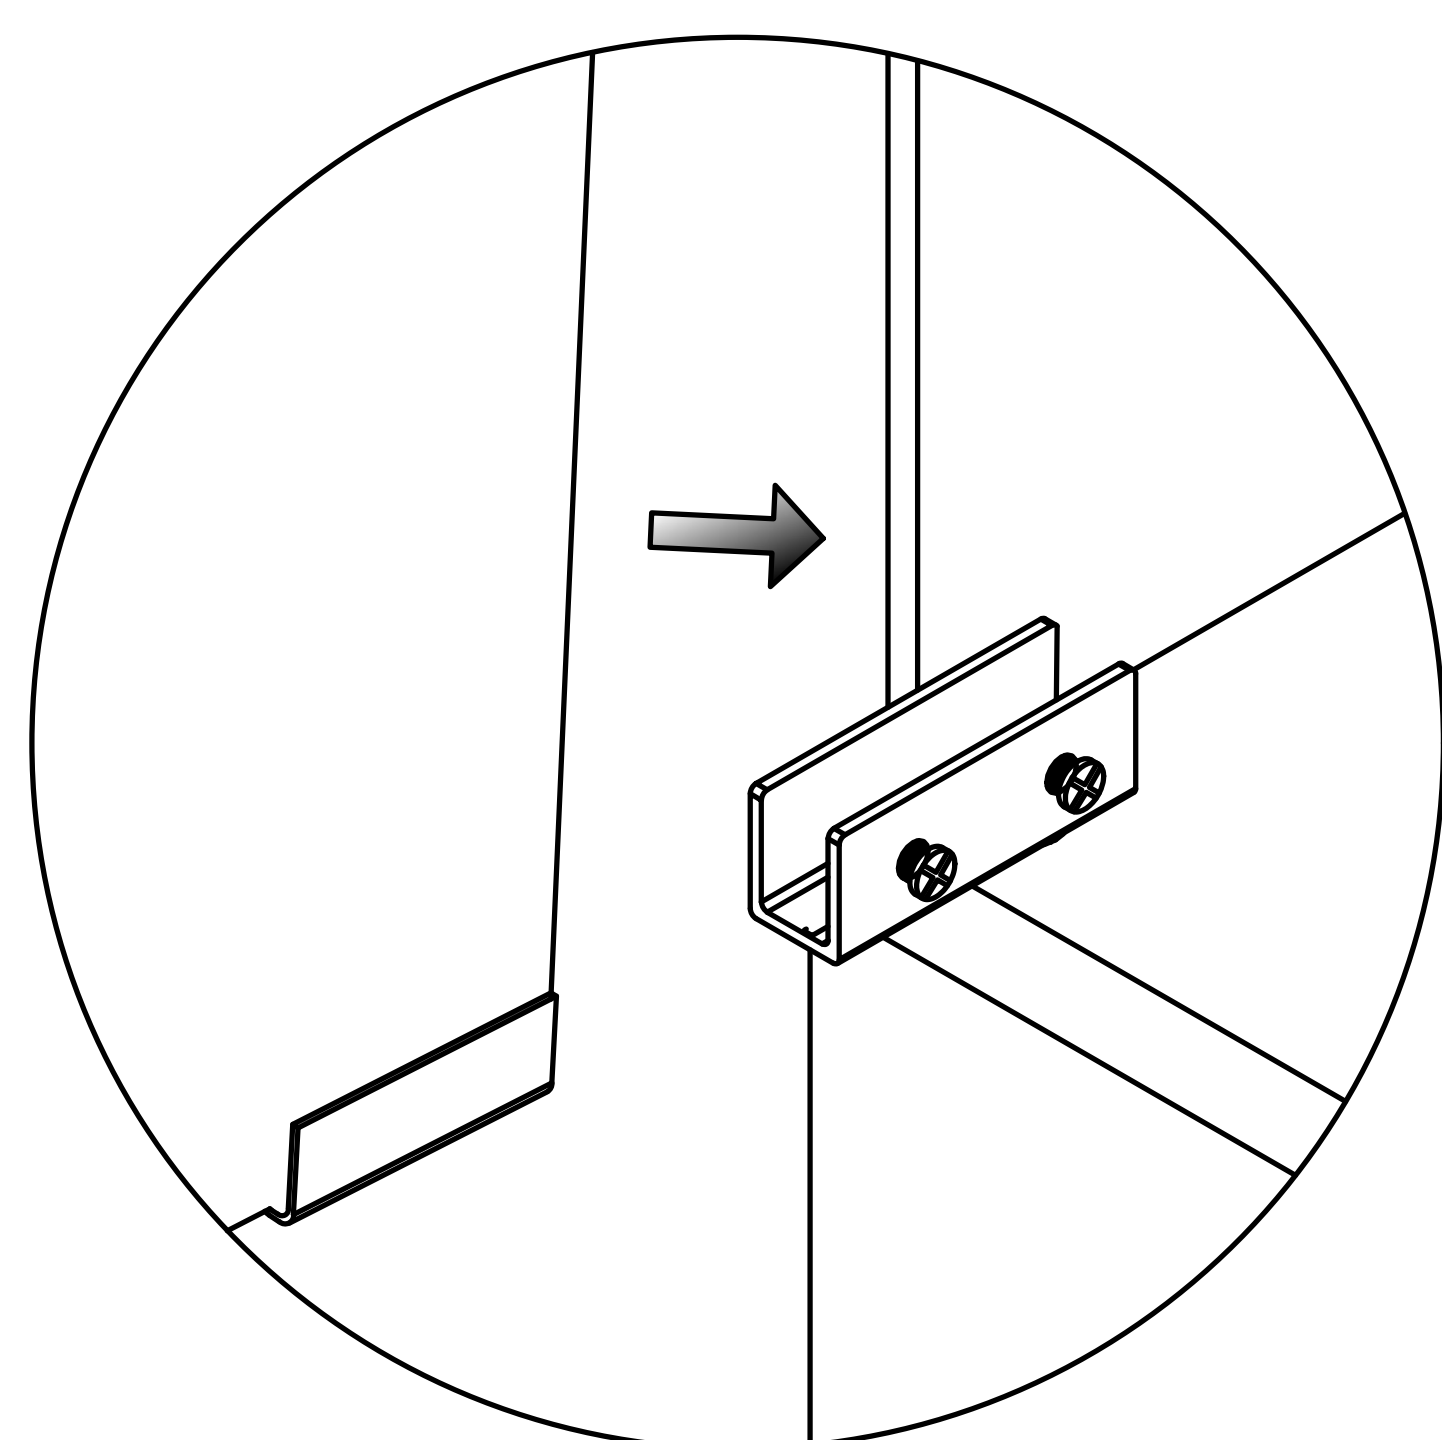

Fit the pad around glass edge


second

Insert the glass into
the door hinge's
slot.

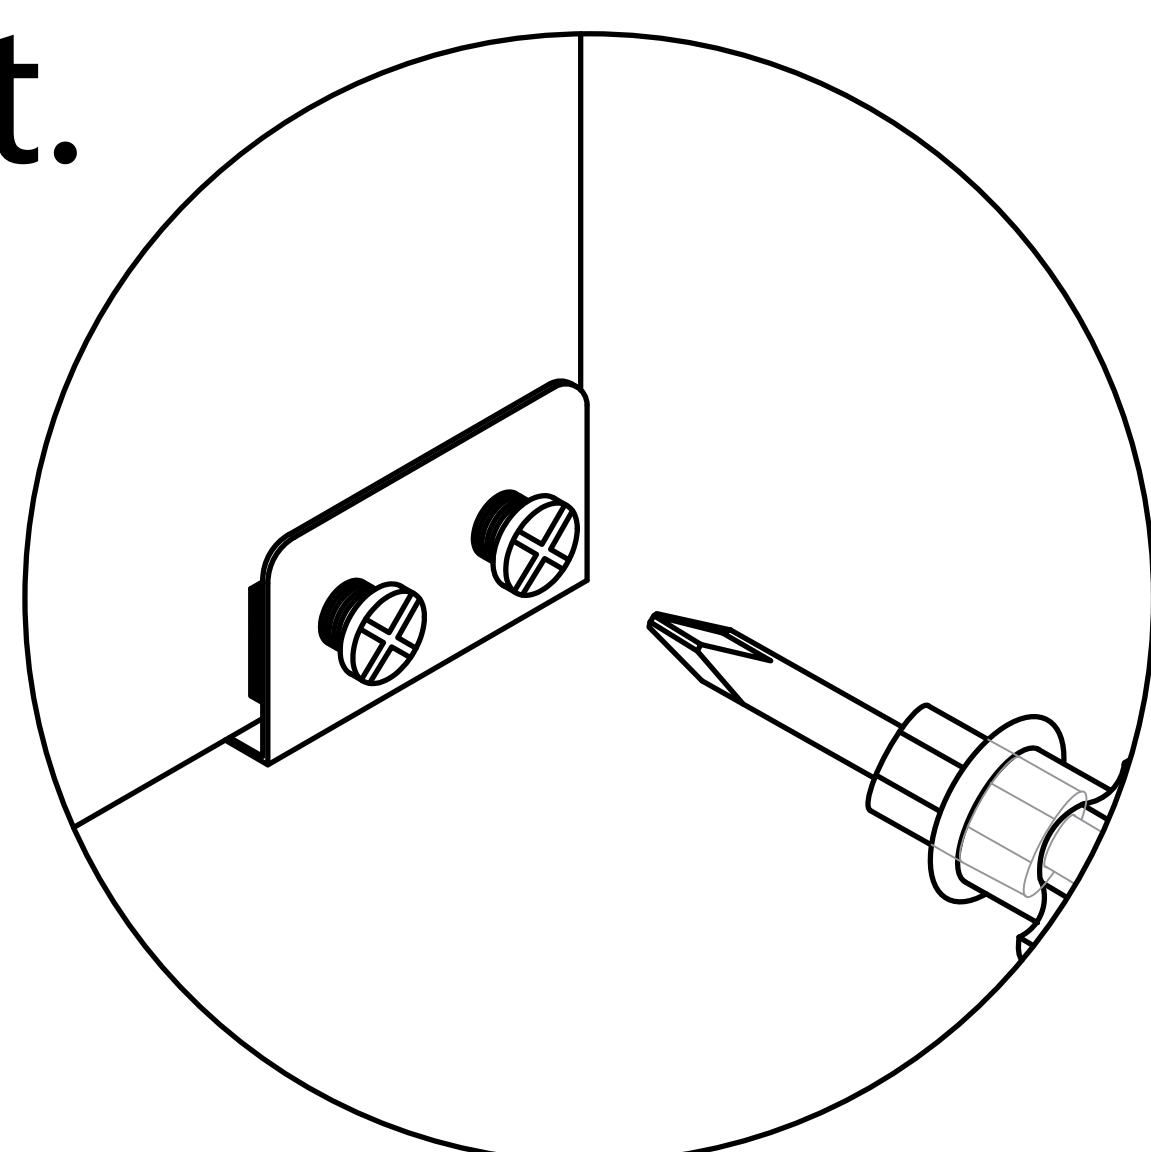


third

Locking screw

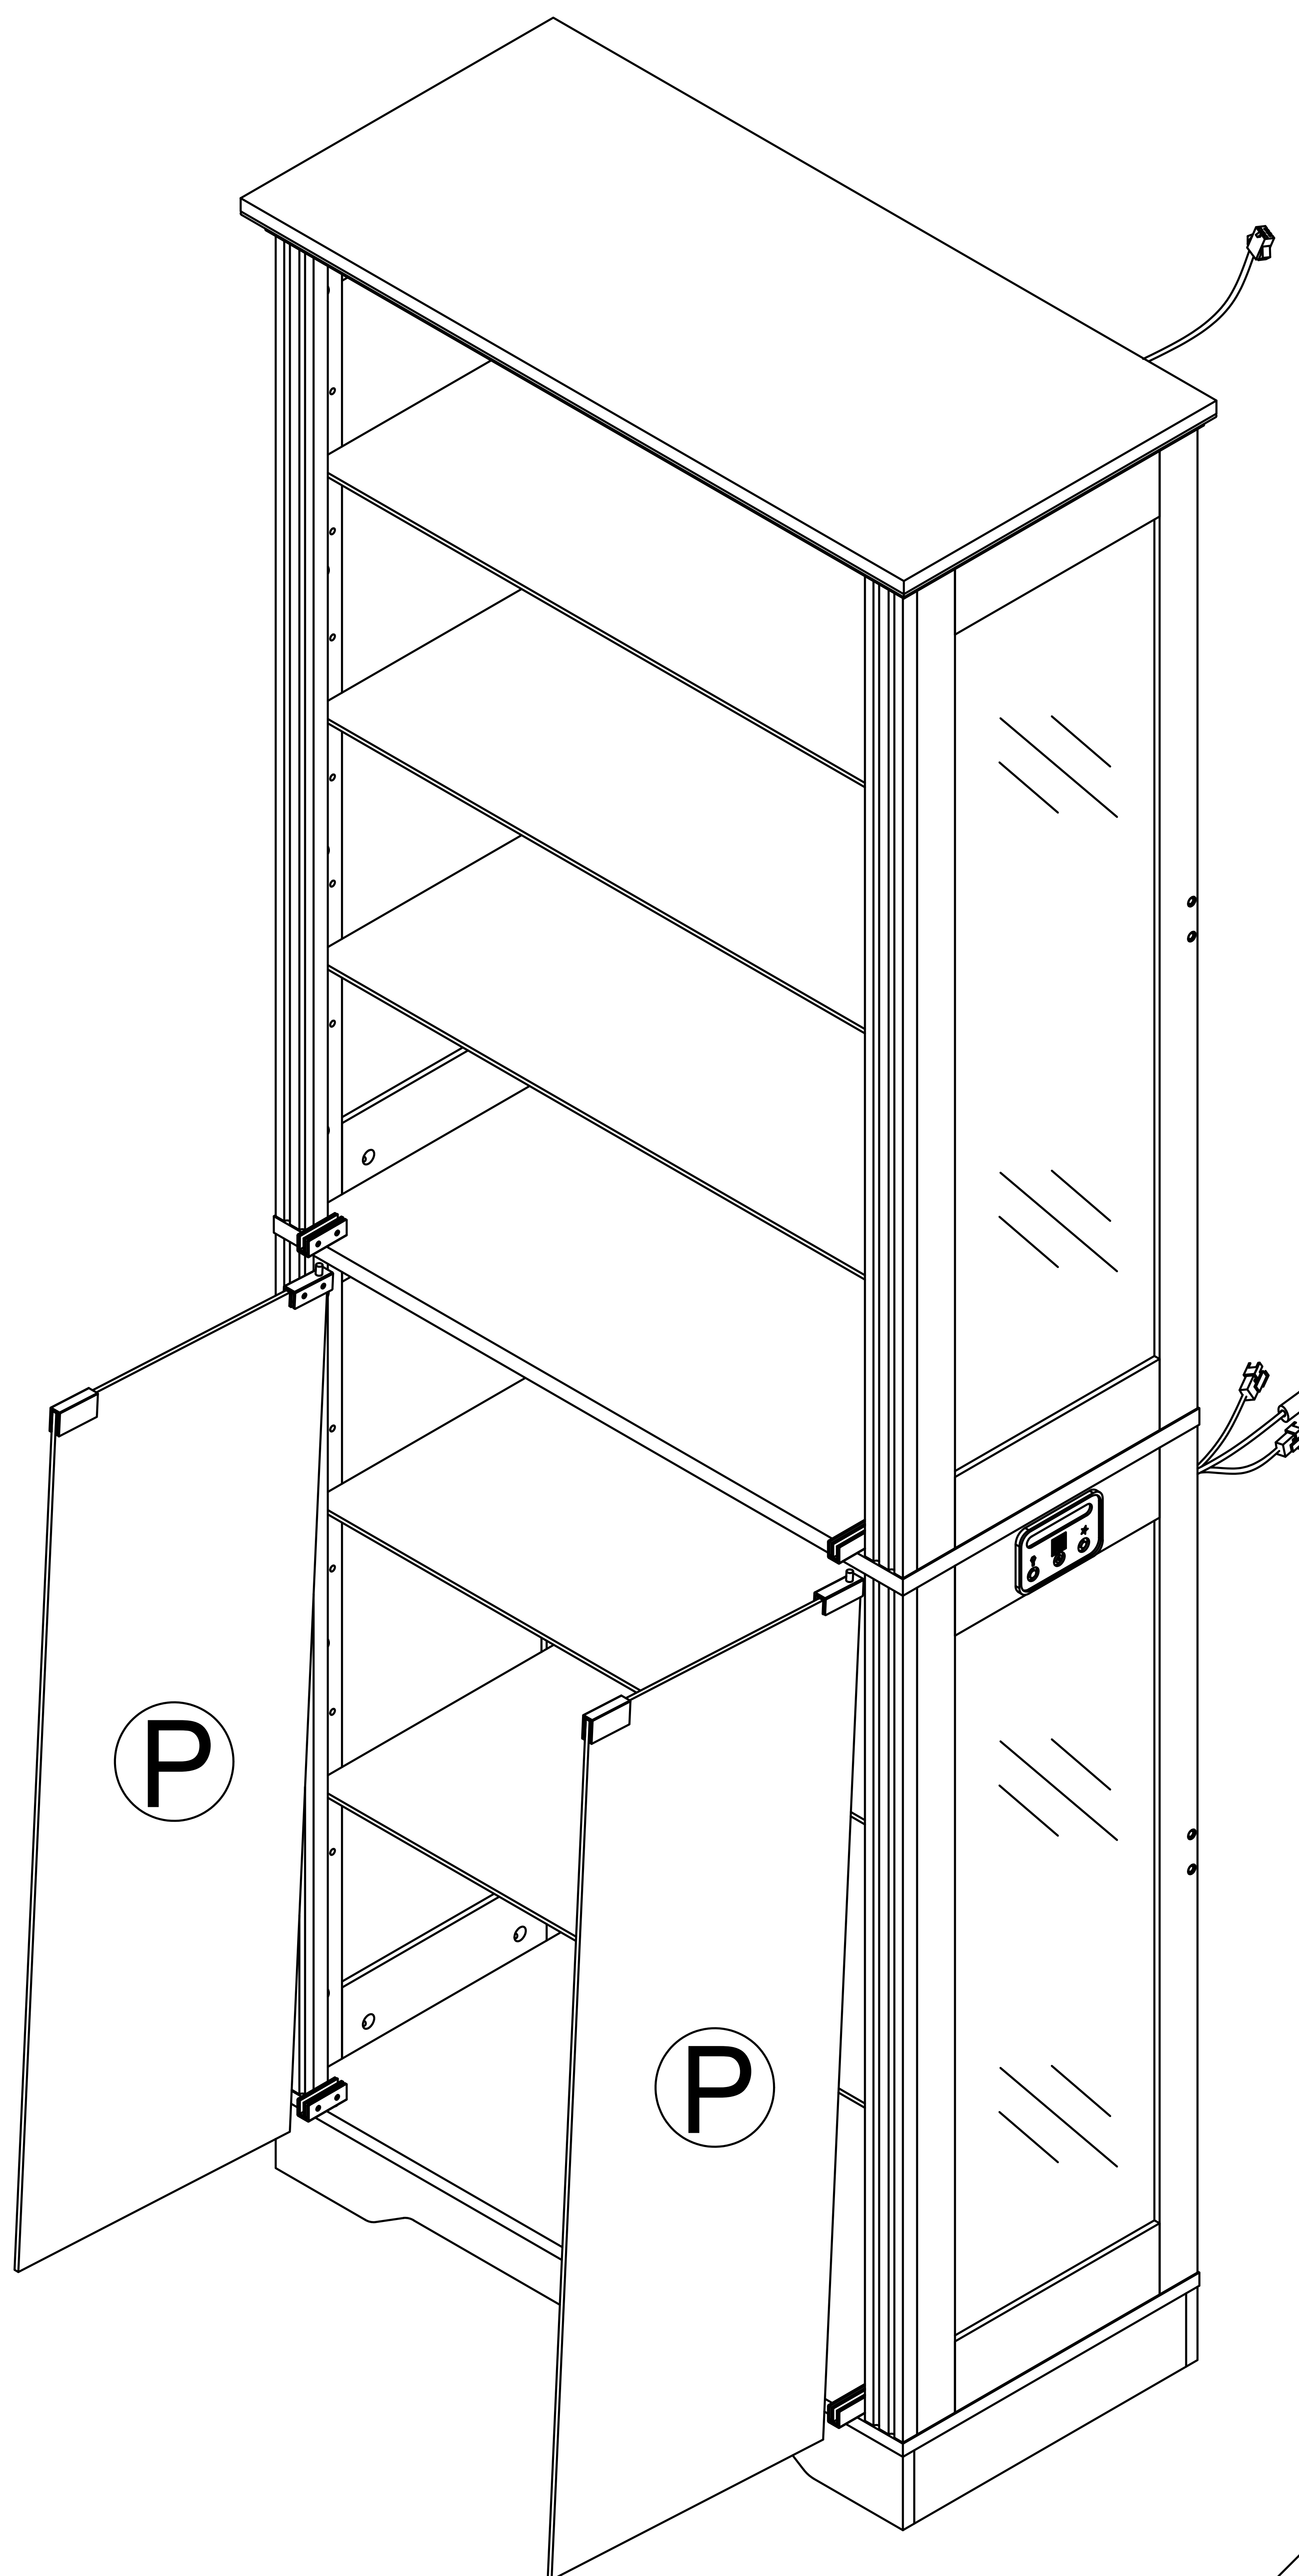


Step 30


First, loosen the screws.

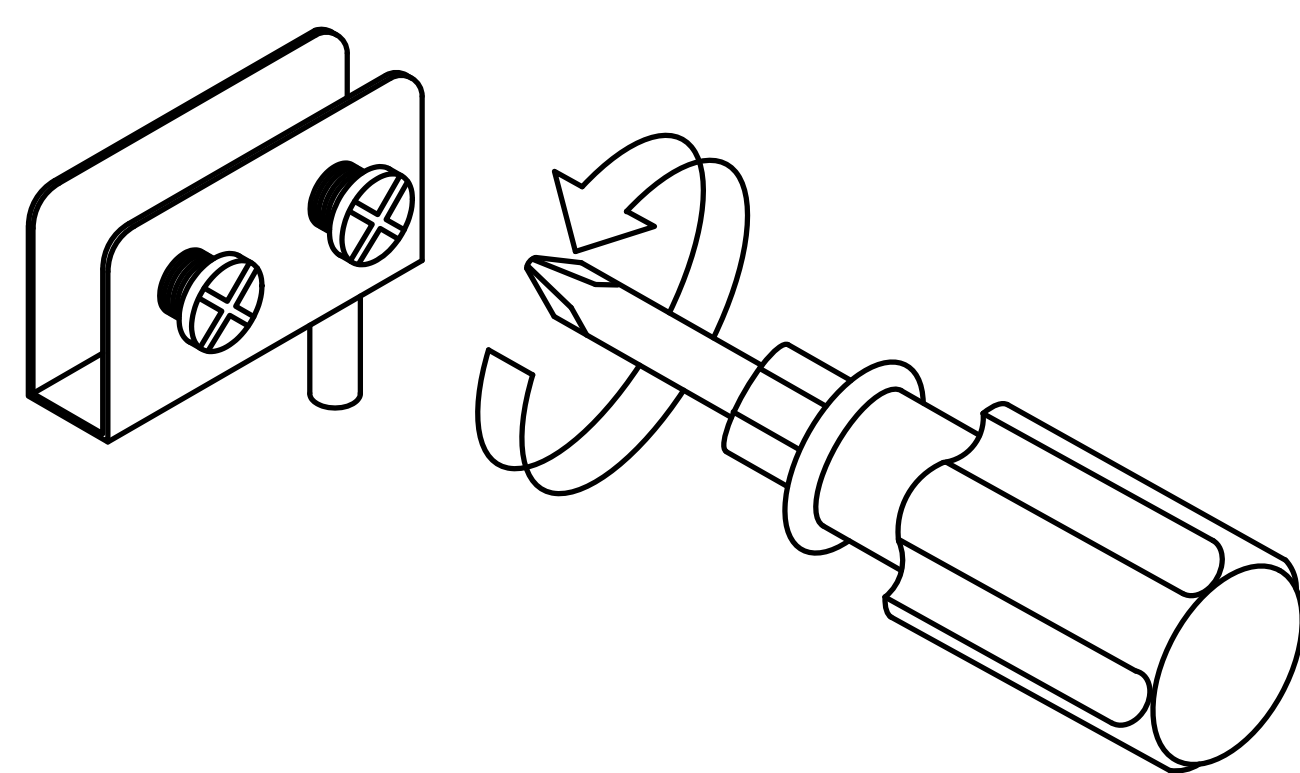

5




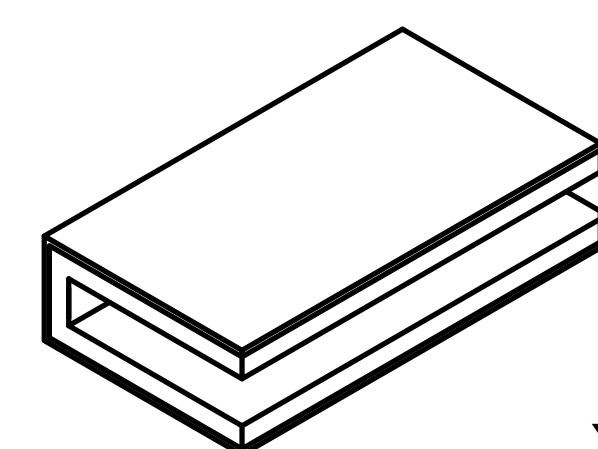


x1

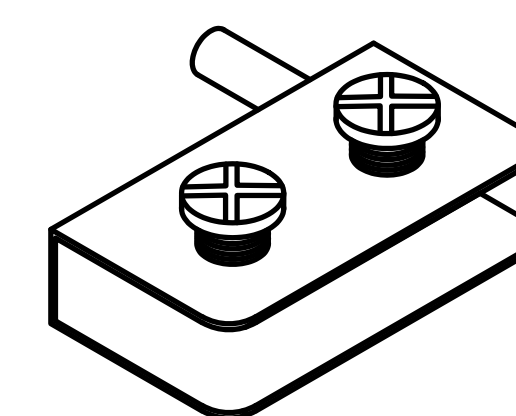


x1

1. Take out the white pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

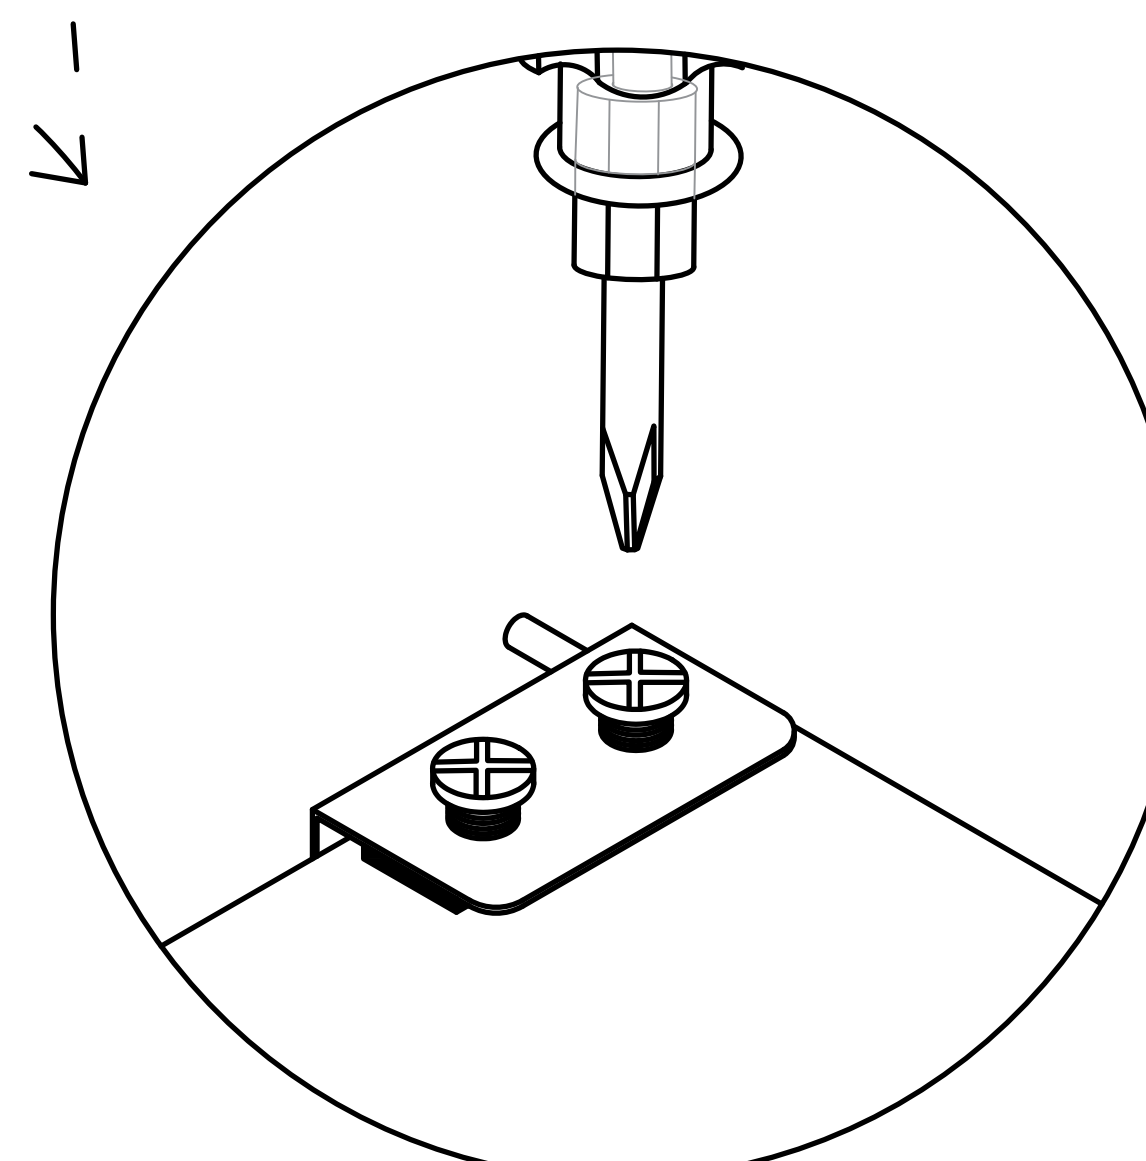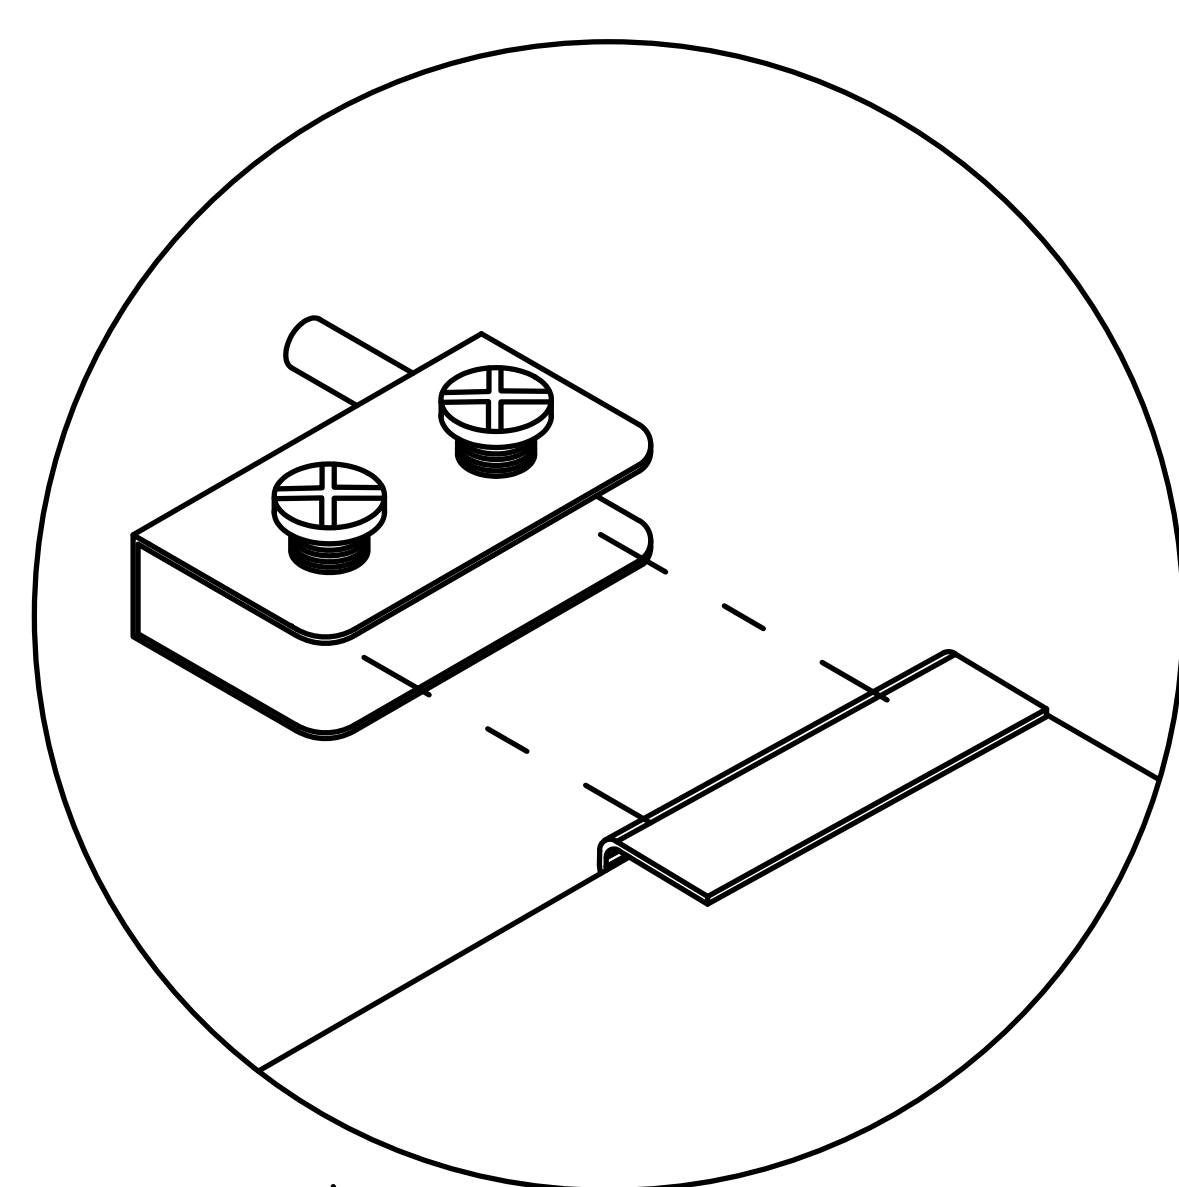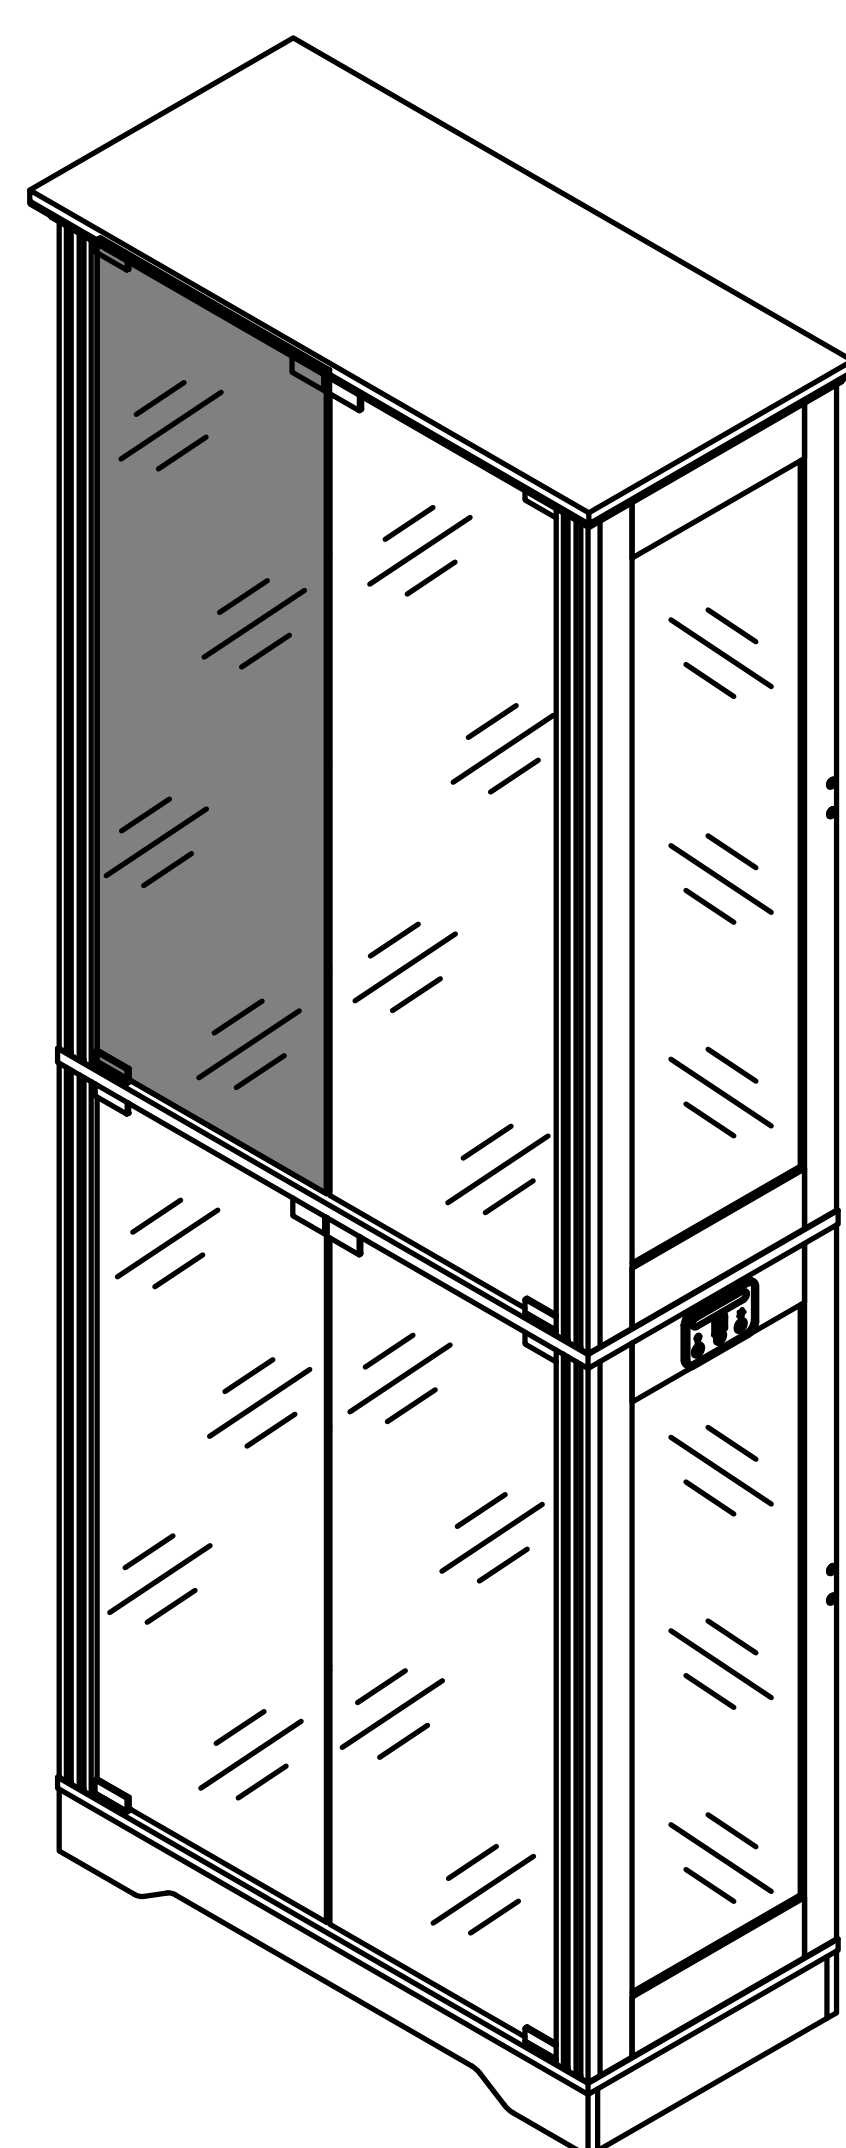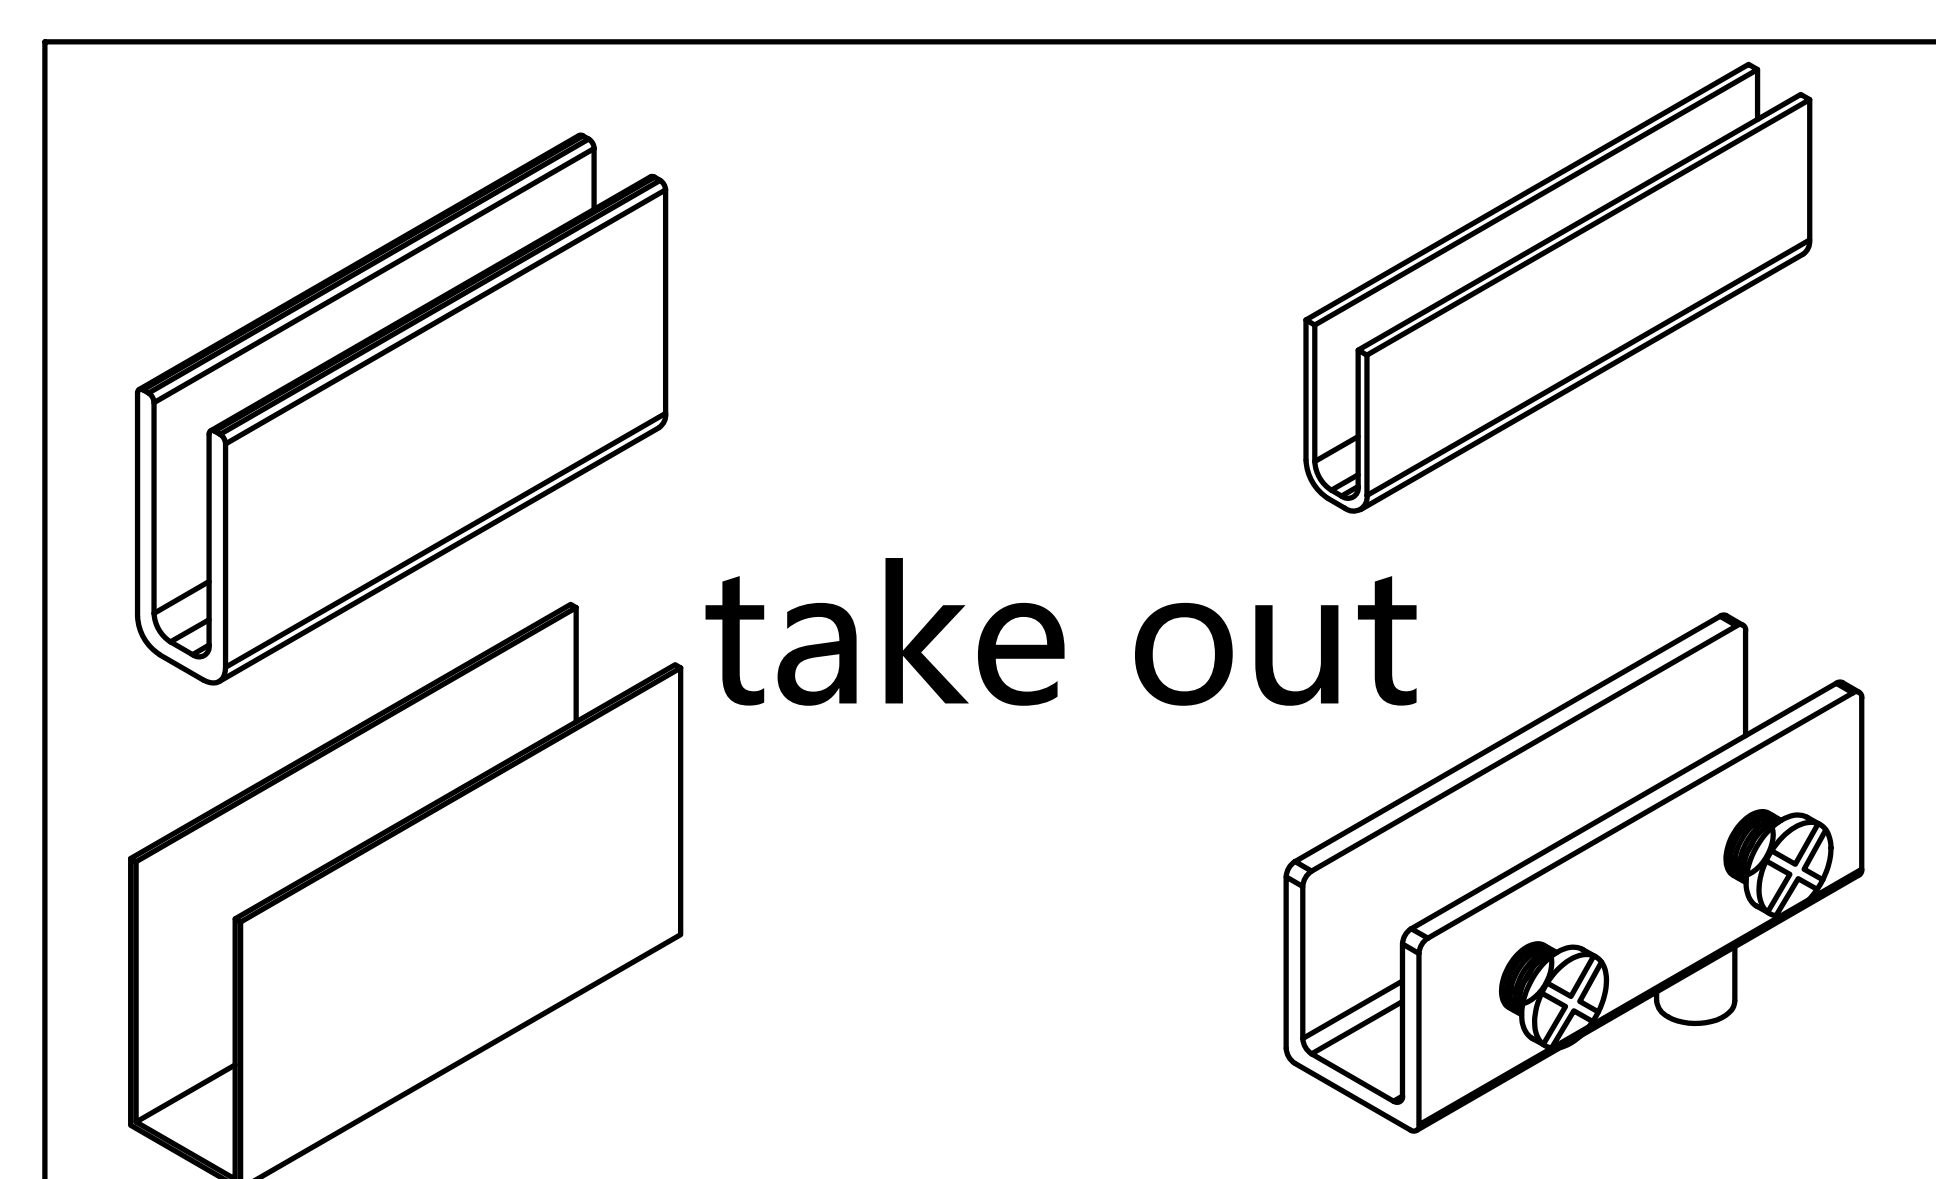


Locking screw

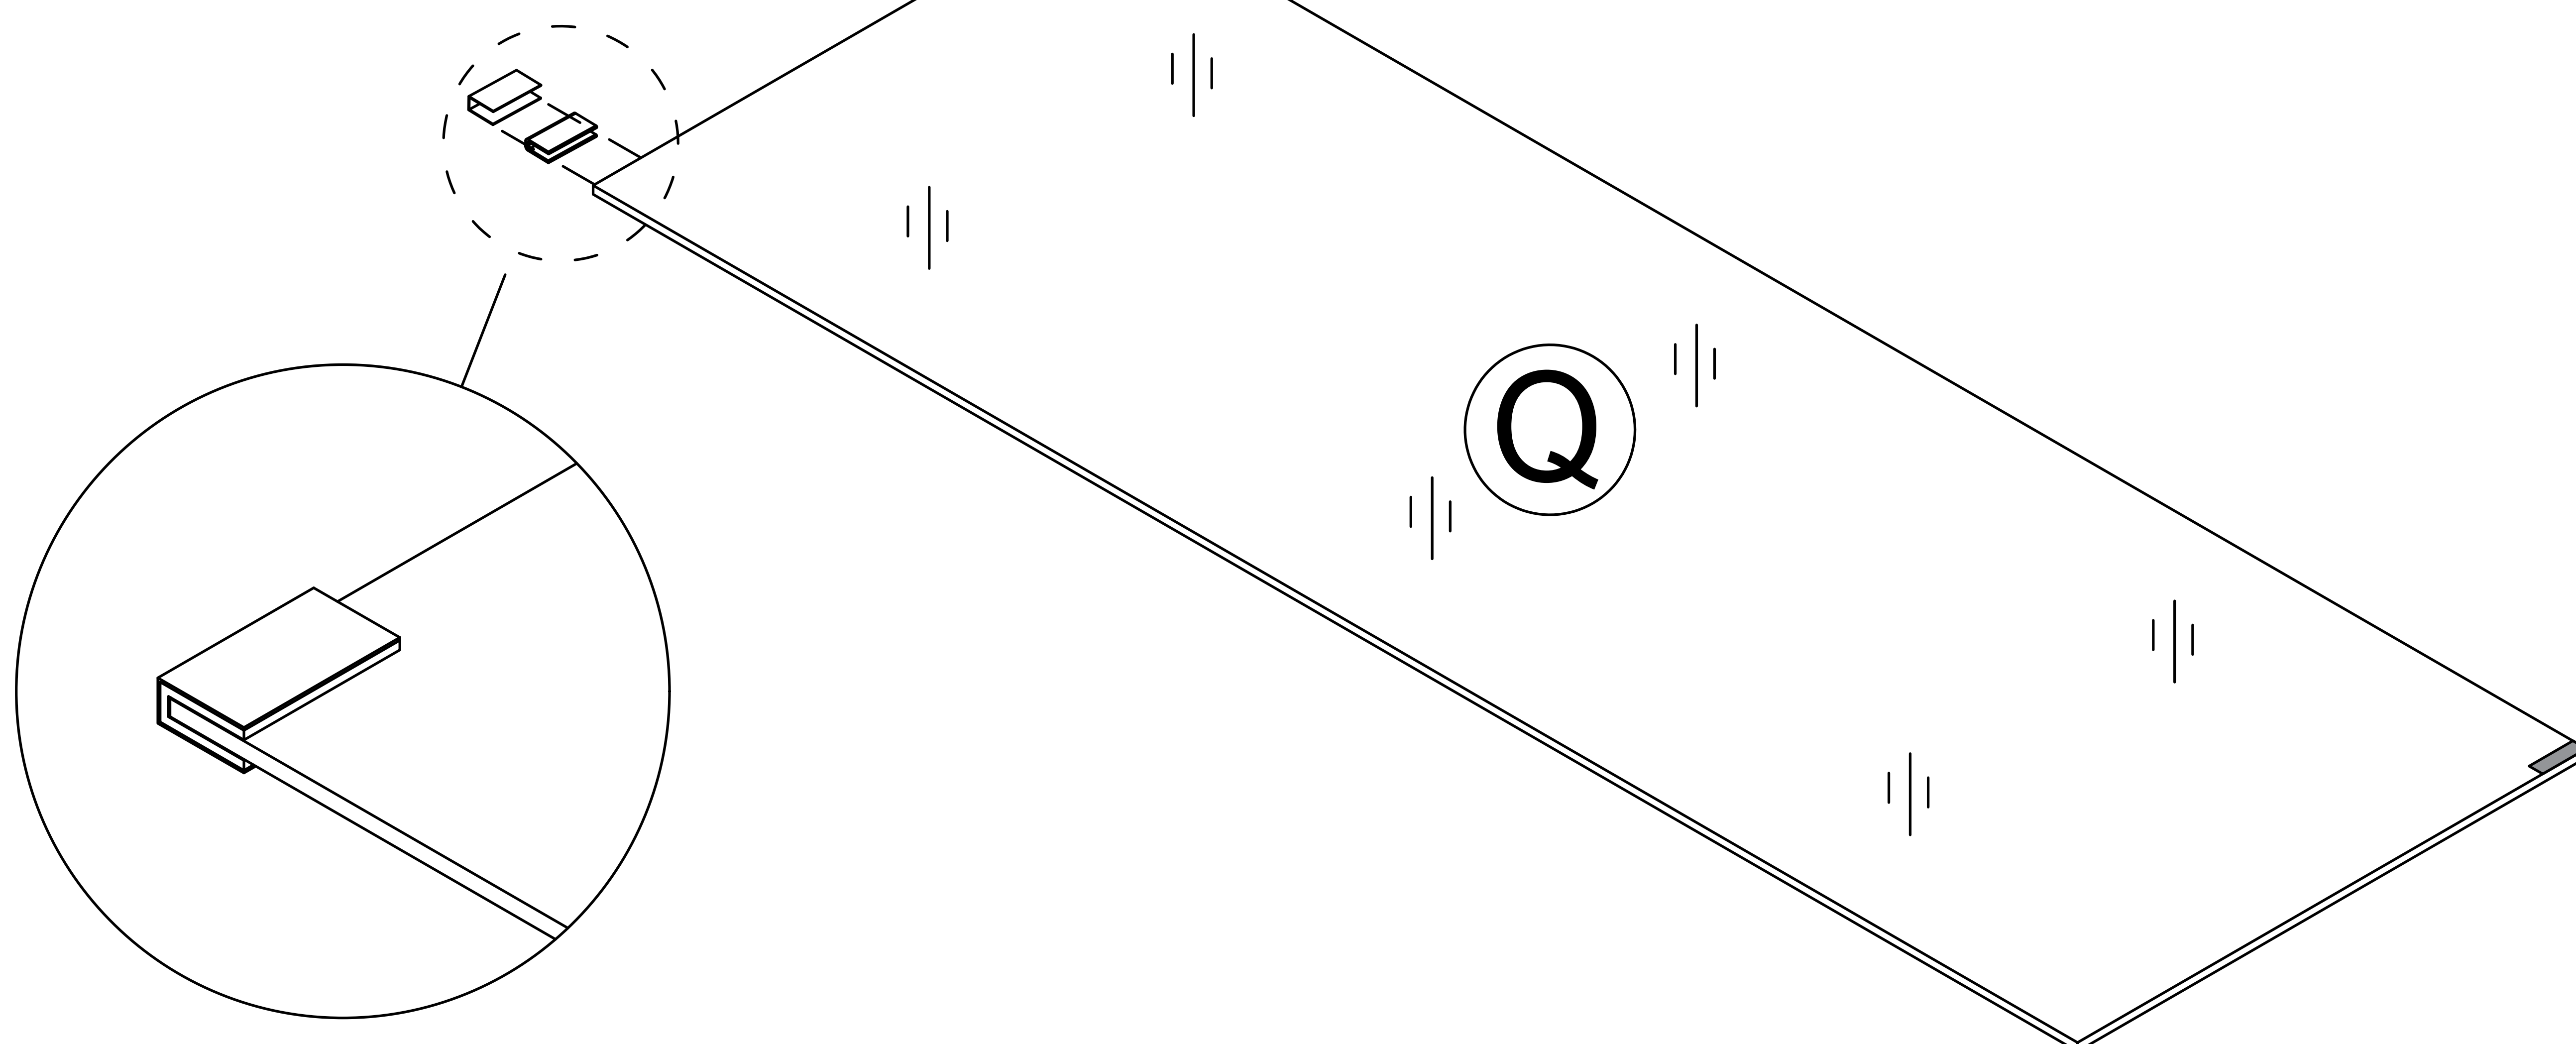


If you feel loose, please pinch the accessory before installation

Step 31


First, loosen the screws.

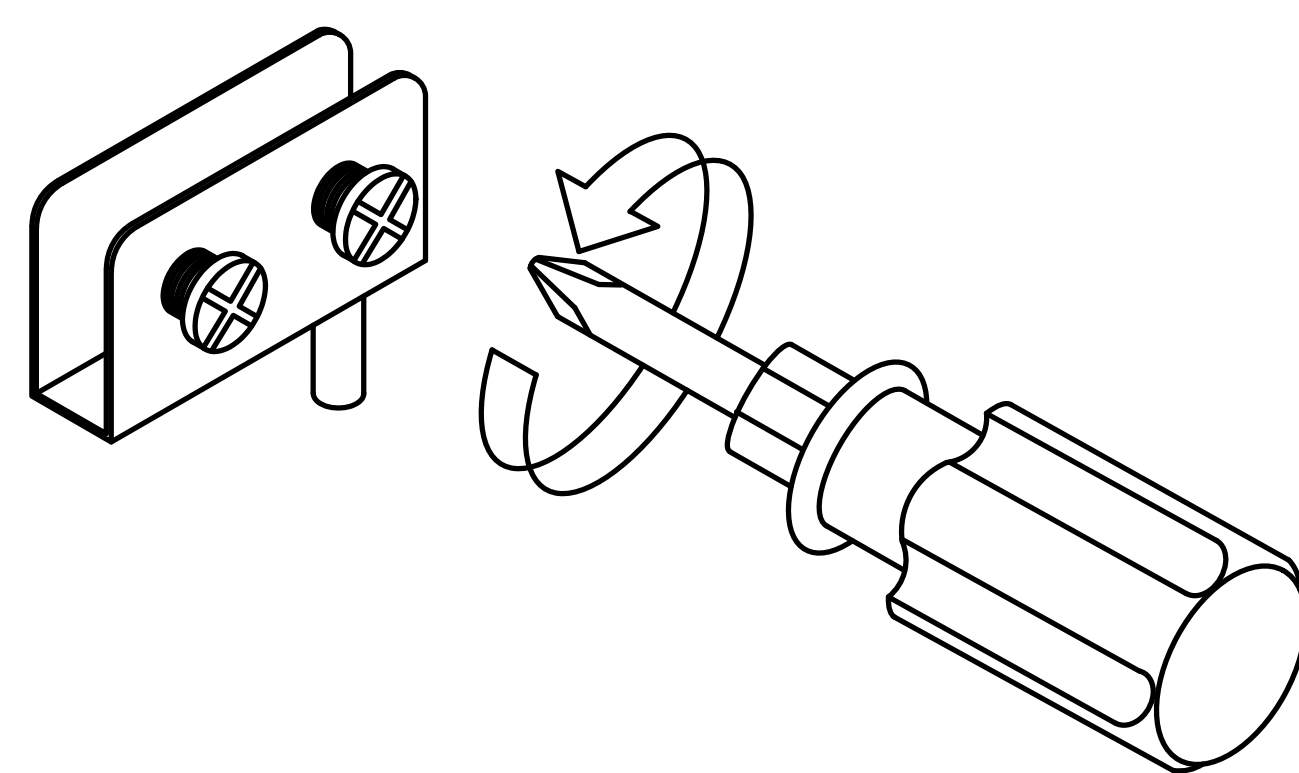

5


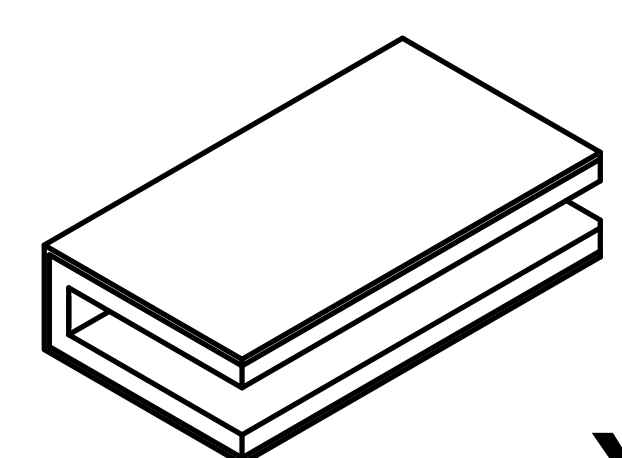


x1




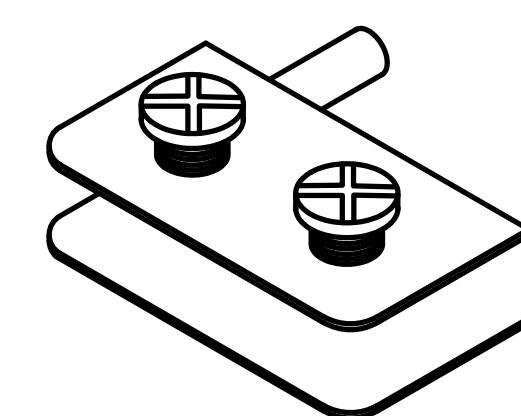


x1

1. Take out the white pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

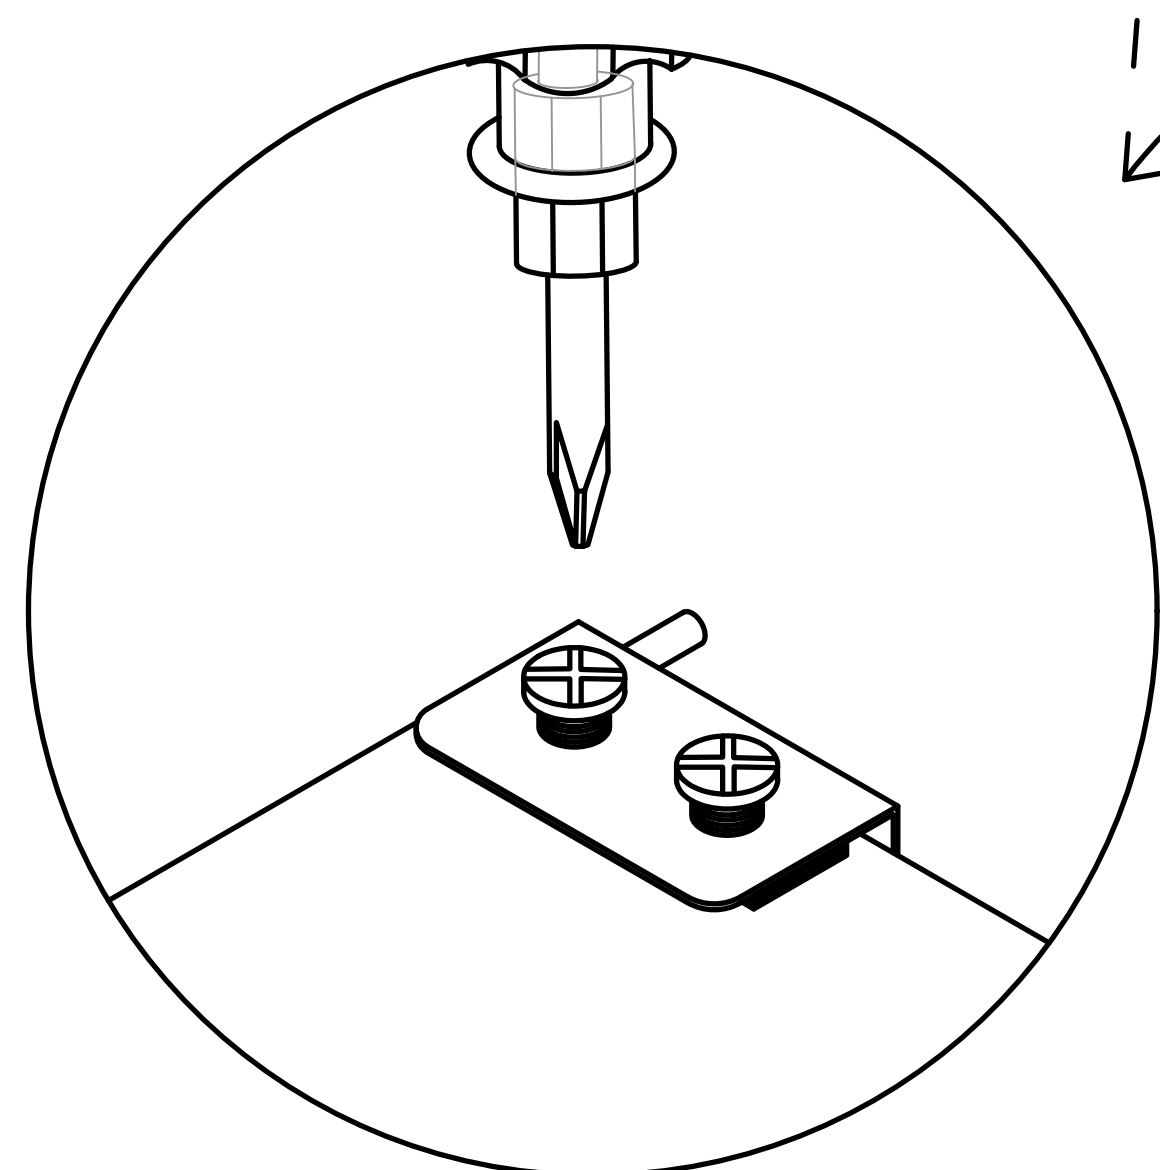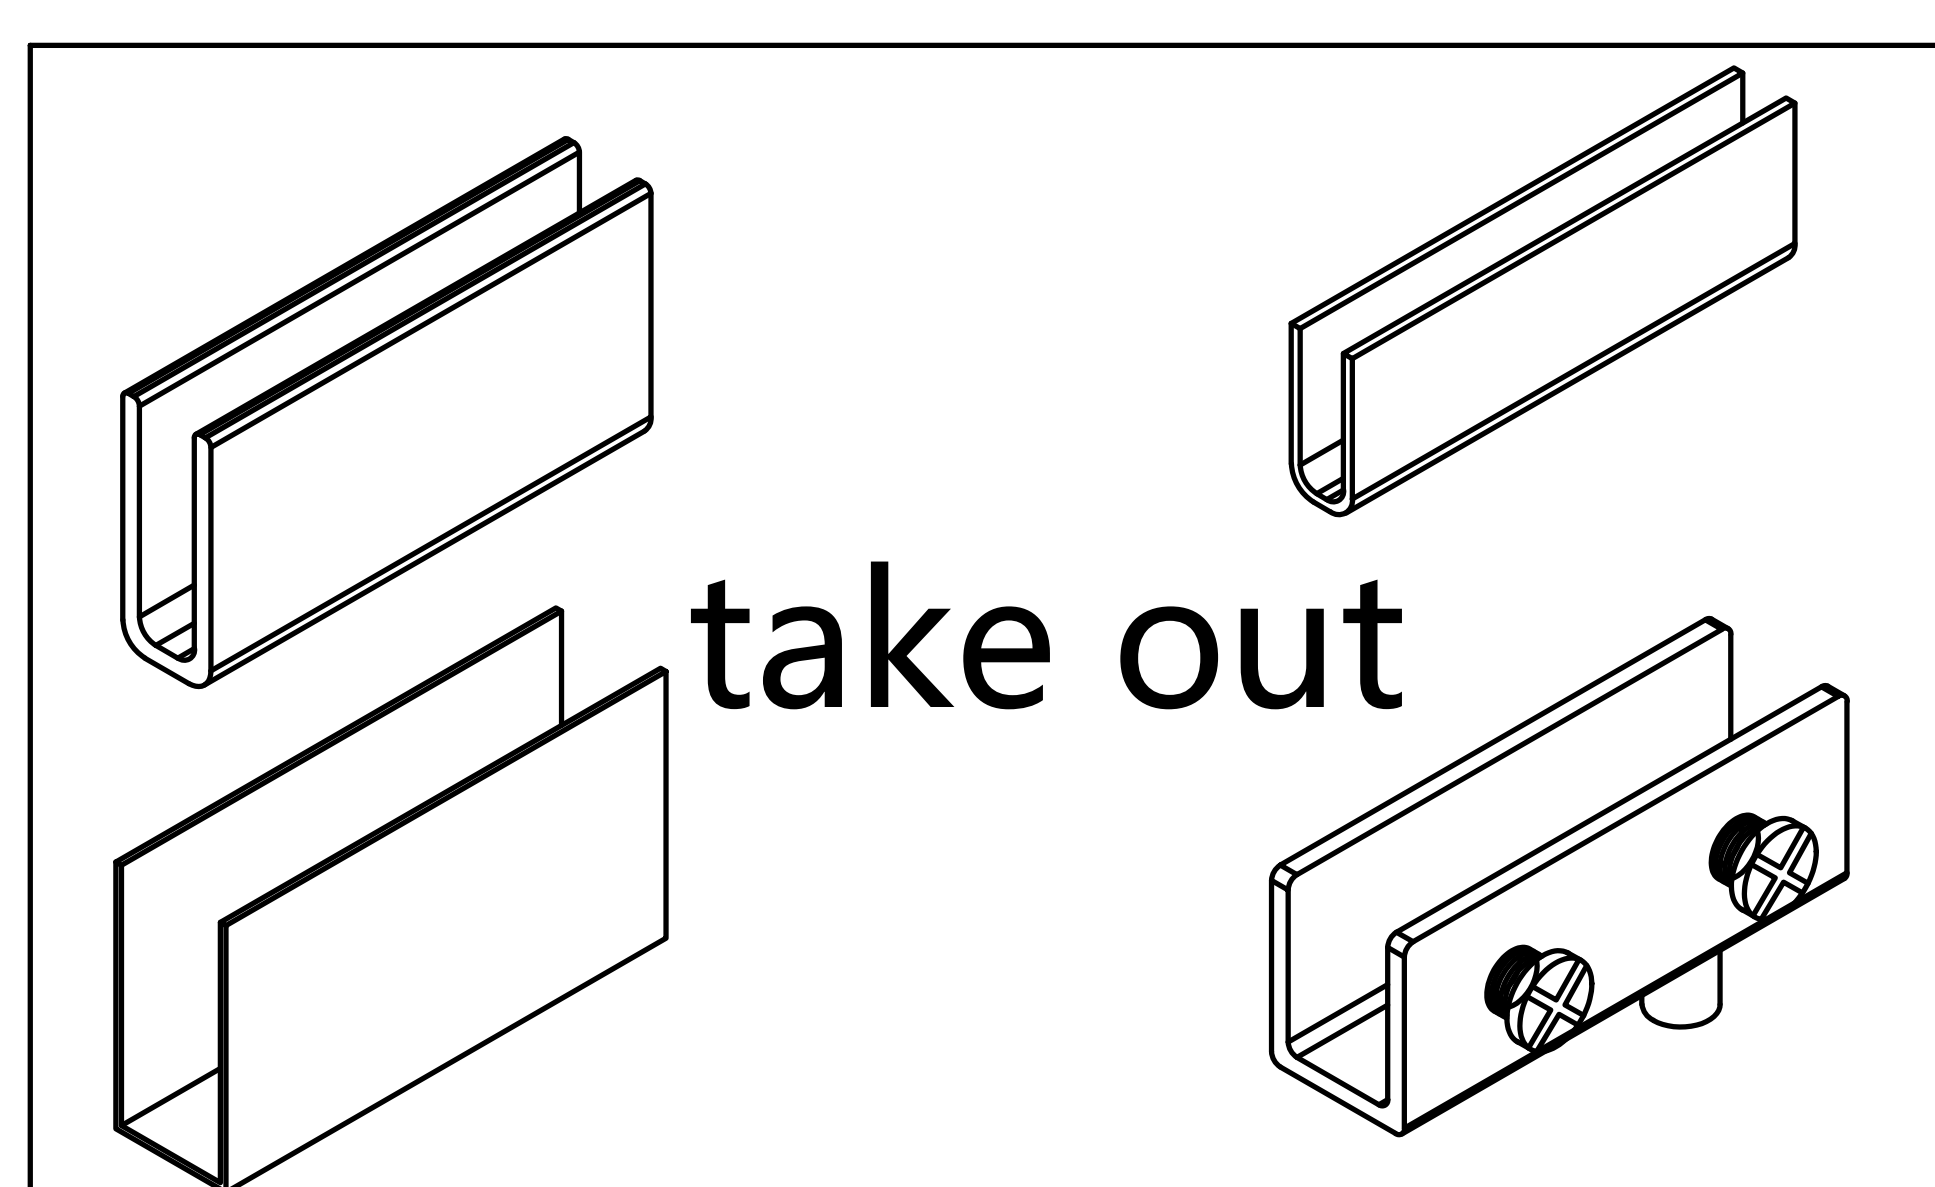

Locking screw

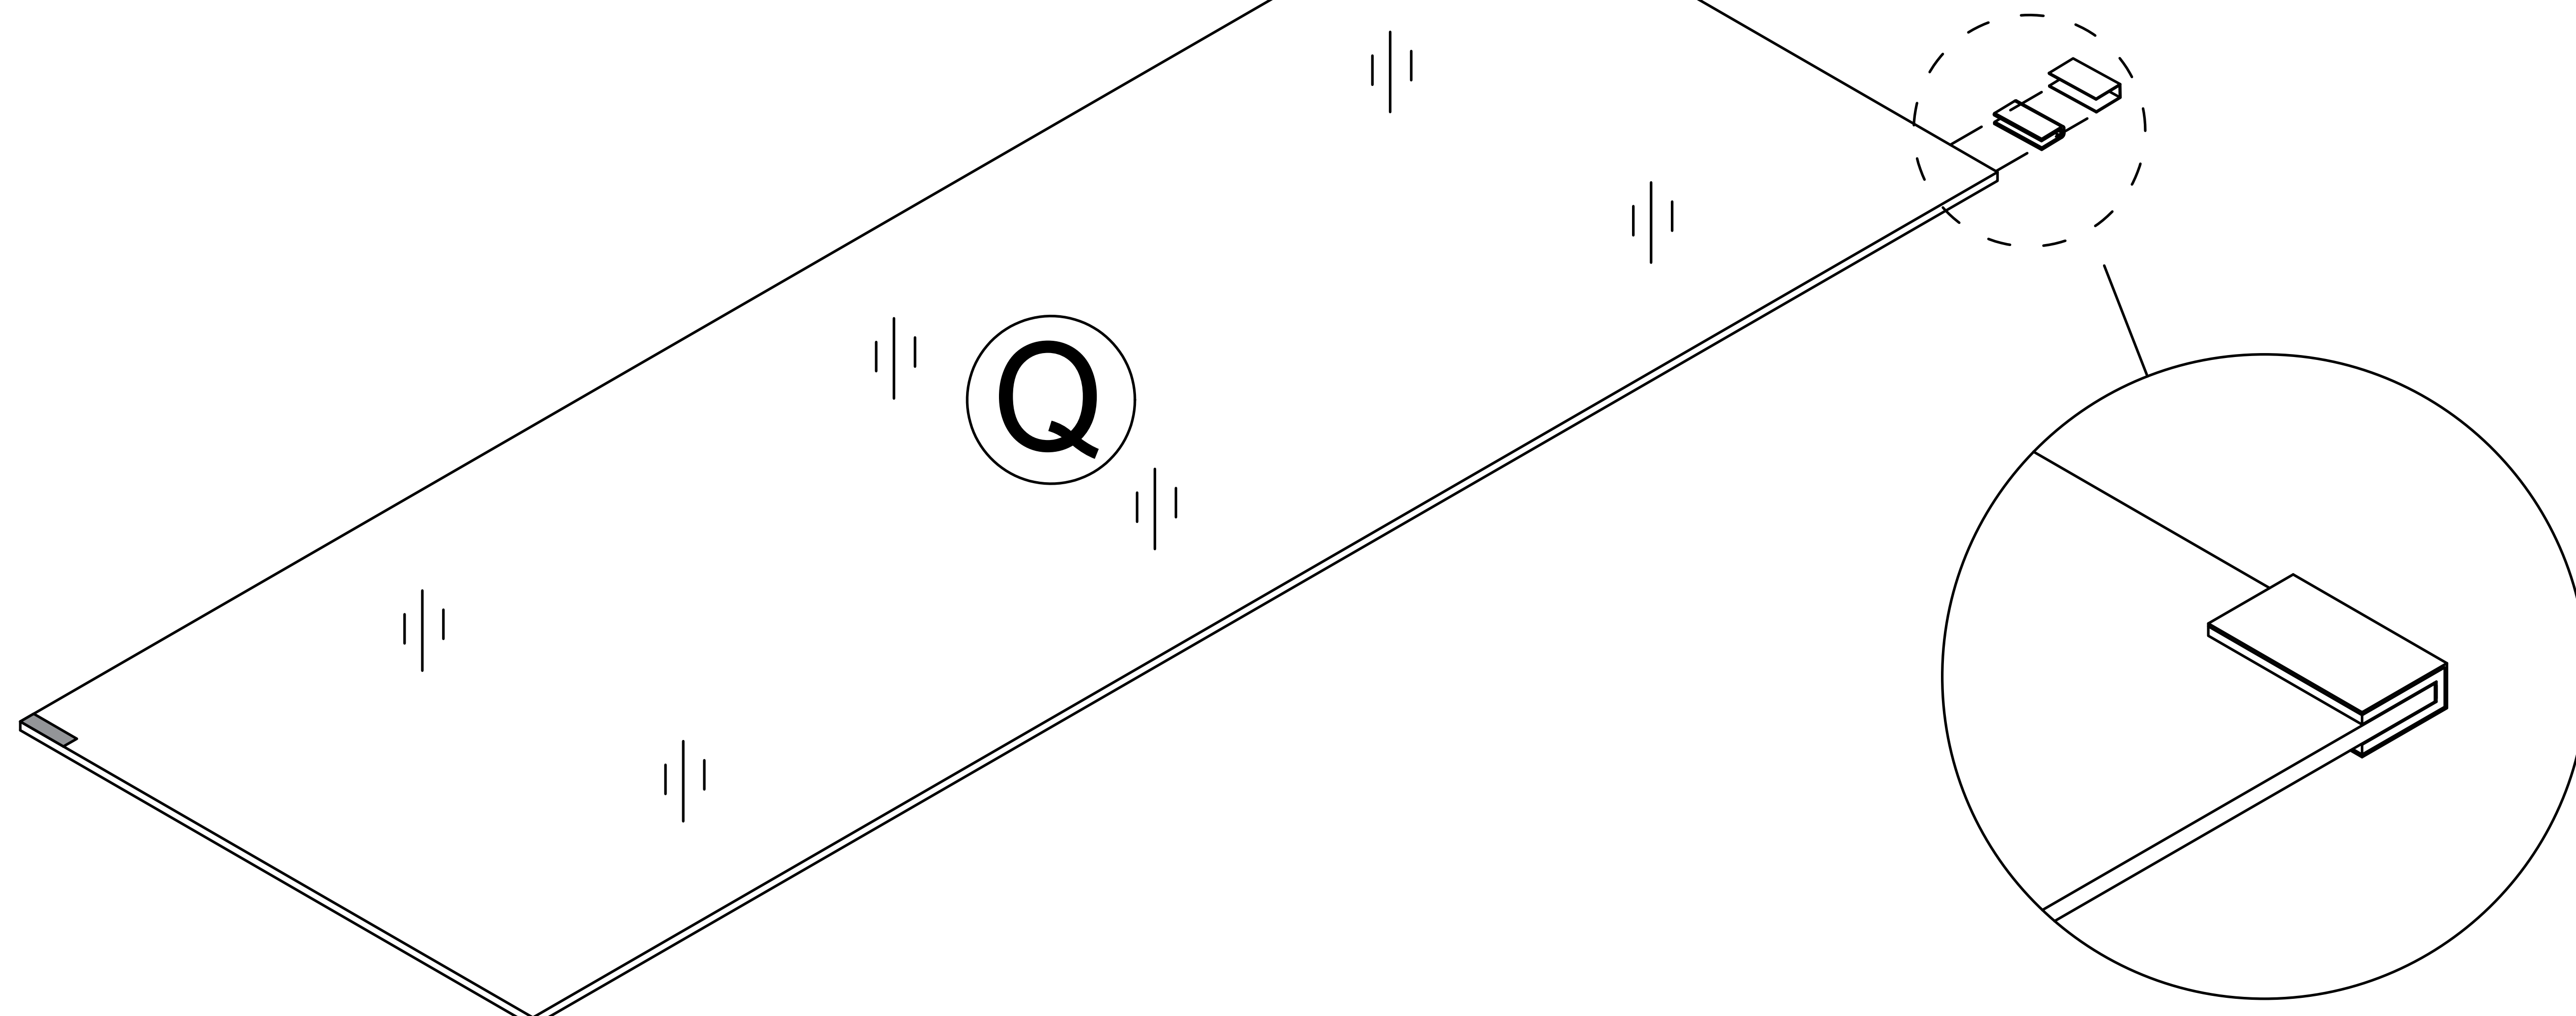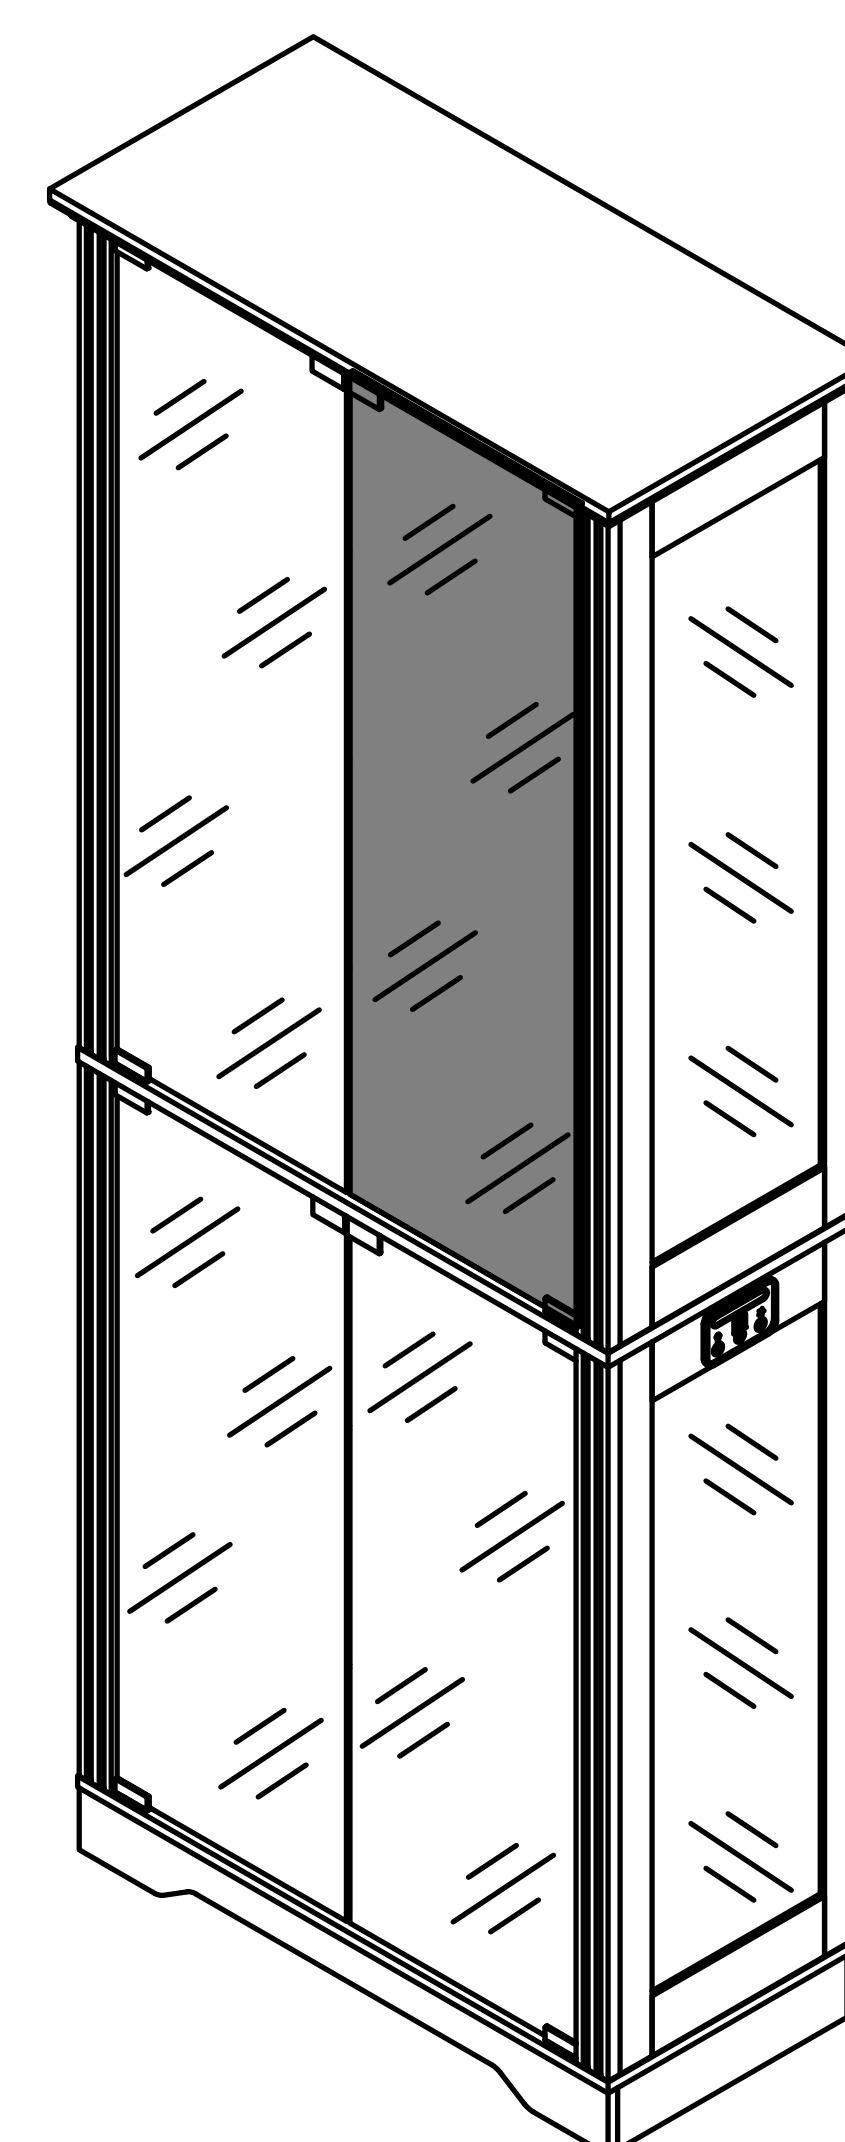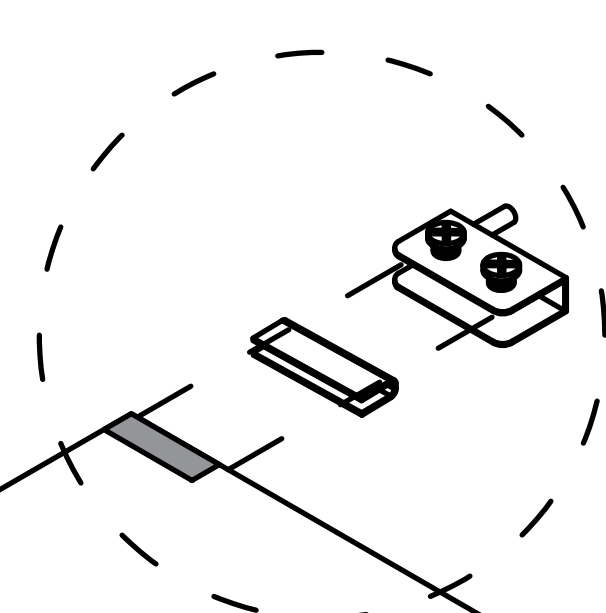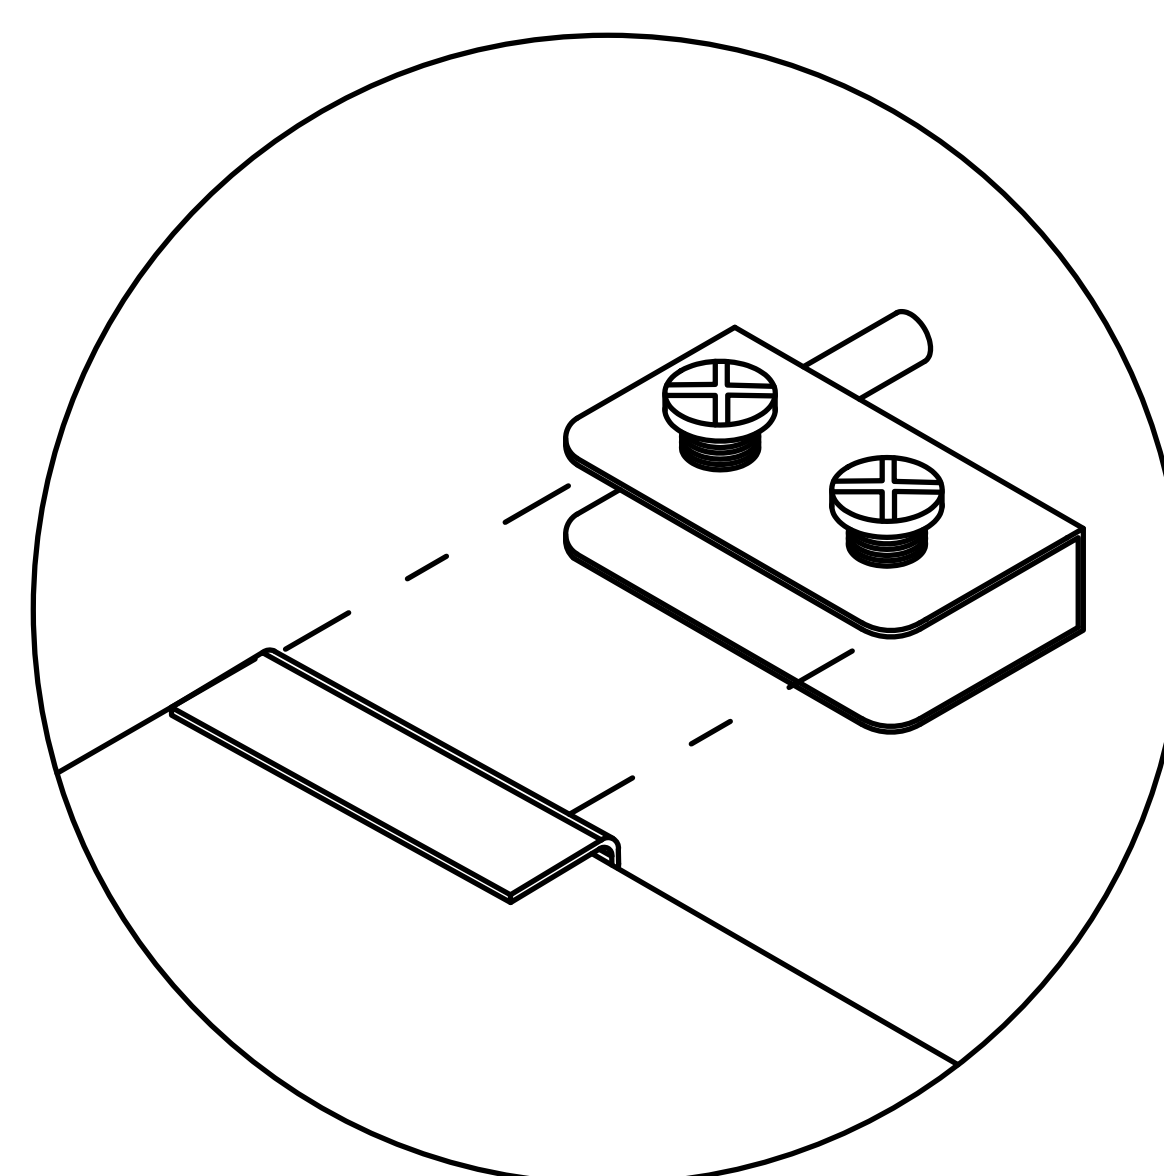


If you feel loose, please pinch the accessory before installation

Step 32


Pay attention to the direction of the door hinge during installation

5




x2


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.

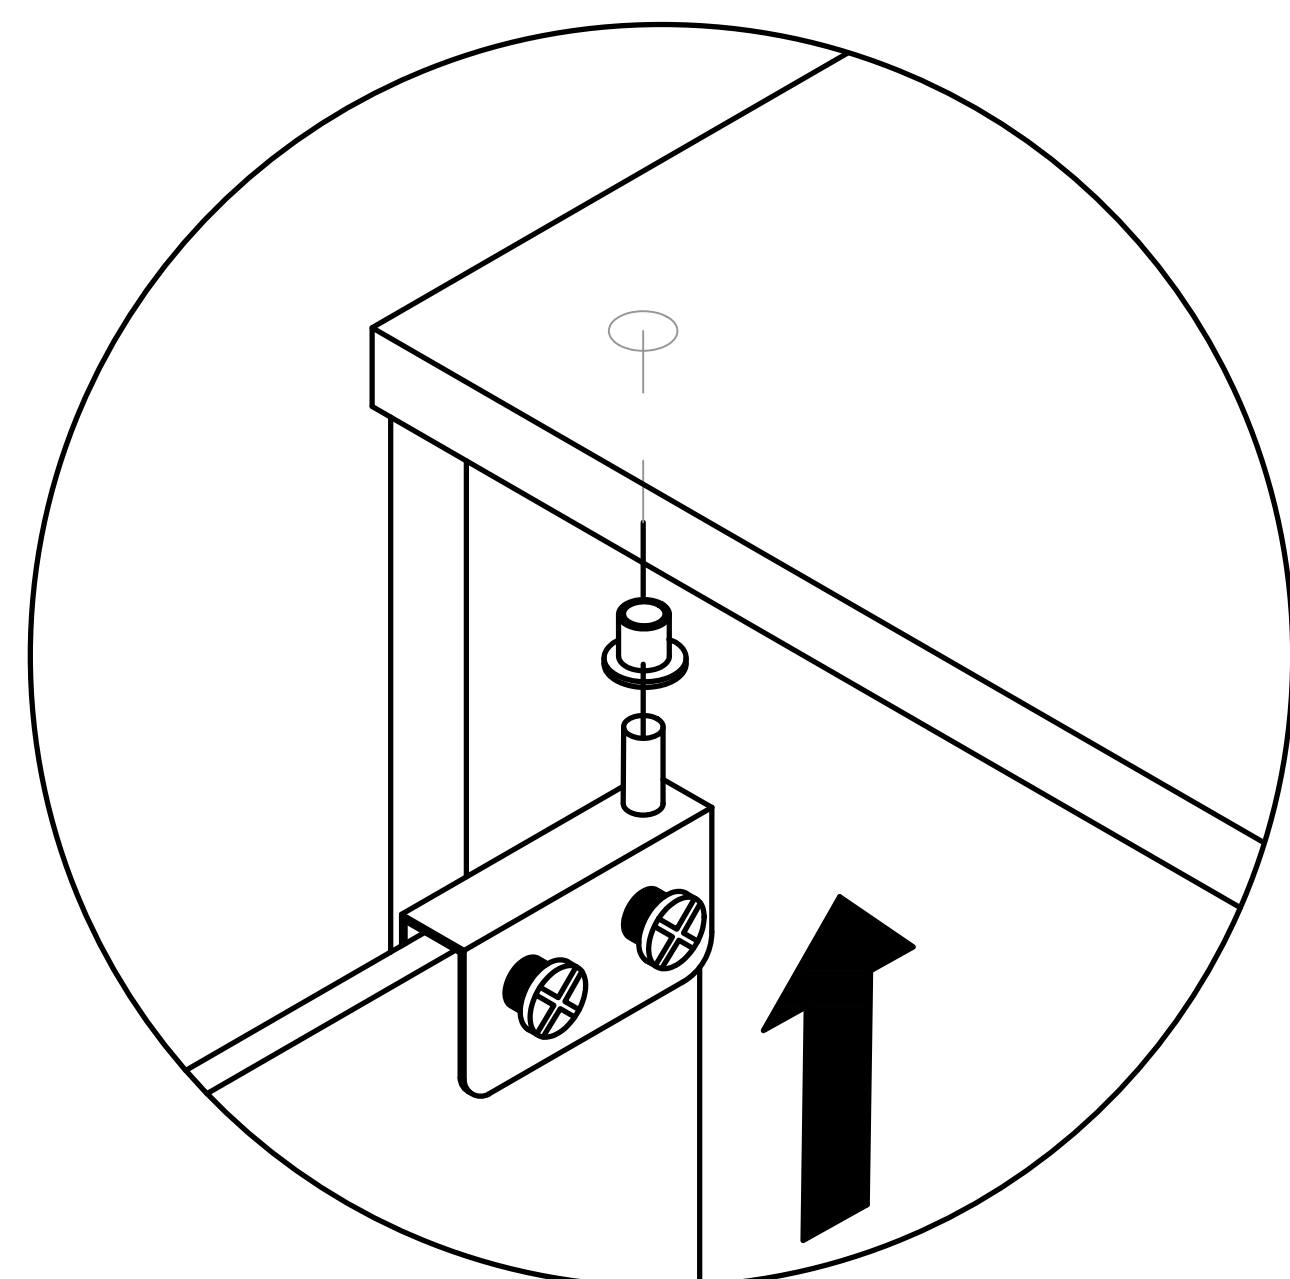

first

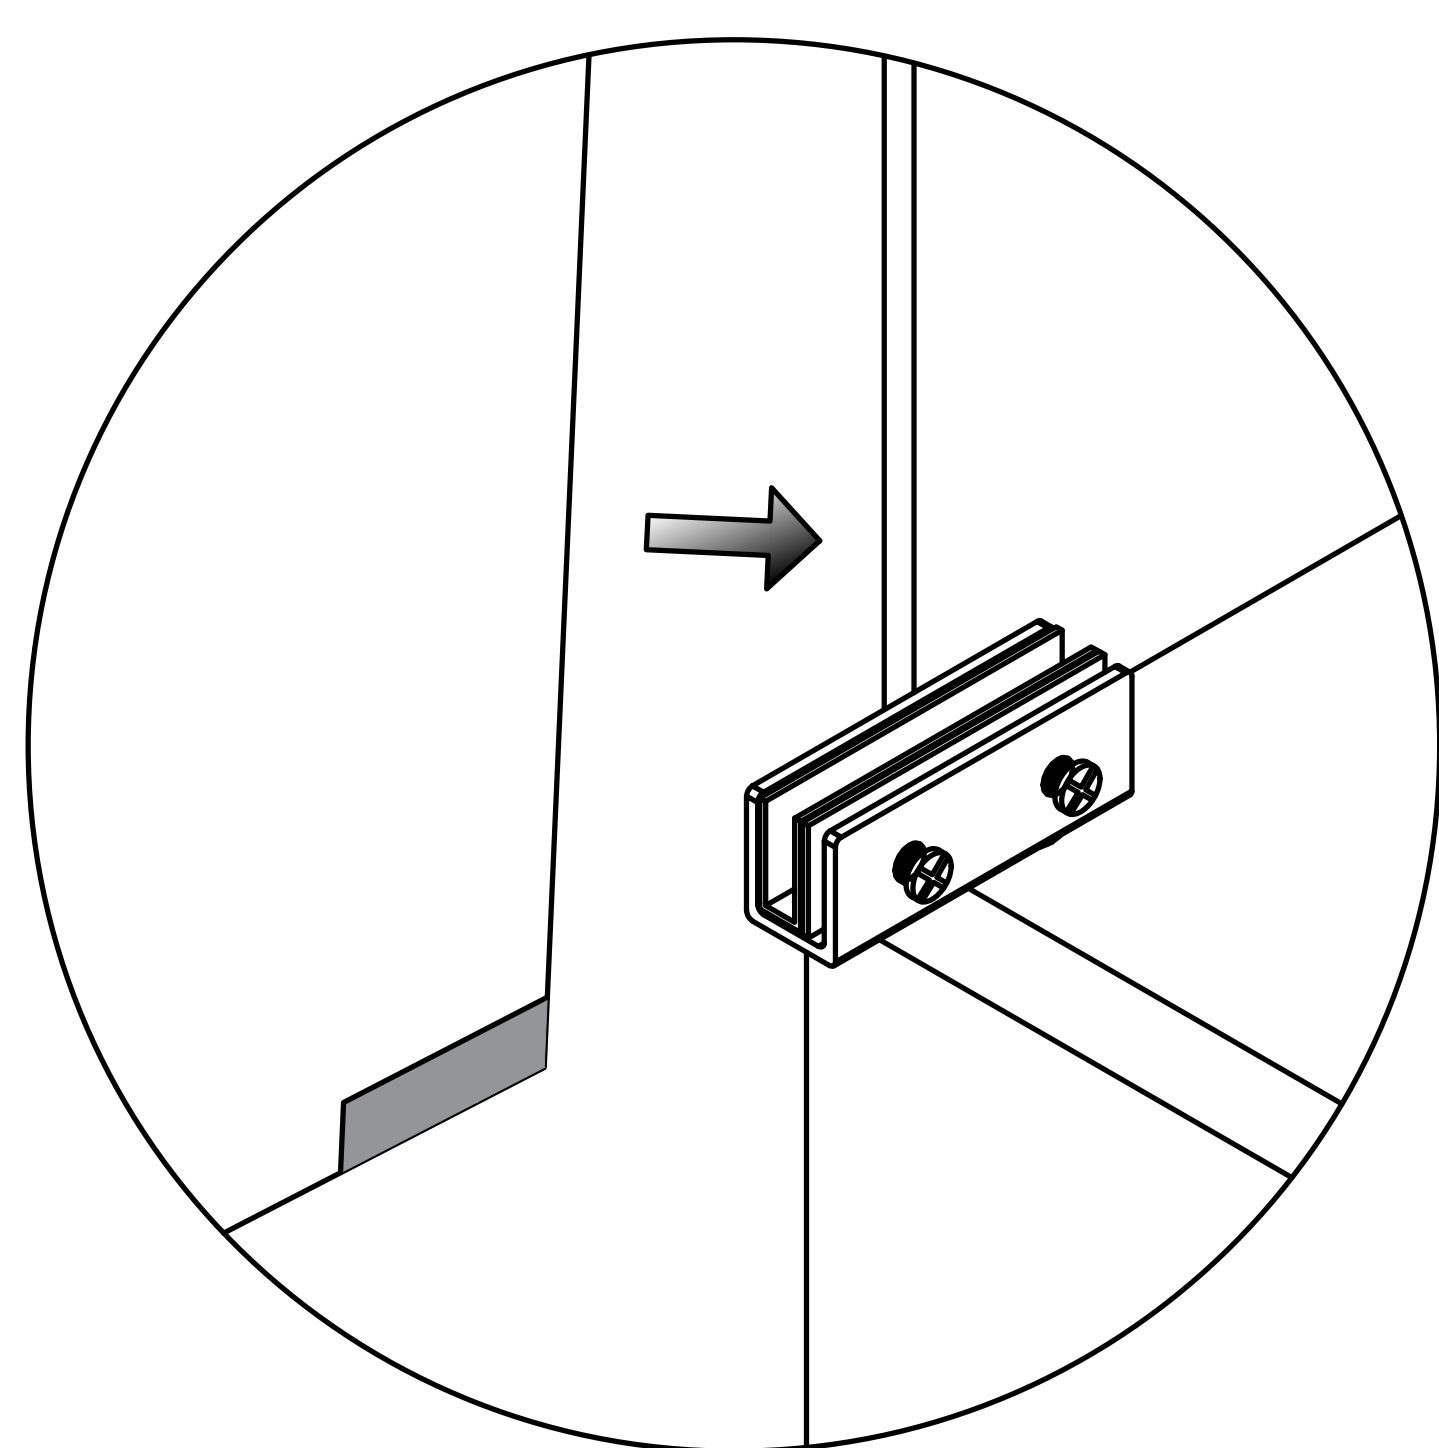


Remove white pad

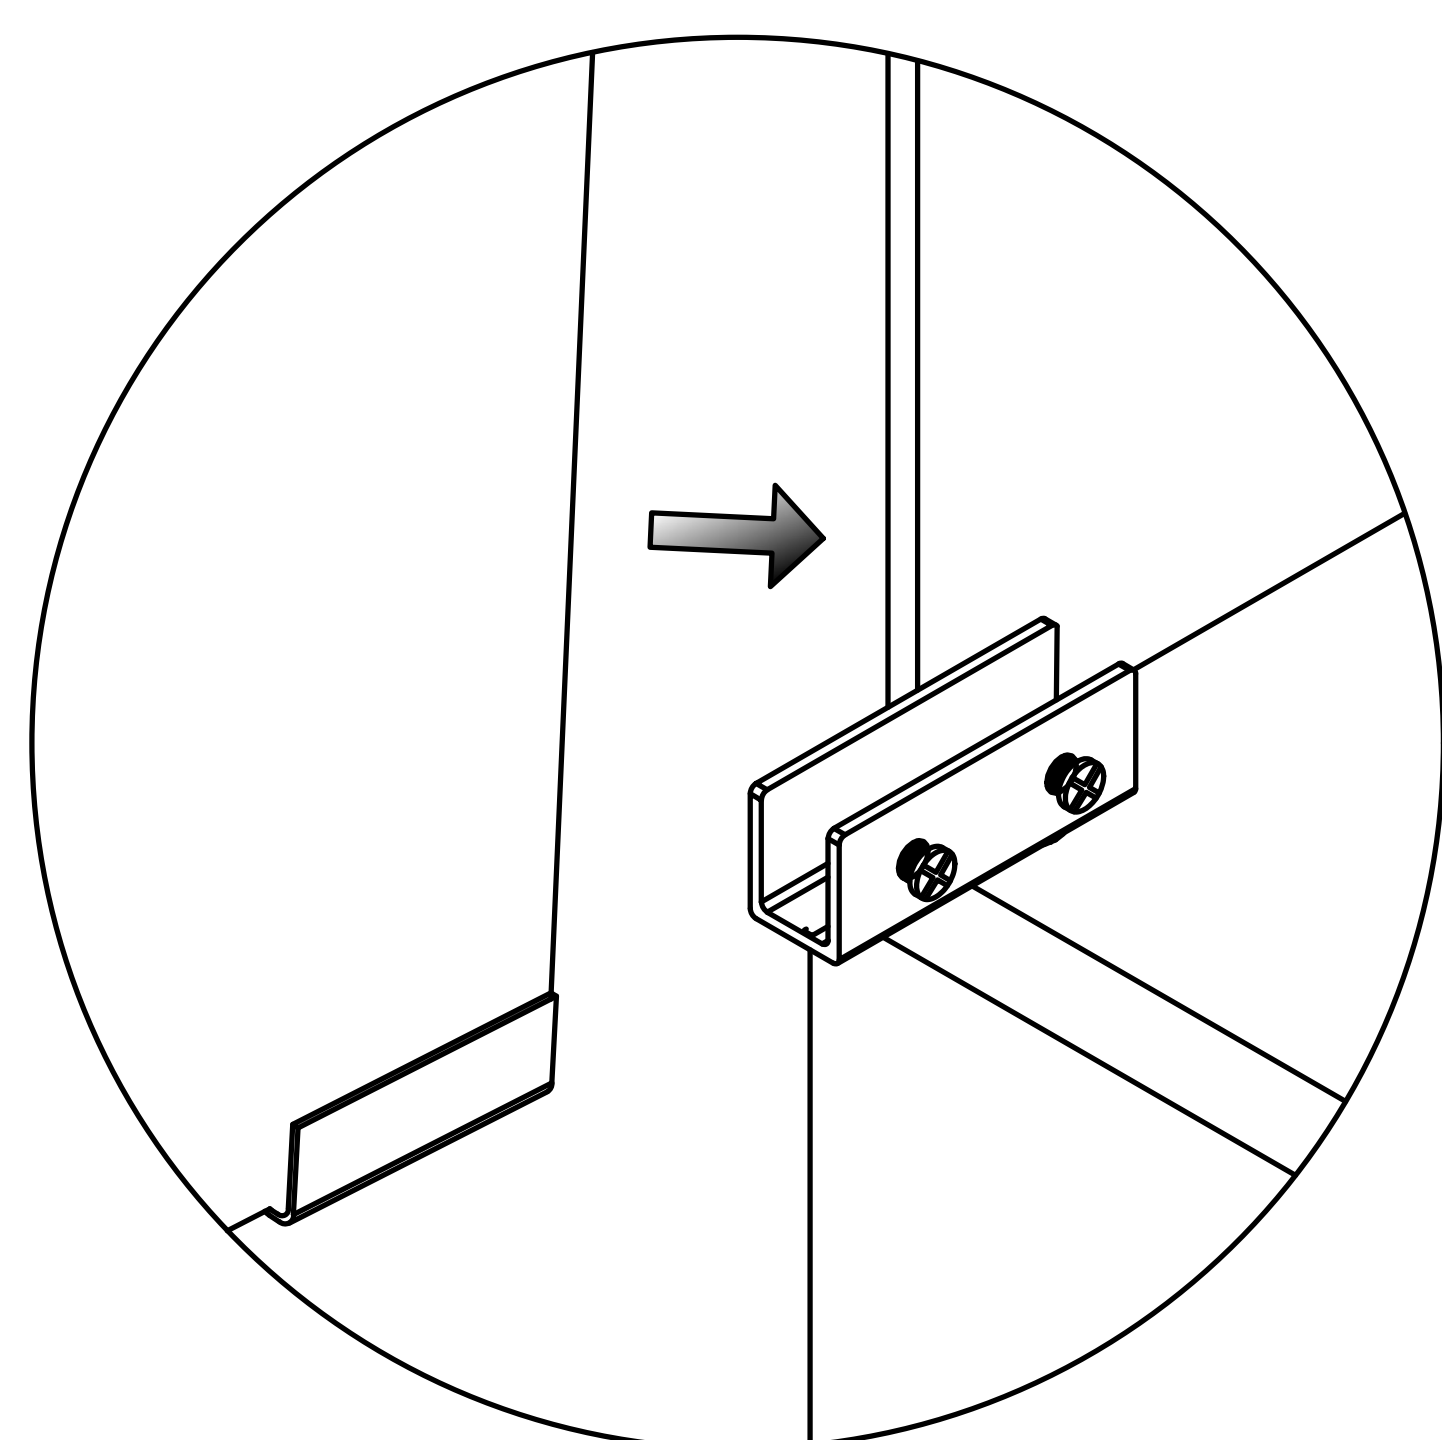

Fit the pad around glass edge


second

Insert the glass into the door hinge's slot.

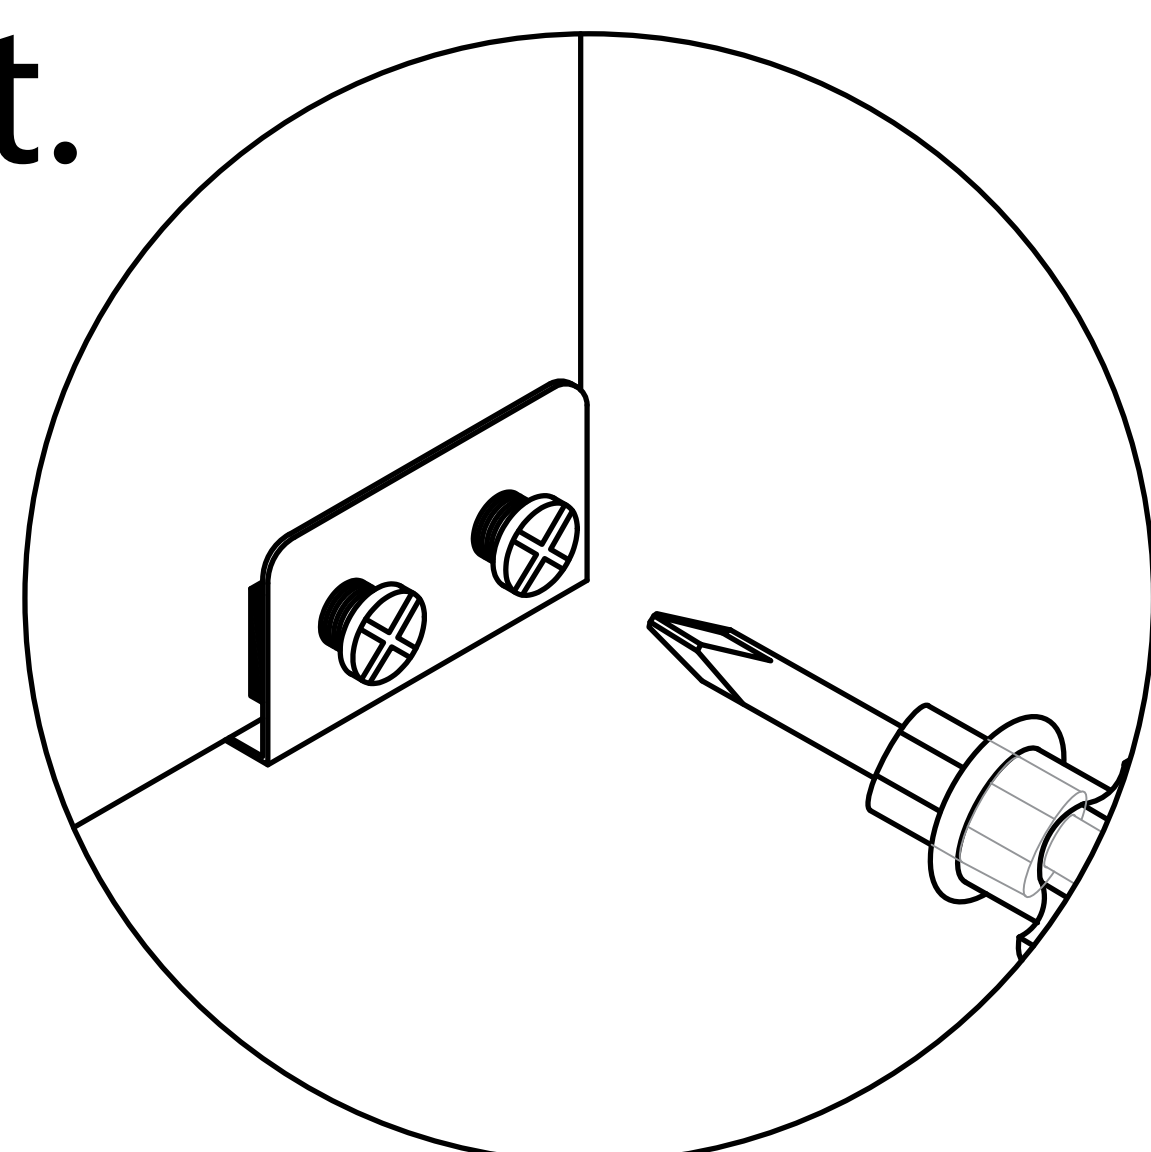


third

Locking screw


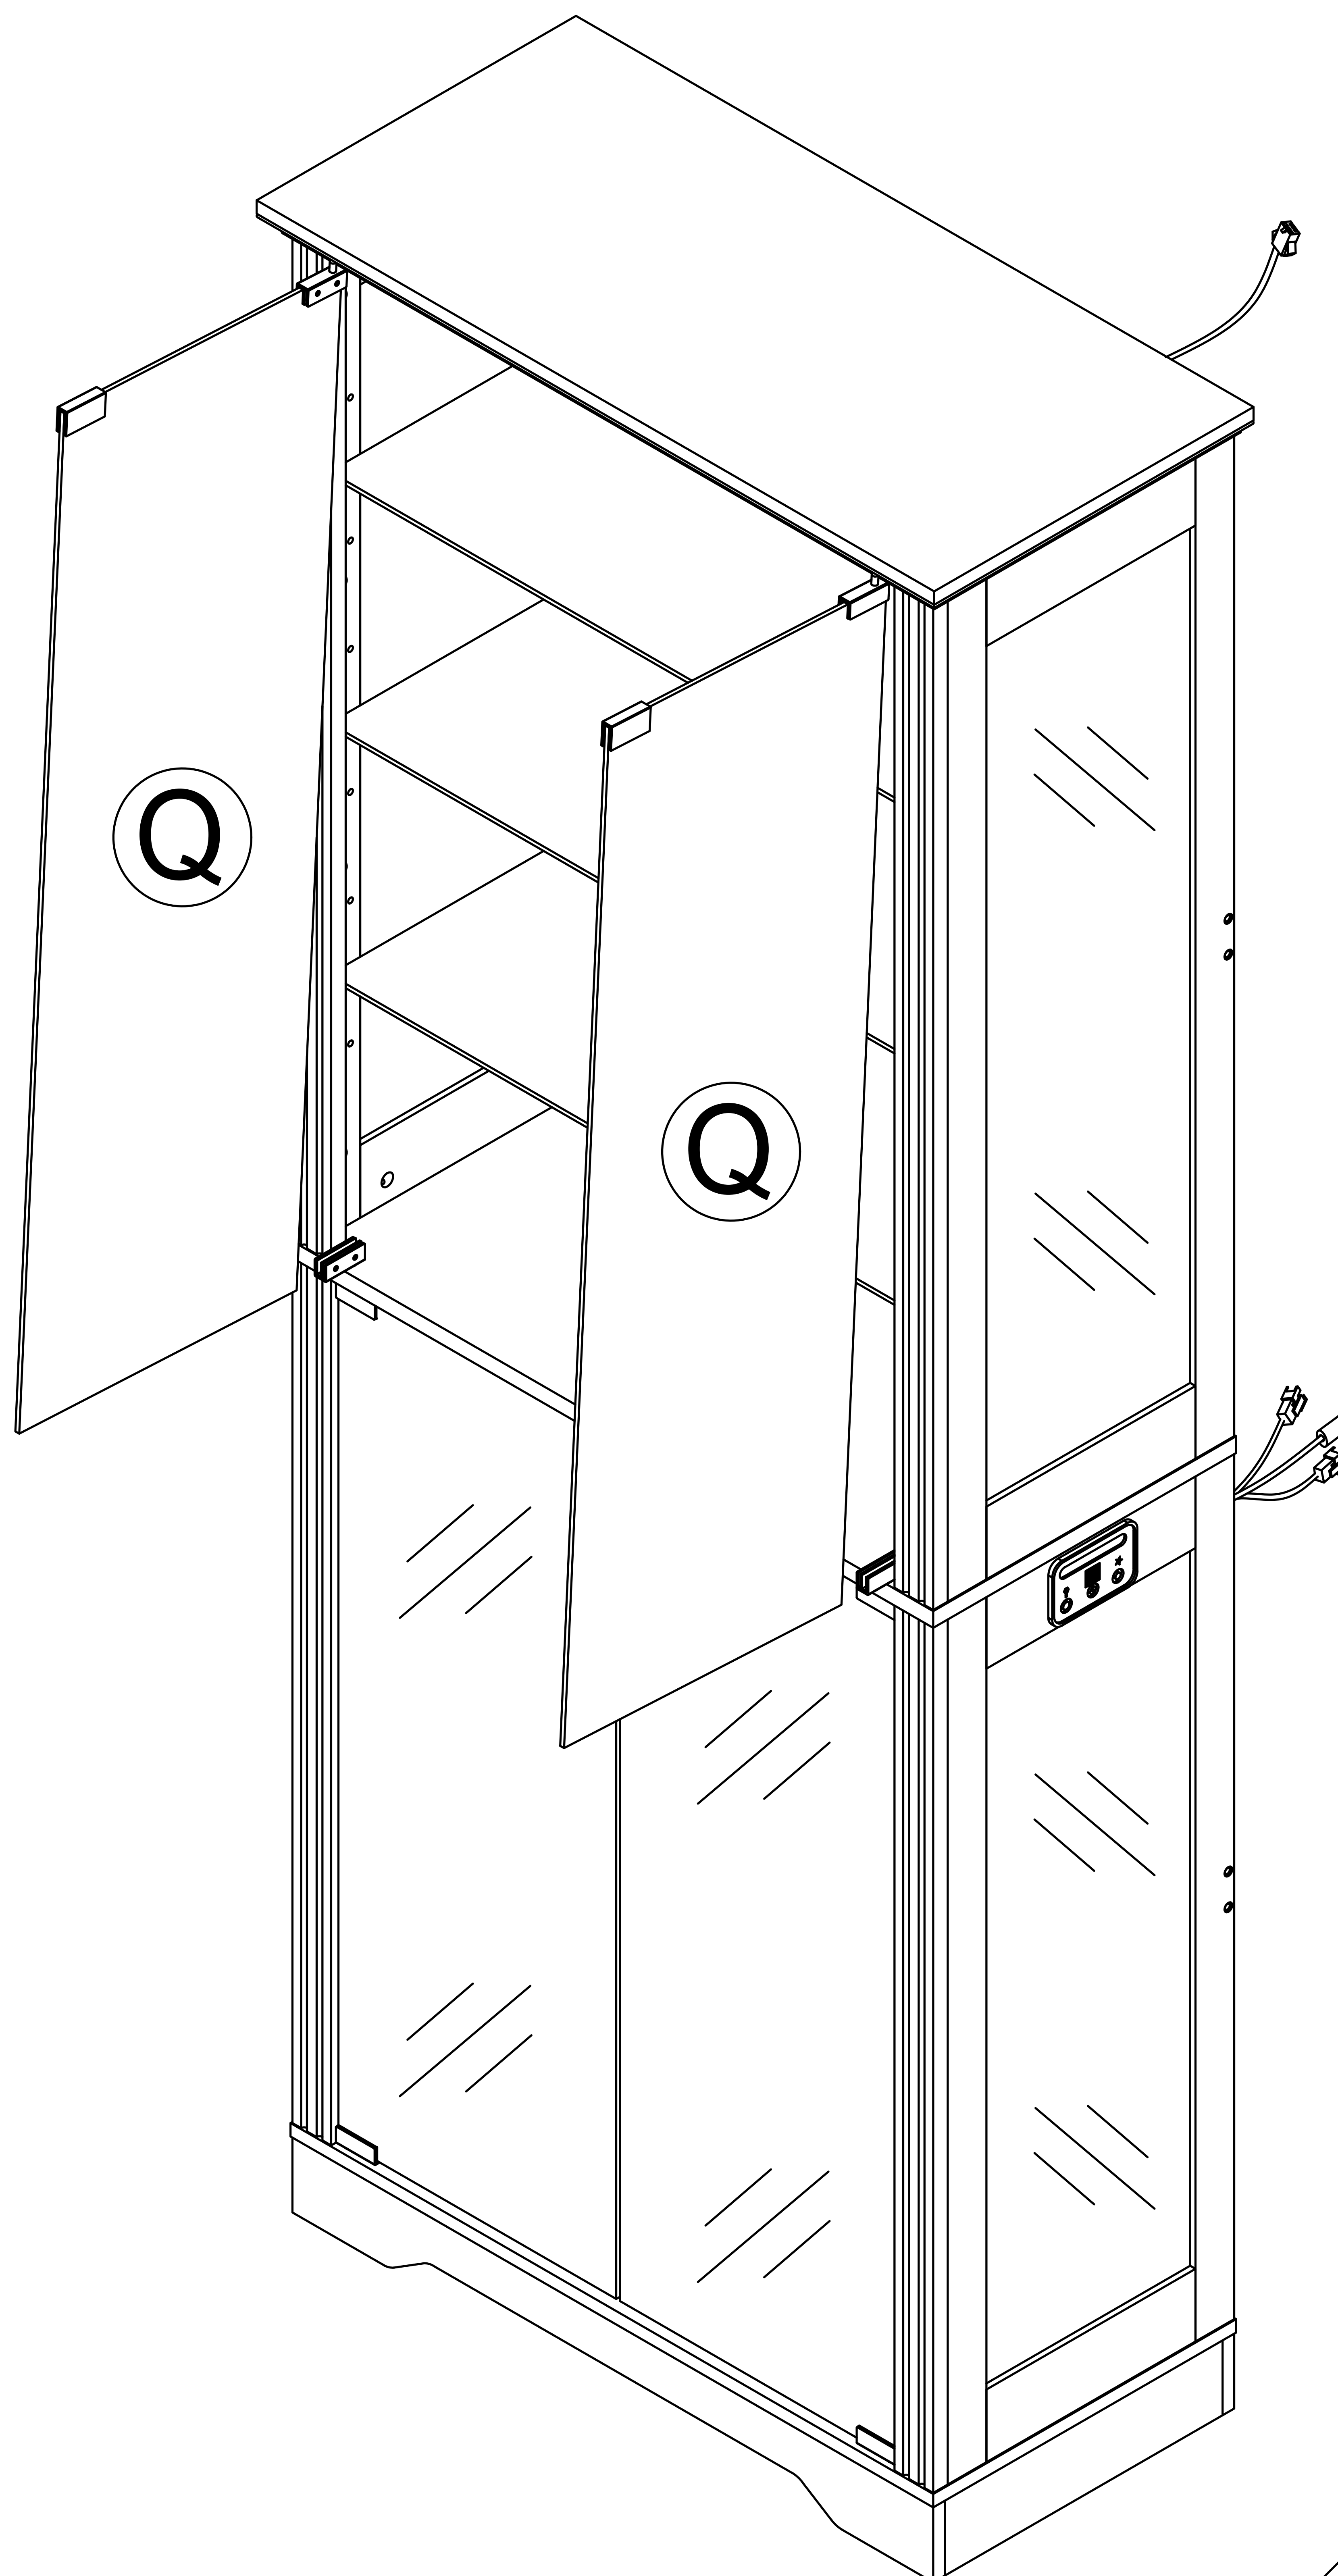


Step 33

Open the glass door


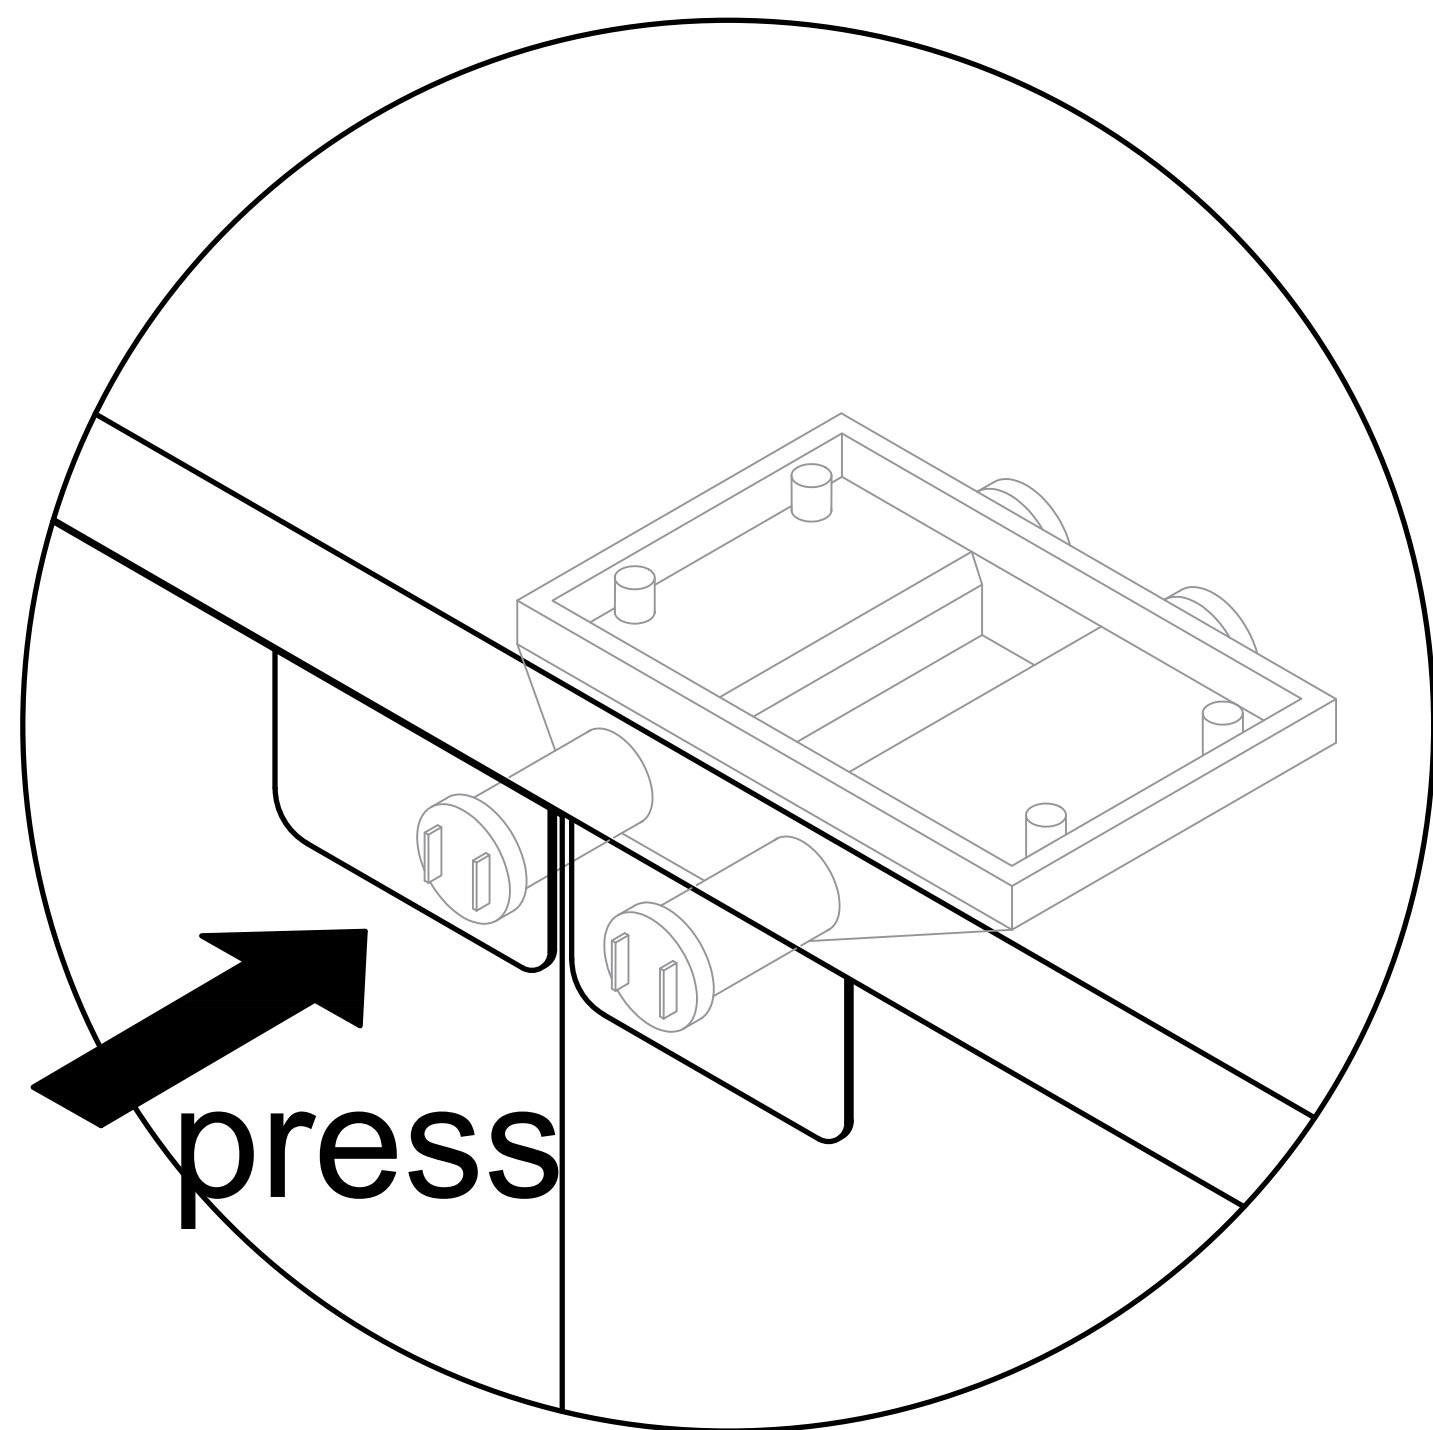


Close the glass door

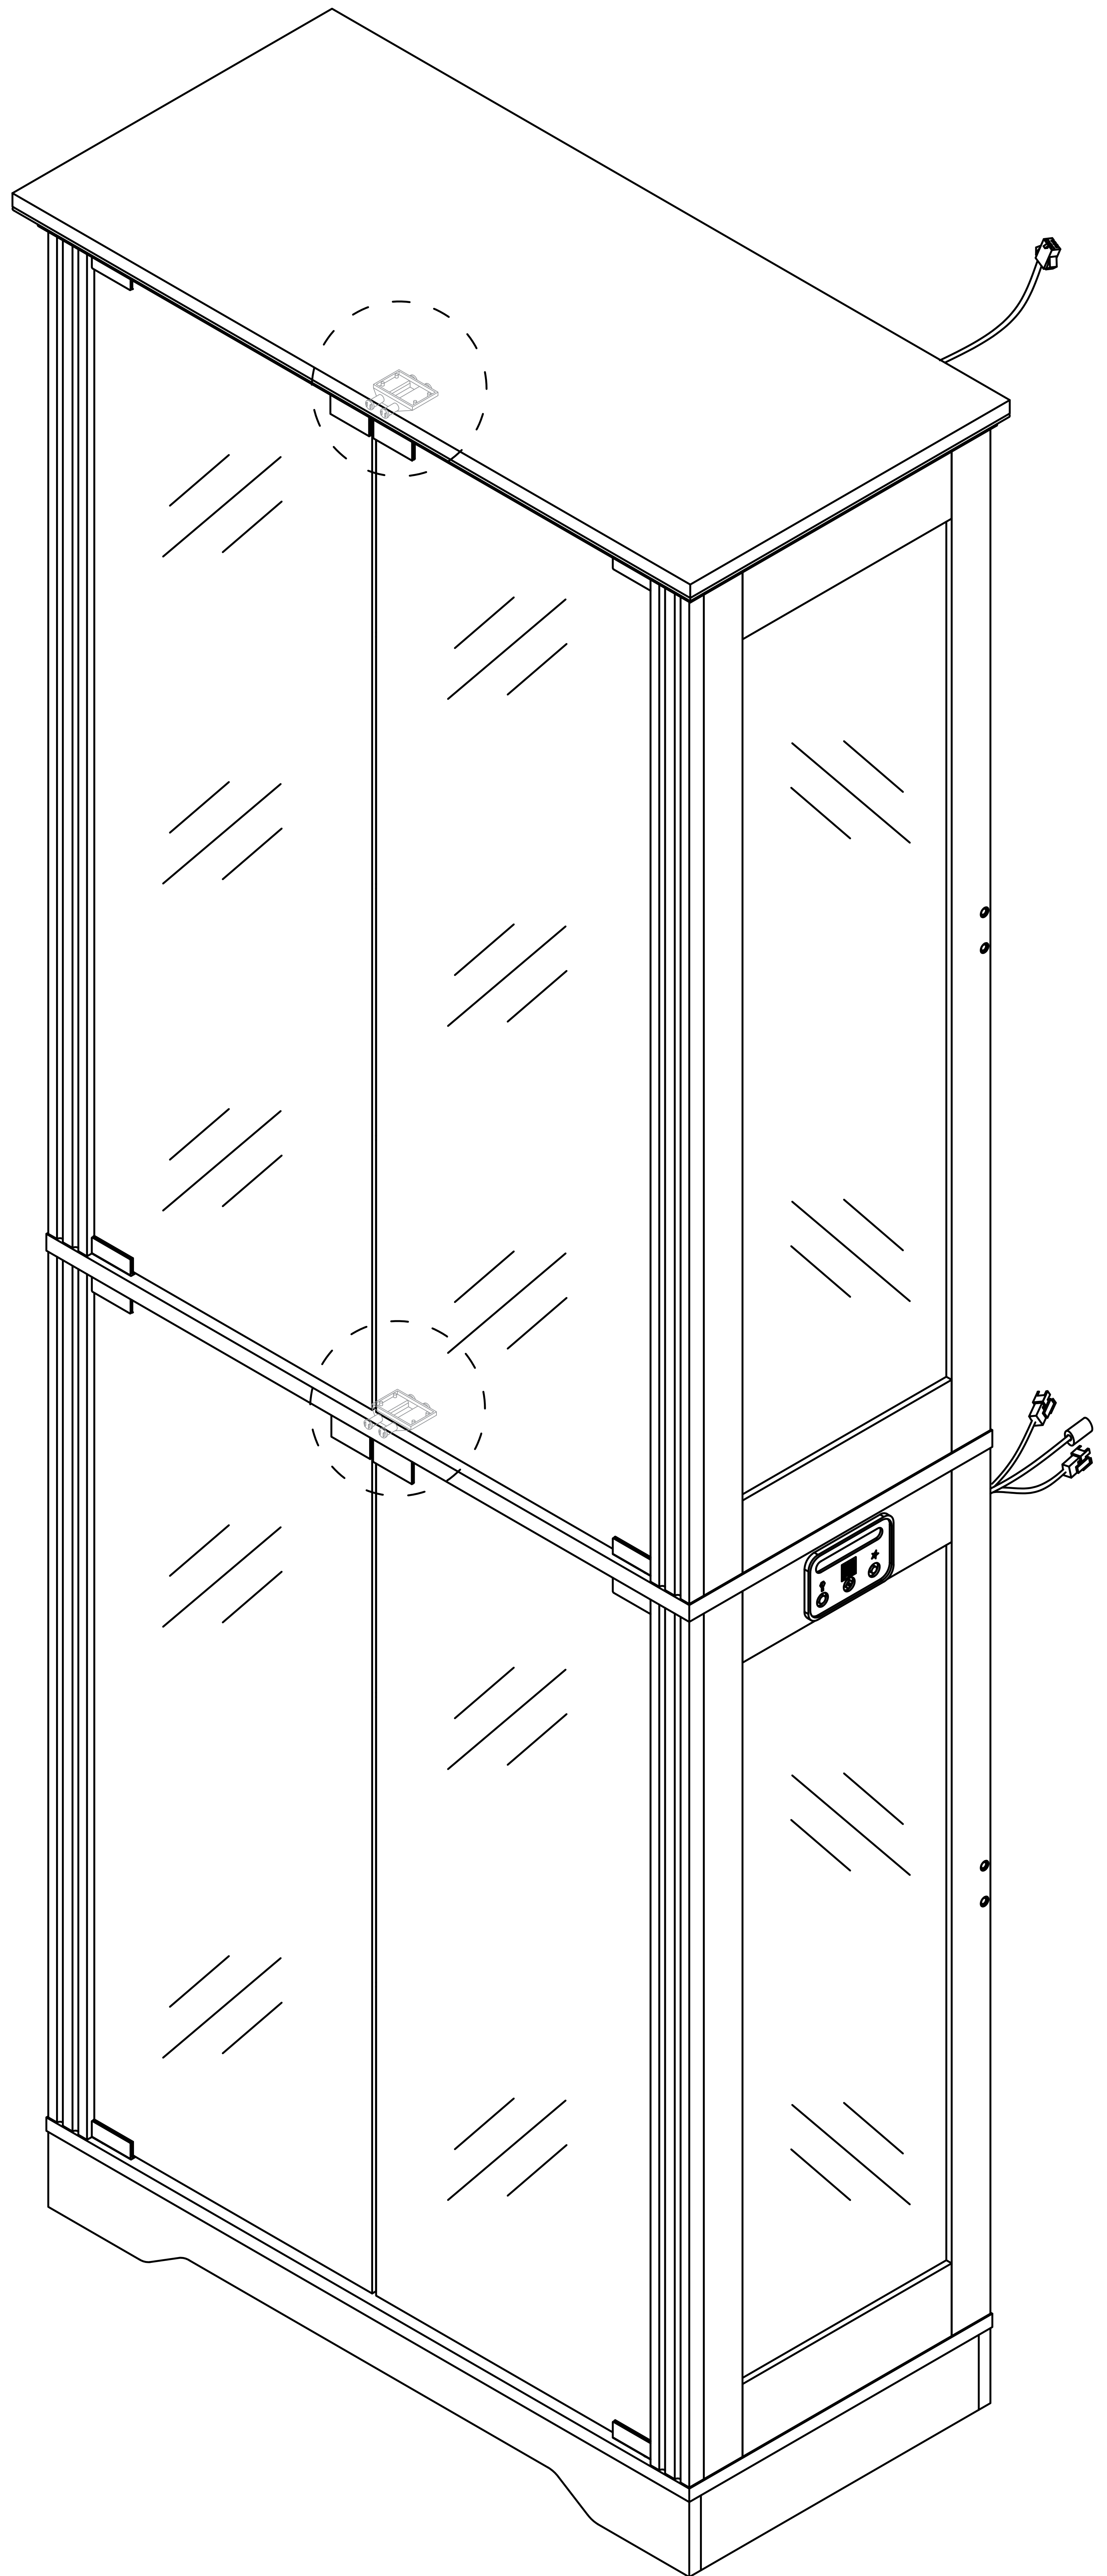
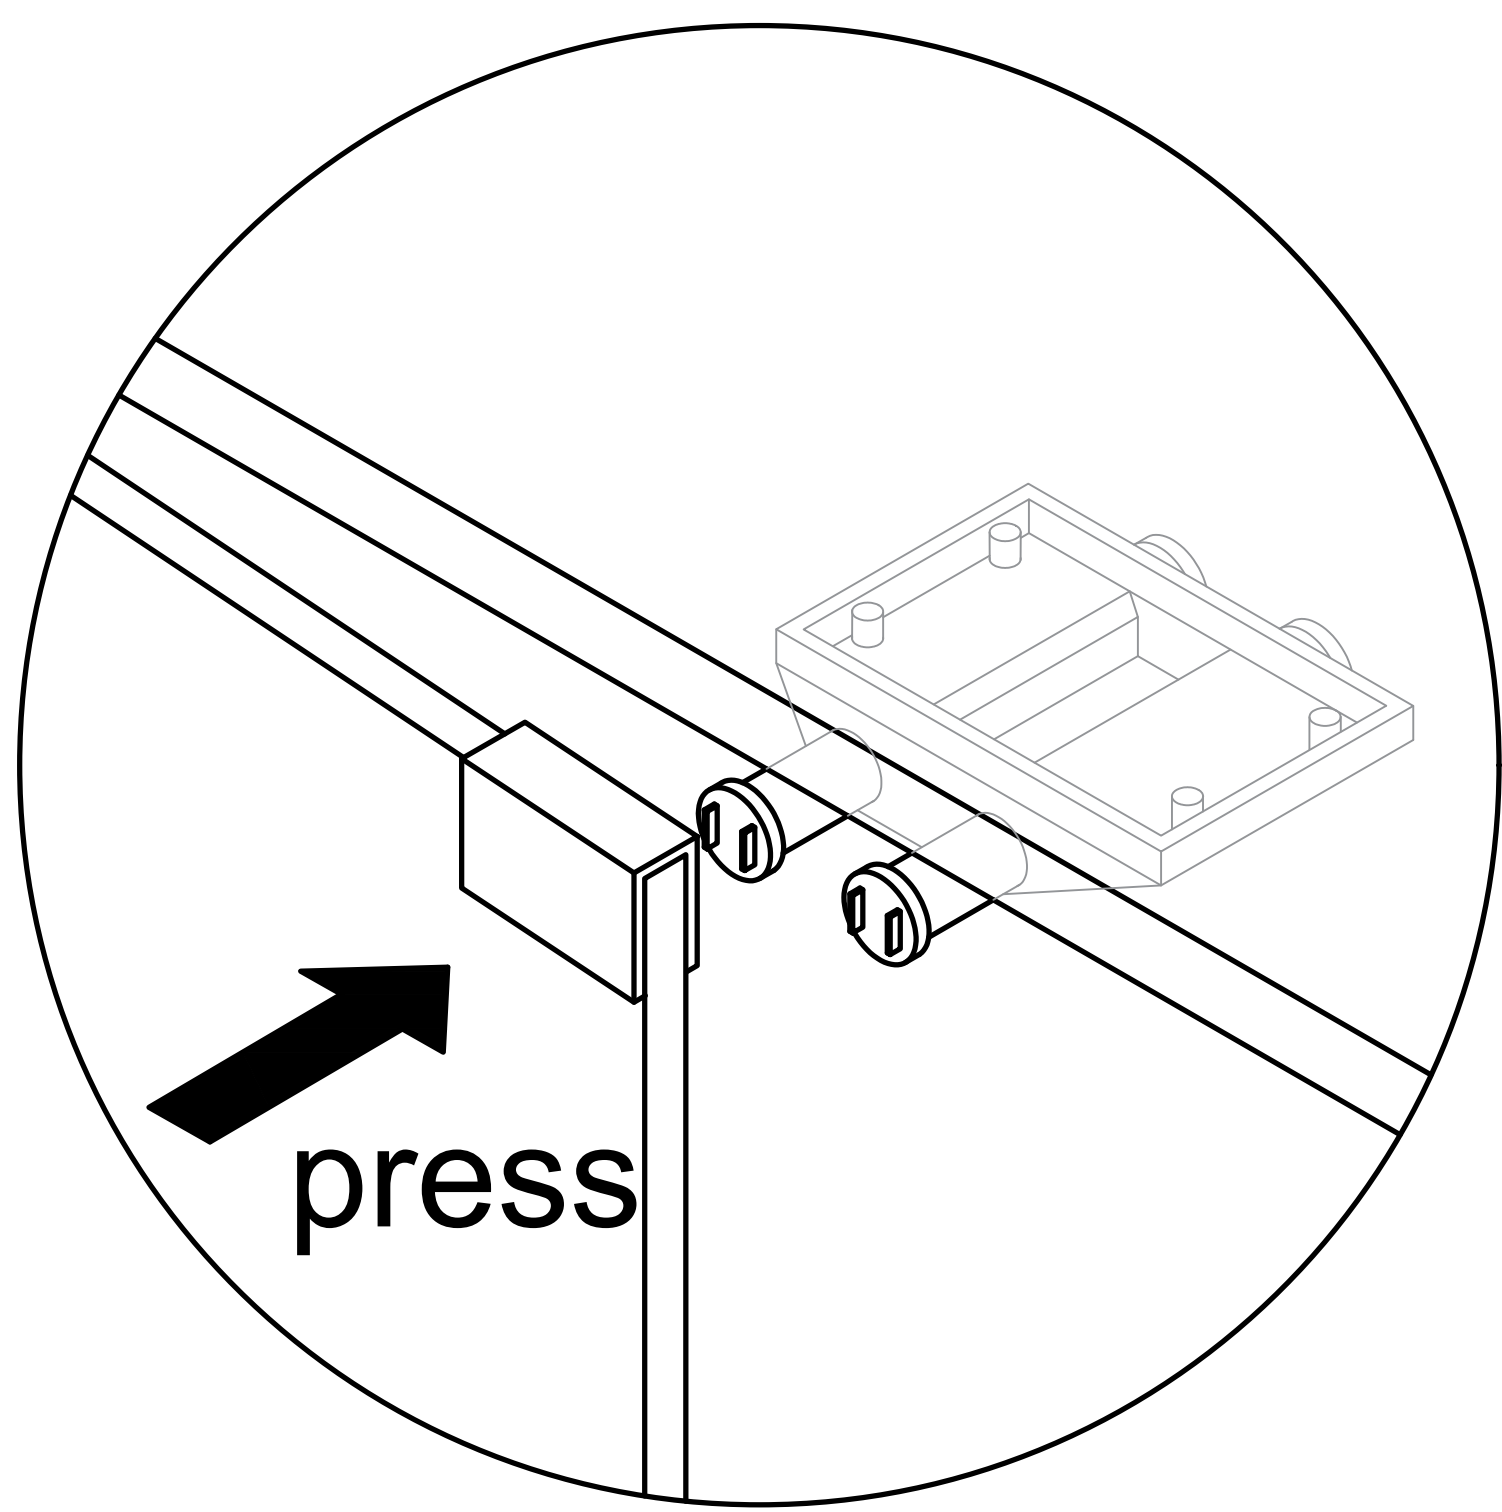


Step 34



7



x24

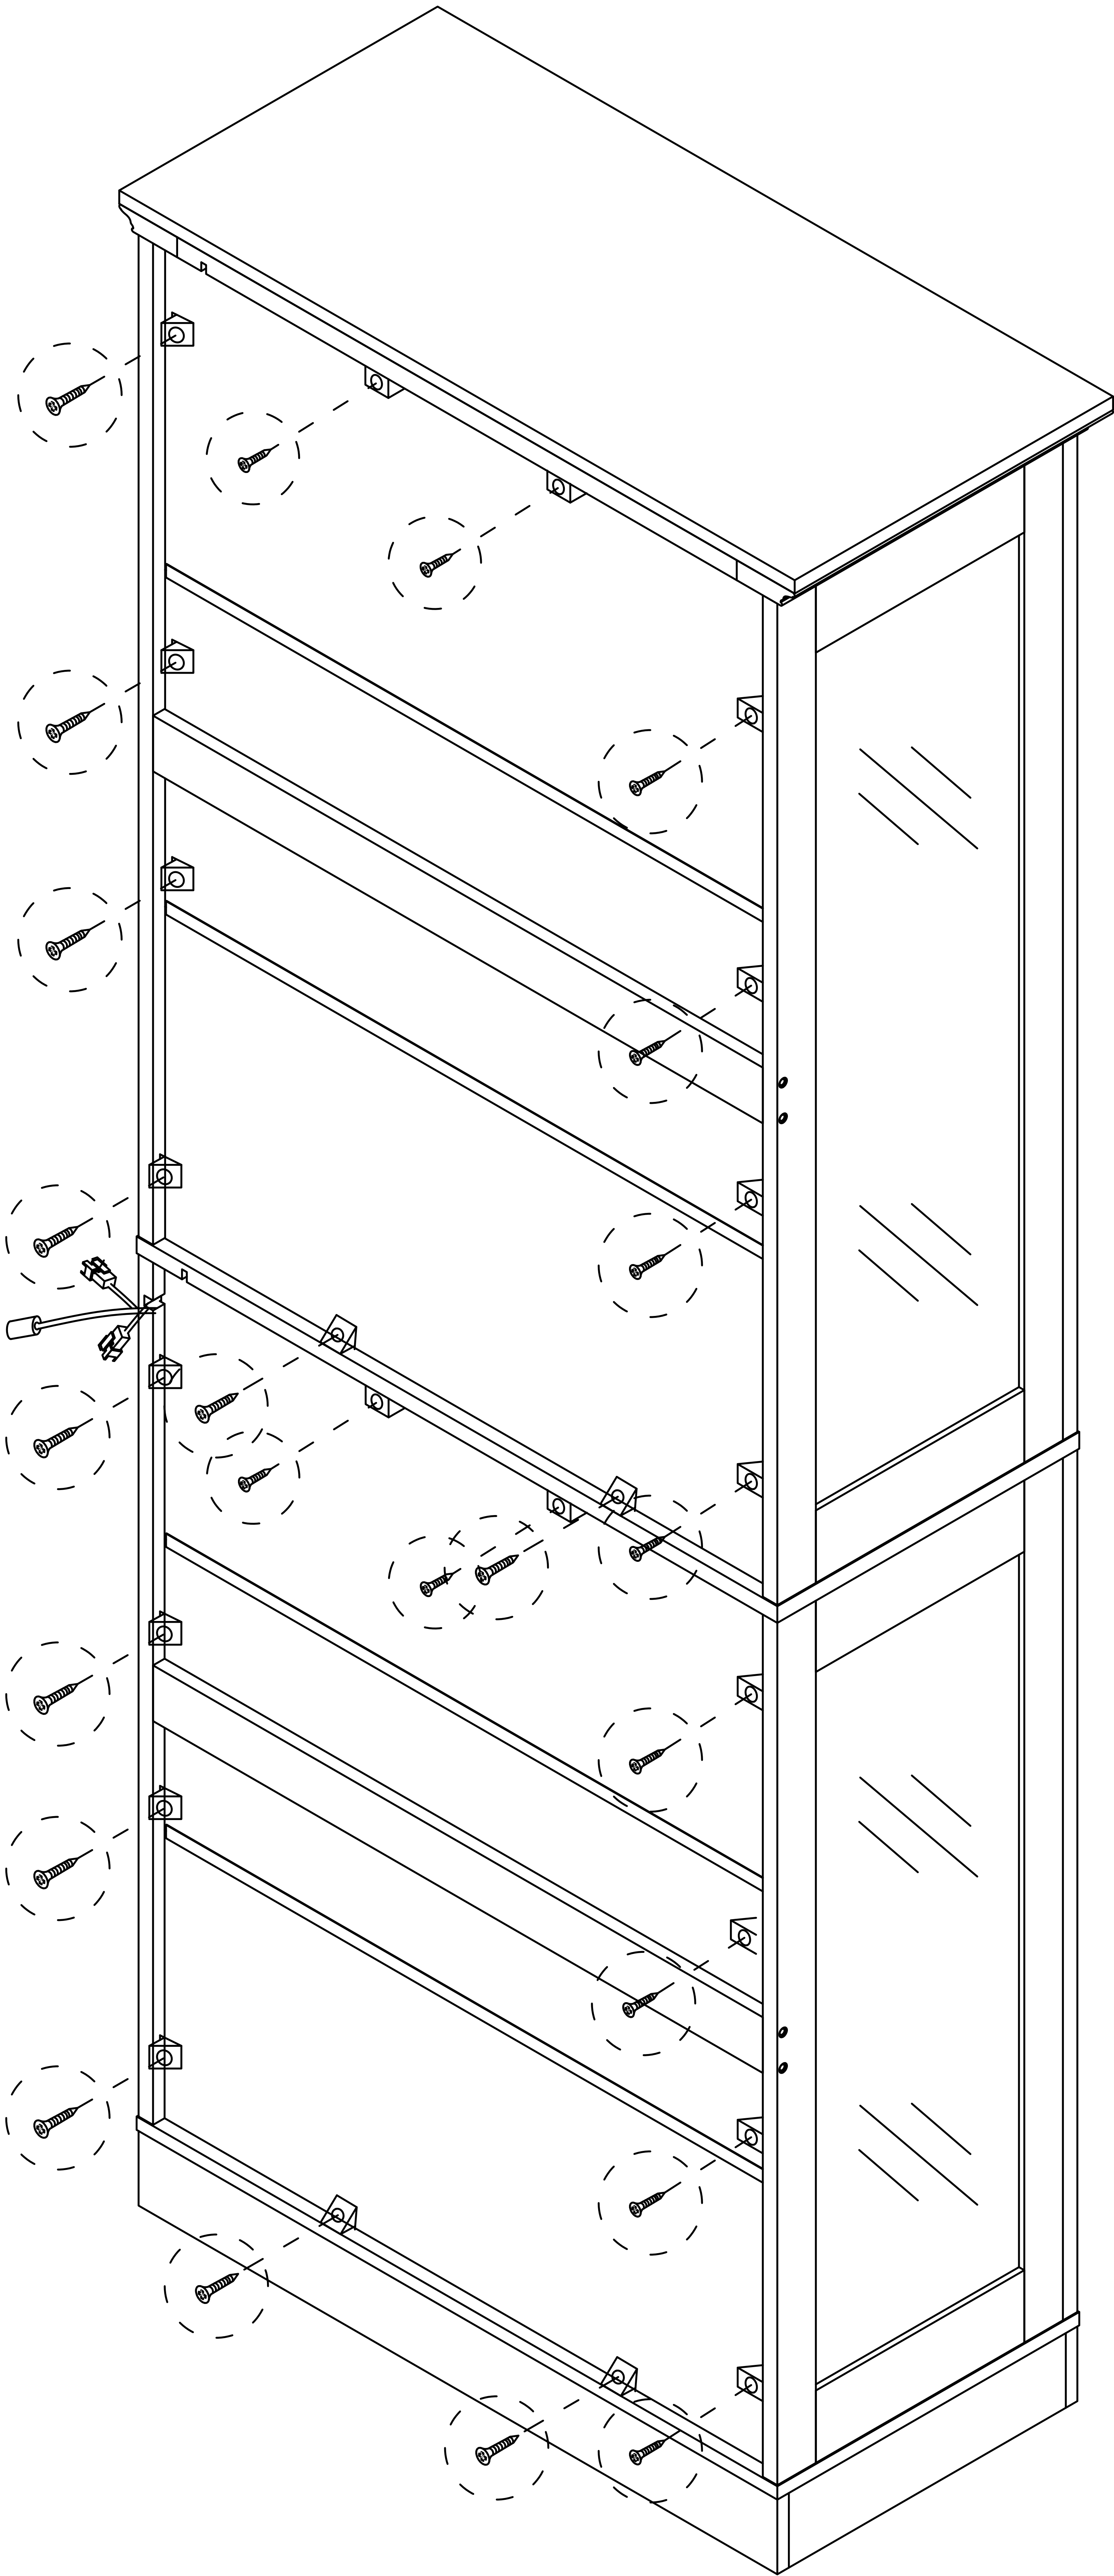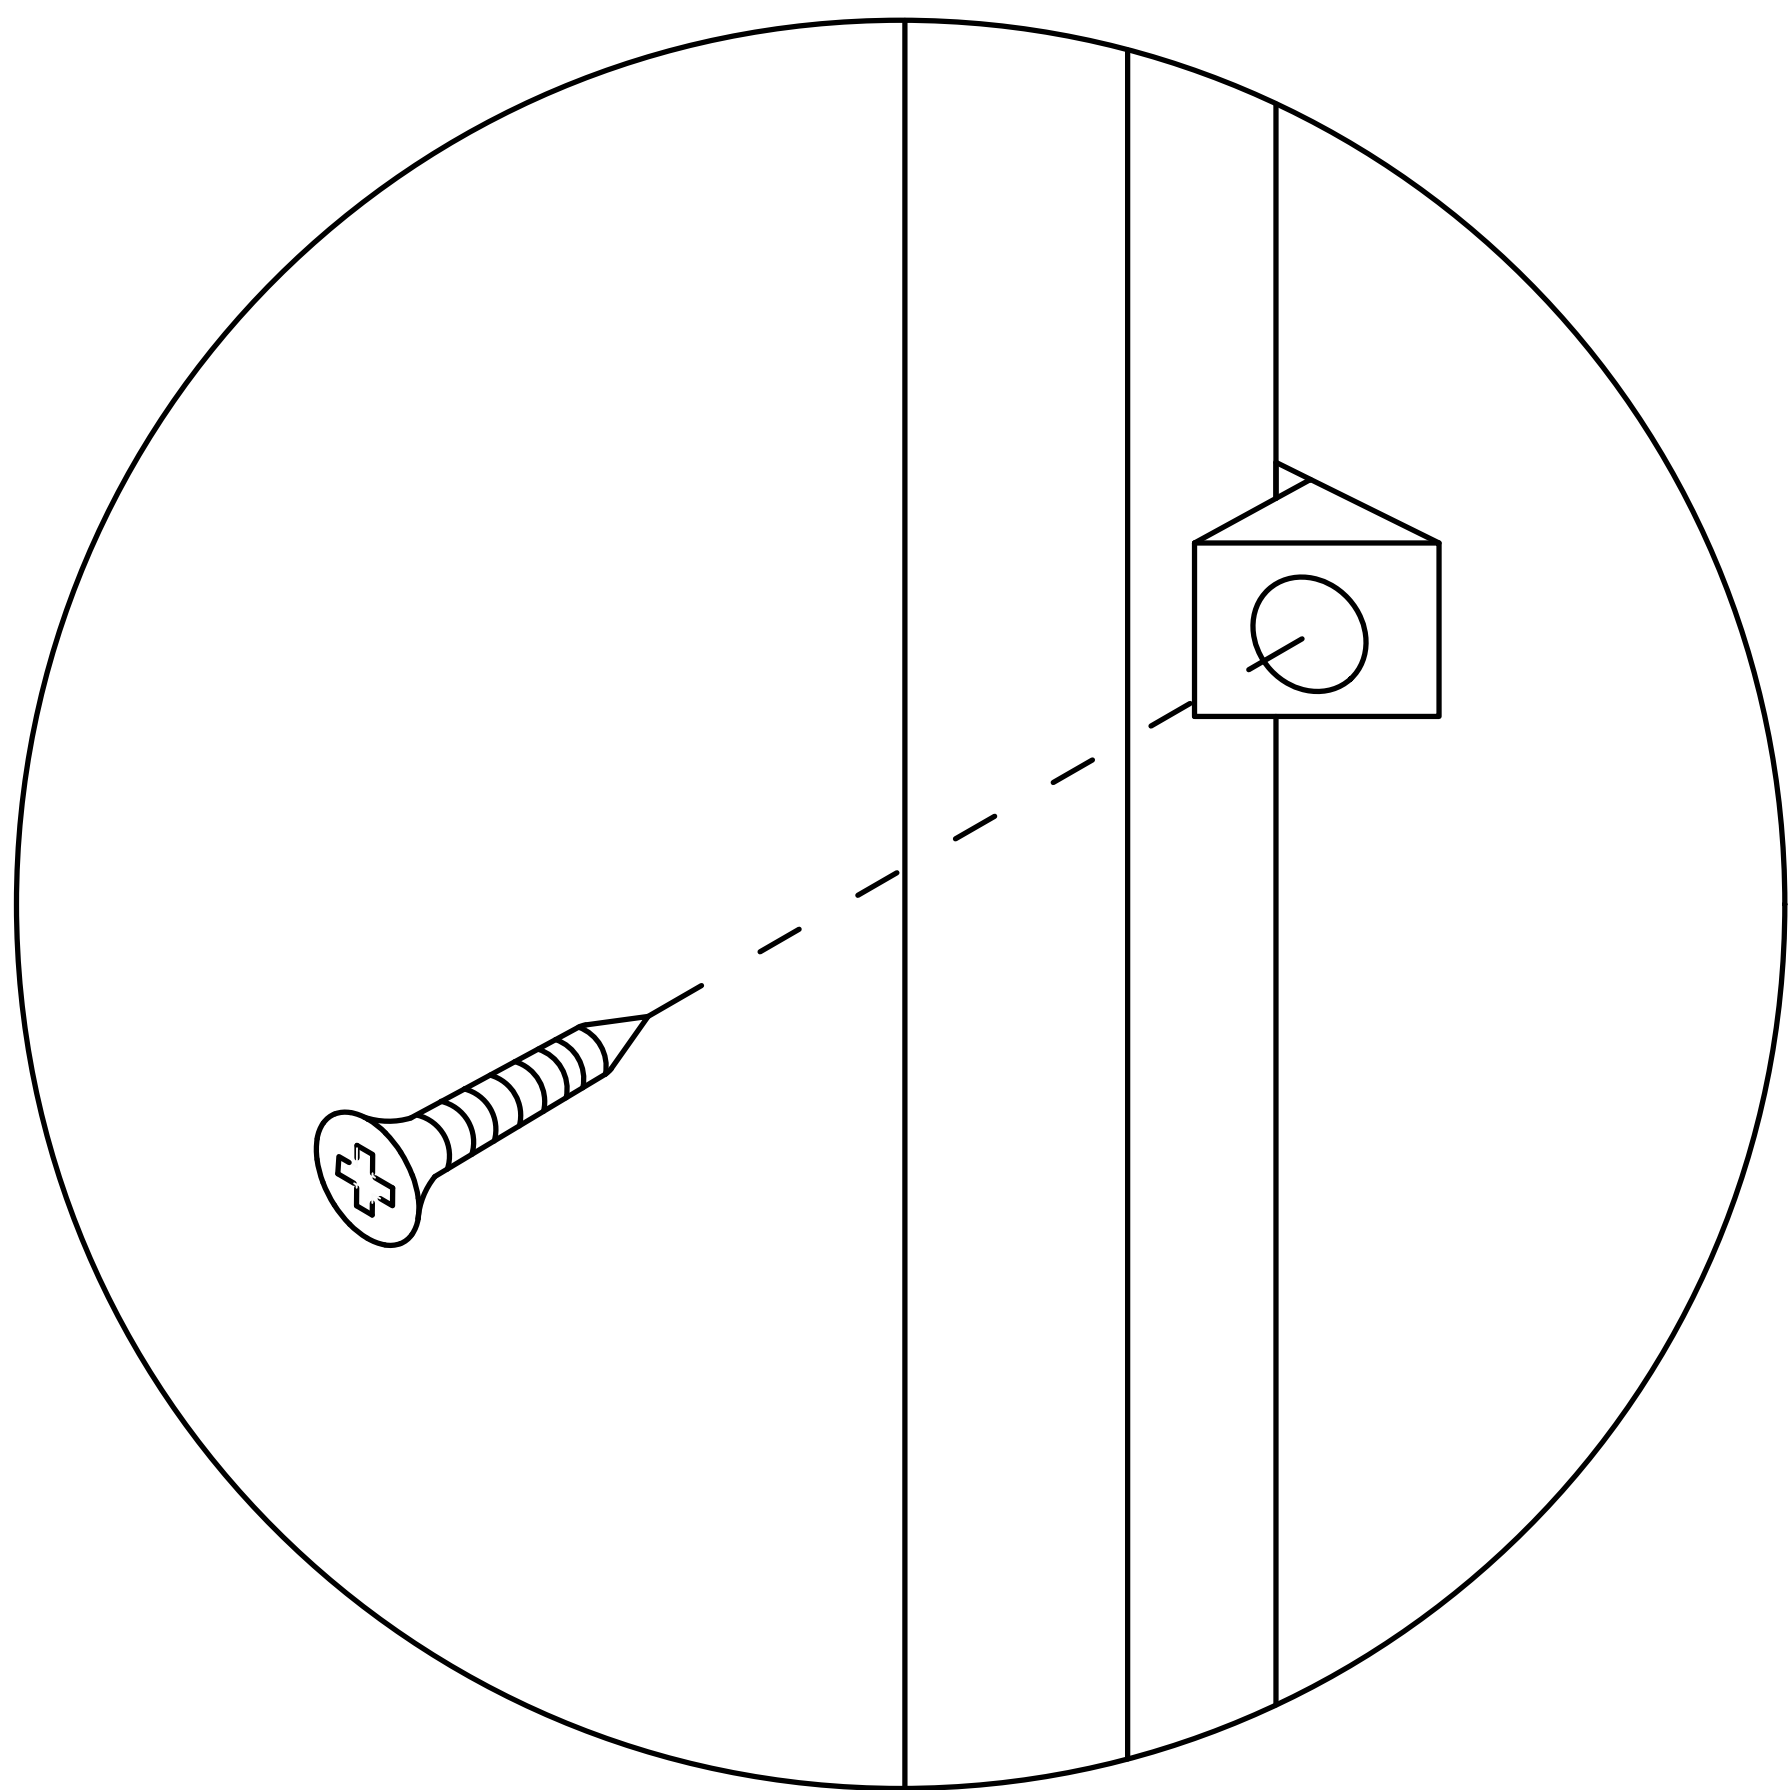


Step 35

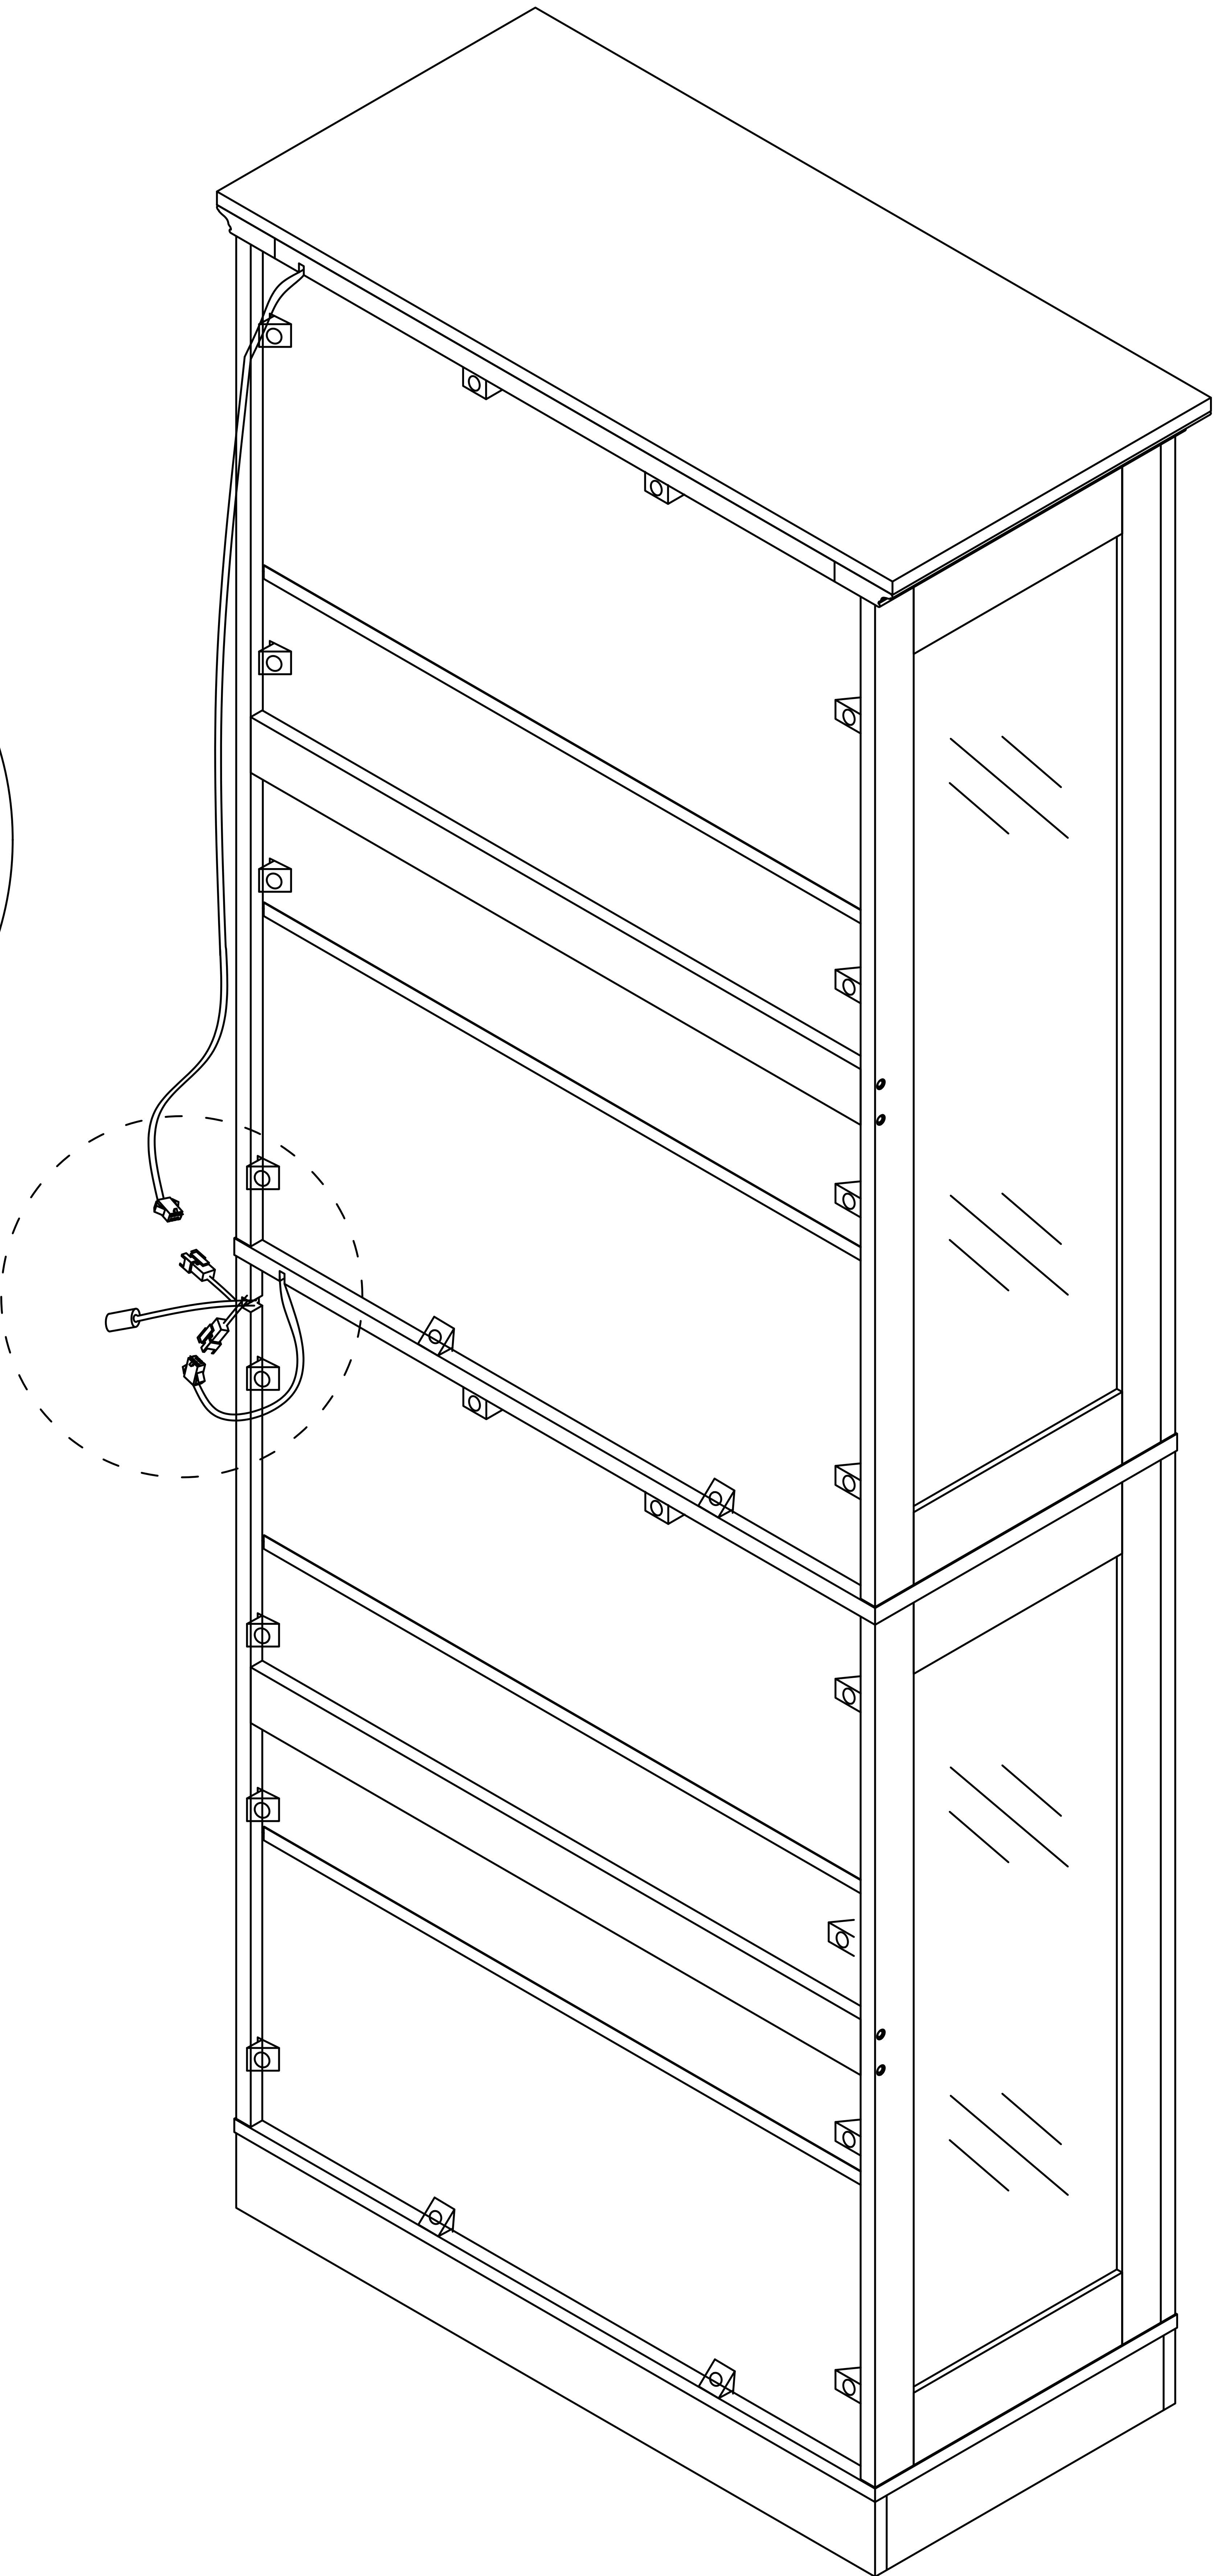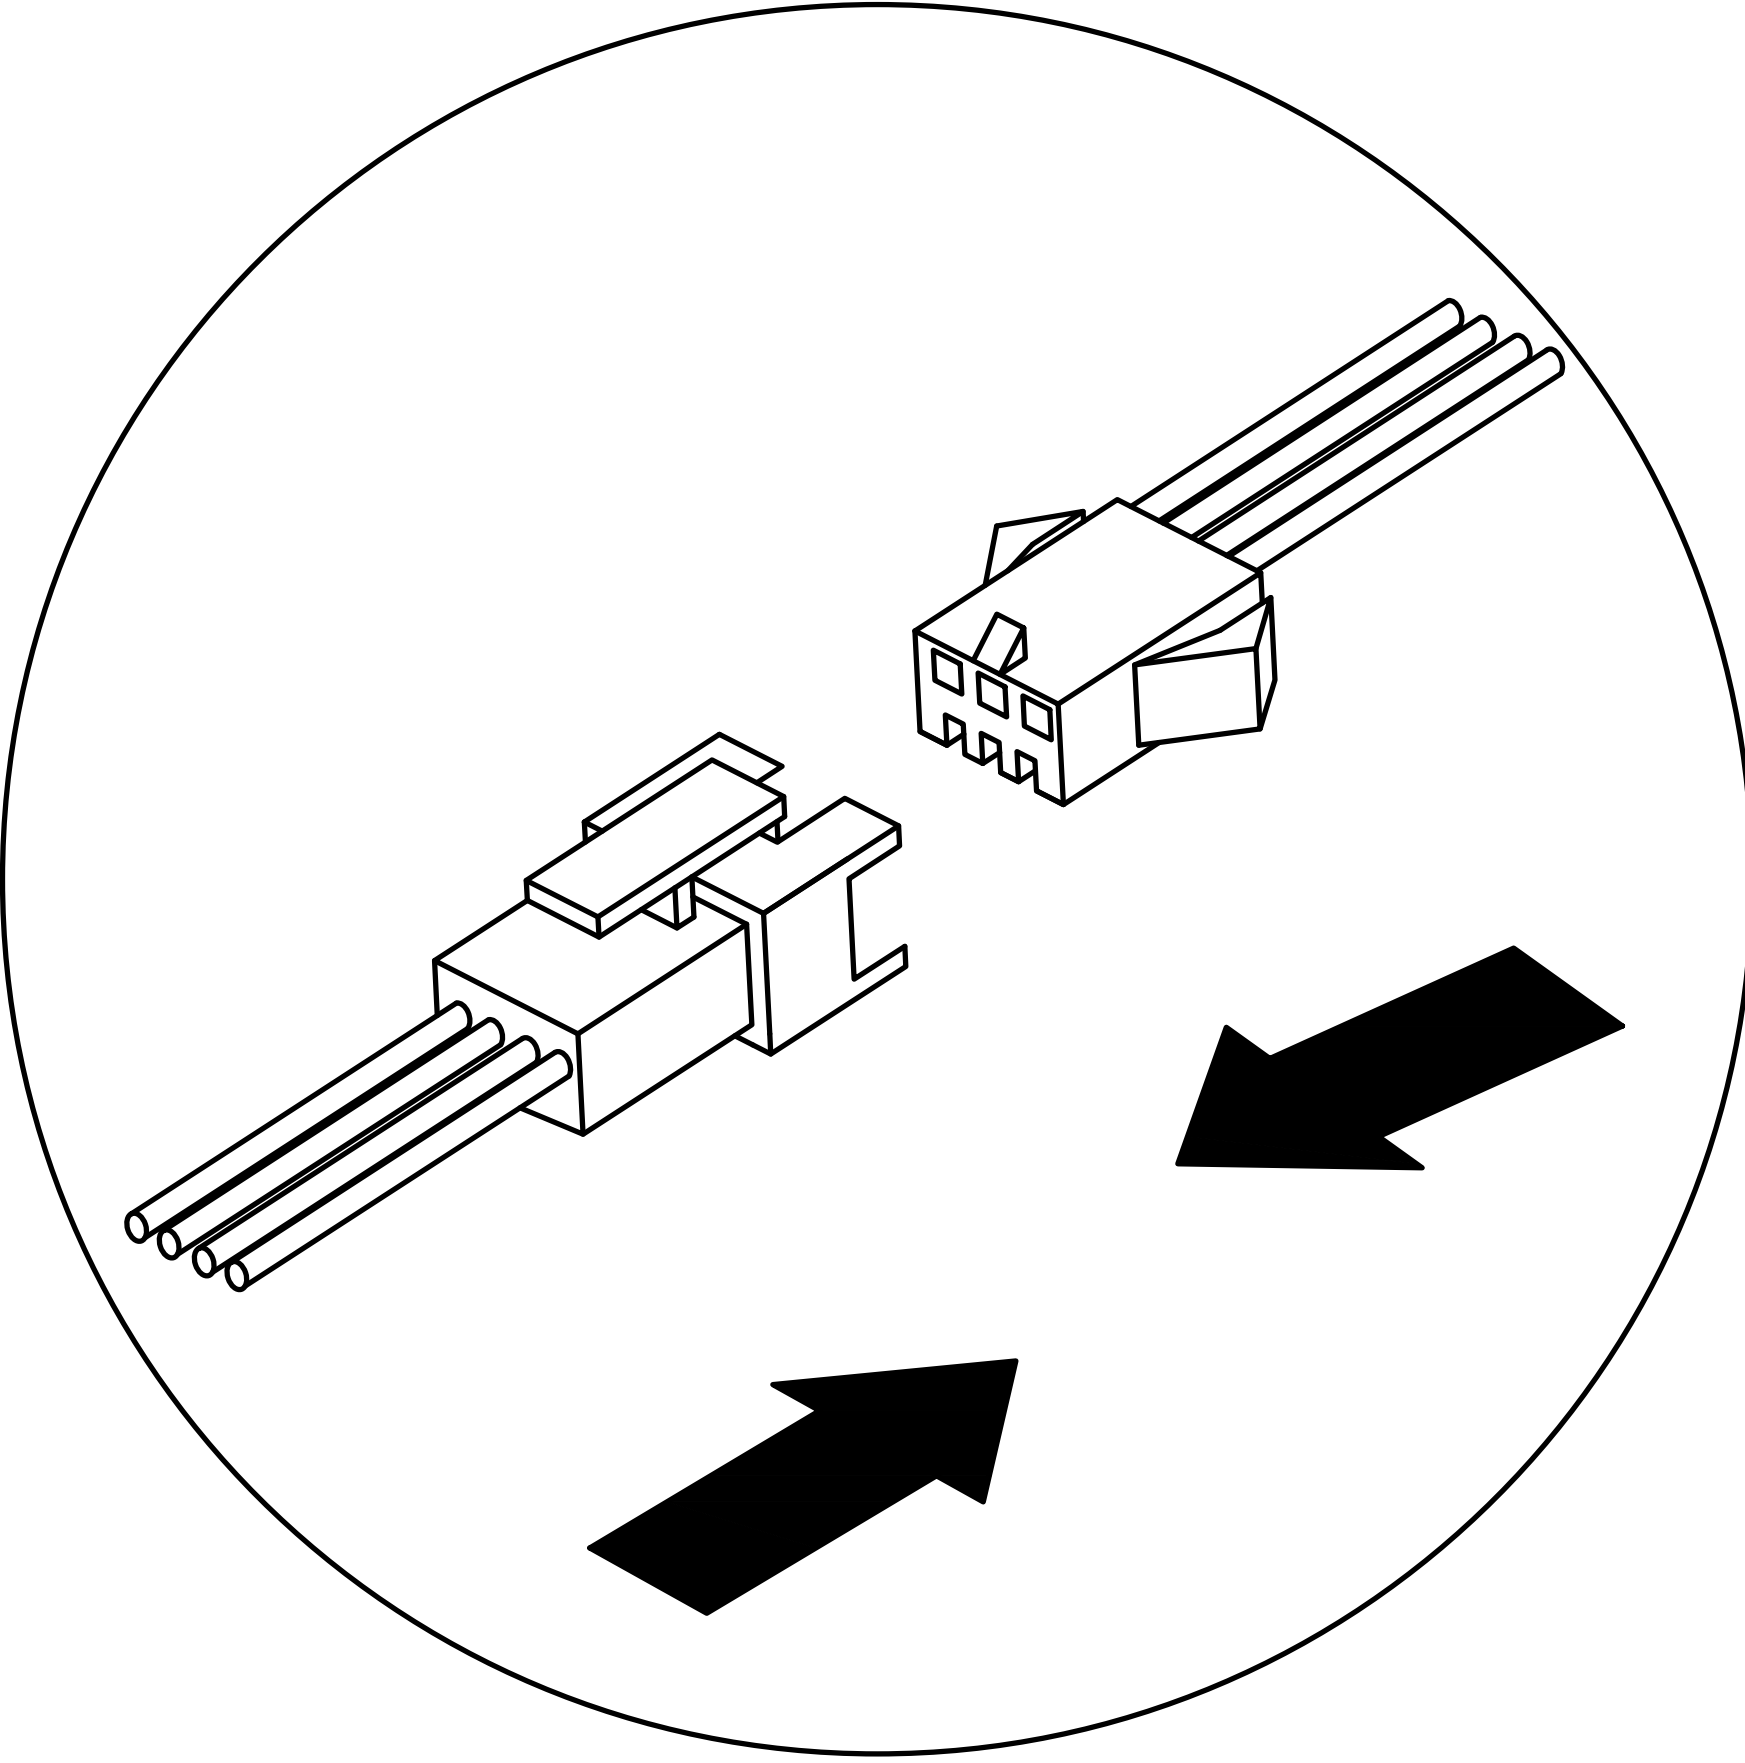


Step 36

8

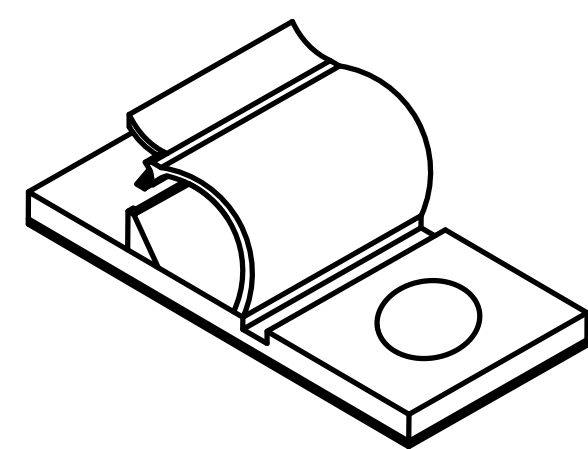


x2

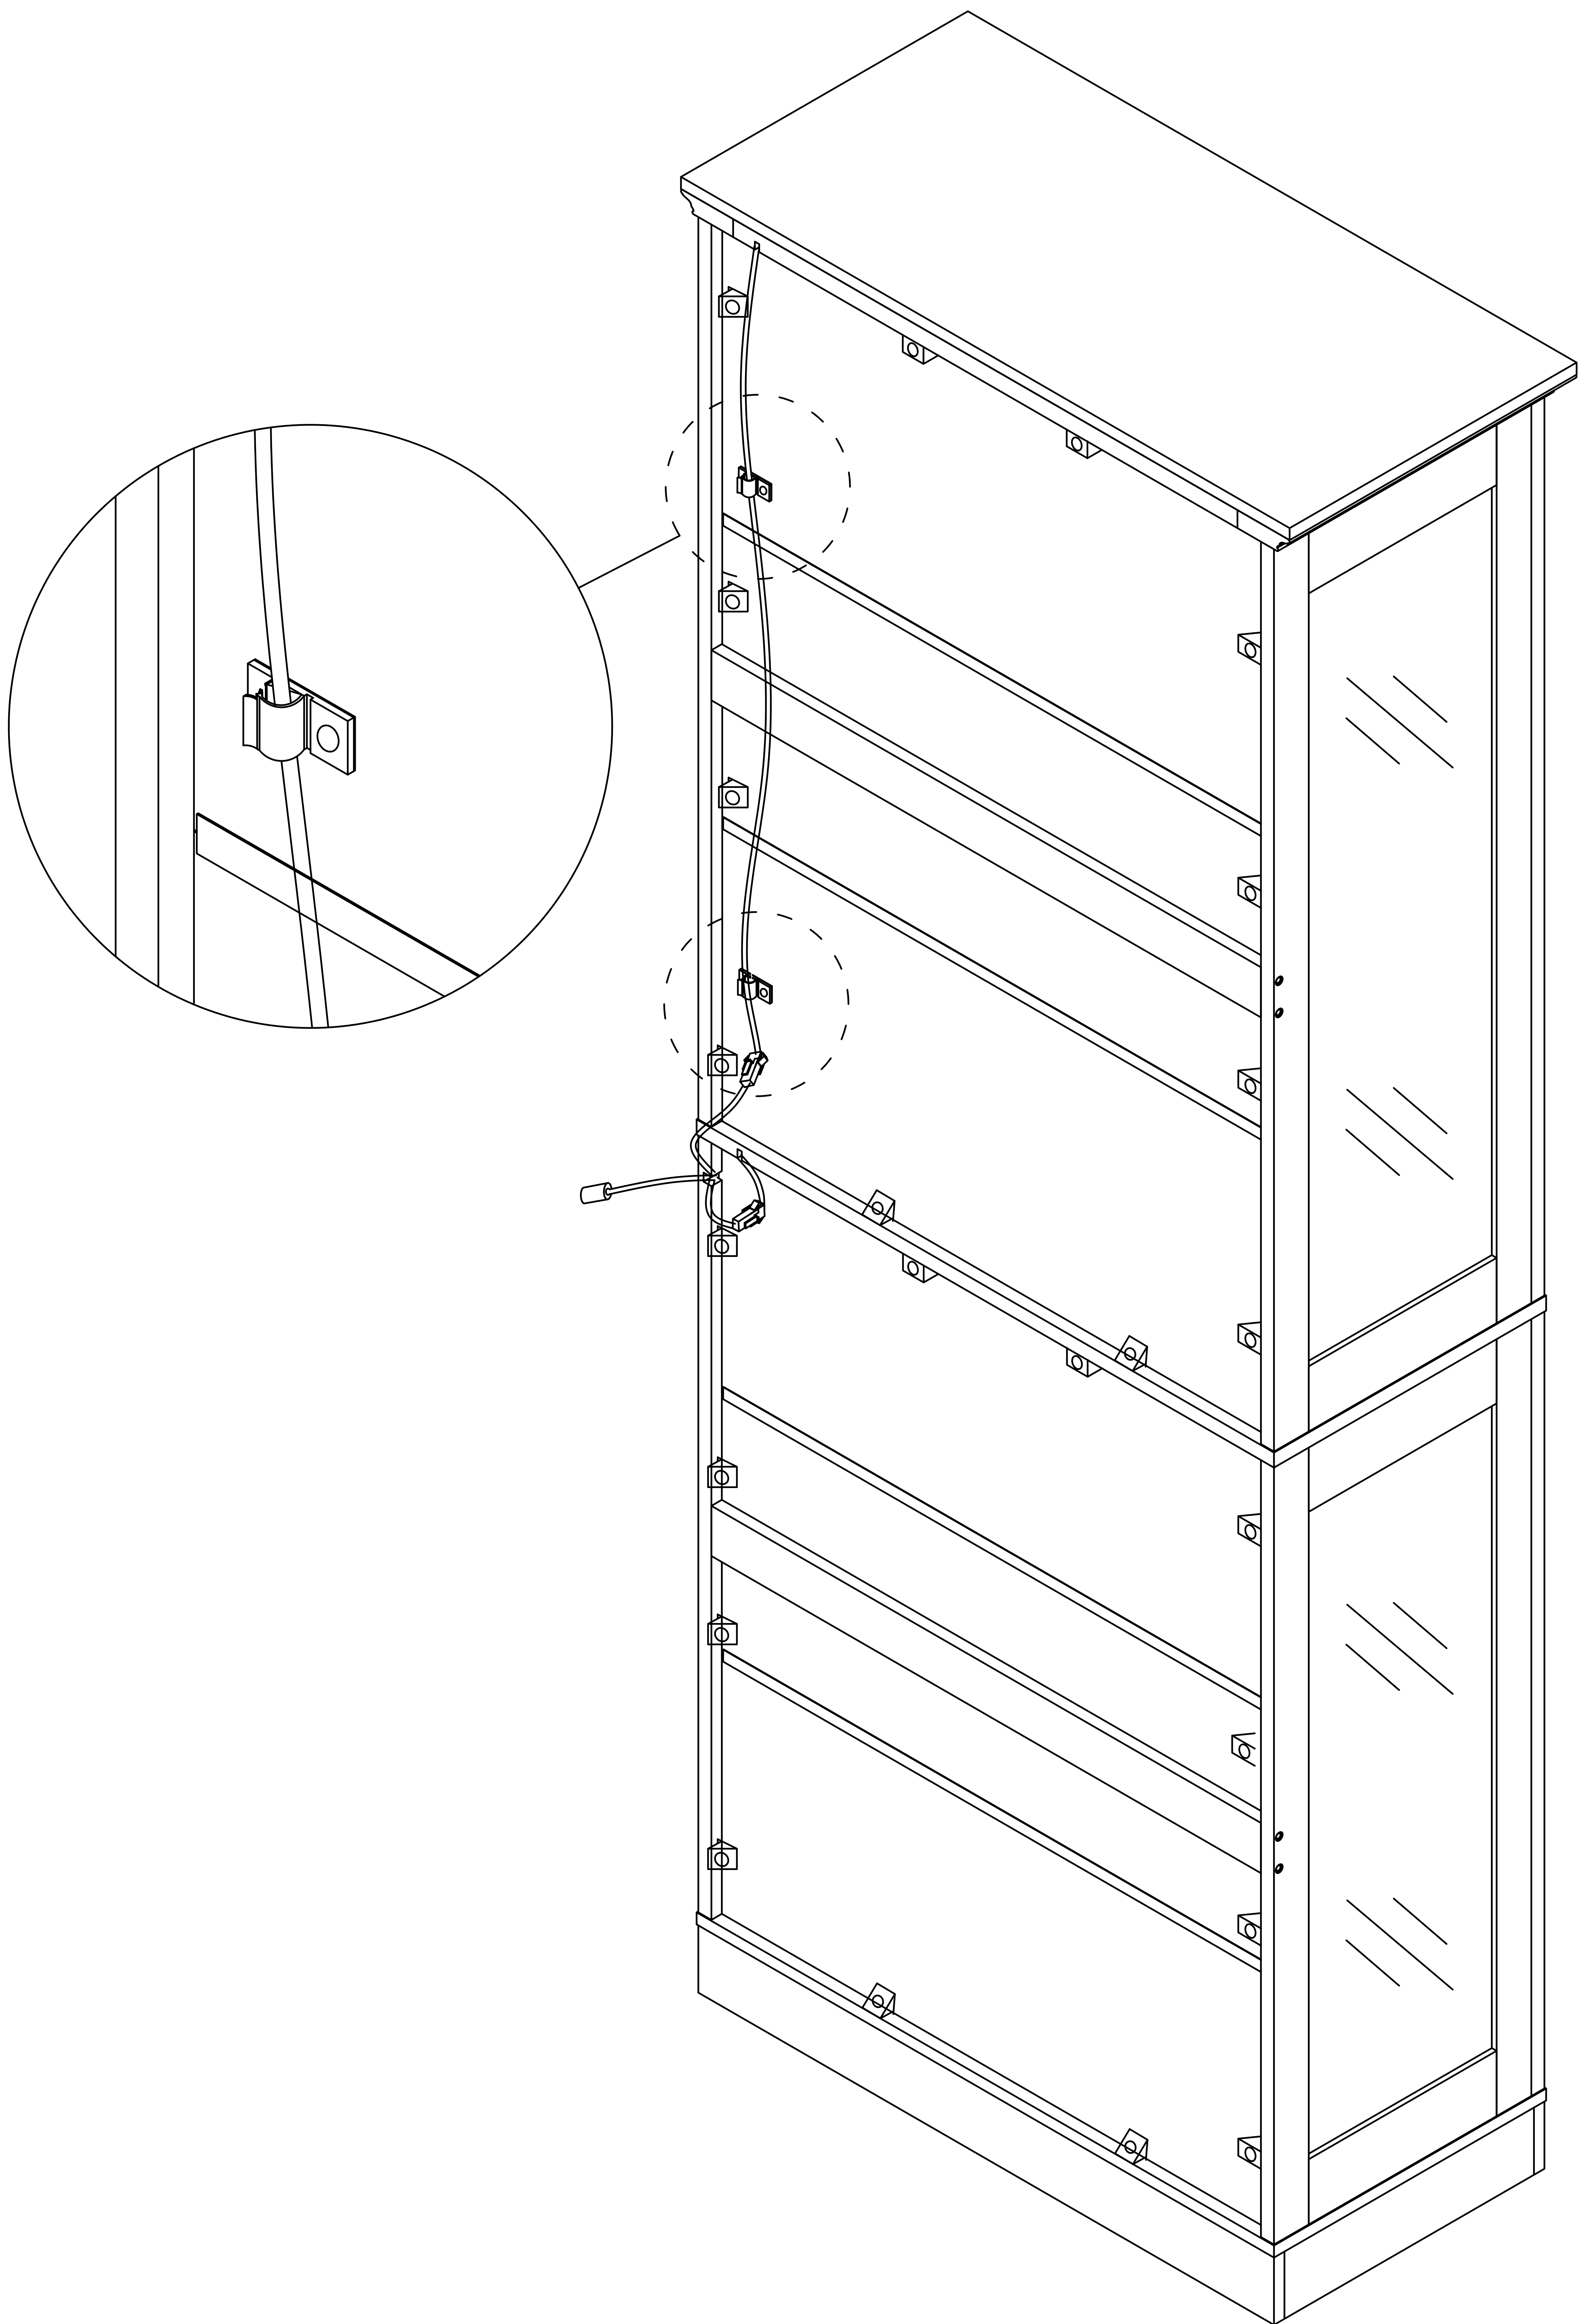


Step 37




9

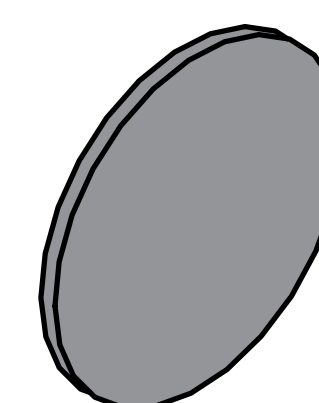


x8

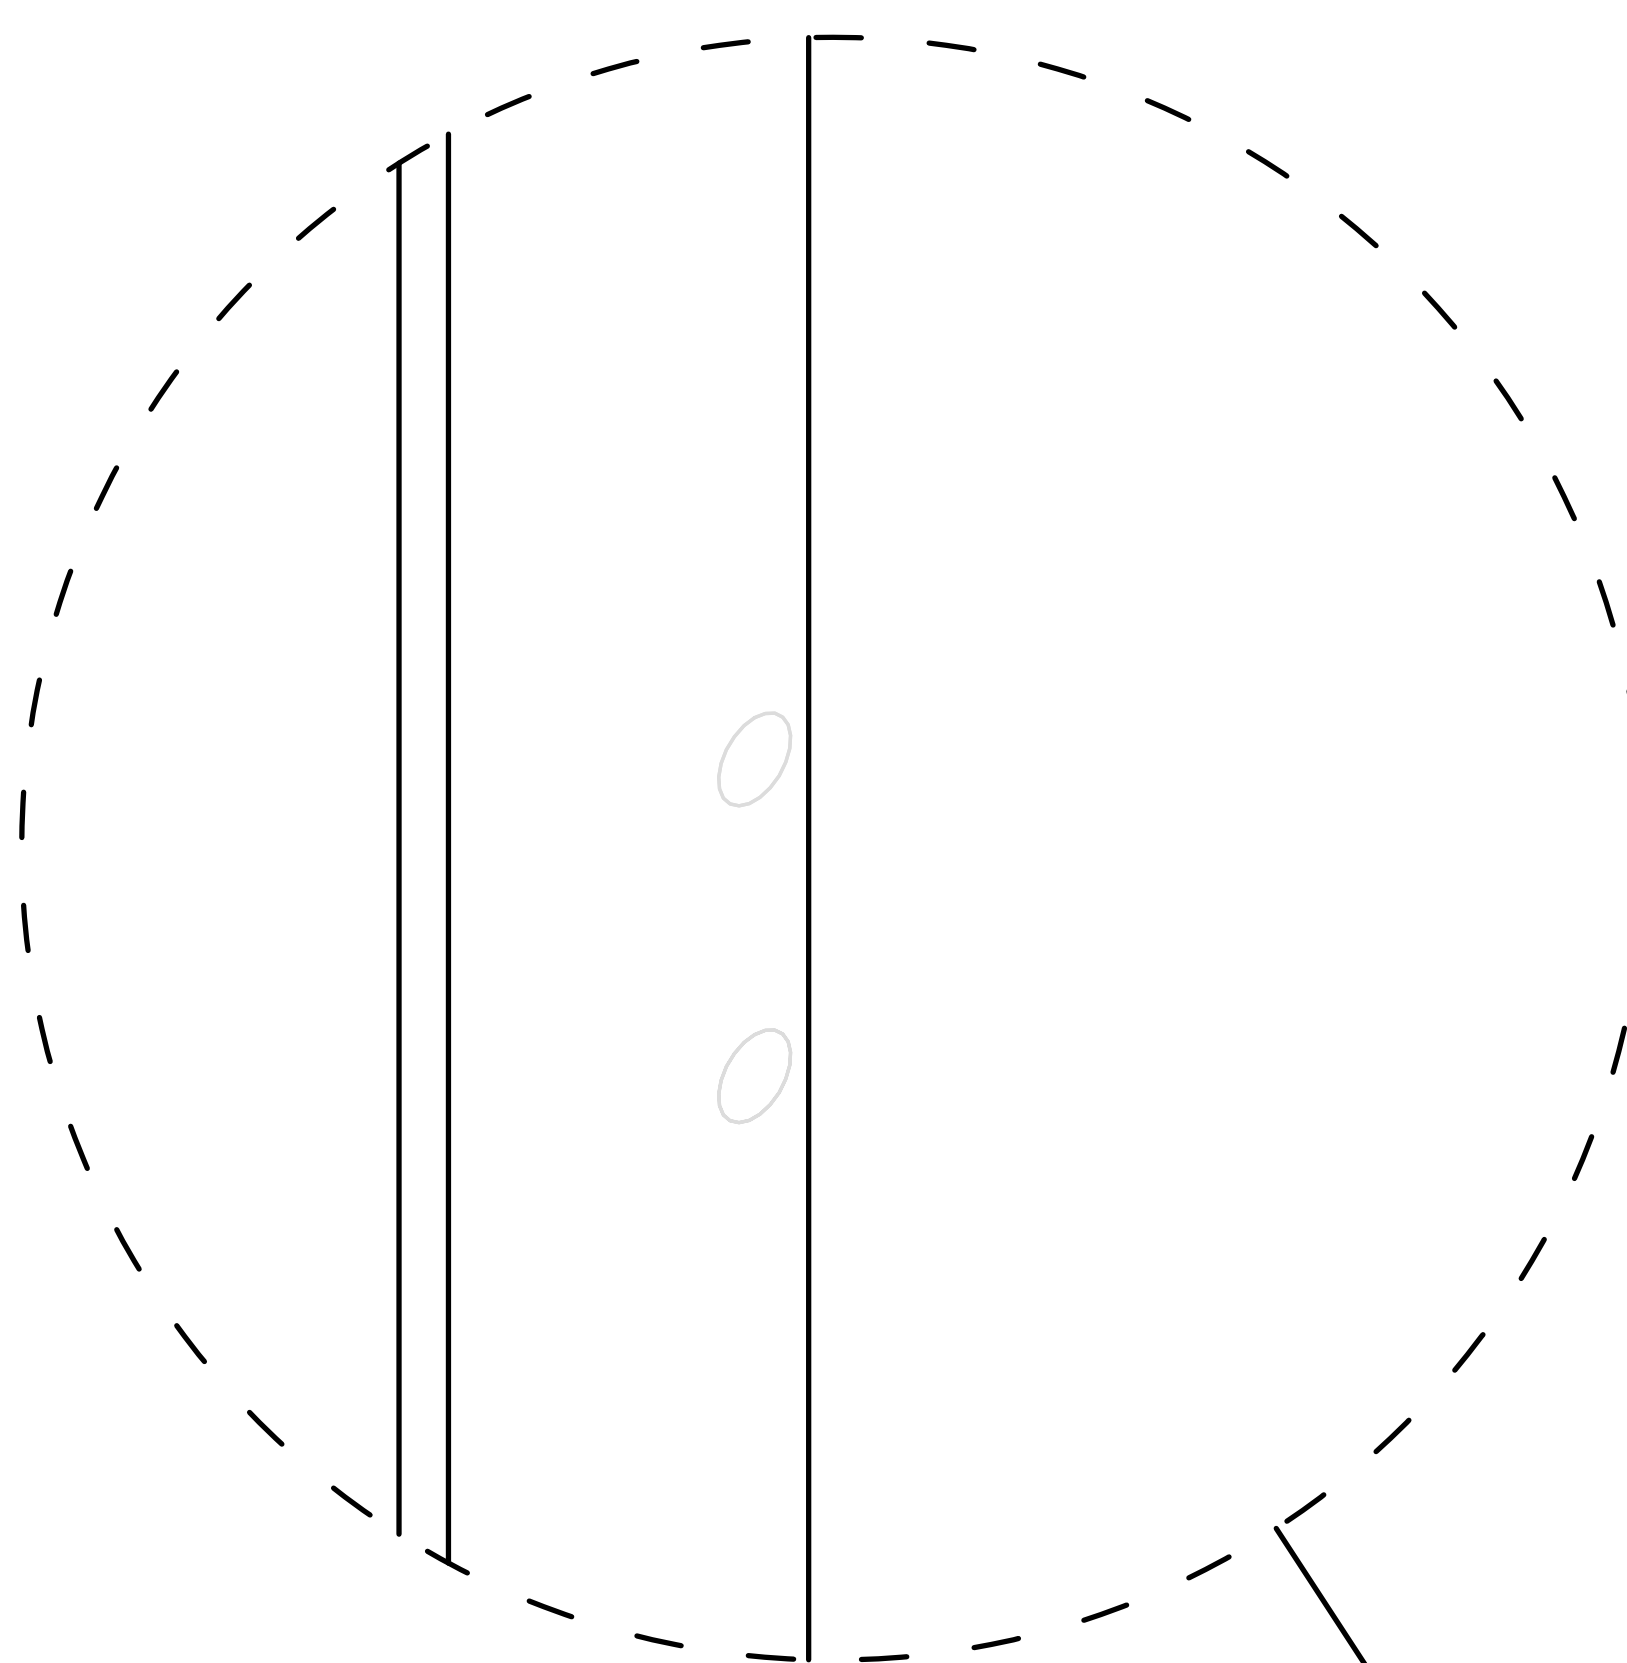



Tear off the protective film
before installation

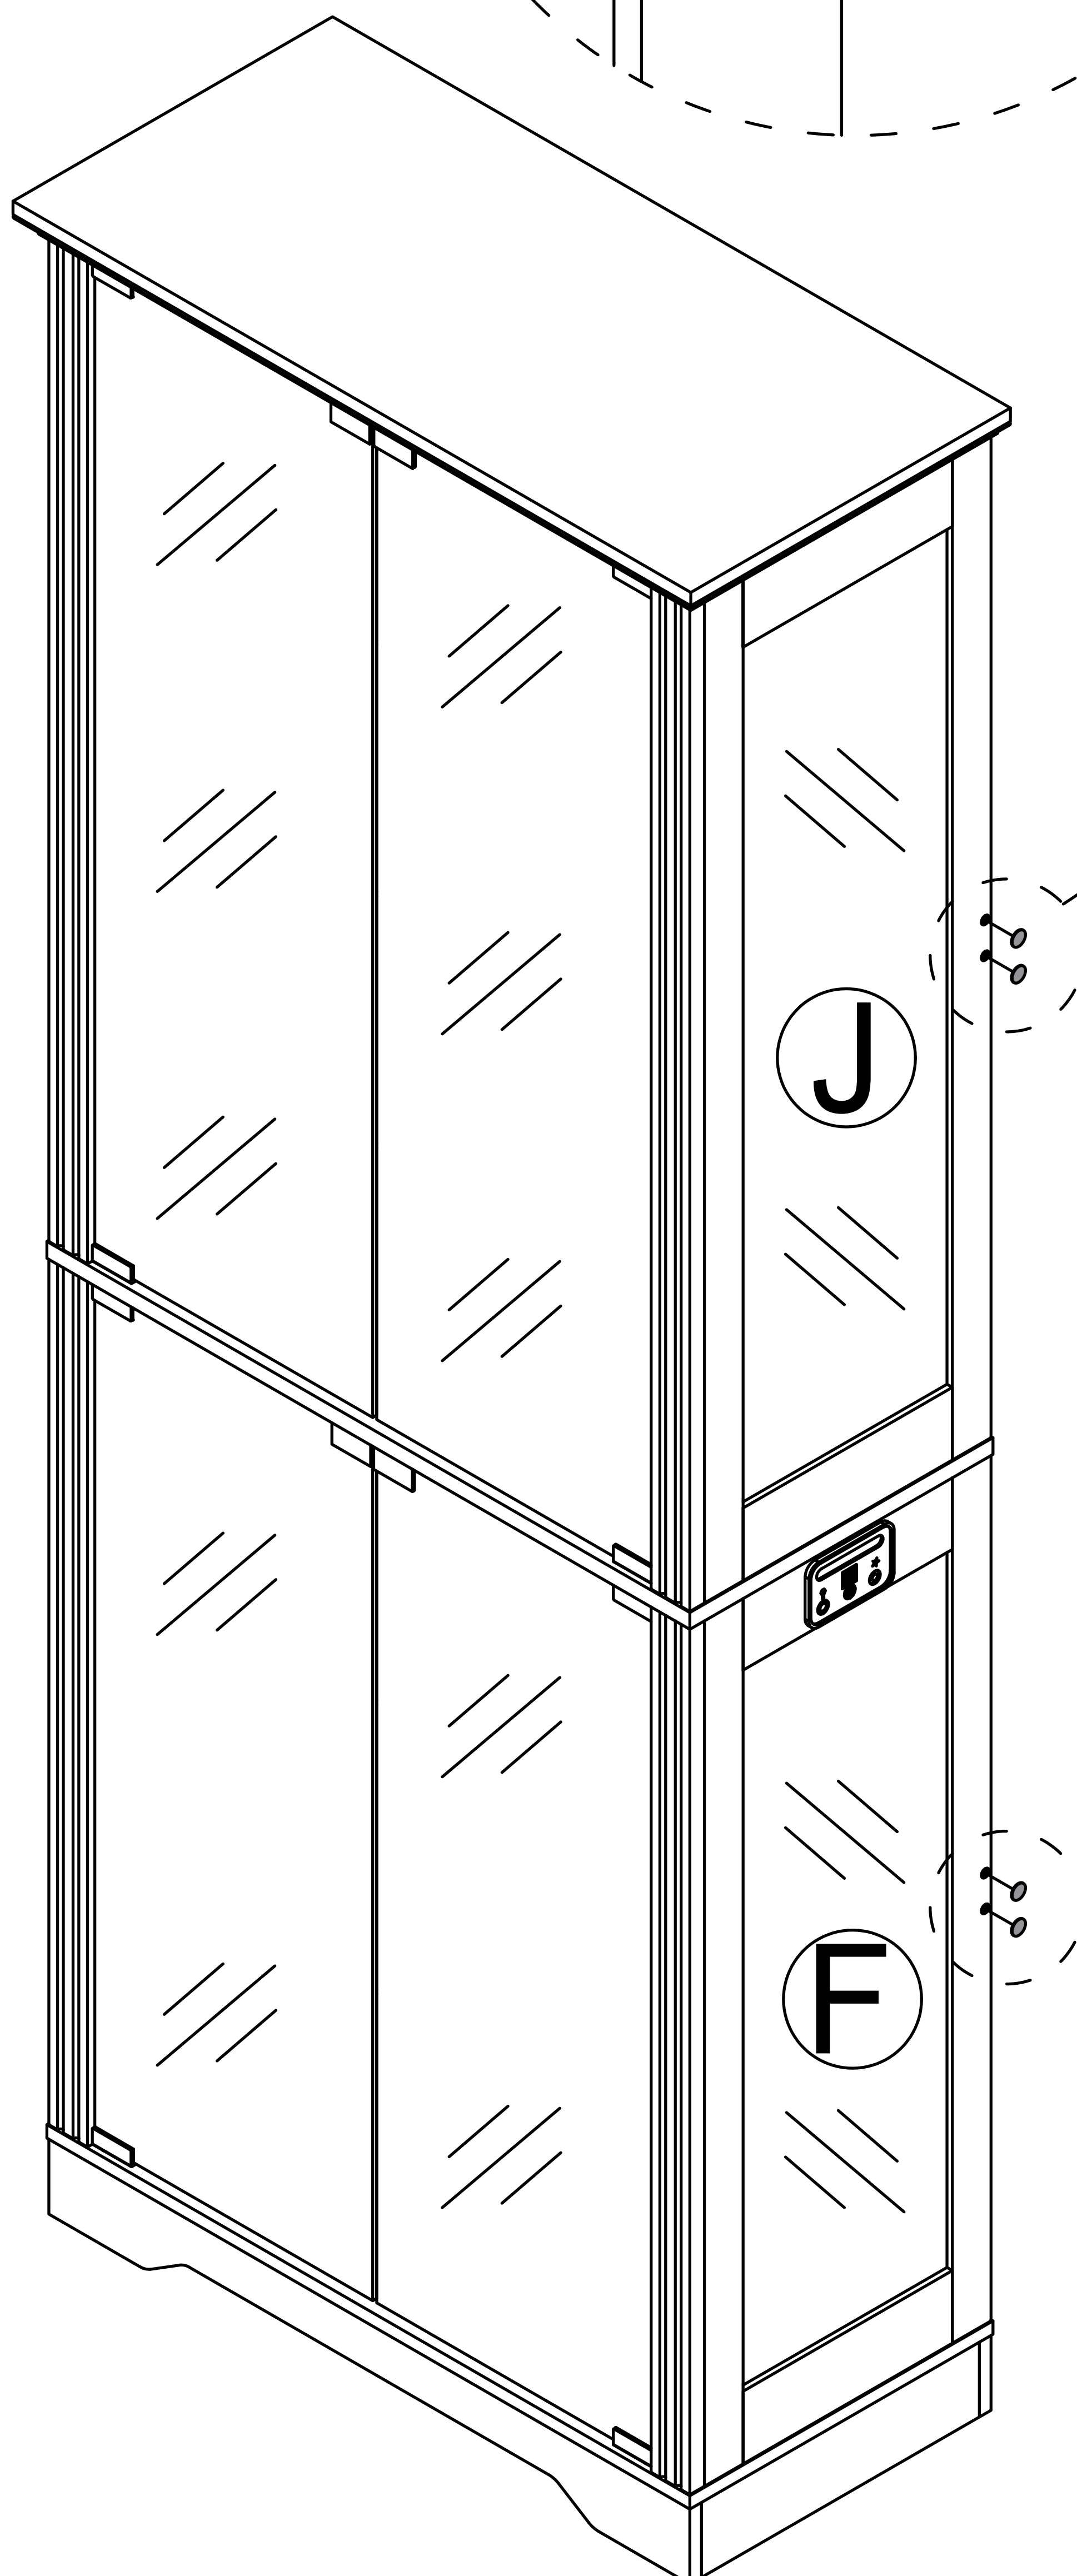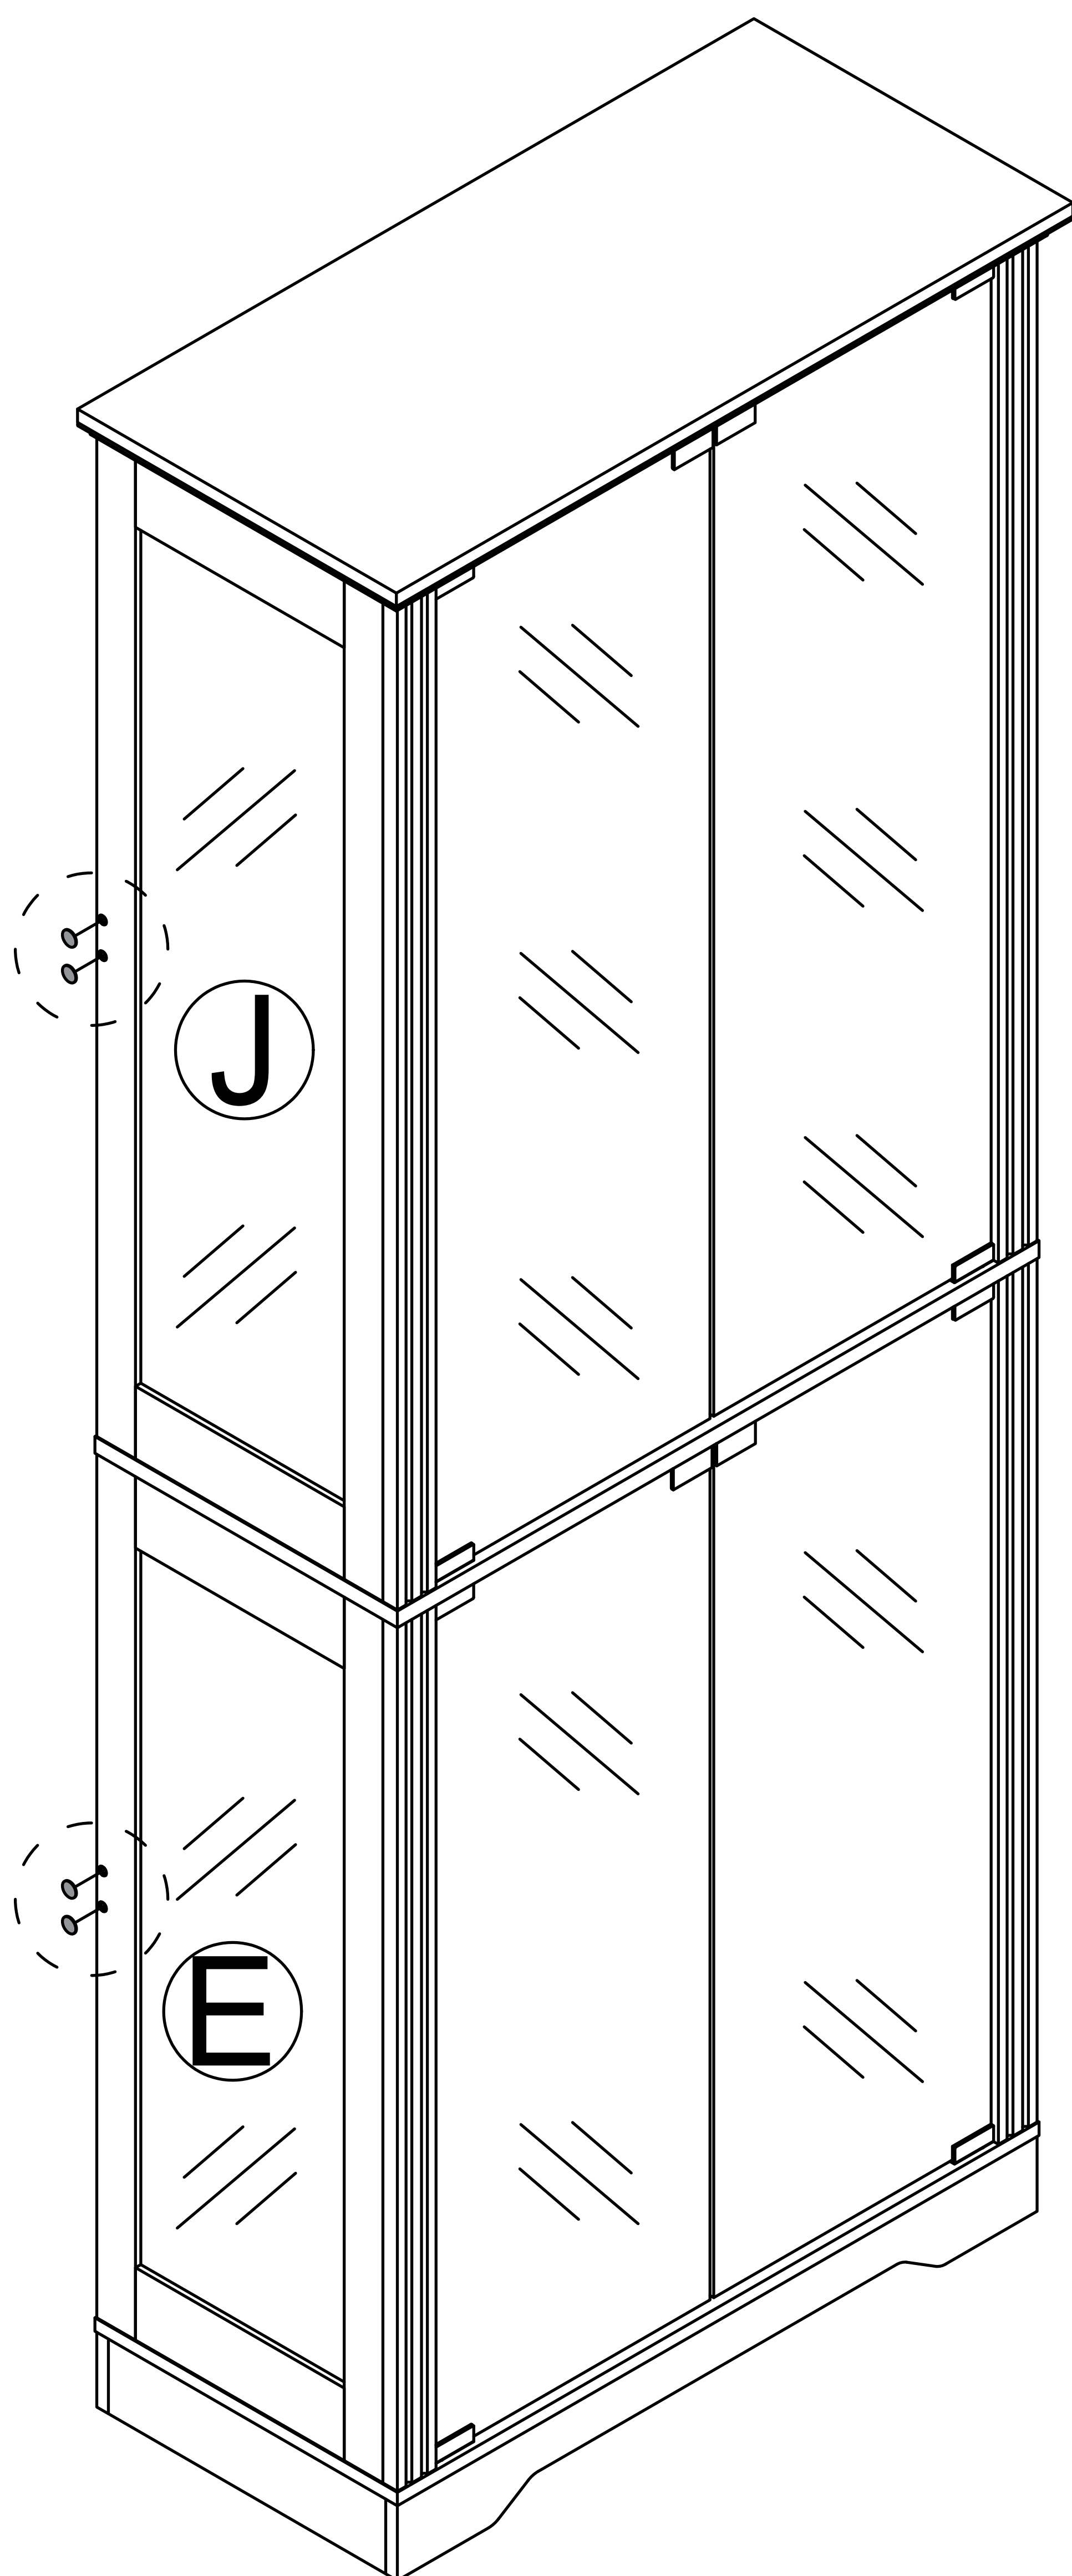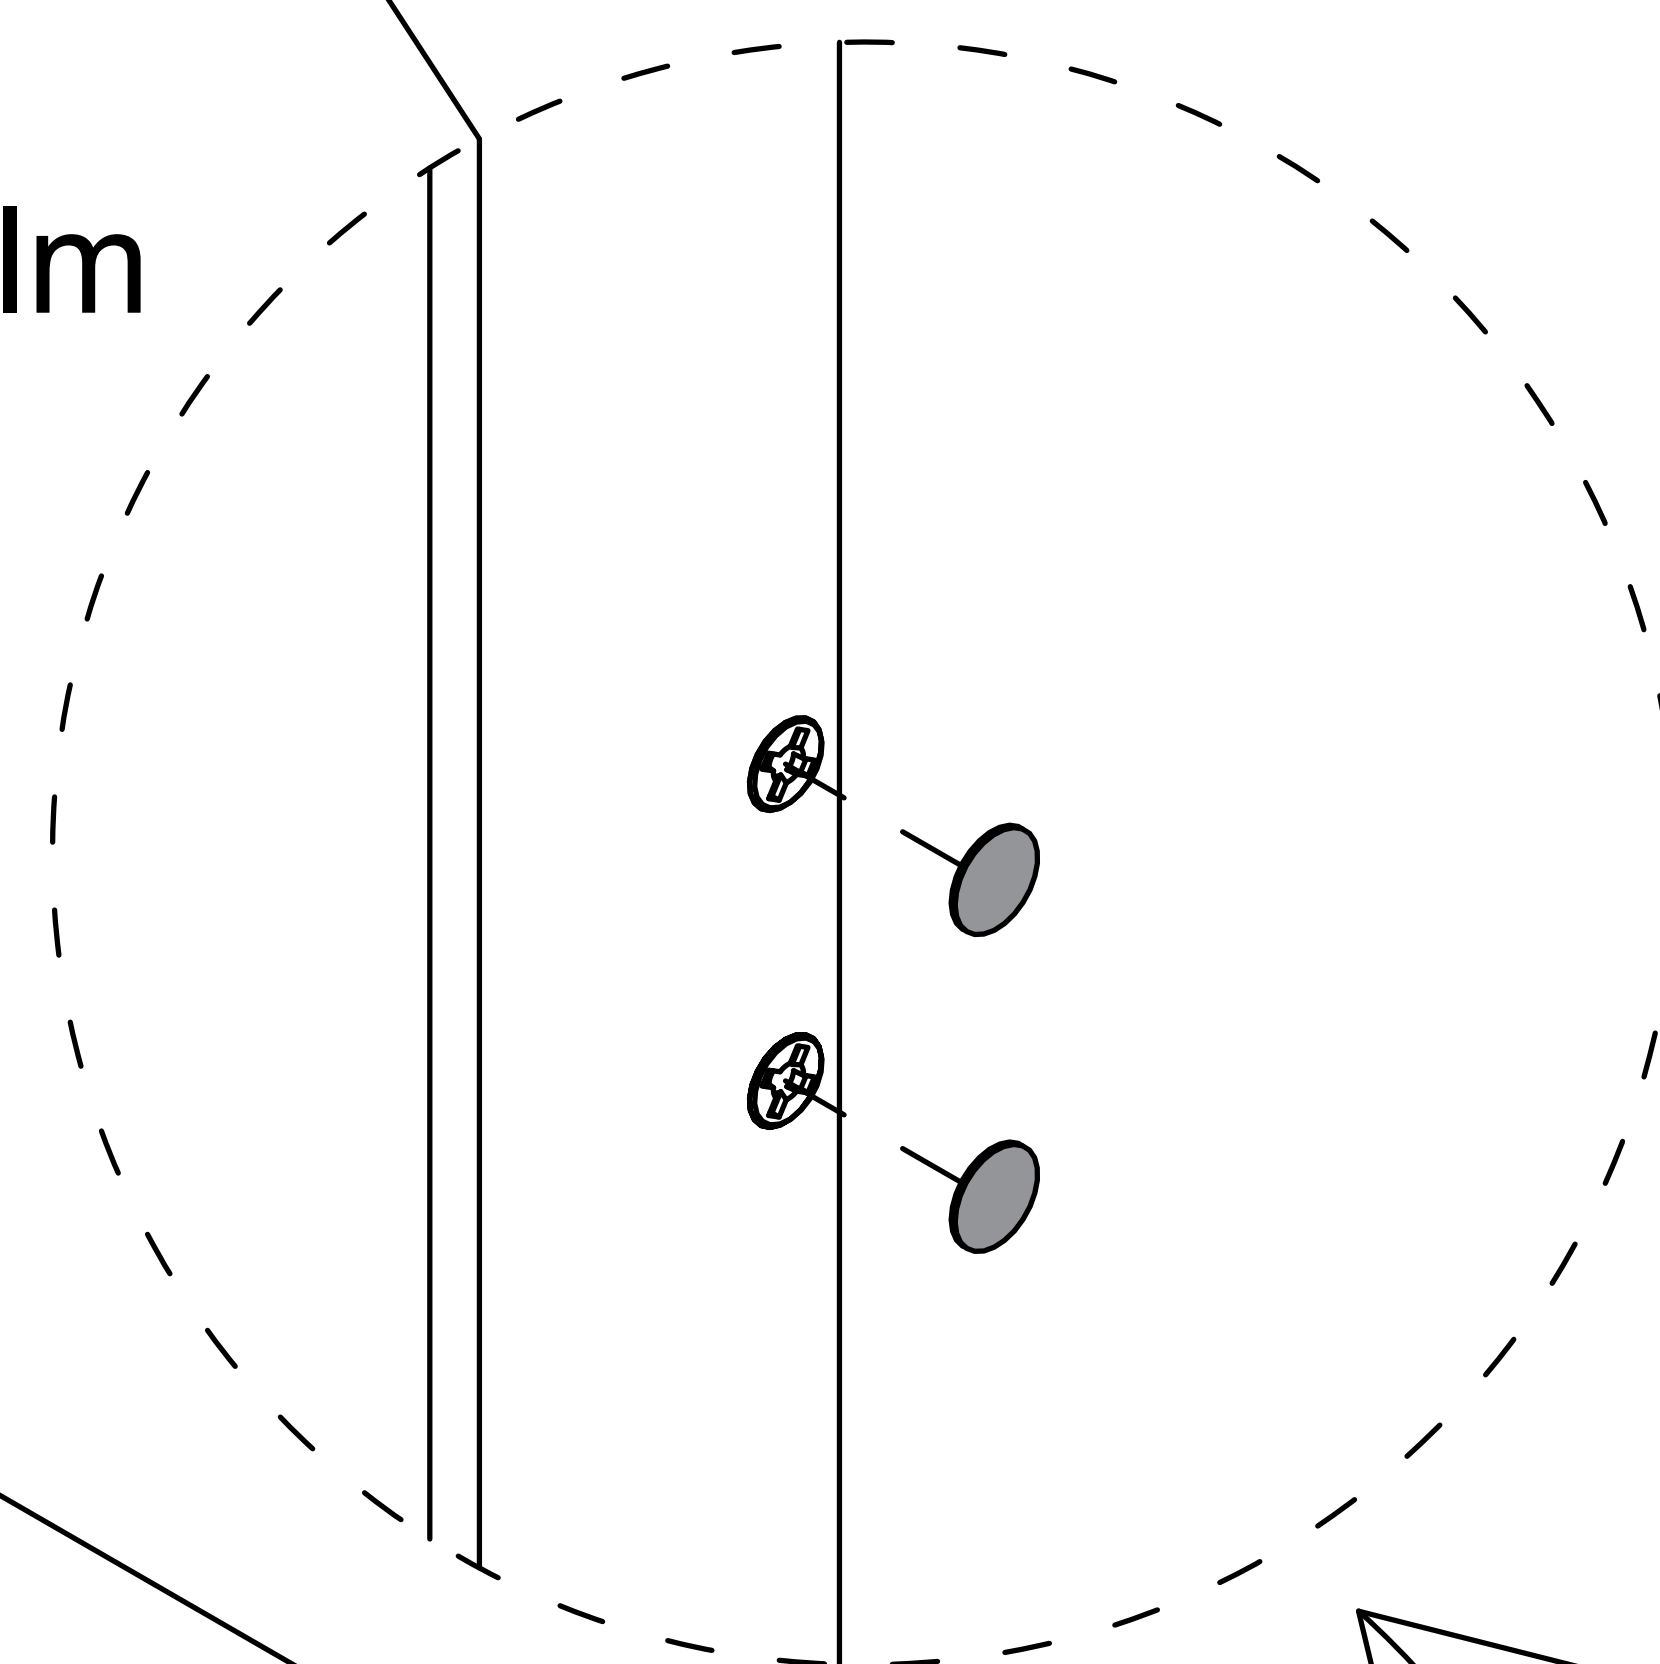

Step 38

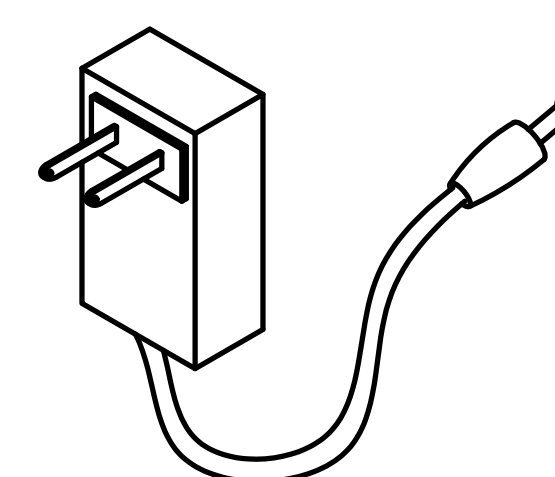


x1

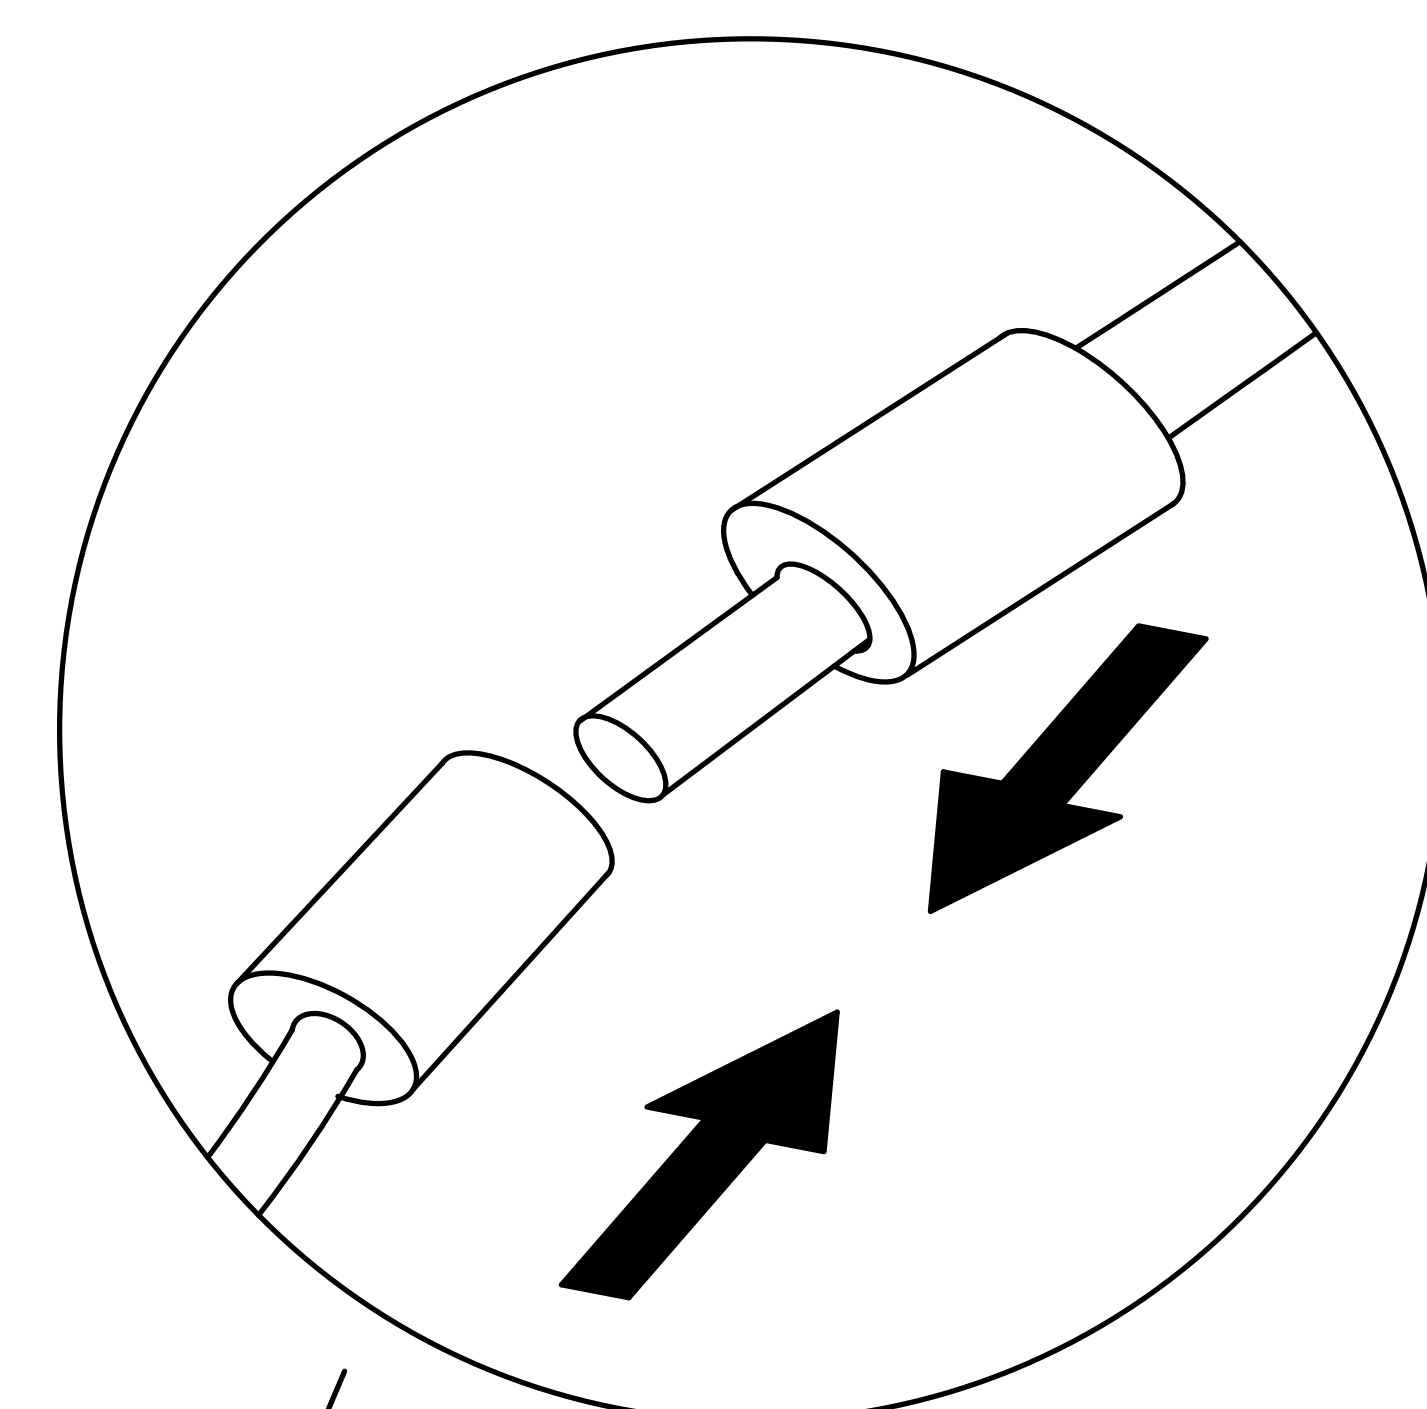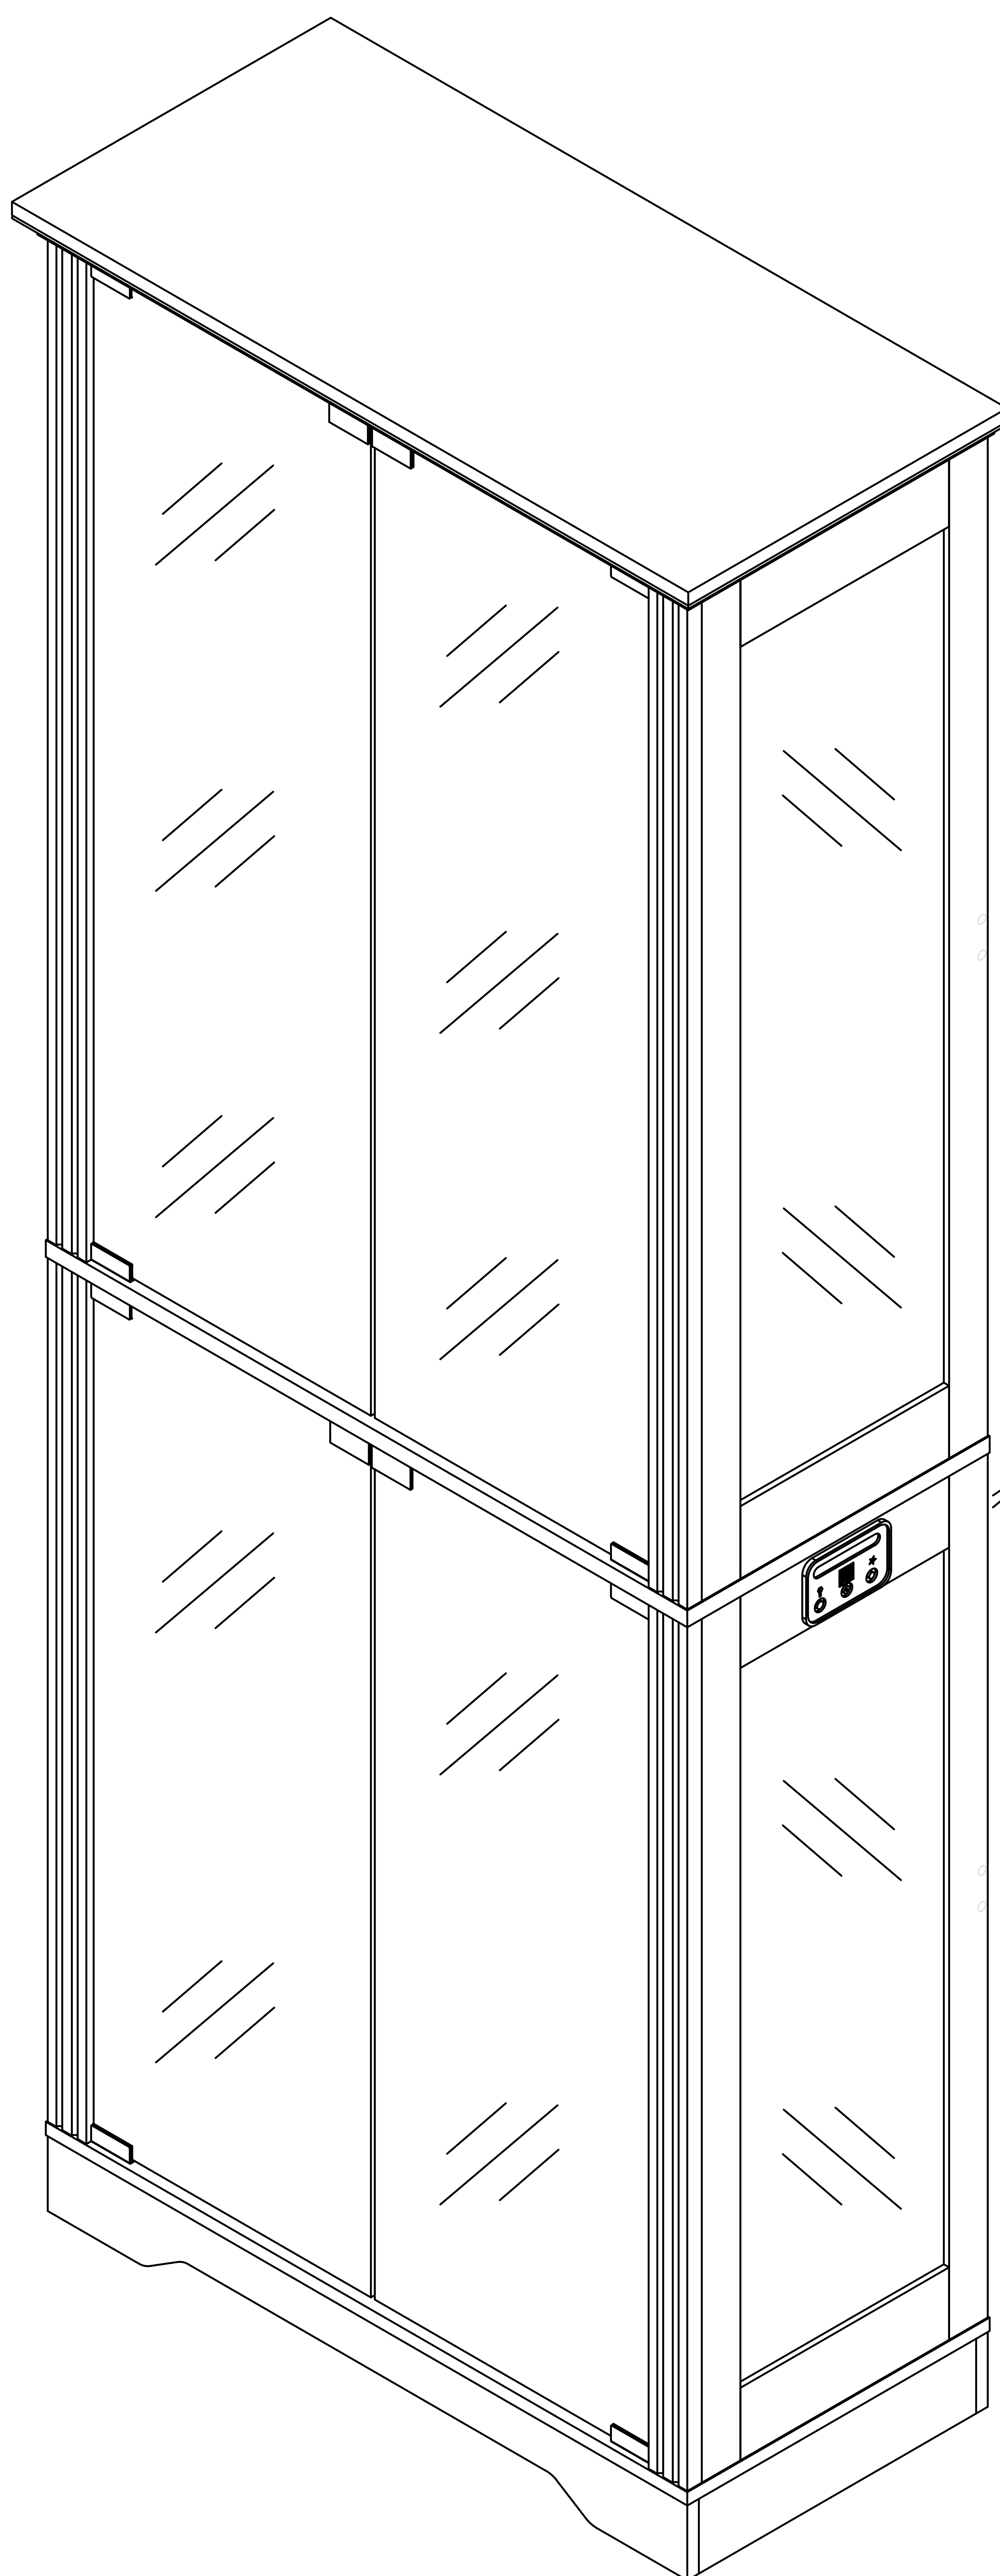


Step 39

Install as required

10

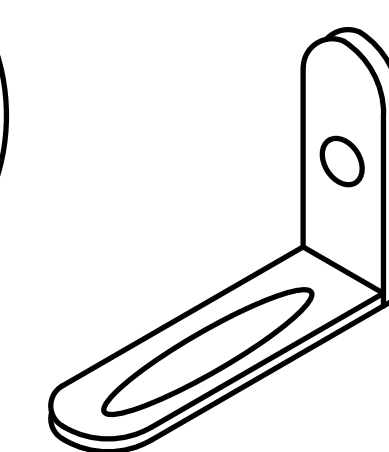


x2

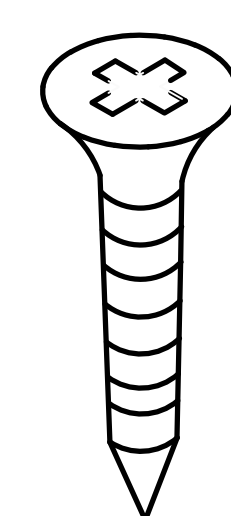




x2

x2

3.5x14mm

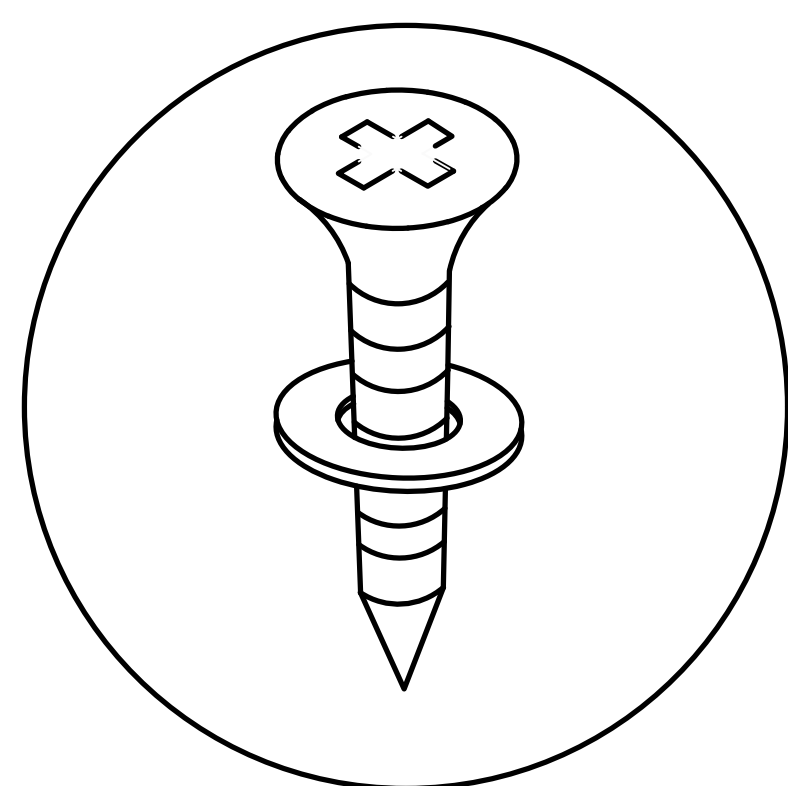

Install the anti fall hardware on the cabinet as shown in the picture first

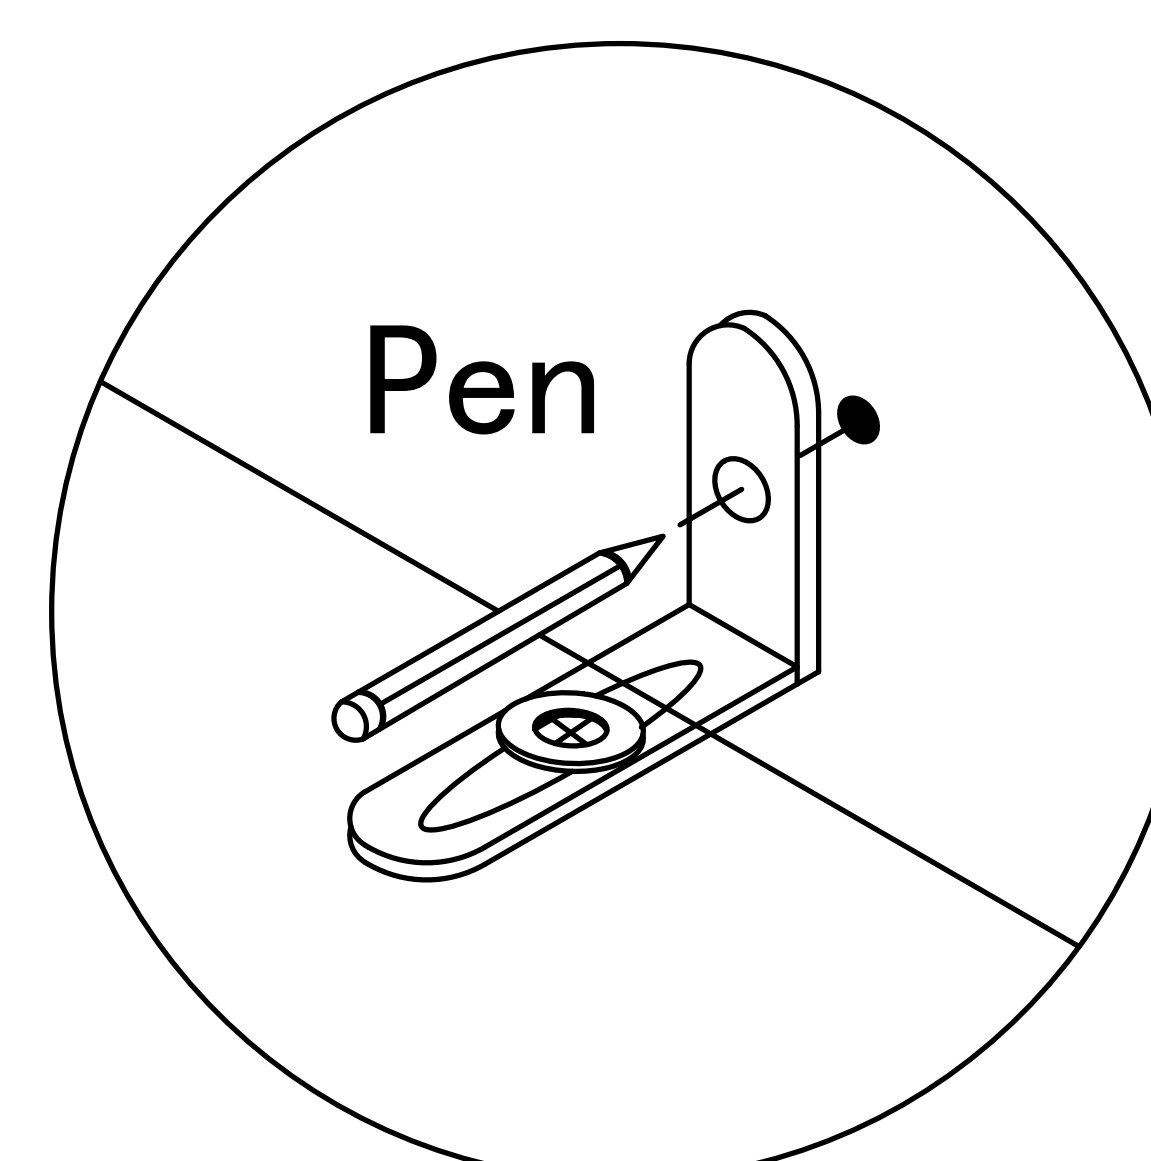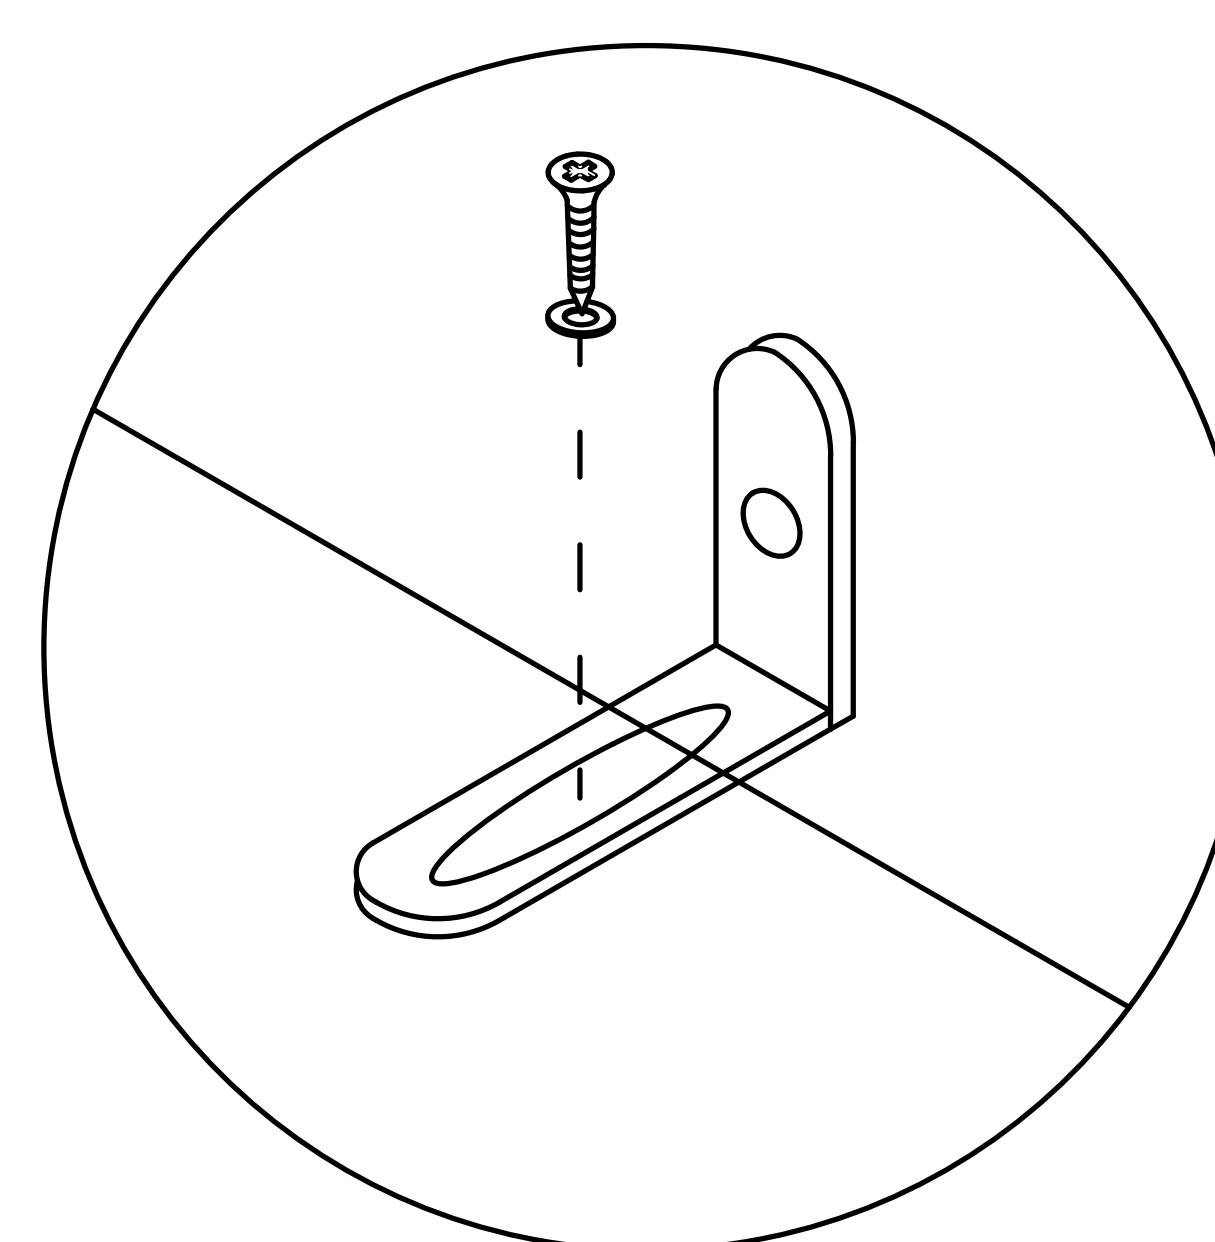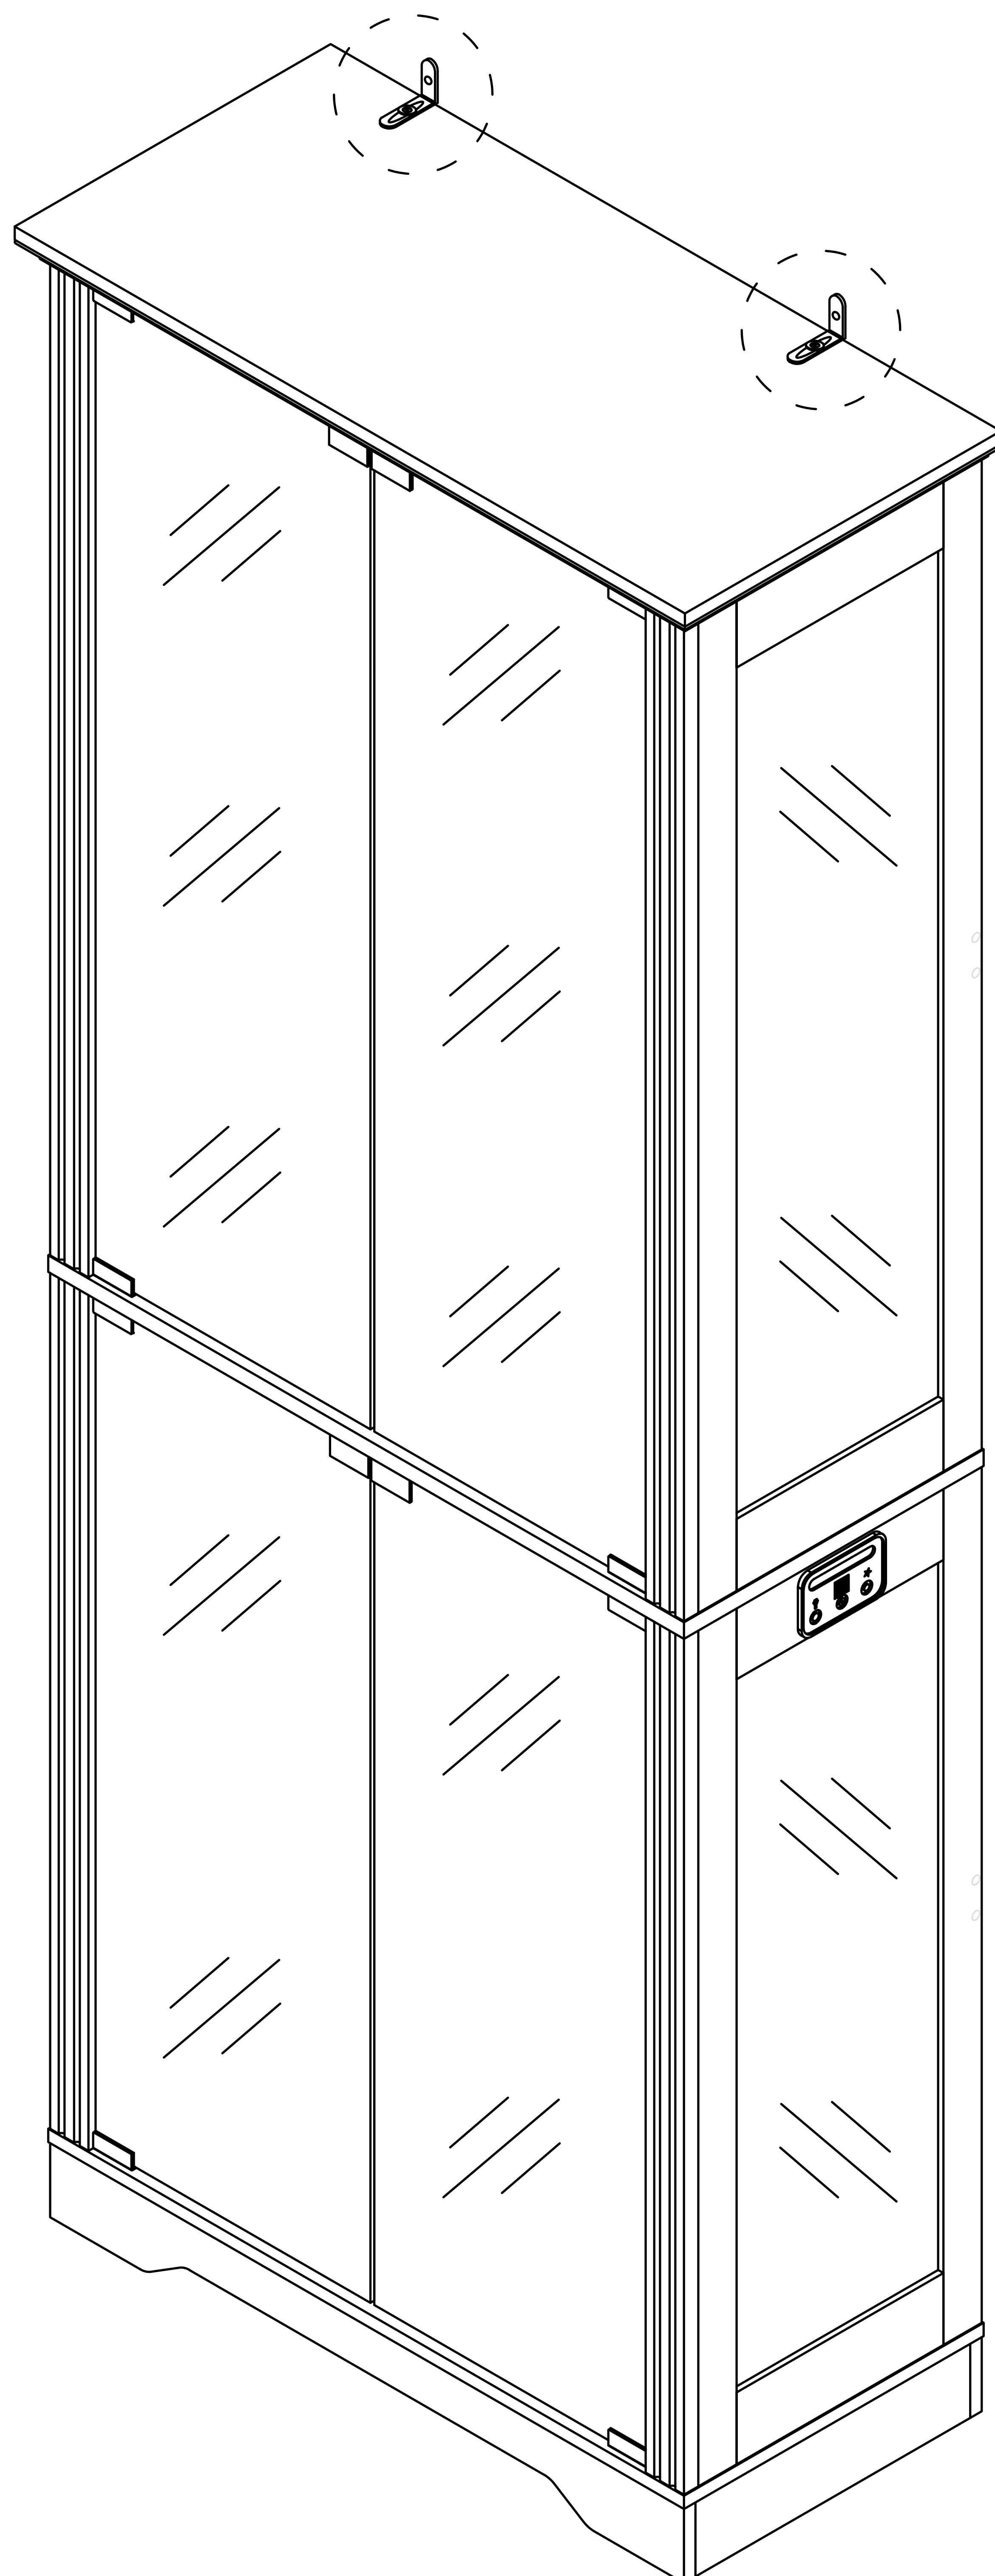

Pen


Then mark the wall with a pen through the holes in the anti-fall hardware

Step 40


10



x2

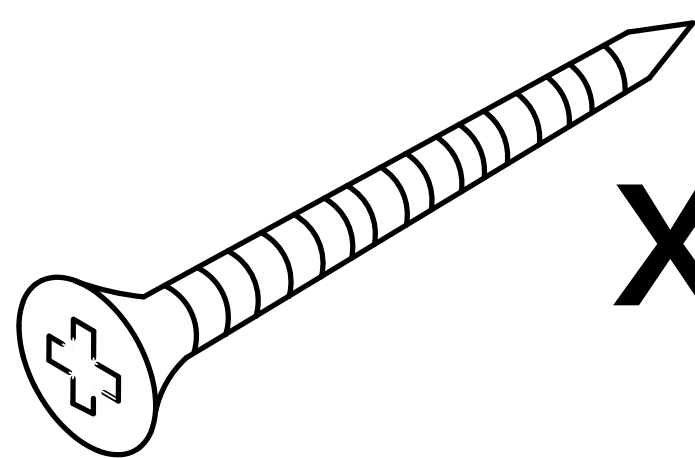


x2



x2

Wall Mount

+

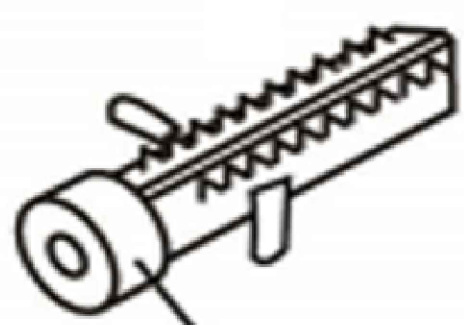

Wall

Drill the hole after measuring and marking position.






Wall



Wall


Drill the hole with an electric drill and punch in the colloidal particles

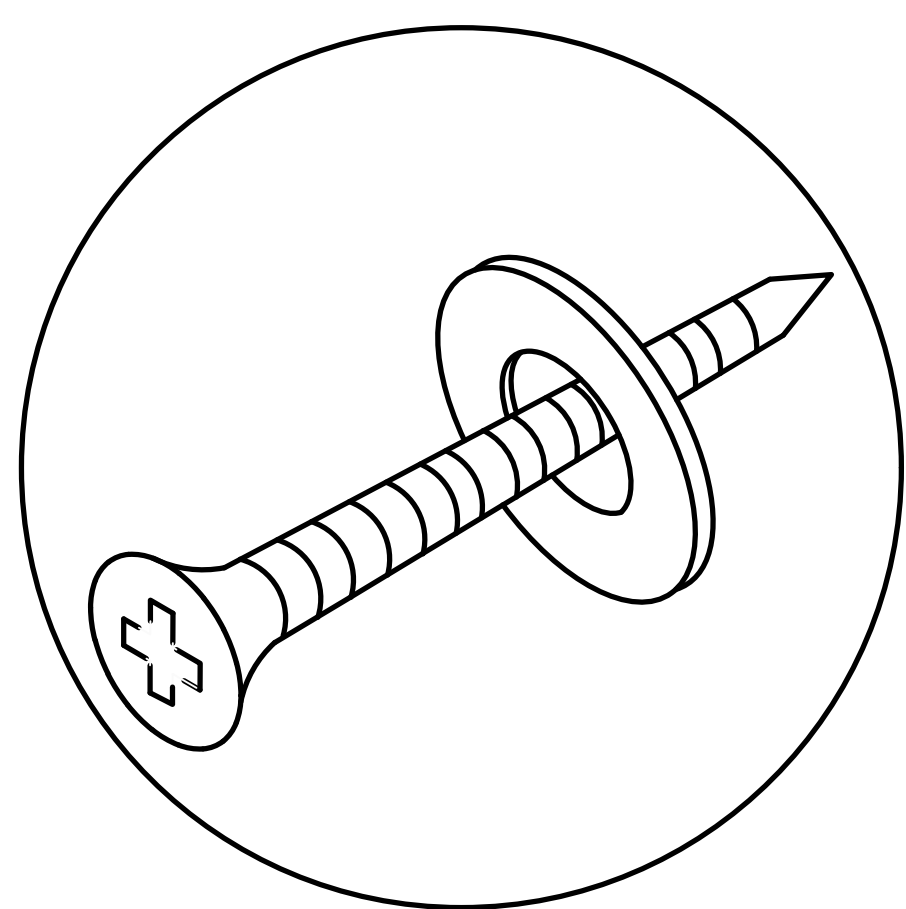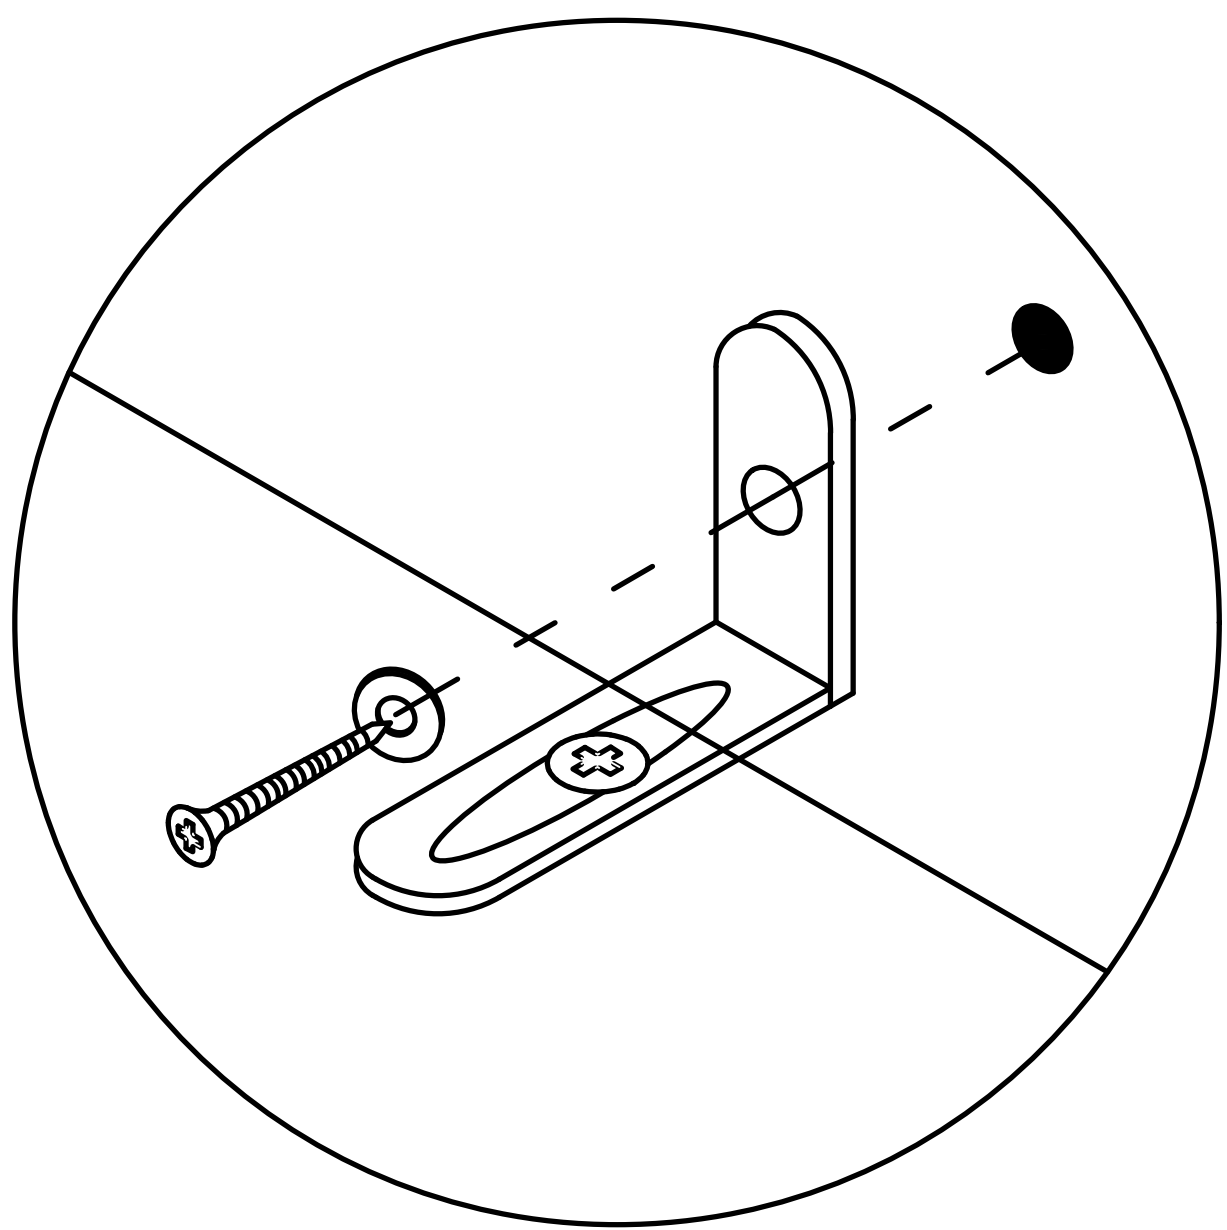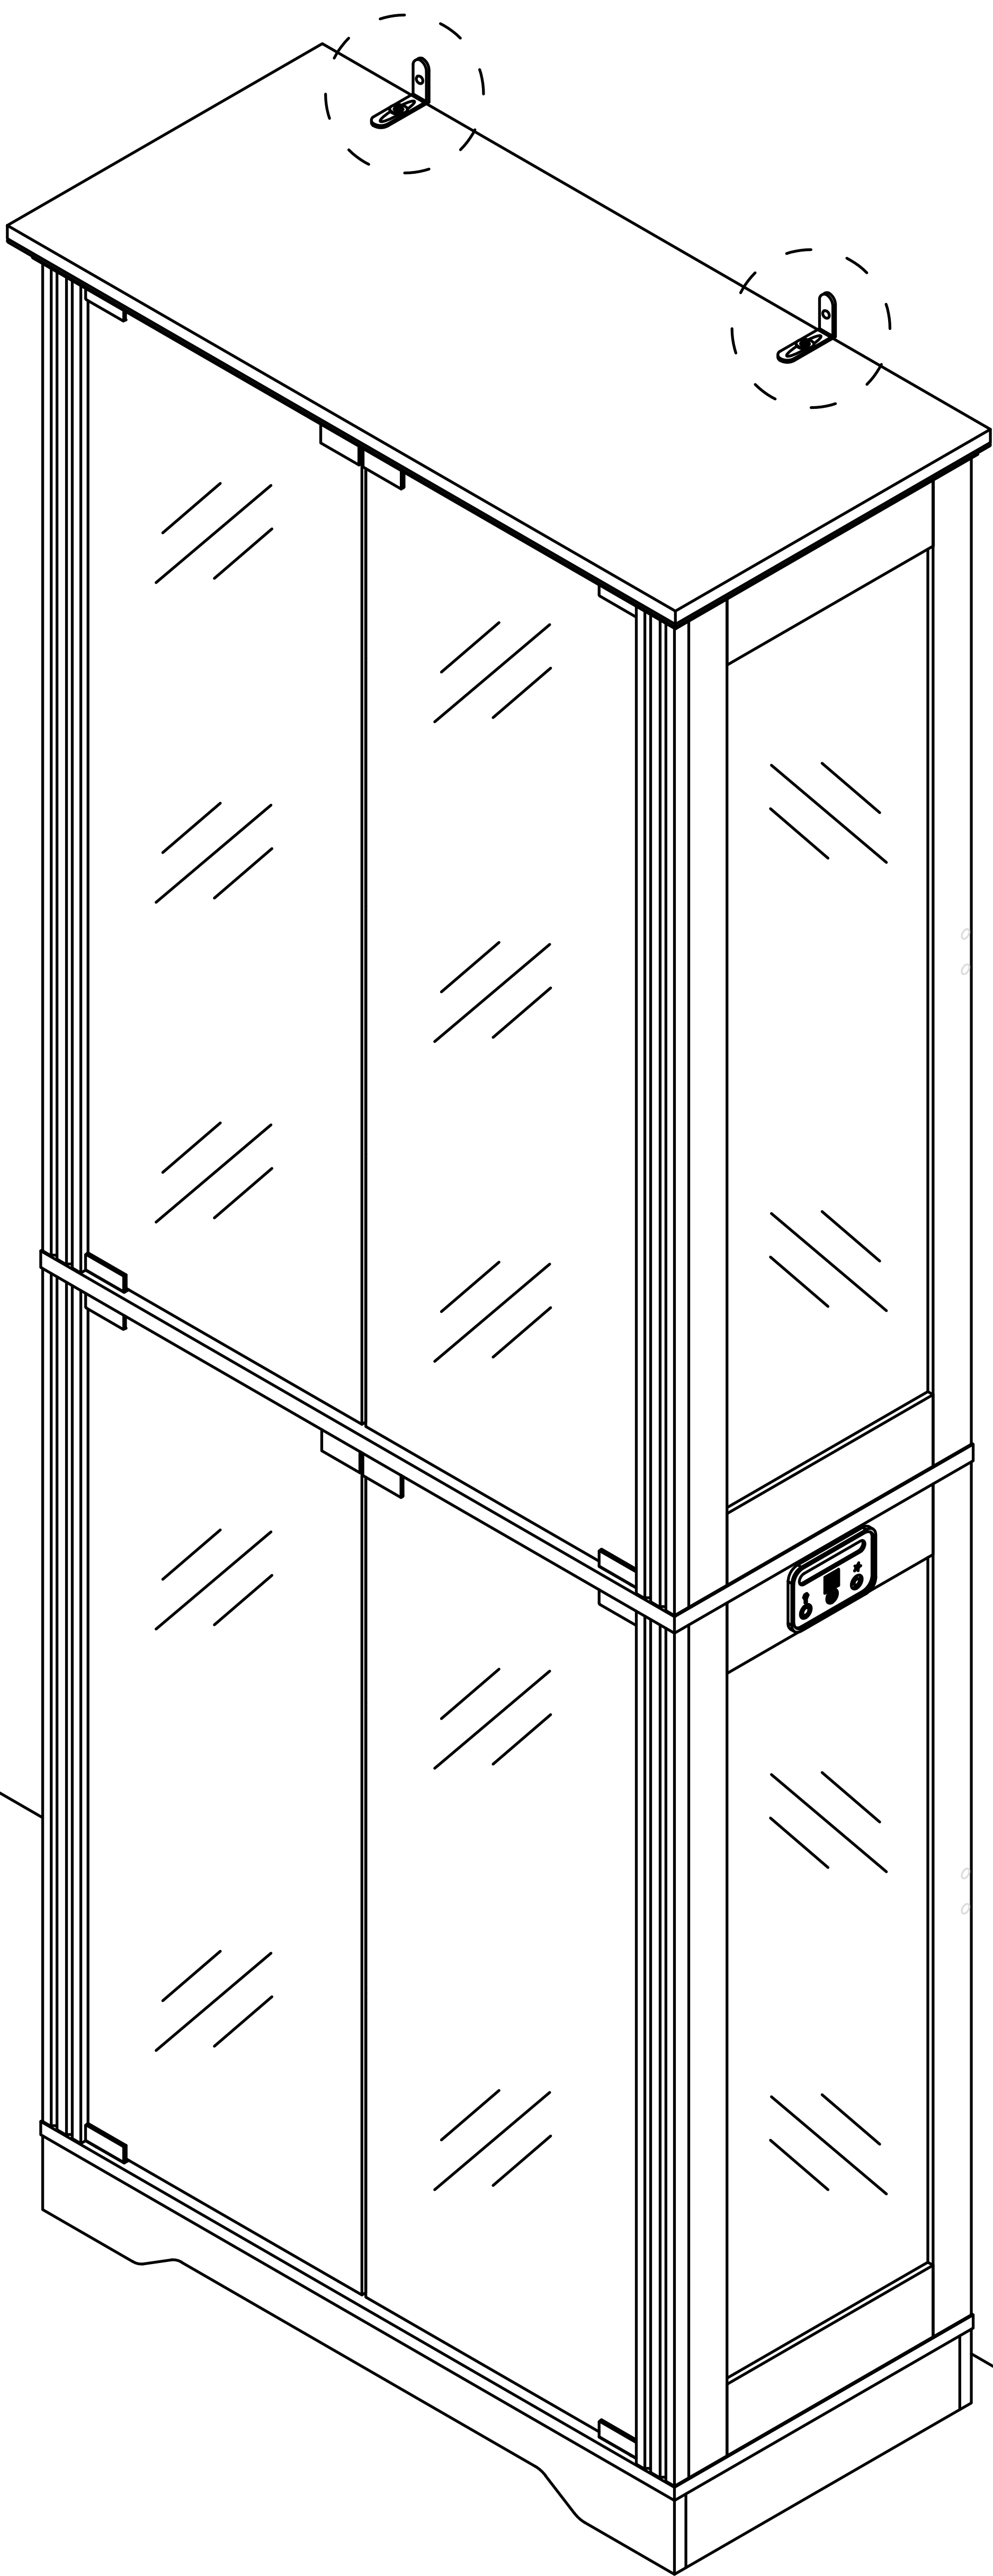

4x45mm


Fix the dressing table to the wall

Smart Box Plug Power Off

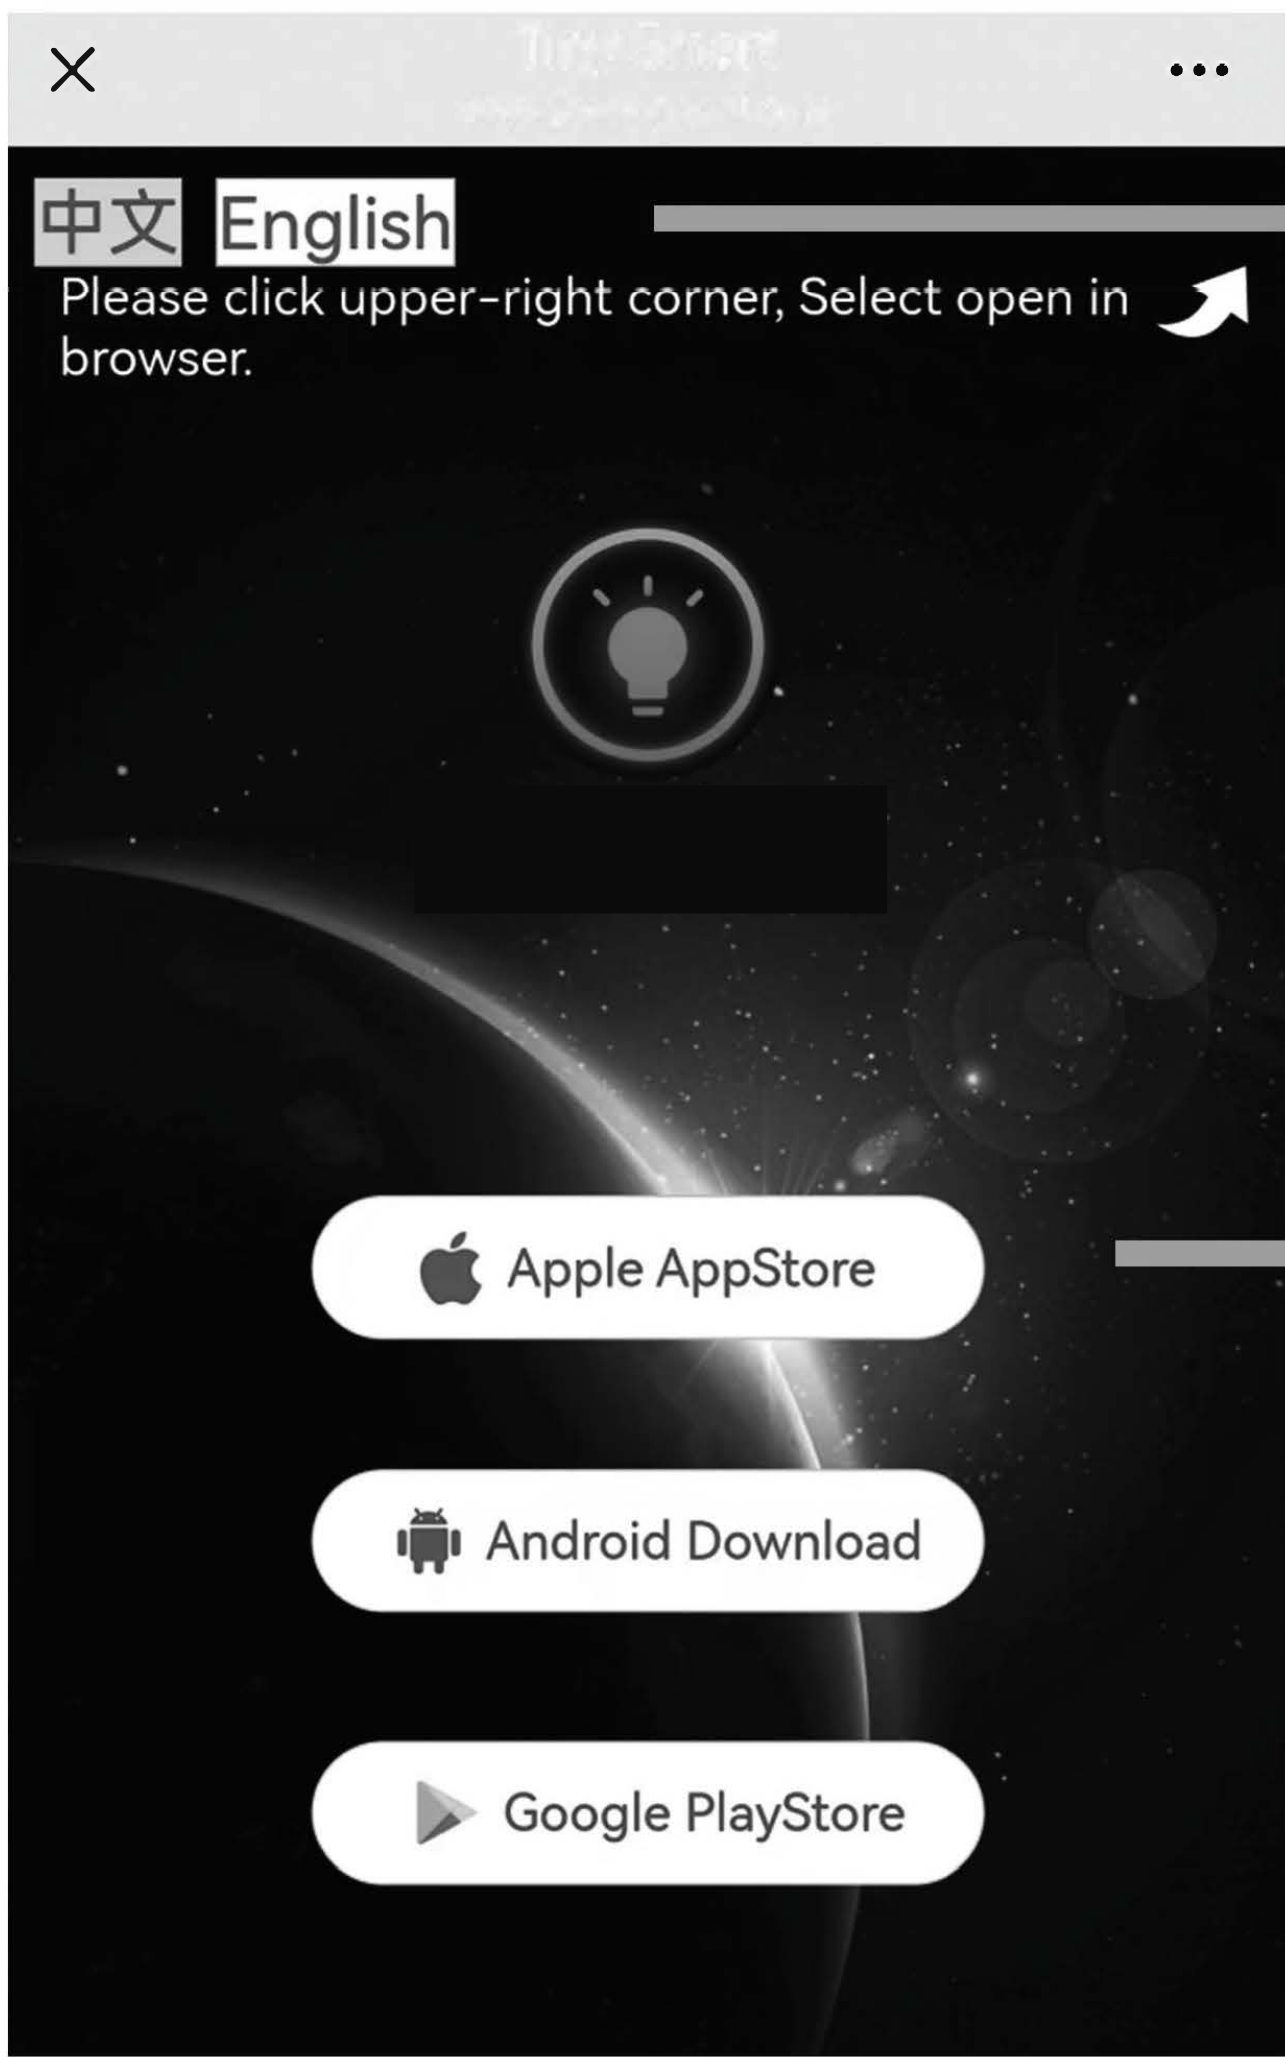


Select English Language

Select the corresponding device to download.
Note: If the download fails,
please turn off the “Enhanced Protection”
in the Pure Mode settings of the device.

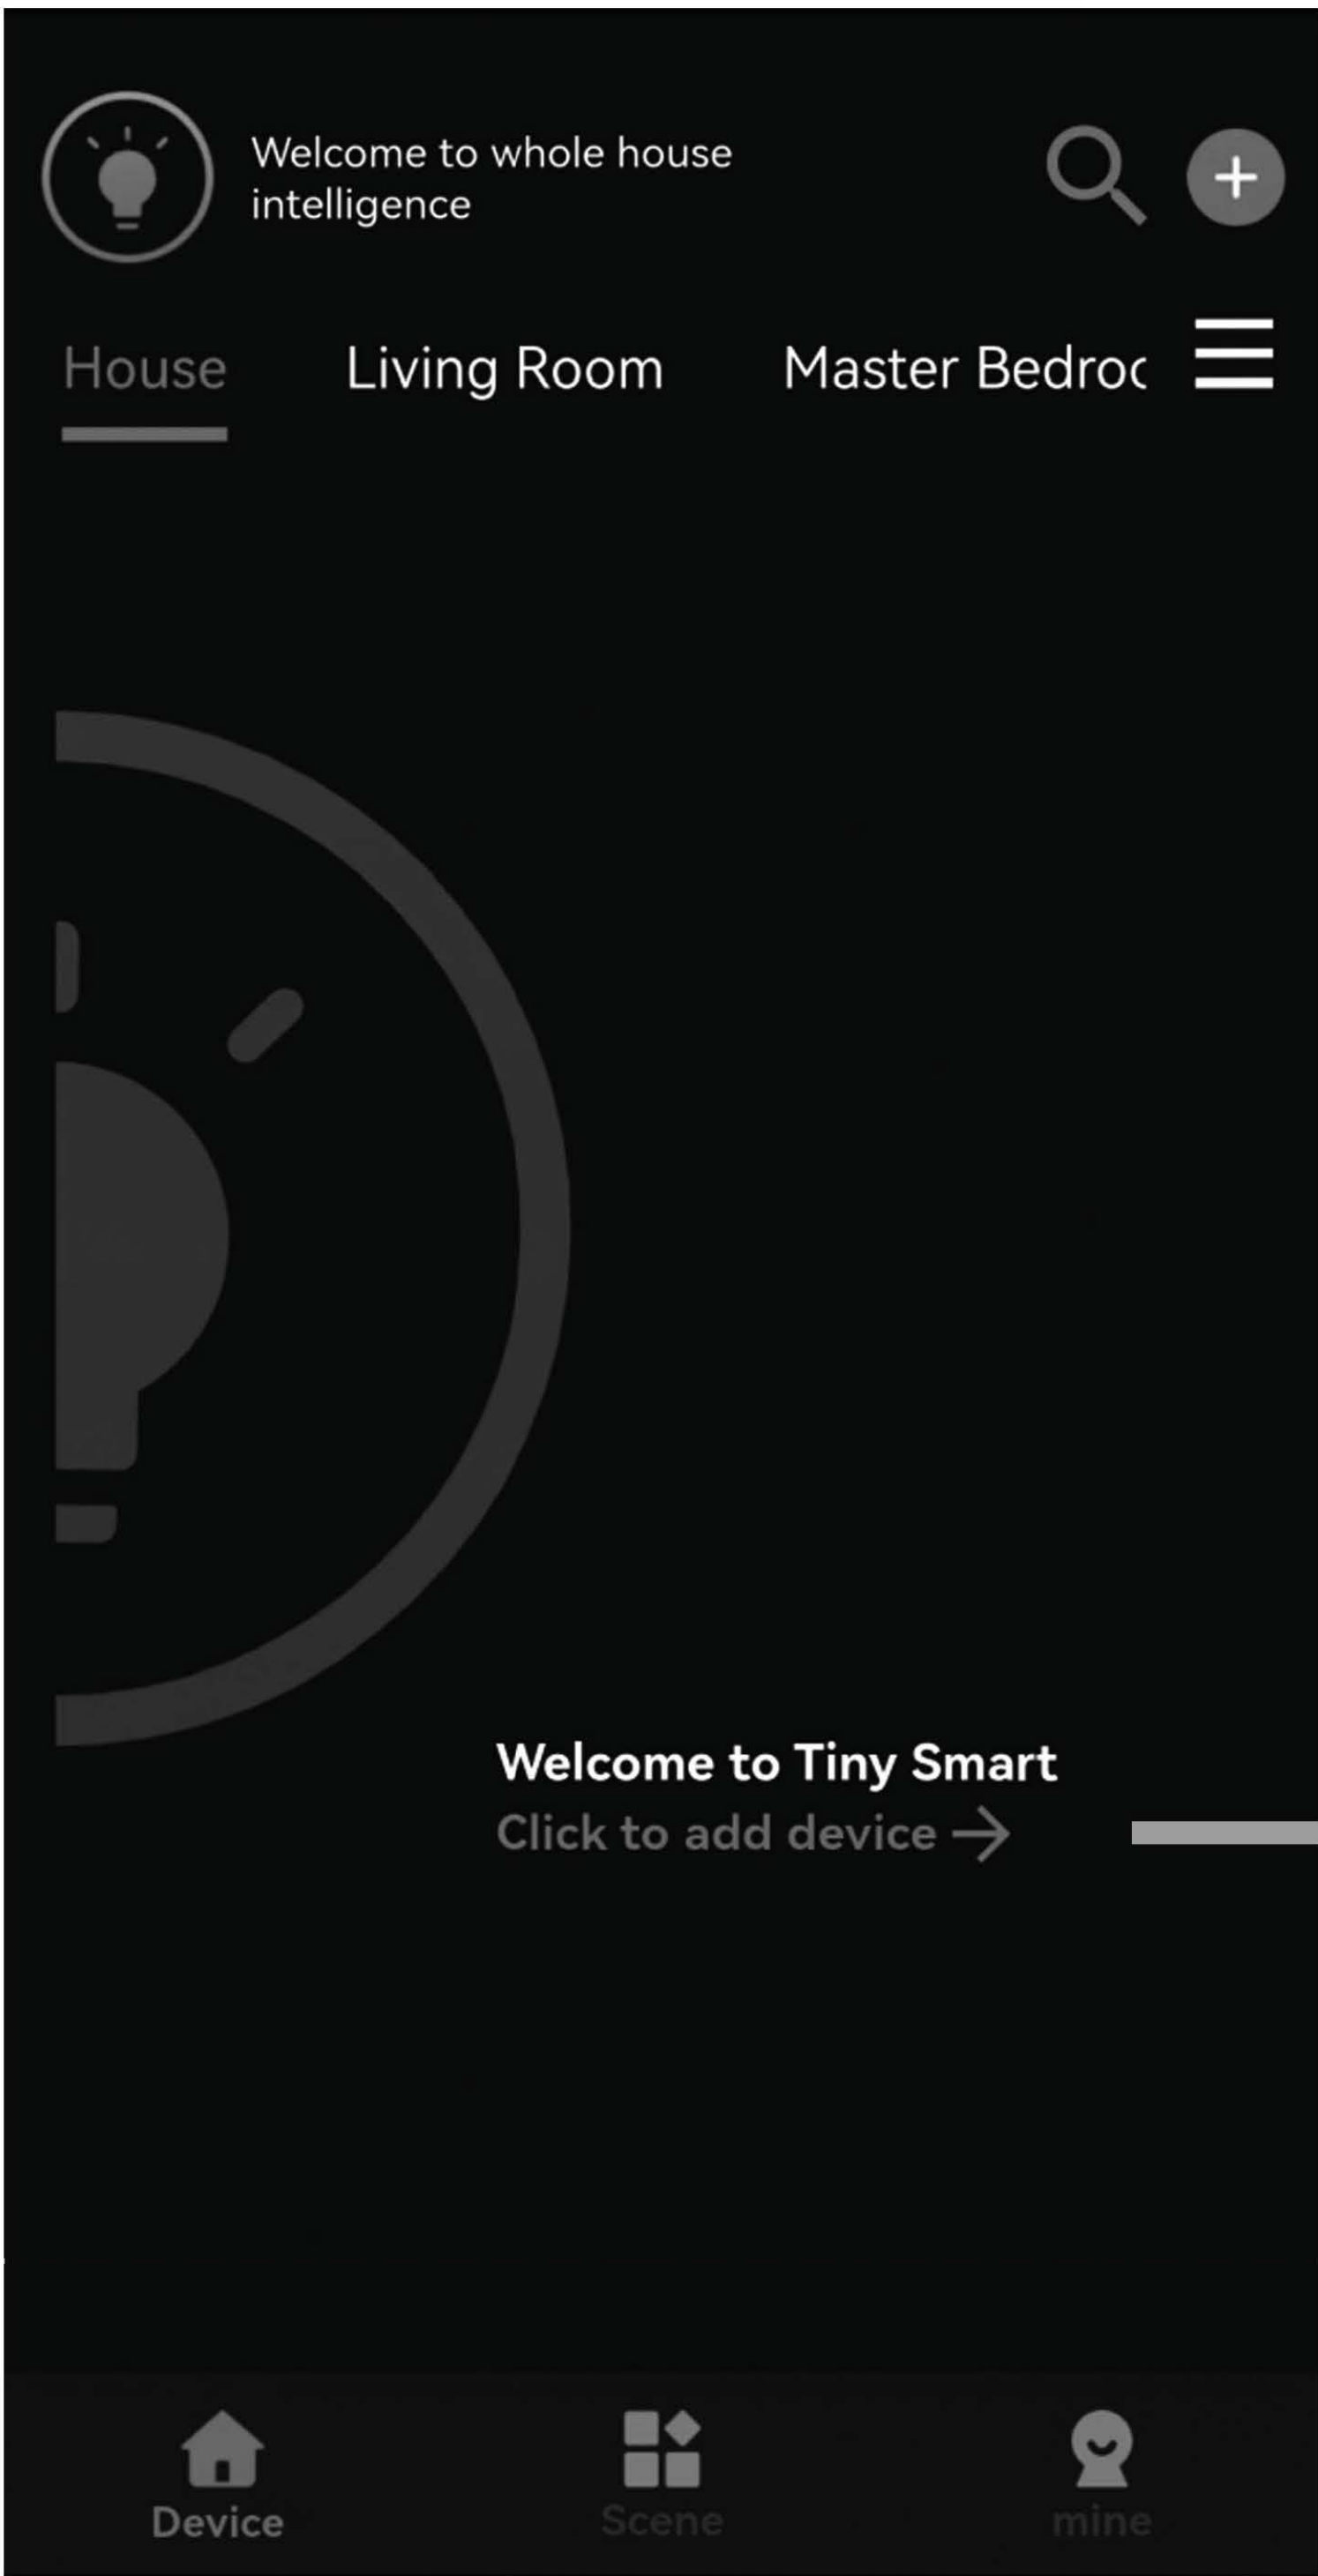


1

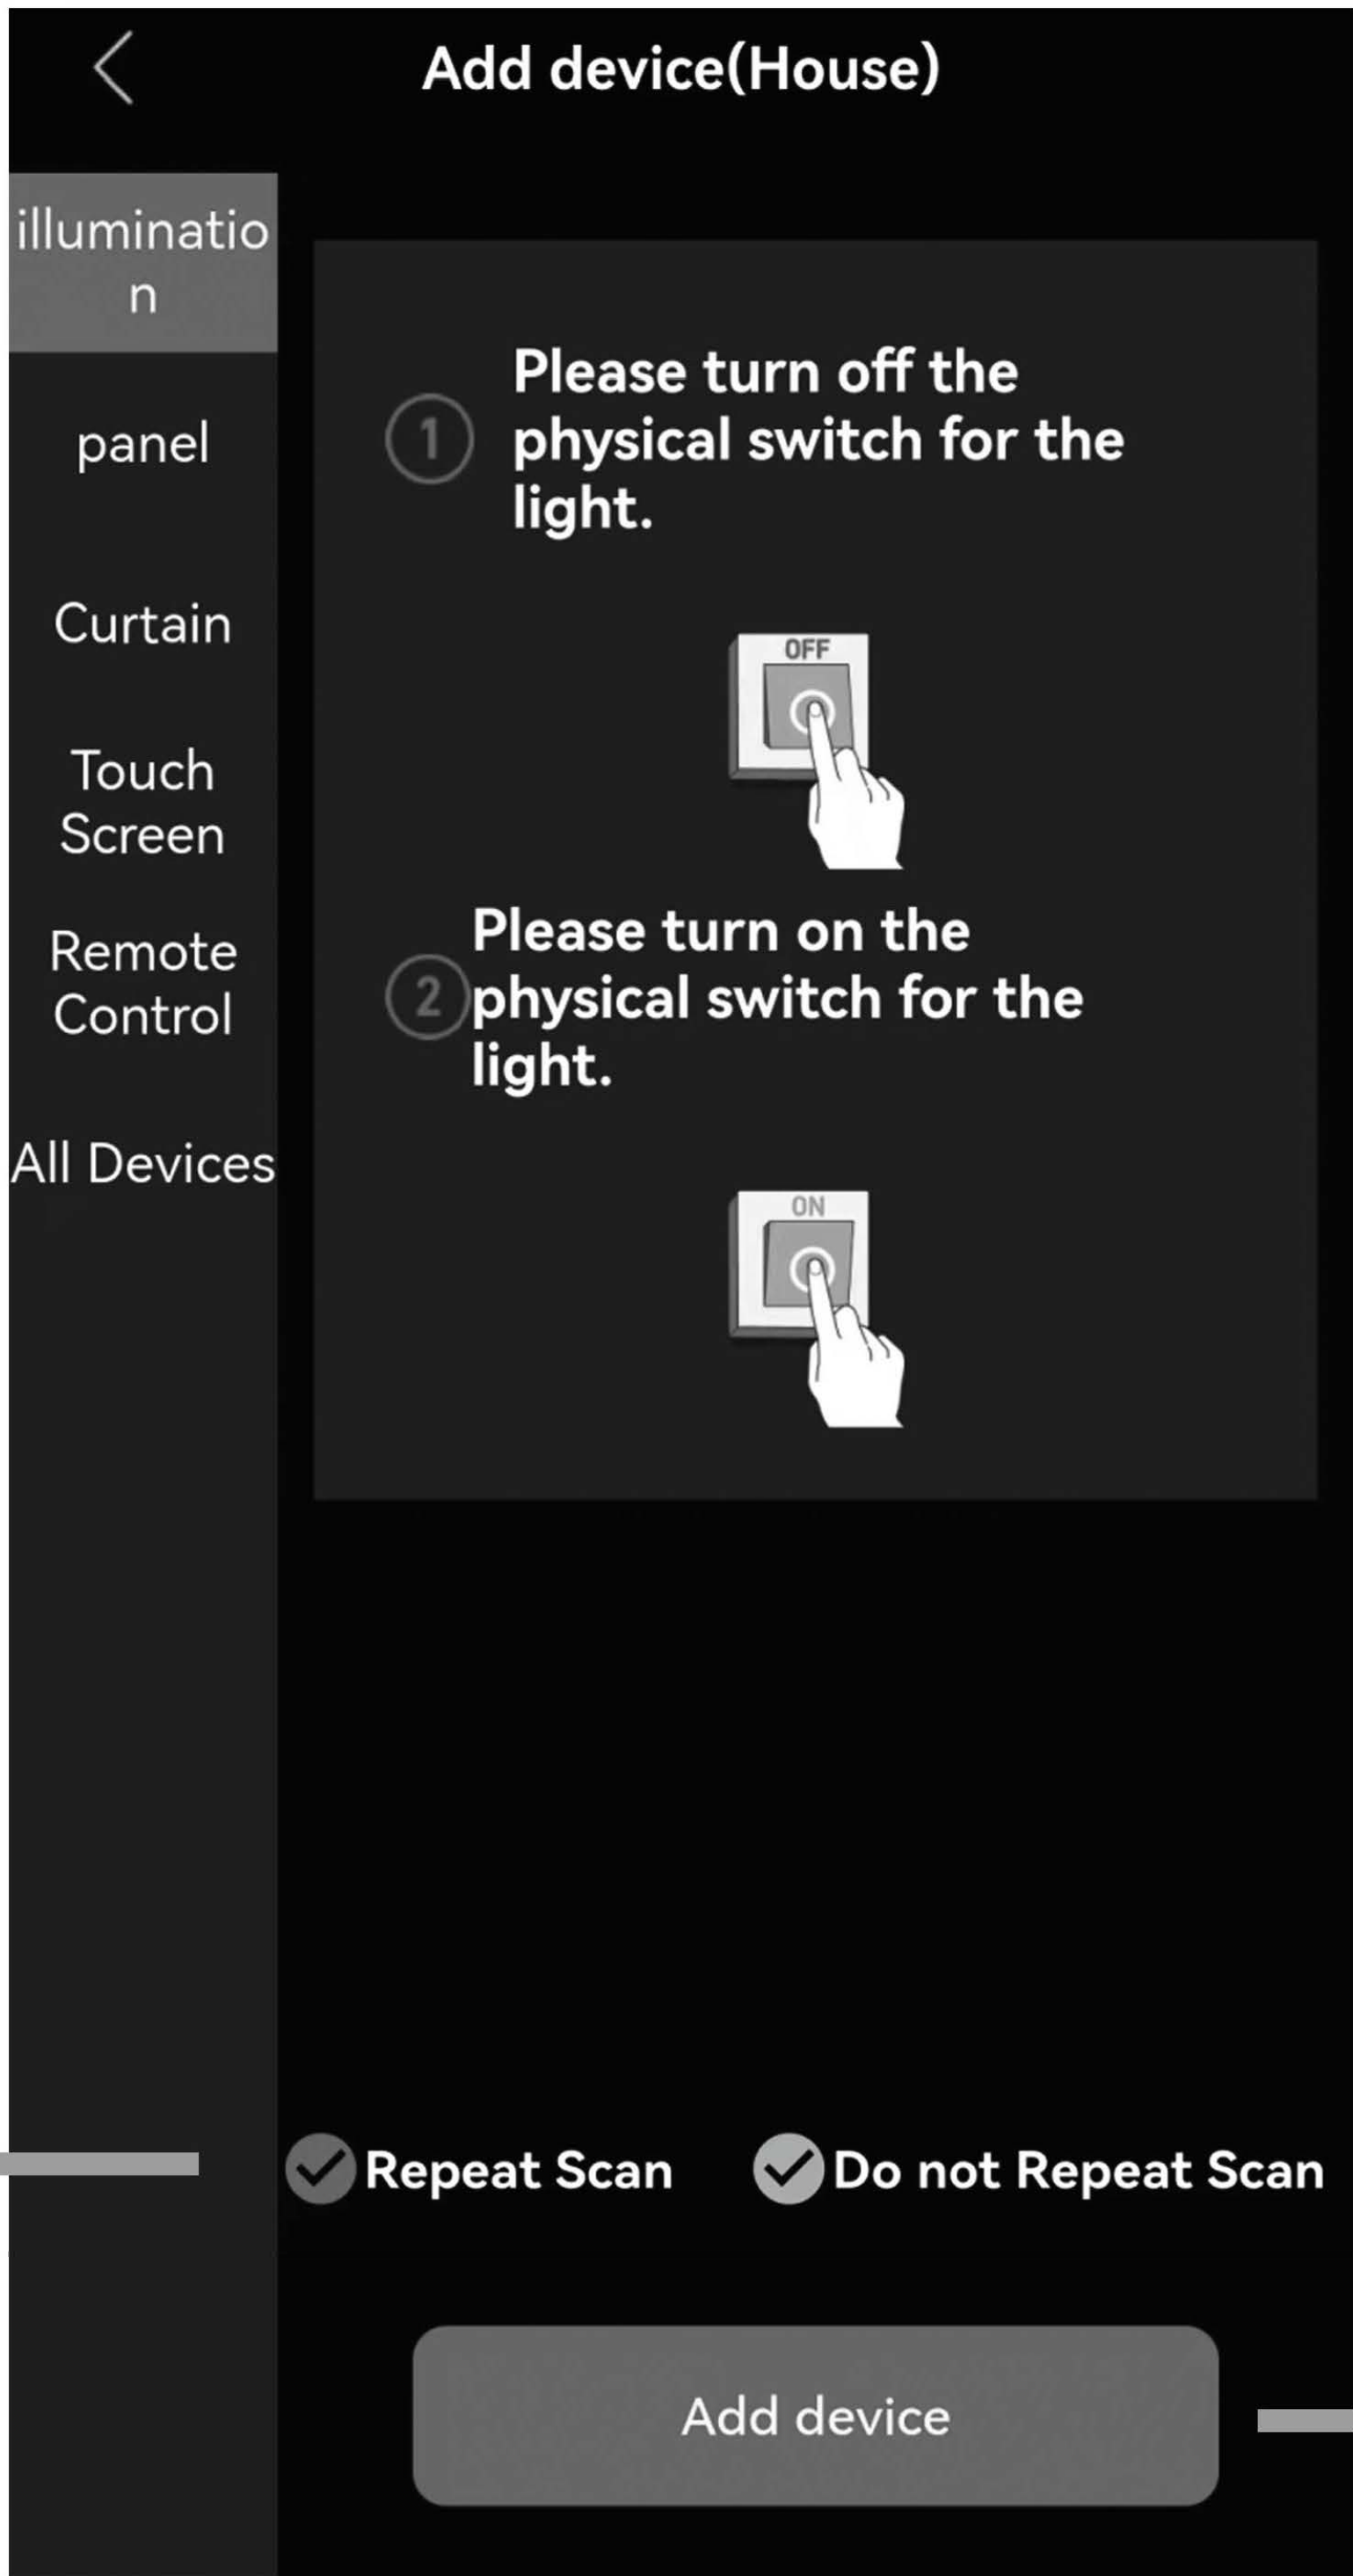

2

It turns blue after clicking


3

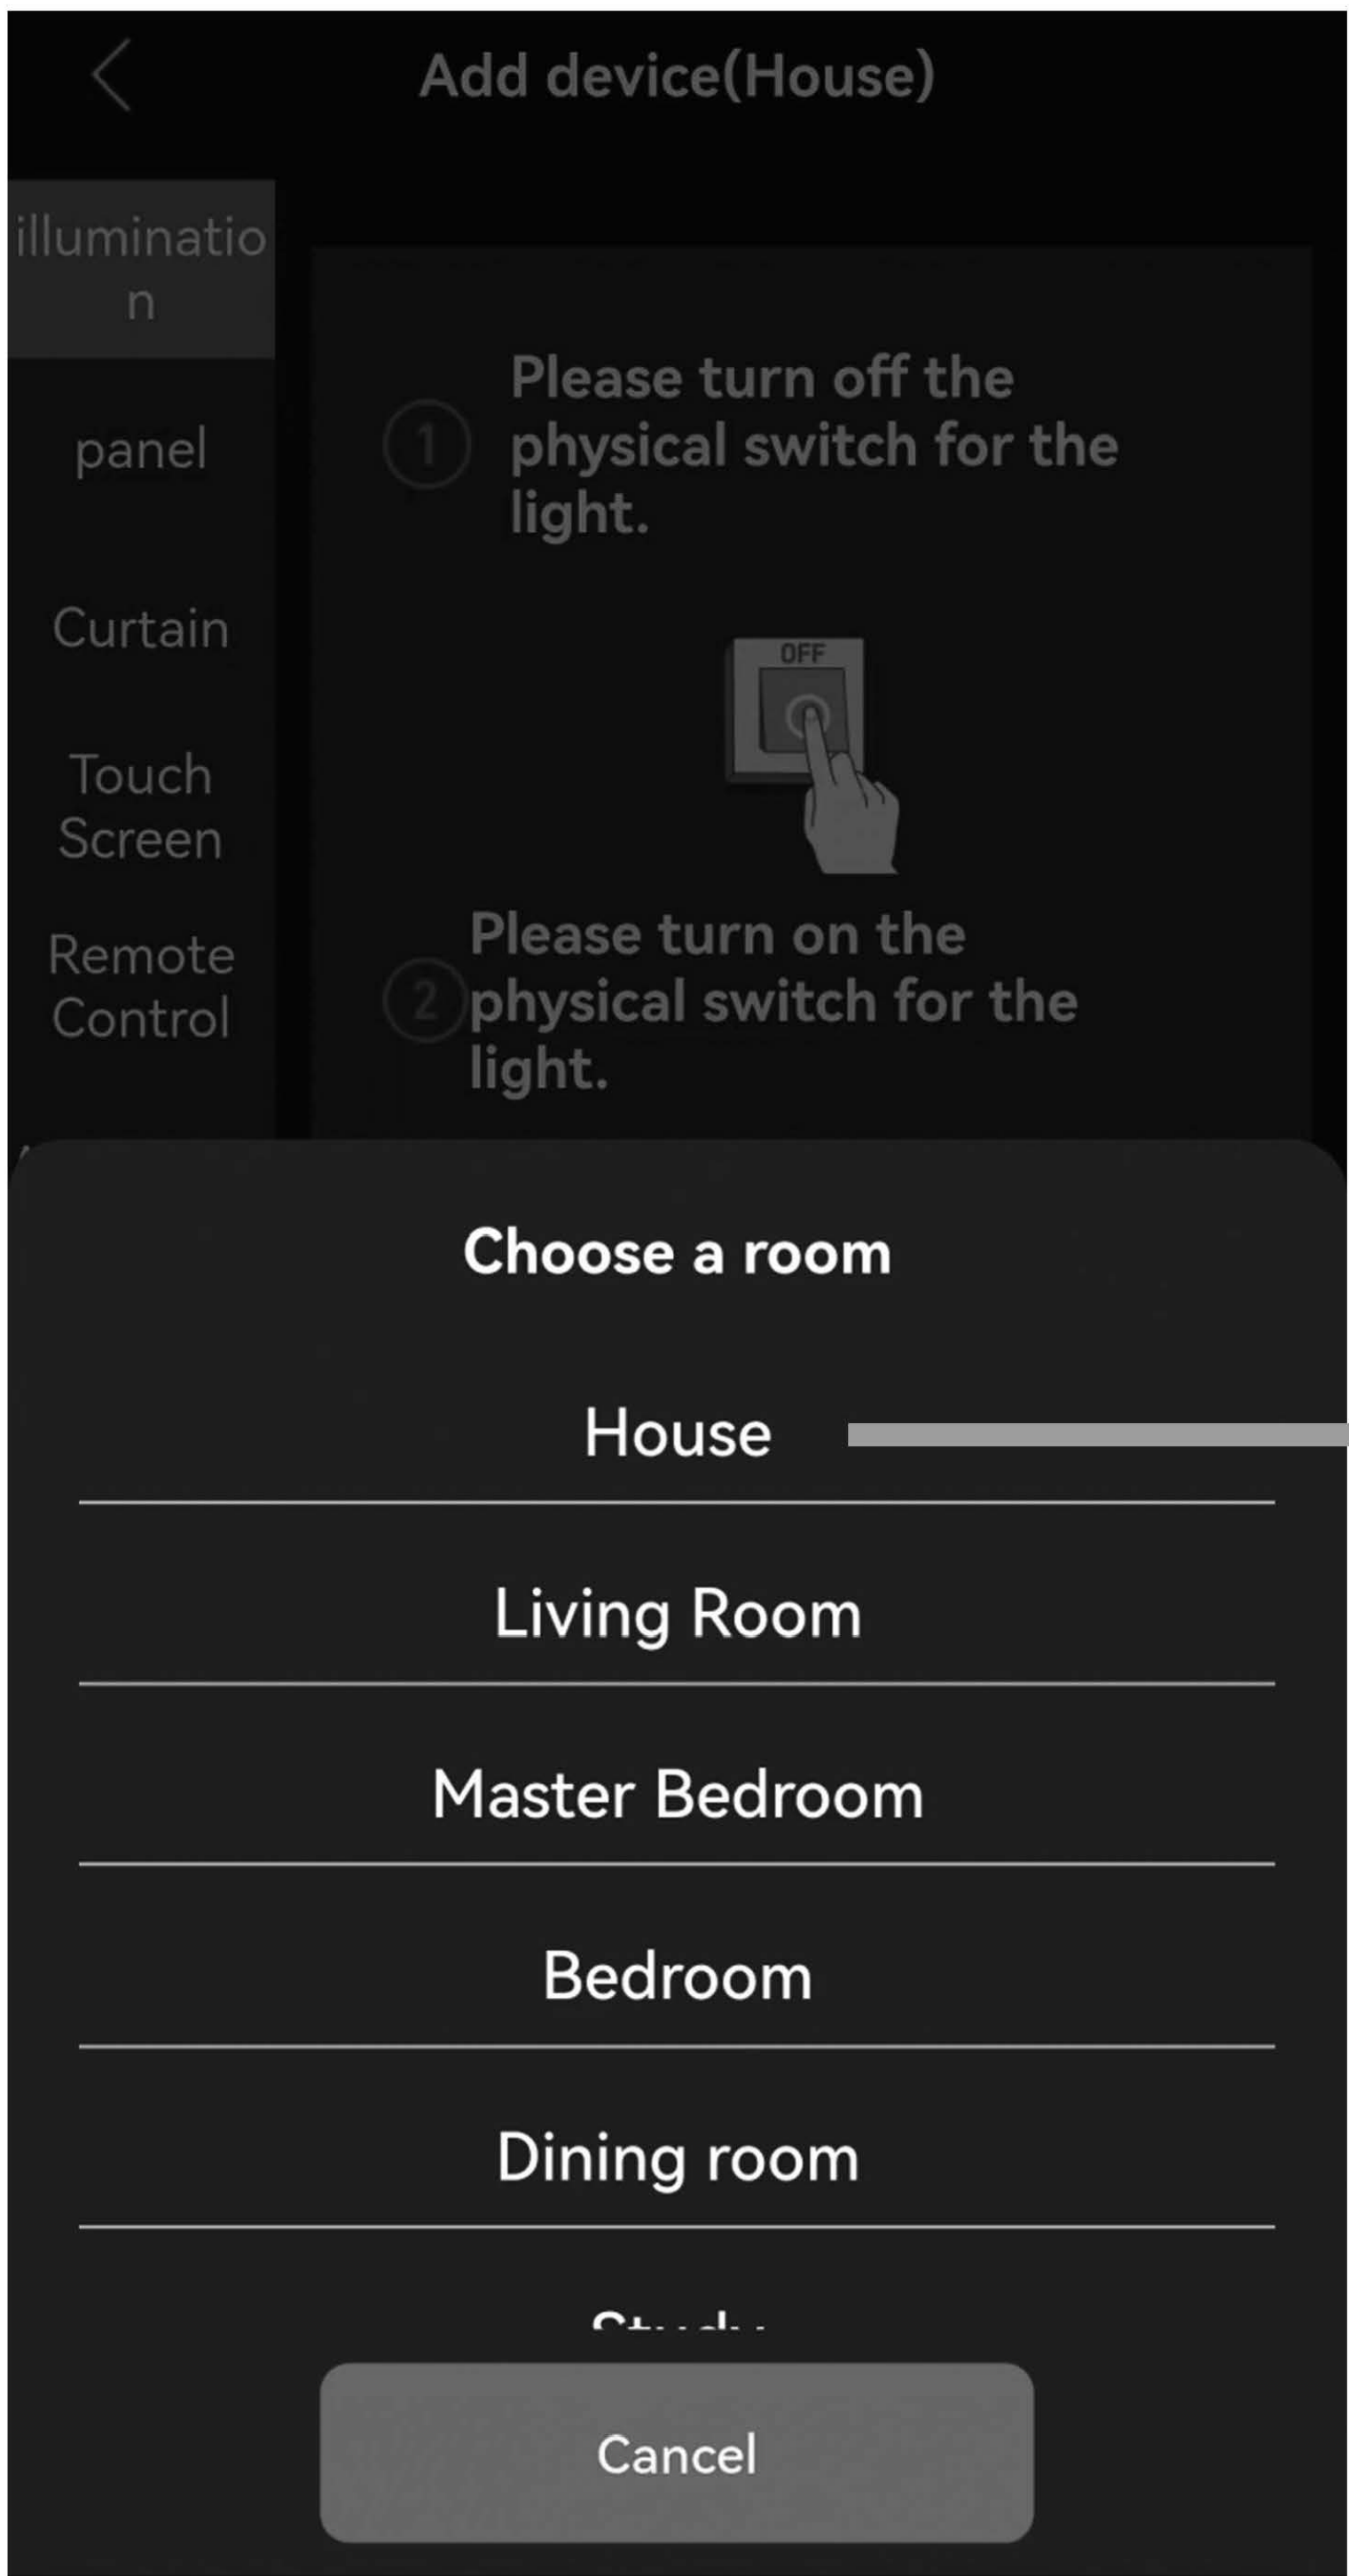

4




5 Unplug the smart box

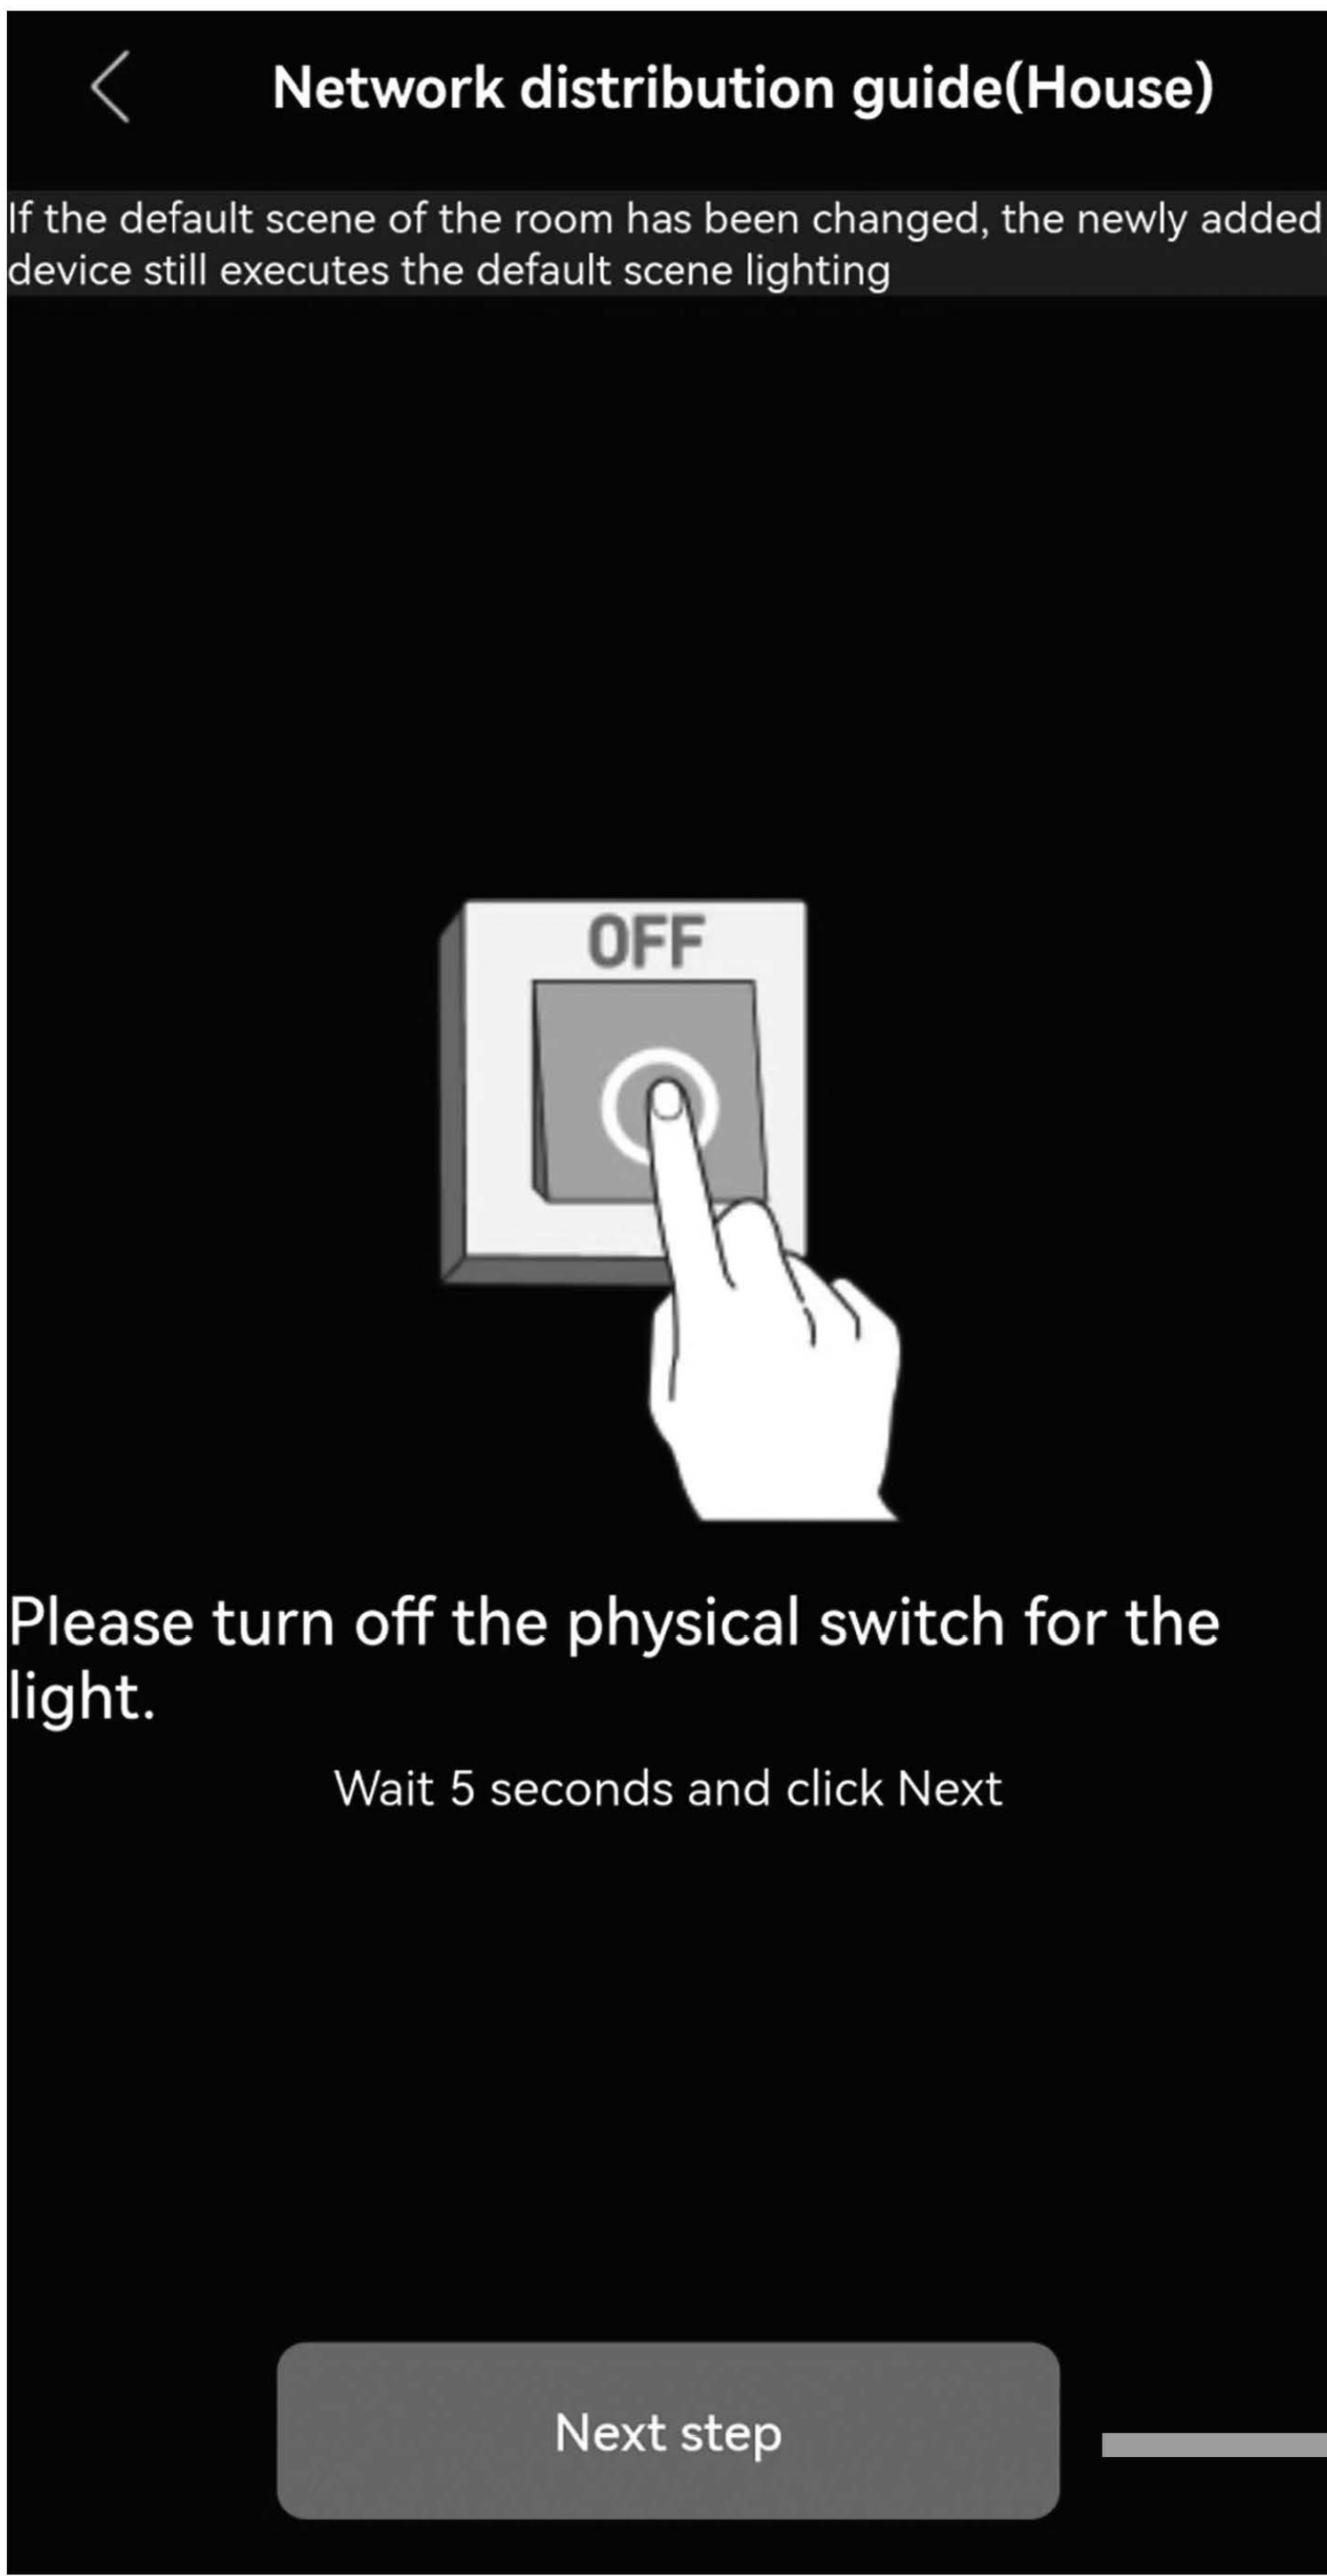


6

7 Plug in the smart box power plug.

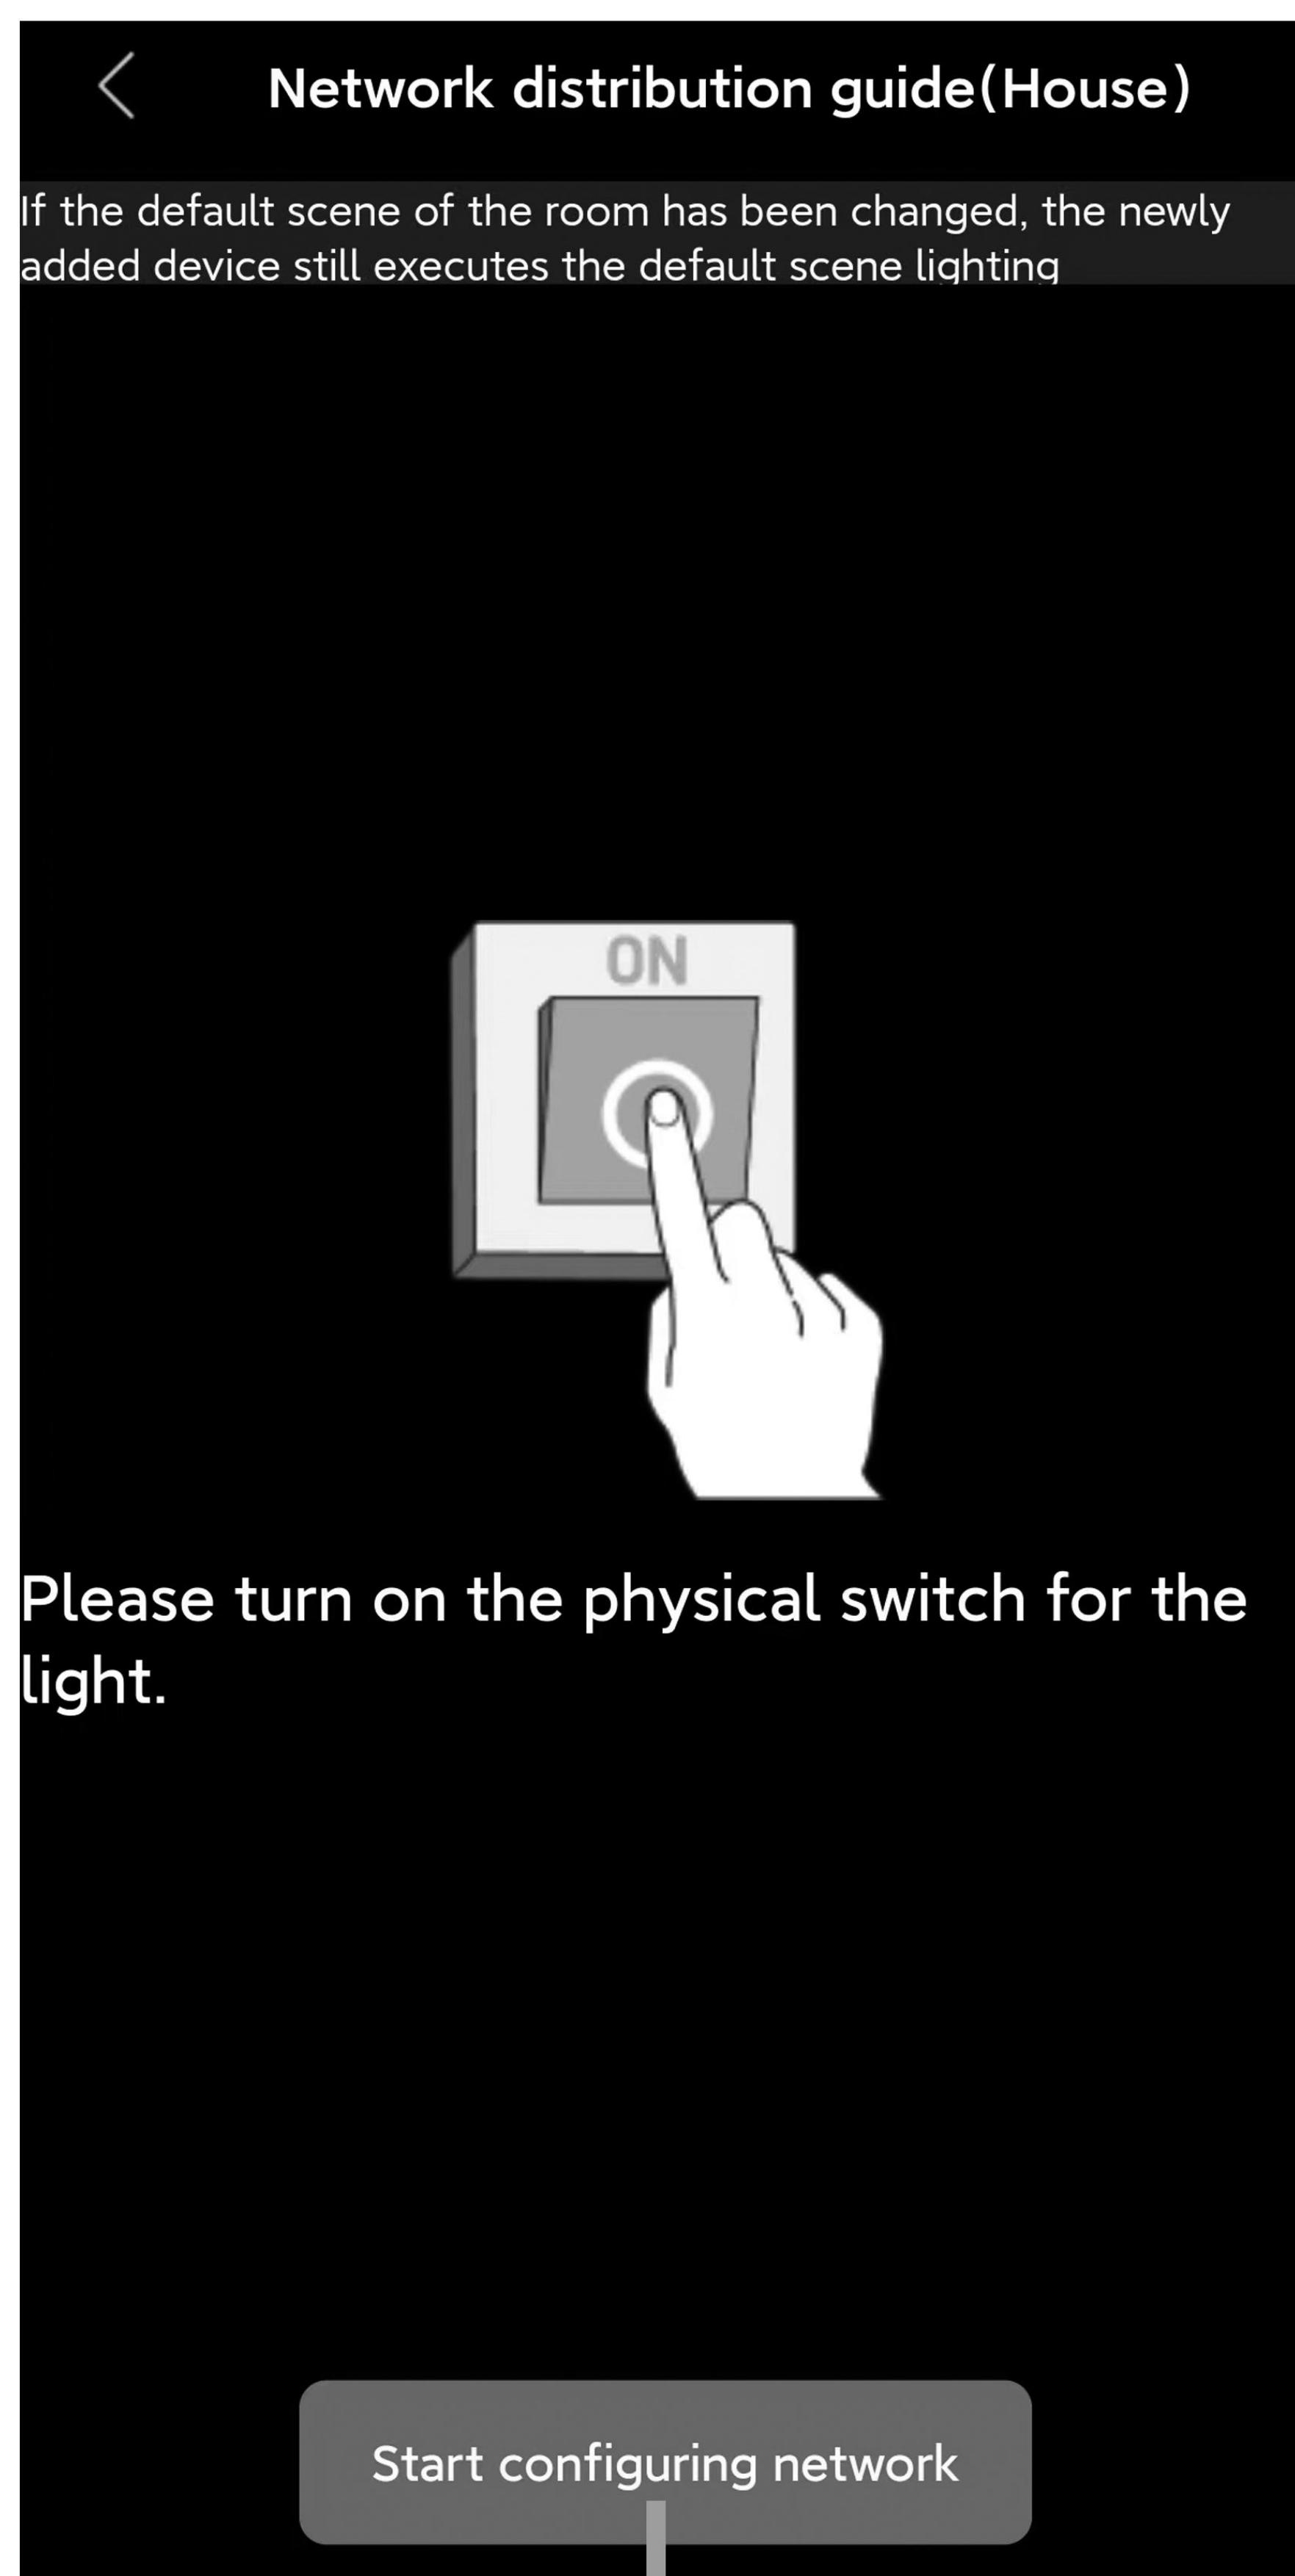


8


The appearance of this program icon indicates that the matching is complete

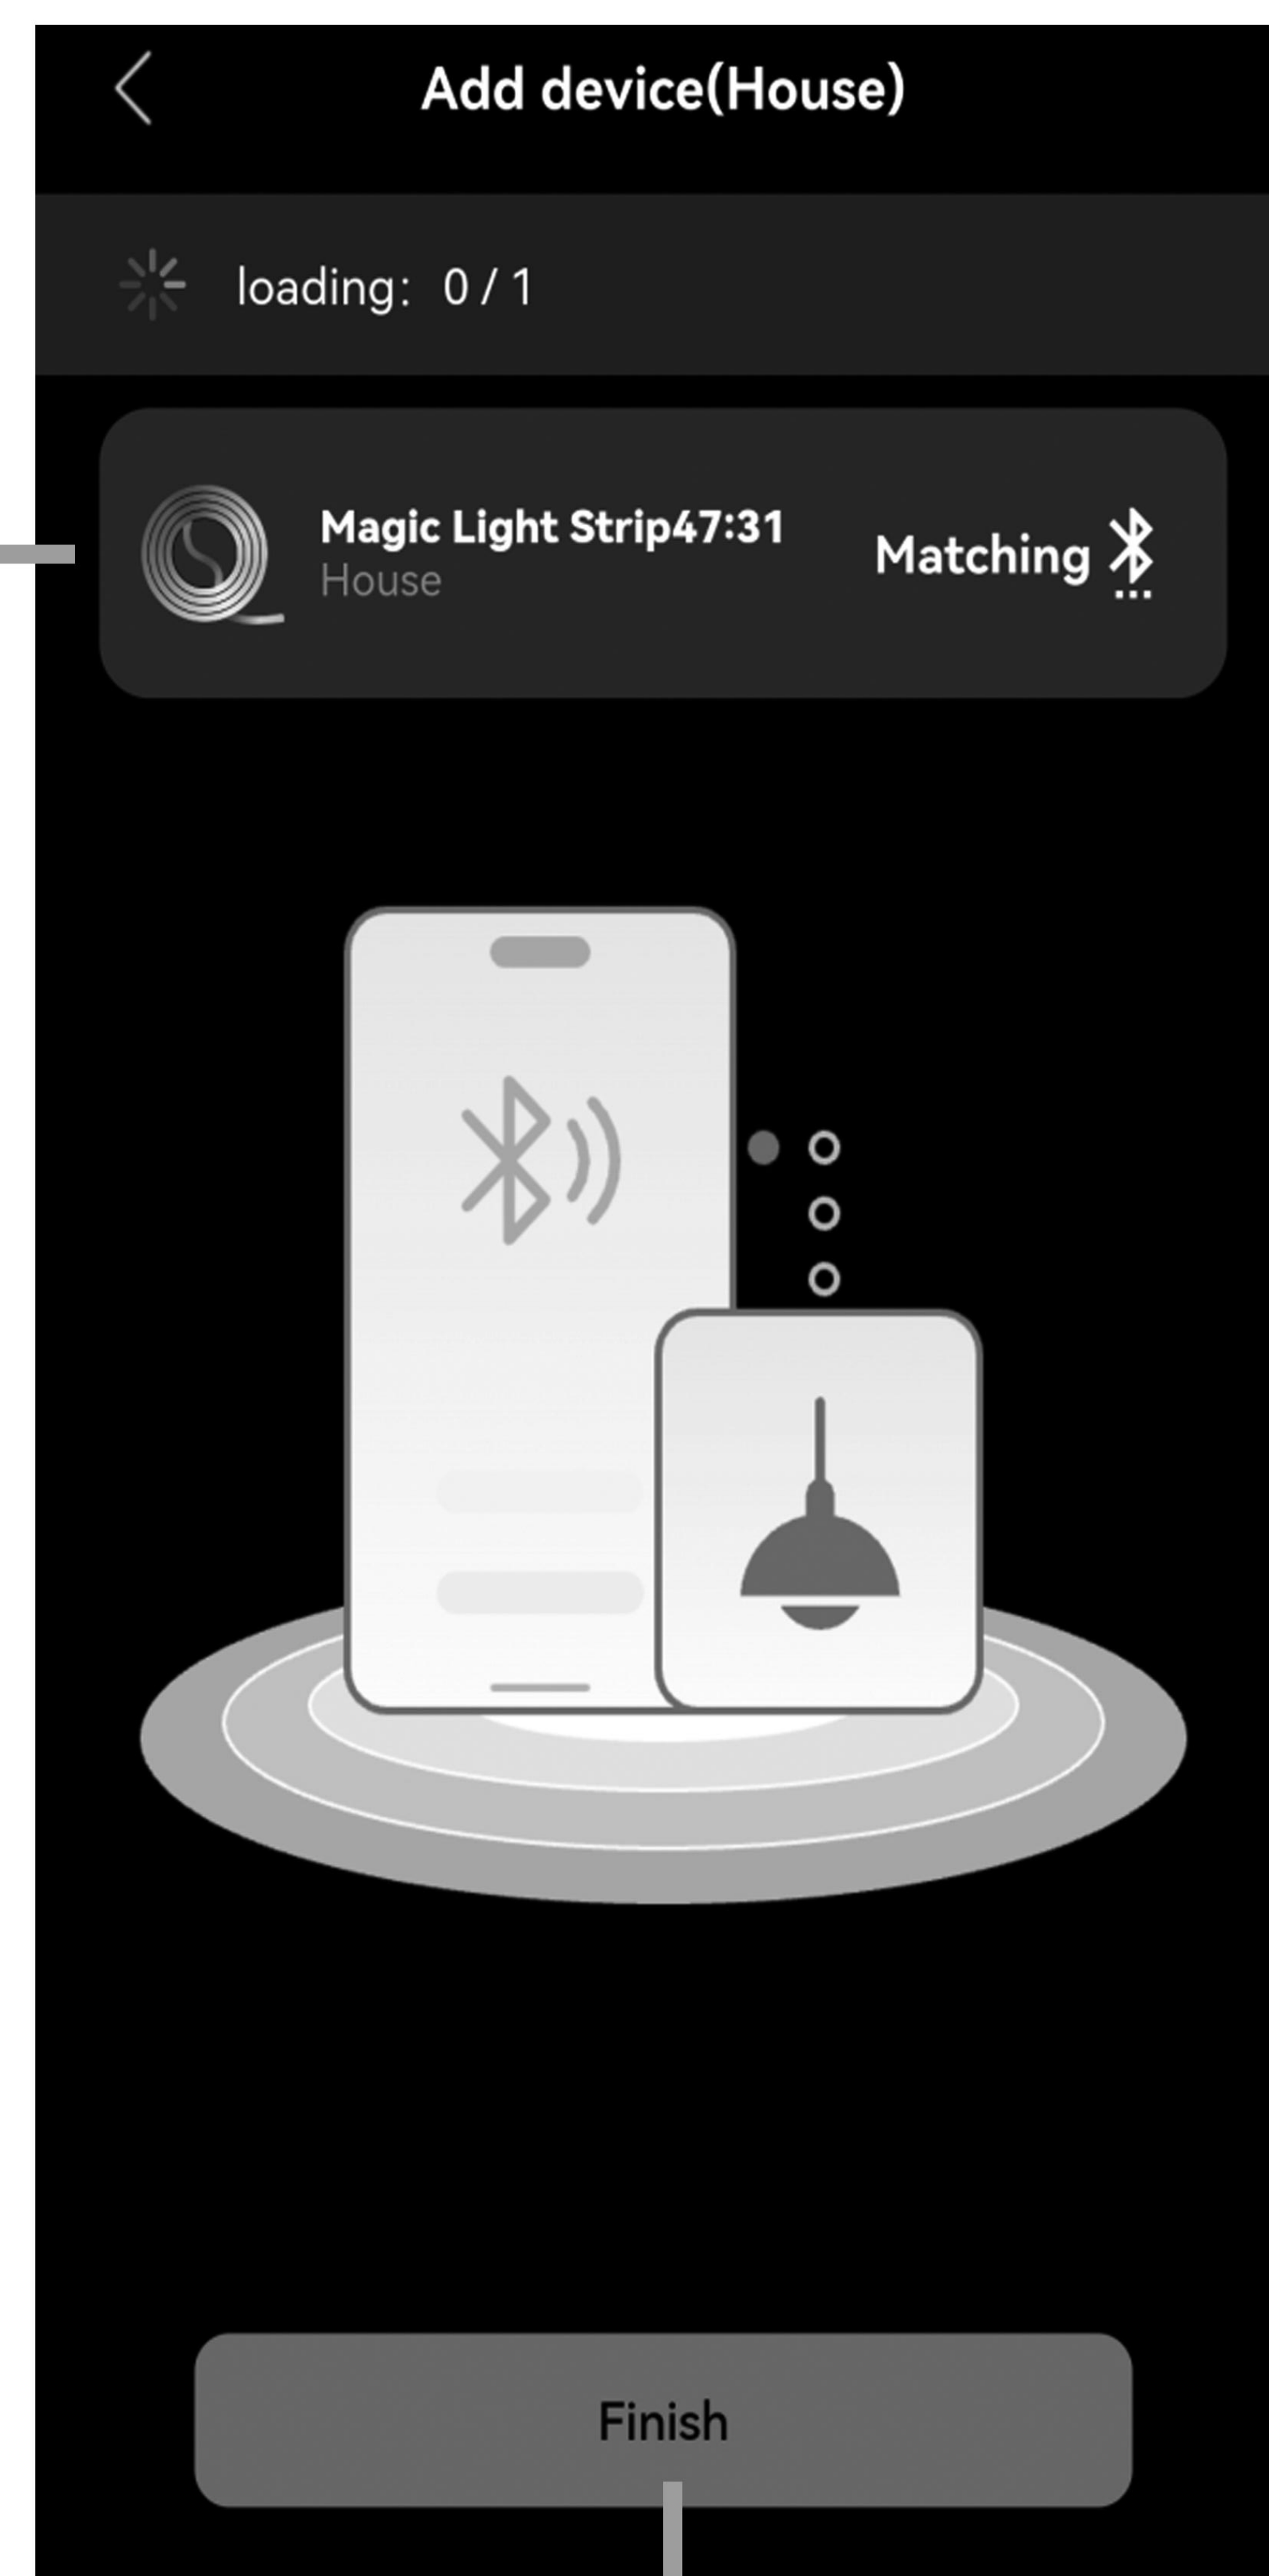

9

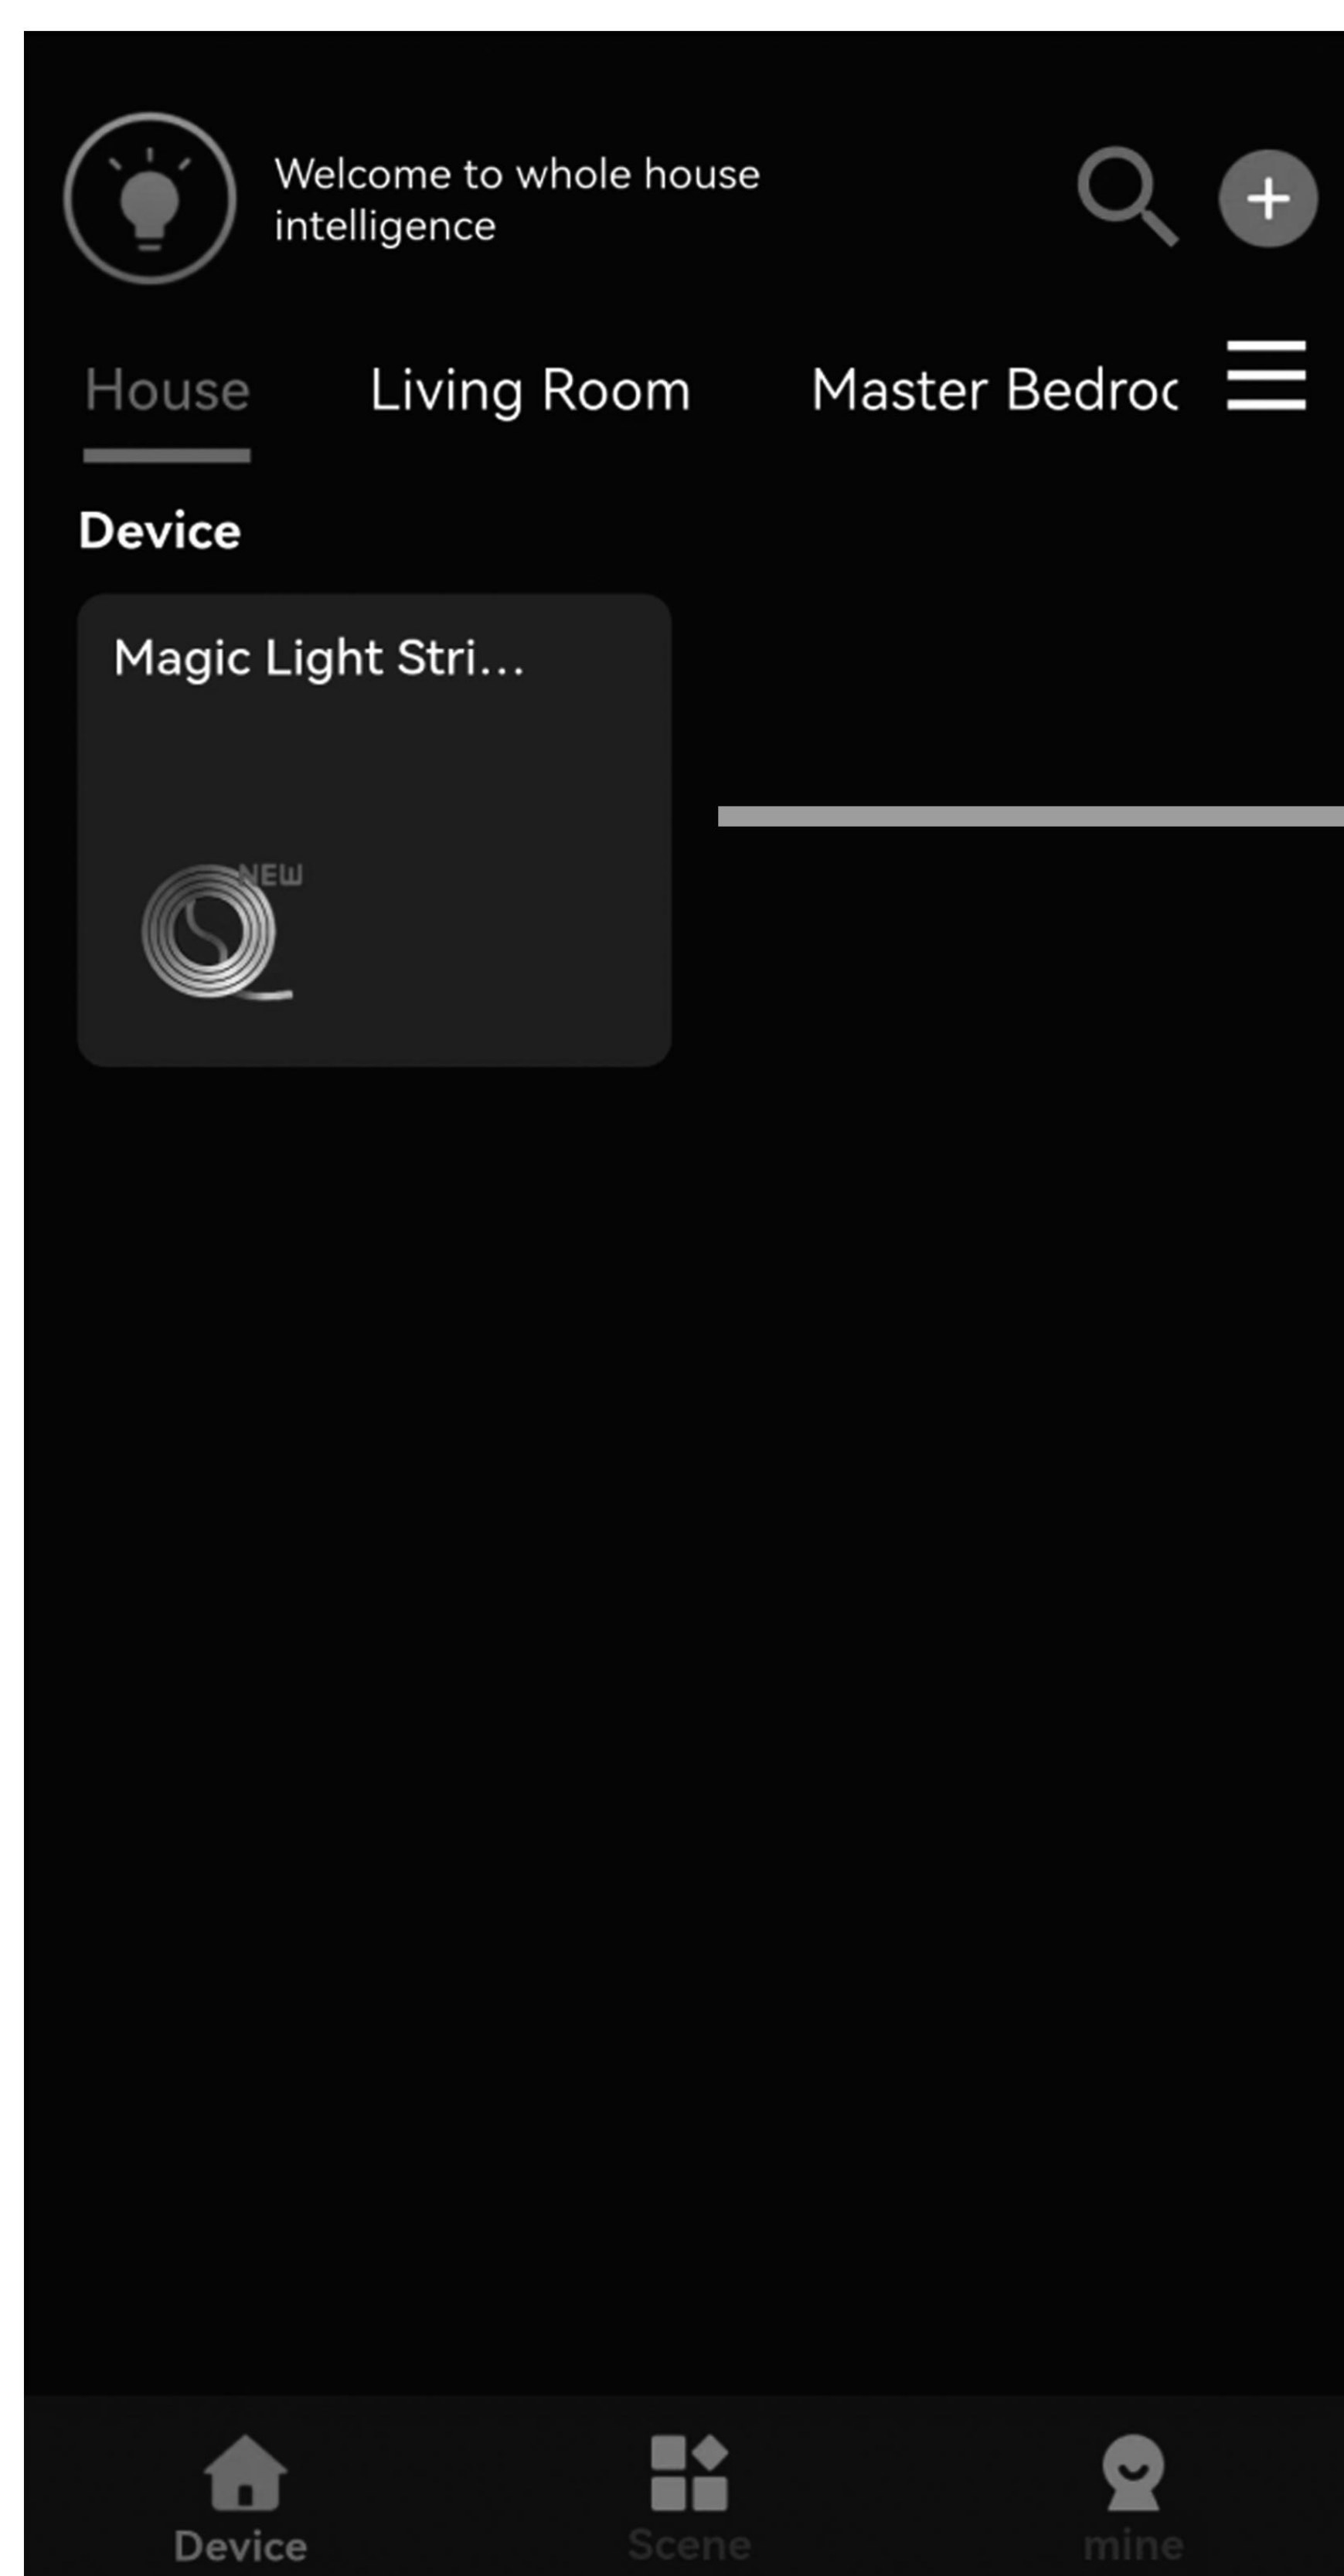

10

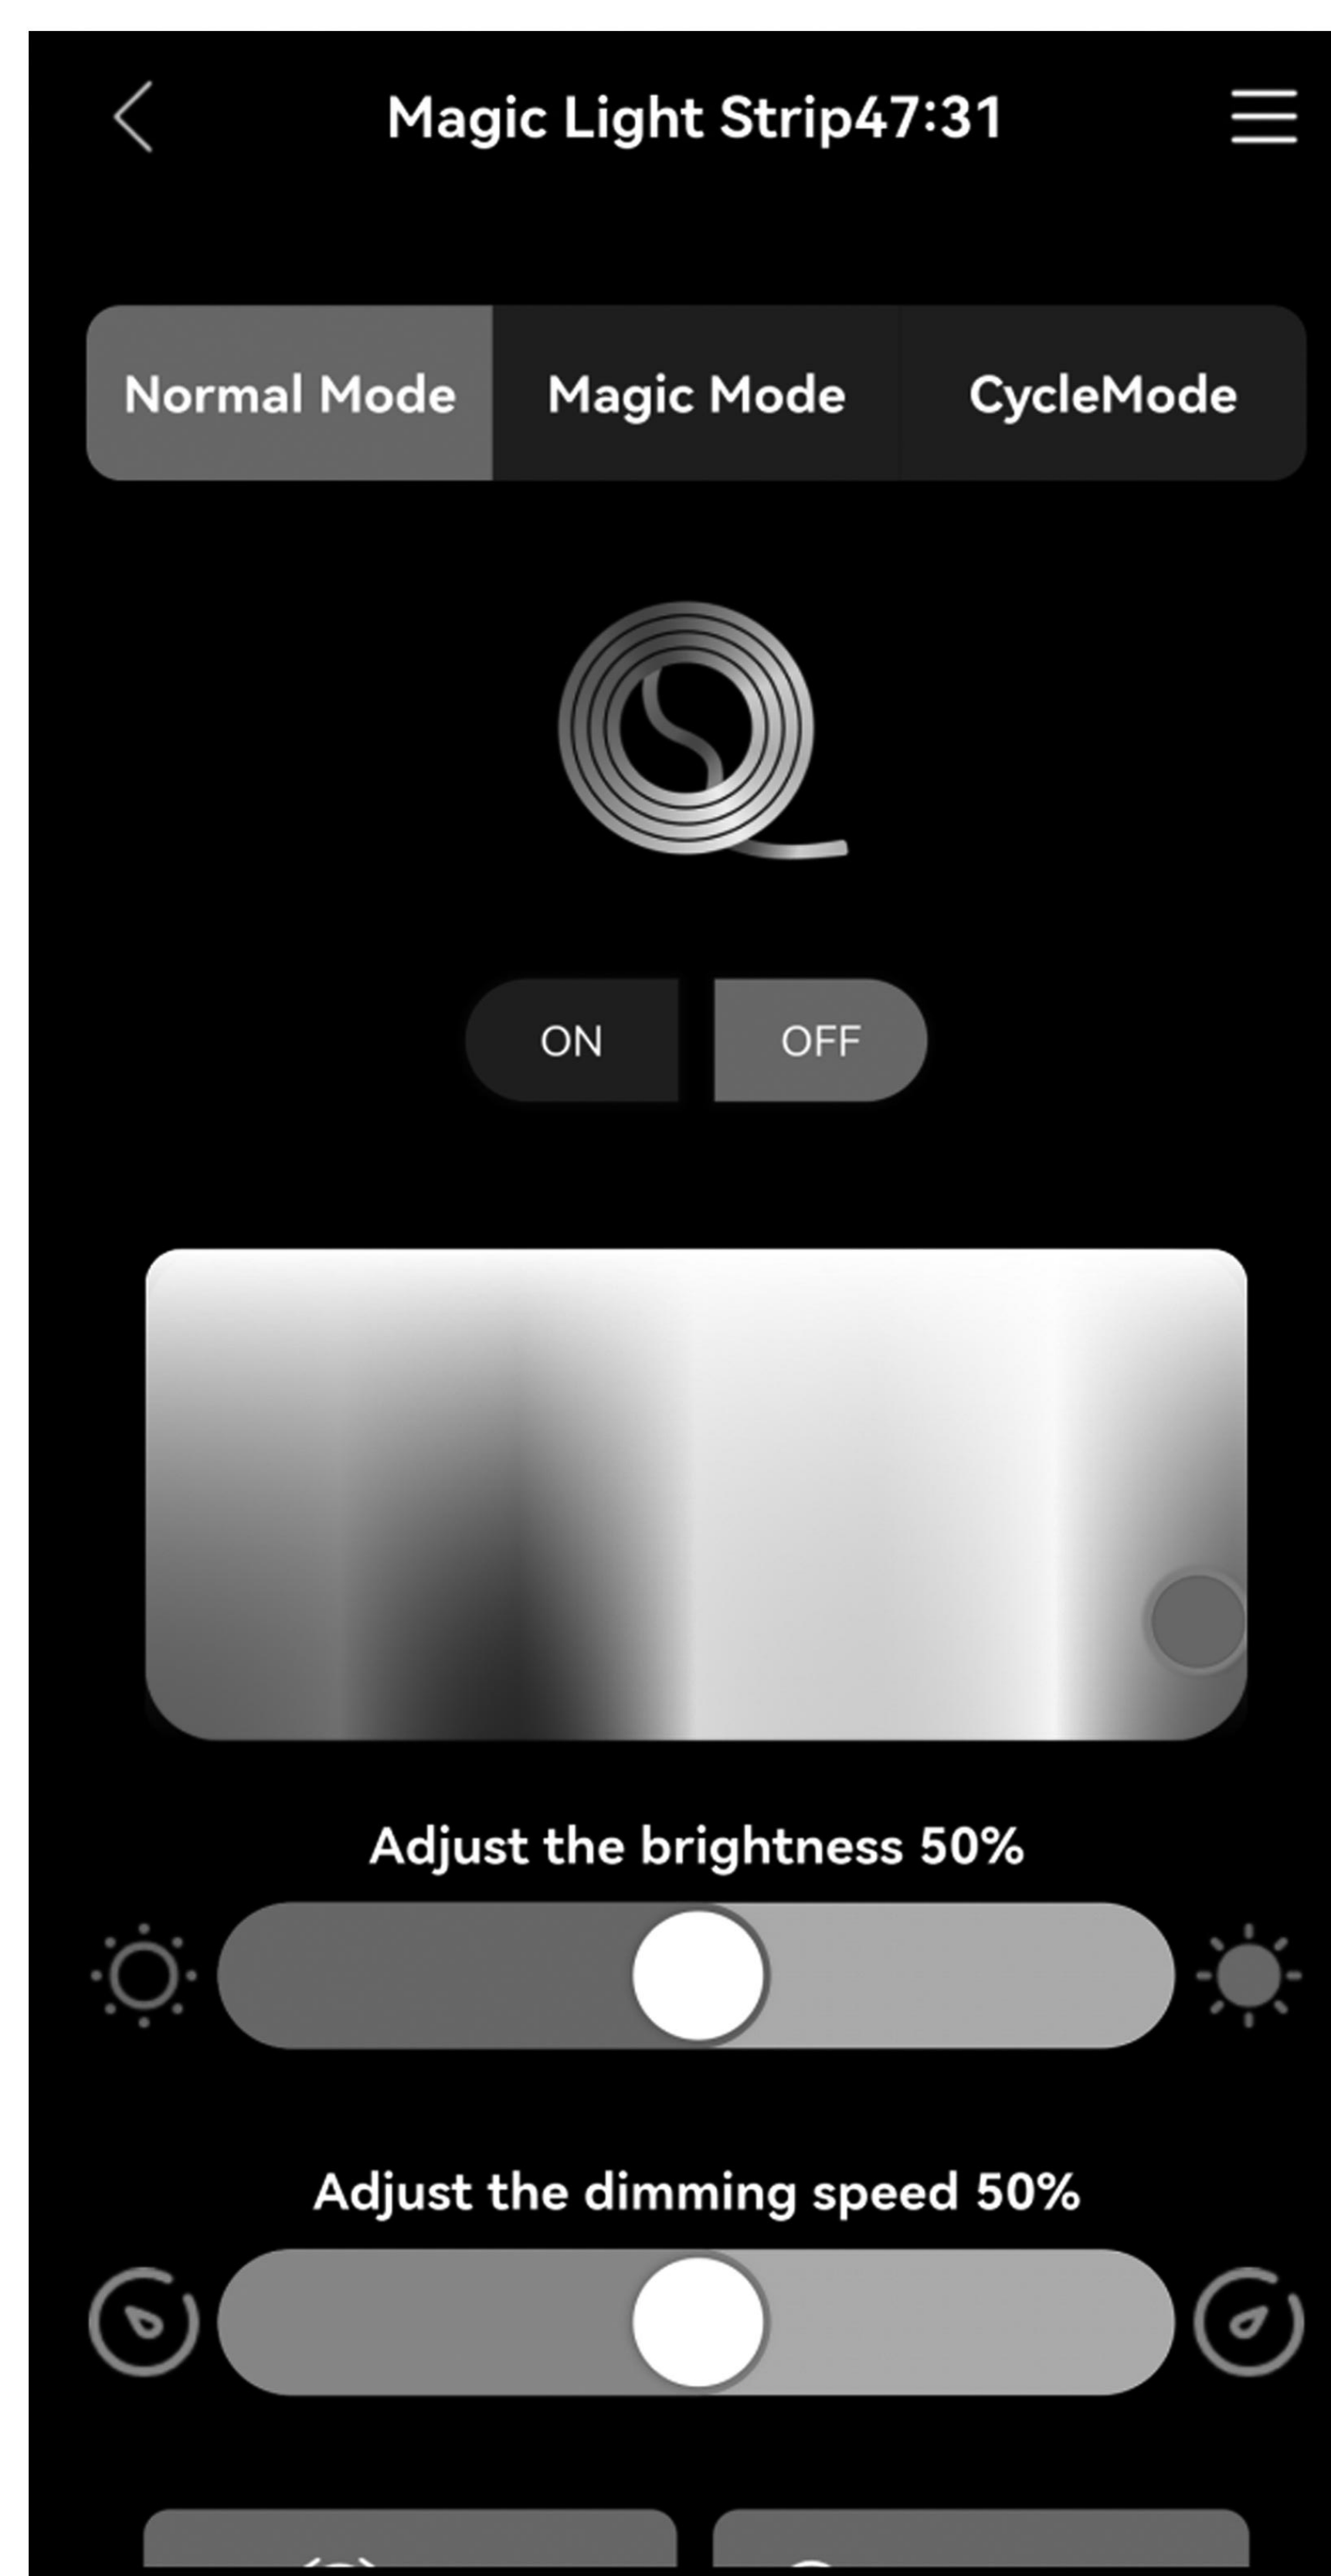


Now you can freely adjust the lighting according to your preferences

User's Guide

Thank you for purchasing this product.
To use this product, please plug it into a 12V DC power supply.
Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller. With 4 touch buttons,
it can turn ON/OFF the light and turn ON/OFF the induction function,
change light colors, and adjust the light luminance.
The lights can be controlled through both the touch buttons and a dedicated app.

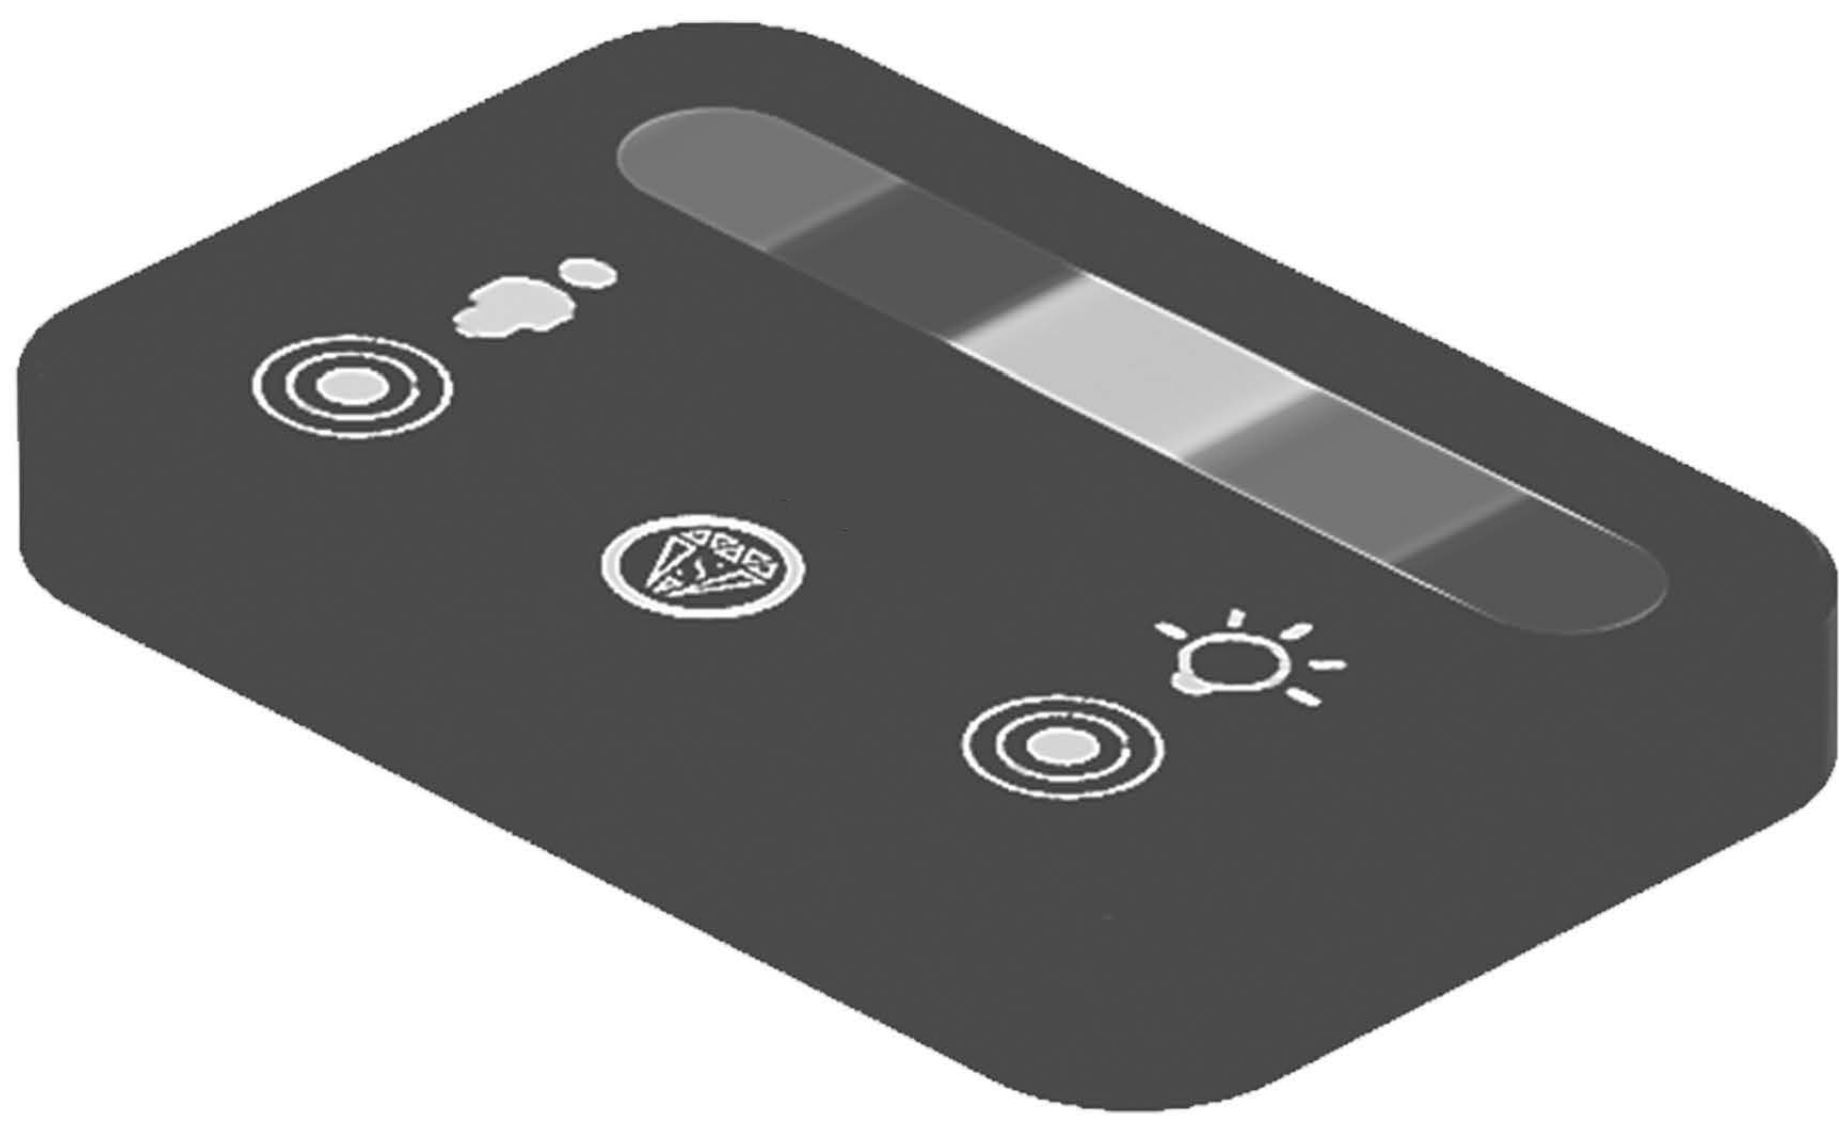

Operation

This touch button is used to turn the light on/off, adjust brightness, and switch the color of the lights.



- i. Single Click: Turn the light on/off.
- ii. Quick Double-Click: Switch between 7 static RGB colors.
- iii. Long Press (2+ seconds): Adjust the light luminance.

This touch button is used to turn on/off the induction function.




- A.touch this button once to turn on the induction function (indicator light on).
After the person leaves or remains stationary for more than 30 seconds, the light strip goes out; people and objects within a range of 1 meters move will light up the light strip.
- B. Long press this button for 0.5 seconds to turn off the human body induction function(the indicator light goes out).
At this point, Keep the light strip as it was before turning off and no longer be affected by humanand object activities.
By default, induction function is enabled when powered on.

This touch button is the Dynamic Phantom Color Mode, which includes 5 magical lighting effects.
Simply tap to cycle through the options.(Attention:This mode cannot adjust the brightness)



This area controls the color switching function.
You can tap or slide to any color bar position to change the color.

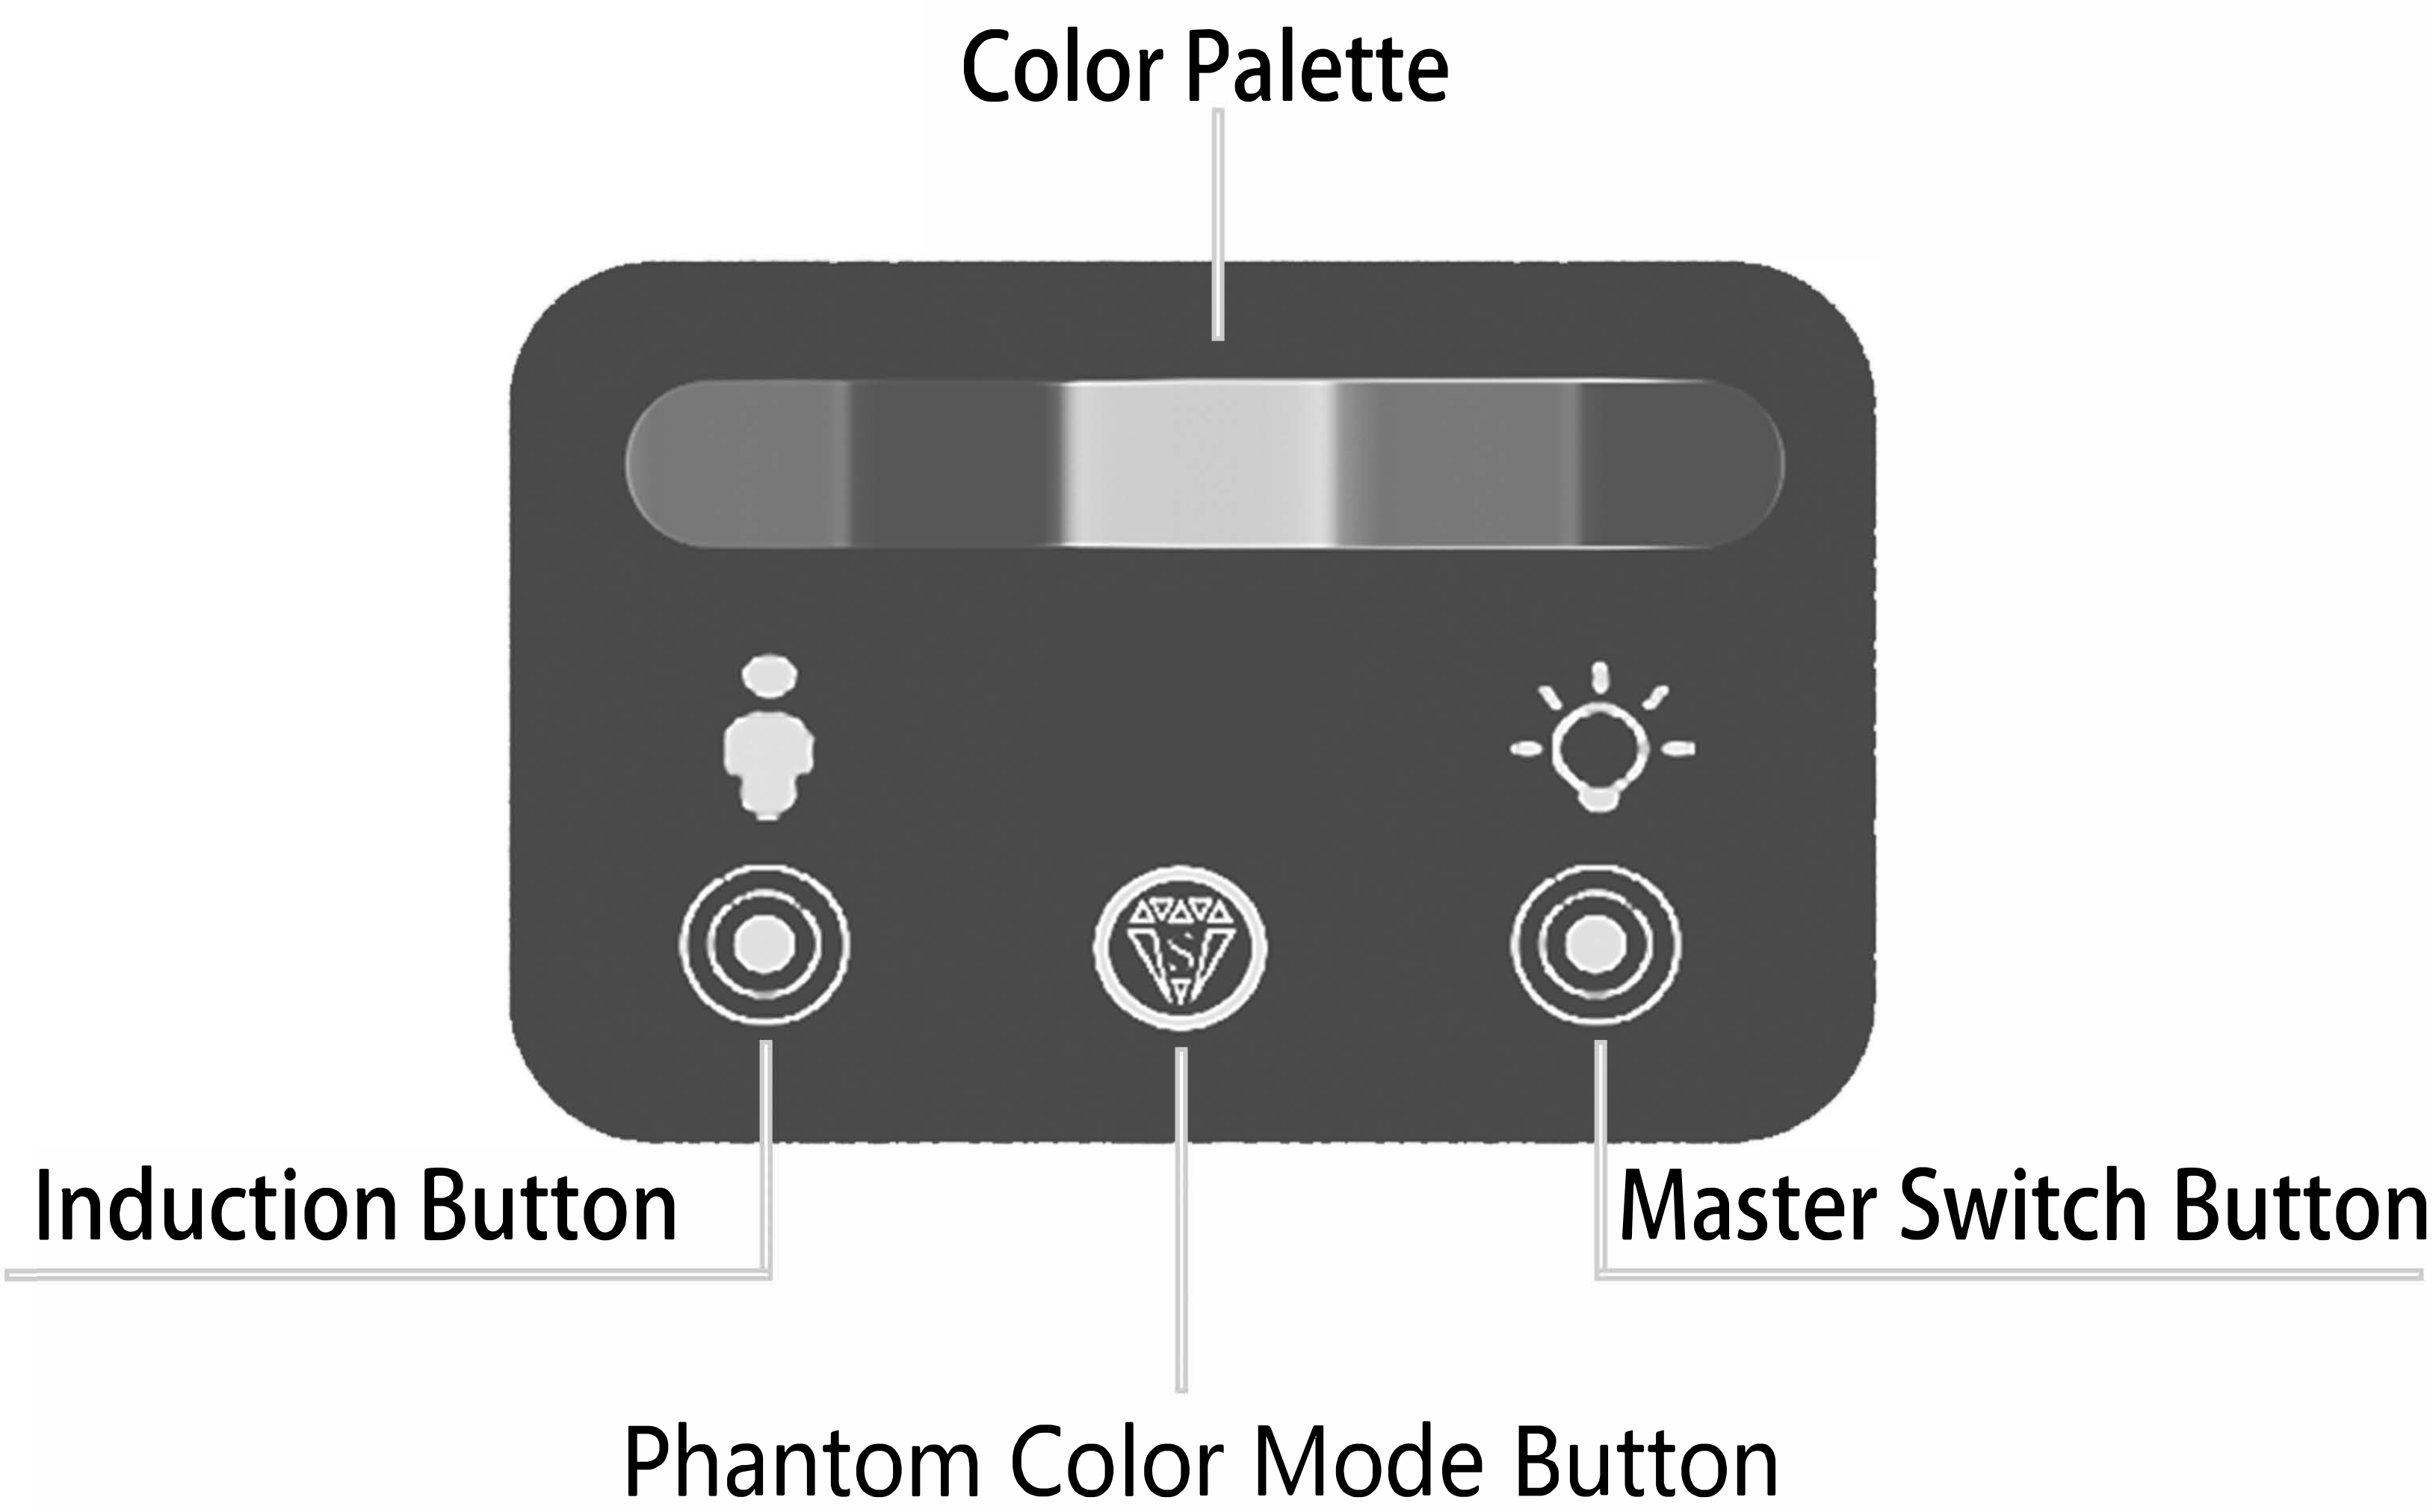

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.
3. If you have any questions when installing, please feel free to contact us. Thank you.