

# Office Chair



Missing parts, damages, and any problems in the installation process, please contact us by text or email. Please choose email as your first choice for communicating with us.

# Parts list

## PARTS

A x1




B x5




C x5



D x1



E x1



F x1



G x1



H x1



## Hardware

I



Screw : x10  
M6\*14MM

J



Screw : x4  
M6\*30MM

K



Screw : x8  
M8\*30MM

L



Caps: x8


M



Allen key : x1


# Installation steps

1

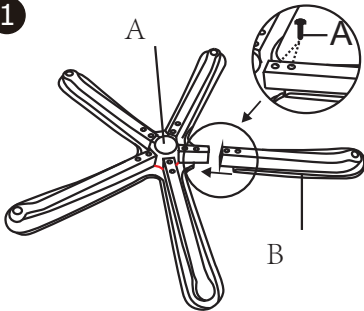


Insert part B into part A and secure with screw I

2




Insert Part C into Part B, then install Part D

3



Use screw J to fix Part E to Part H


4



Install Part H on Part D

# Installation steps

5



Attach the armrest to the seat cushion and backrest using screws K. During the installation process, please do not tighten all the screws, otherwise the backrest will not be installed. After installing the backrest, tighten all the screws.

6



End all installation after installing part L.


7



Installation is complete


## 5D ARMREST ADJUSTMENT

Not only are the armrests adjustable in height, the padded can also be adjusted forward and backward and rotated 360°.

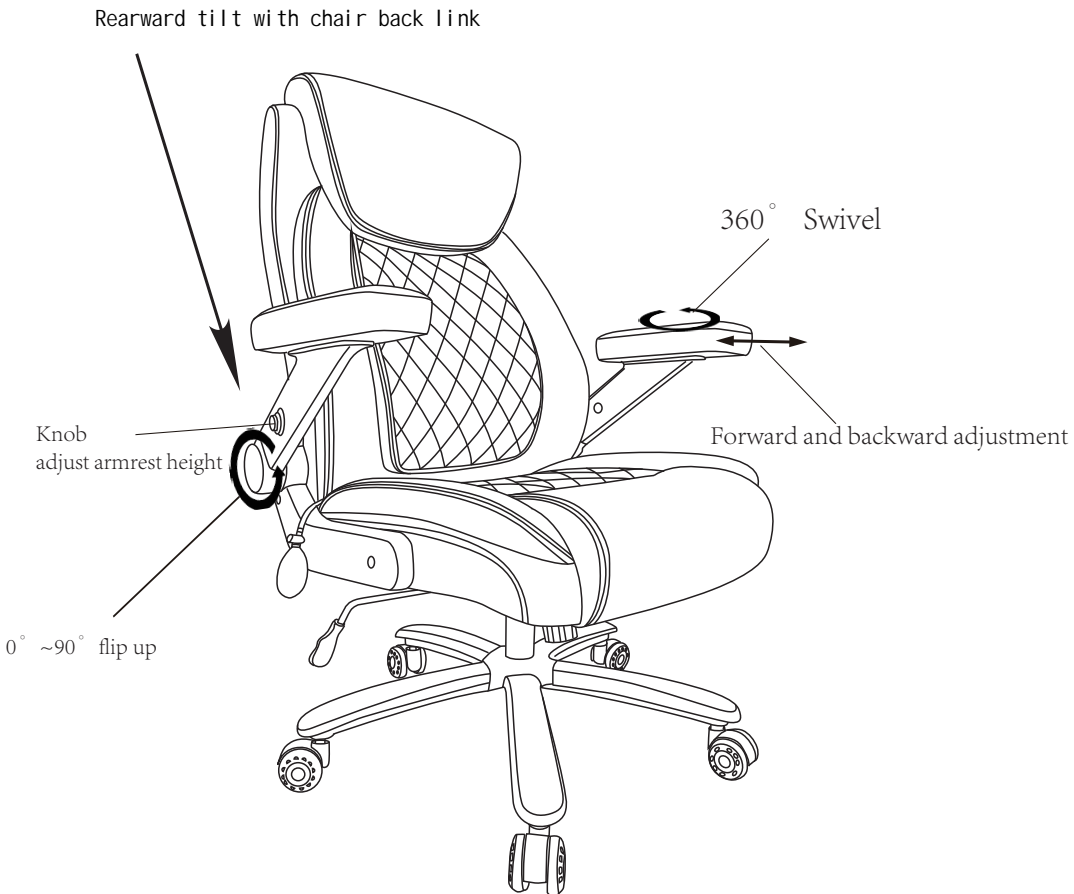

## HEIGHT ADJUSTMENT

Seat Height adjustment (Adjusting  
Lever on the right)

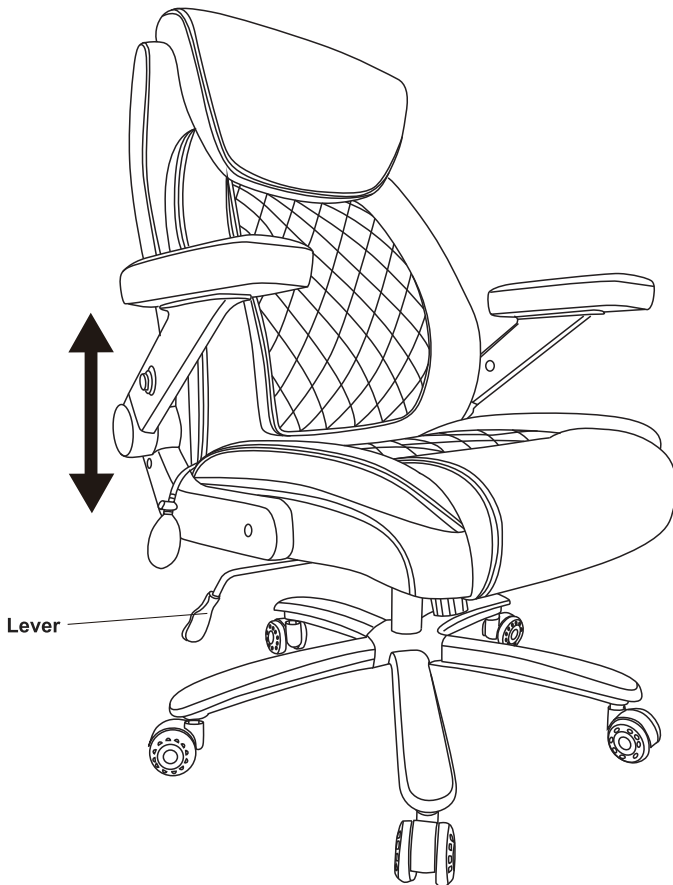

## TO OPERATE TILT LOCKOUT


While seated, reach under the left side of the chair to find the lever.

Push down the lever and lean back to allow the chair to tilt backwards. To lock the chair in the upright or vertical position, sit upright and pull the left lever to the level position.




## ROCKING ADJUSTMENT FUNCTION

The tighter the knob is turned, the less shaking it is, and vice versa.

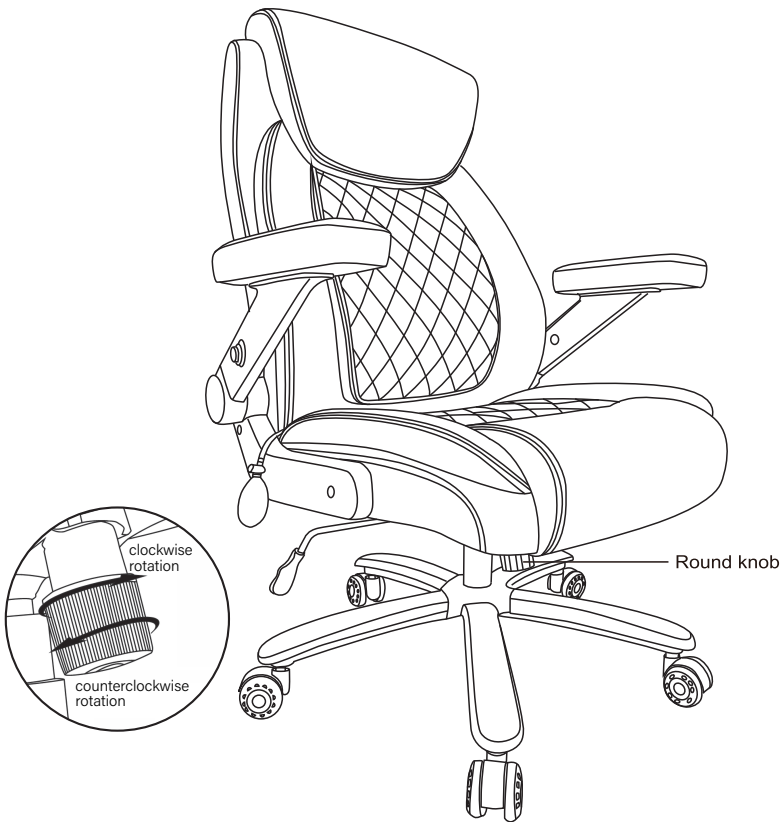

## ADJUSTABLE LUMBAR SUPPORT

The lumbar support can be adjusted by rotating the air bag

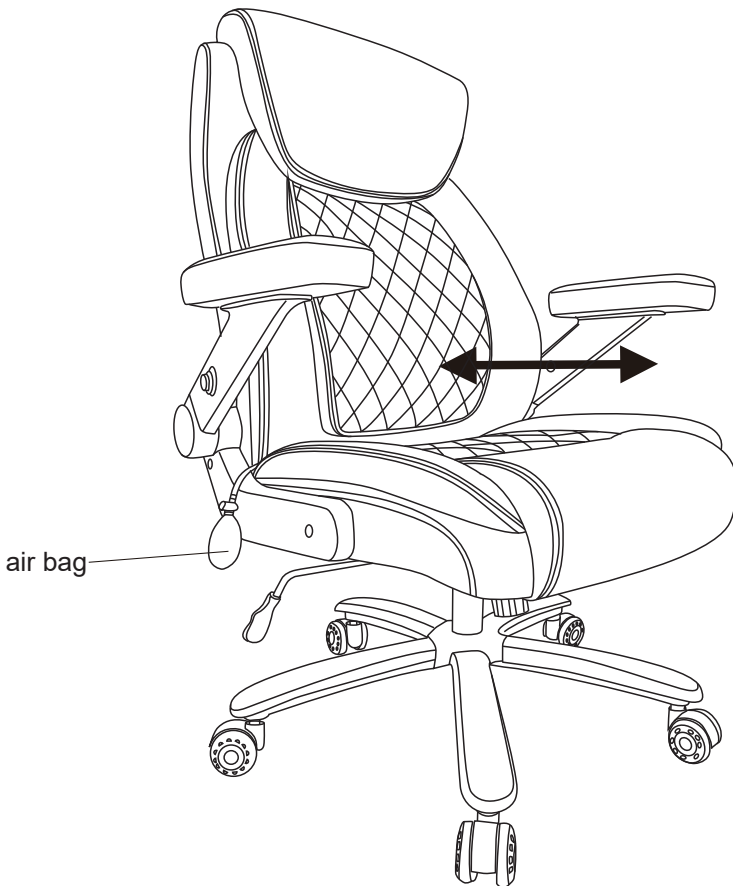

1.

Q: The chair doesn't stay at the height I want, and sunk when I sit on it. What should I do?

A: This problem can be solved by replacing the gas lift. If you can't solve the problem even with the help of the video, please contact us and we will send you a new replacement part.

2.

Q: I received a screw that couldn't match with the hole or I received an incomplete screw, what should I do?

A: If the screw didn't match or couldn't tight with hole, please check whether the screw has thread or the hole has thread. If not, please contact us. Of course, we will send you replacement screws if they was lost.

3.

Q: I found that the chair was very wobbly when I sat on it, what should I do?

A: Please check whether the screws of the armrests and backrest are tightened first. If all the screws are tightened and the chair still shakes, maybe it was caused by mechanism damage. Please send some pictures about it, we will send replacement after confirm.

4.

Q: Does the seat itself have a tilt locking mechanism? Something I can lock in to keep me from tilting?

A: Yes, this type of chair have tilt locking function, 90-135 degree rocking.