


Usage Tips

1. For your safety, please assemble the chair carefully according to the steps in the instruction manual.
2. Before you start assembling, please check and make sure all parts are complete according to the instruction manual.
3. If you find any parts missing or other issues, please don't hesitate to send us an email and we will help you out ASAP.

For Longer Use

- *Re-tighten bolts every 6 months by using the enclosed allen-key.
- *Using an electric drill can damage the chair.
- *Please re-tighten bolts manually.

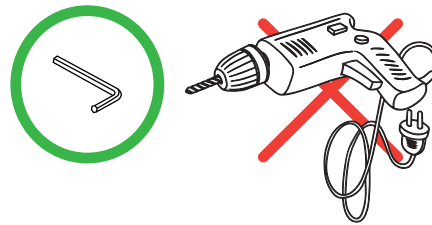

Safety Information



Sit in the center of the chair, with your back to the backrest



Do not sit at the front edge of the chair



Do not stand on the chair



Do not use the chair with more than one person



Do not push the chair around when a person is sitting in it



Do not push down on the backrest when a person is reclined

INSTRUCTION MANUAL





HC-5350FA




Assembly Instruction


PACKAGE LIST

* Without further ado, we kindly suggest you to list all parts needed for the chair first.


(1) X1 	(7) X1 
(2) X1 	(8) X5 
(3) X1 (L) X1 (R) 	(9) X6  M6X35mm
(4) X1 	(10) X5  M6X18mm
(5) X1 	(11) X4  M8X20mm
(6) X5 	(12) X4  M6X20mm
	(13) X1 

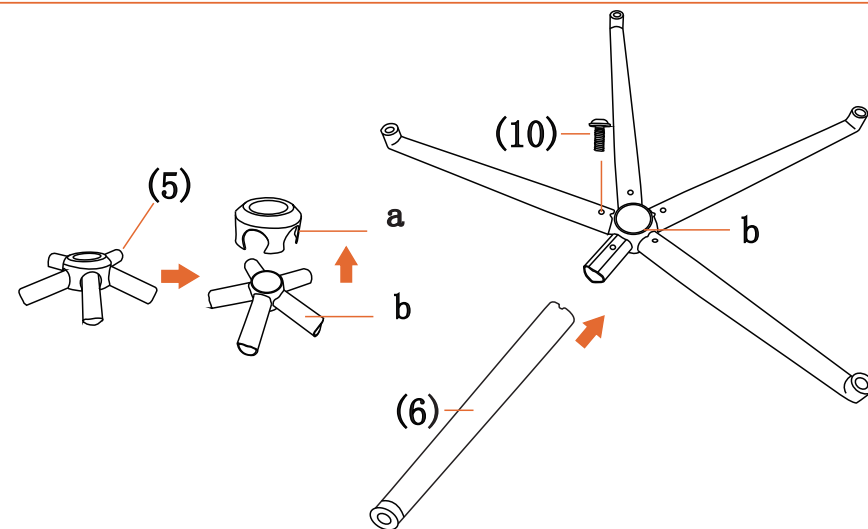

- 1** Turn the Base (5) upside down to two parts (a) and (b), then insert Legs (6) one by one to Base. Use the Wrench (13) to screw Five Bolts (10) into the pre-drilled screw holes to fix Base and Legs.

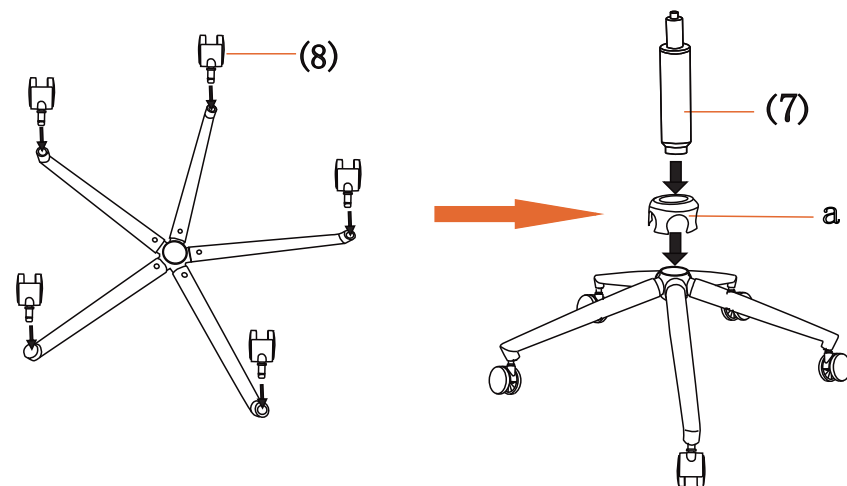


- 2** Both hands are forced at the same time to press the Casters (8) into the holes at the end of each Base Leg. Put the base (a) back the base and insert Gas Lin (7) into the center hole of the Base.

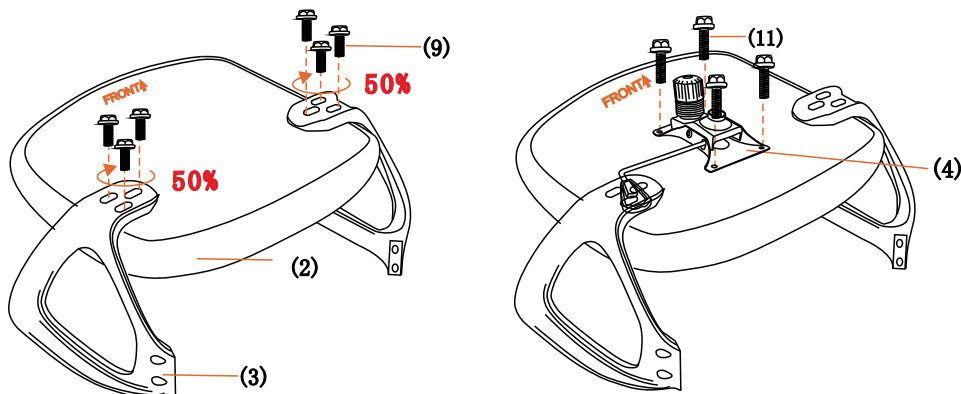

3

Attach the Handrail (3) to the Seat using Six Bolts (9), 50% tighten all the bolts with the Wrench (13). Align the Mechanism (4) over the pre-drilled holes underneath the Seat (2), and attach the Mechanism to the Seat using Four Bolts (11) make sure the front of the mechanism is facing the front of the Seat.

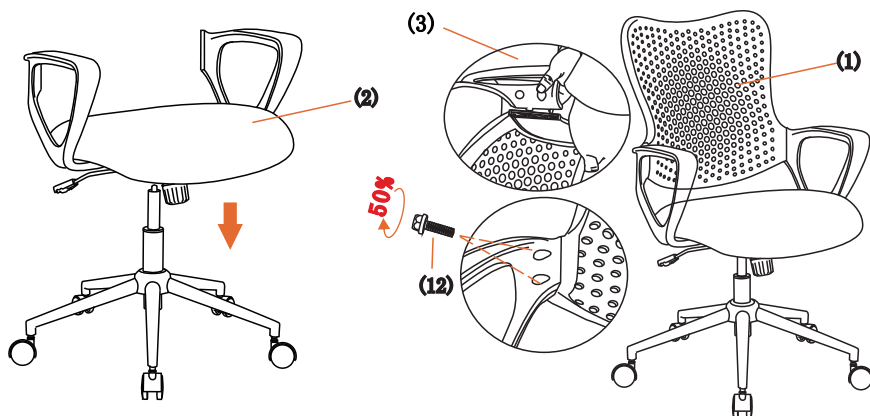

4

Turn the Seat (2) upright and align the center hole of the Seat Plate over the lift, then push the Seat down onto the lift firmly until the connection is secure. Attach the Handrail (3) to the Back (1) using Four Bolts (12), 50% tighten all the bolts with the Wrench (13).



5

Make sure all the details are right and 100% tighten all the bolts.

Maintenance Suggestions

- Check All Screws Before First Use
- Recommended Usage Environment
- Regular Inspection & Maintenance
- Use Within The Weight Limit
- Lift to Move
- Avoid Strong Impact