


Installation & Assembly

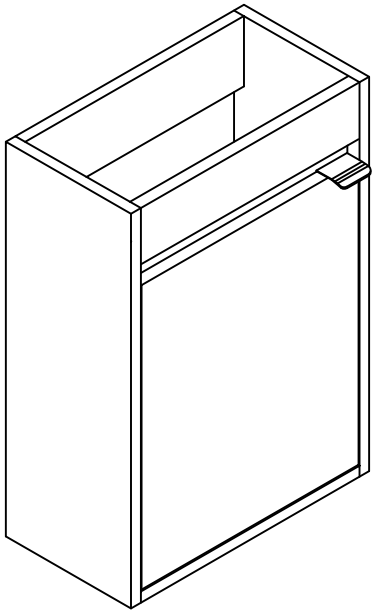

YOU MAY NEED (NOT SUPPLY)

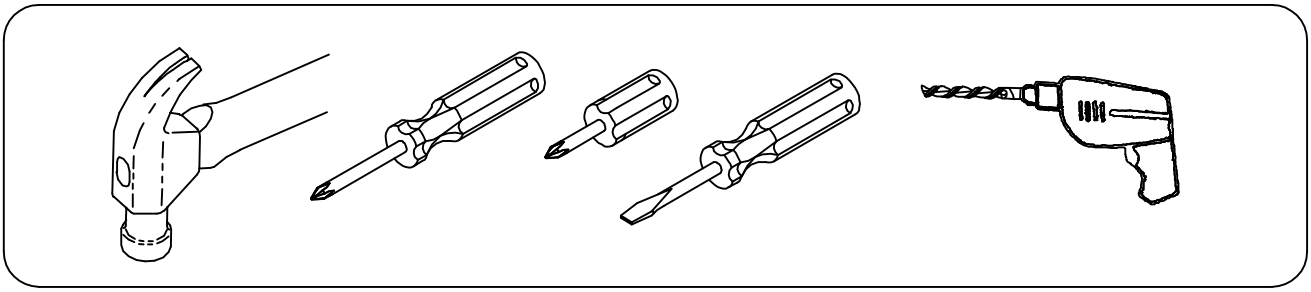

ASSENBLY DIAGRAM

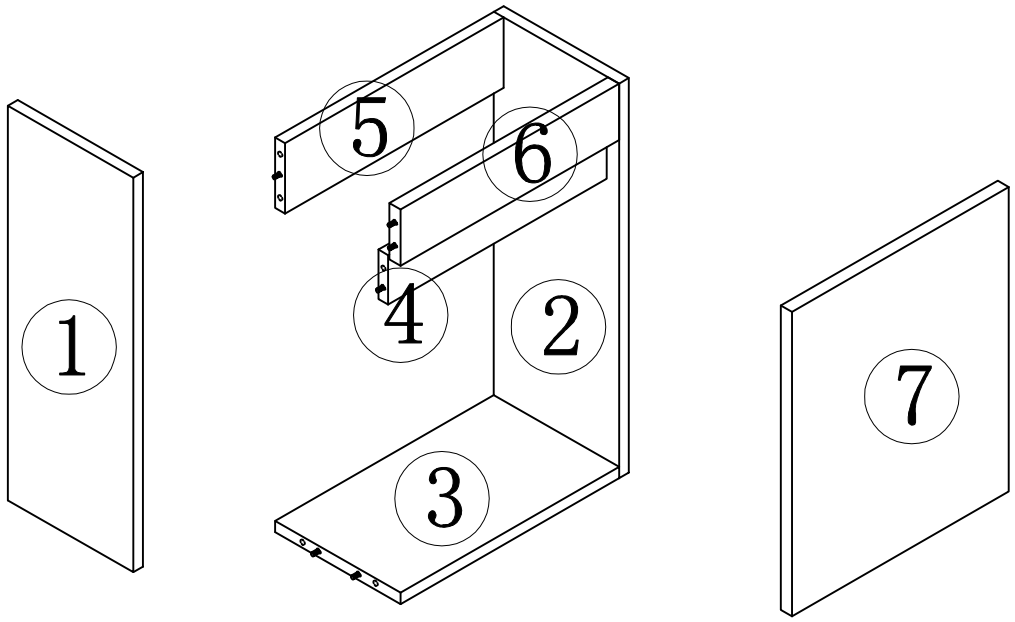

PARTS LIST

PARTS LIST

NO	DESCRIPTION	QTY	NO	DESCRIPTION	QTY
①	Left side panel	1	⑤	rear drop down	1
②	Right side panel	1	⑥	Front baffle panel	1
③	Bottom panel	1	⑦	Left door panel	1
④	front pull-up	1			

PARTS LIST


HARDWARE LIST

NO	DESCRIPTION	QTY	NO	DESCRIPTION	QTY
A	Three-in-one eccentric wheel	10	E	Door hinge	2
B	Three-in-one connecting rod	10	F	4*16mm screw	14
C	Three-in-one sticker	10	G	Door handle	1
D	8*40mm wood dowel pins	12			


CAUTION:


Please confirm the parts list before installation

STEP 1


HARDWARE LIST	
Three-in-one connecting rod B 10PCS	

1.Put the three-in-one connecting rod in the 10mm hole of the following panels and tighten them with a cross screwdriver or an electric tool.




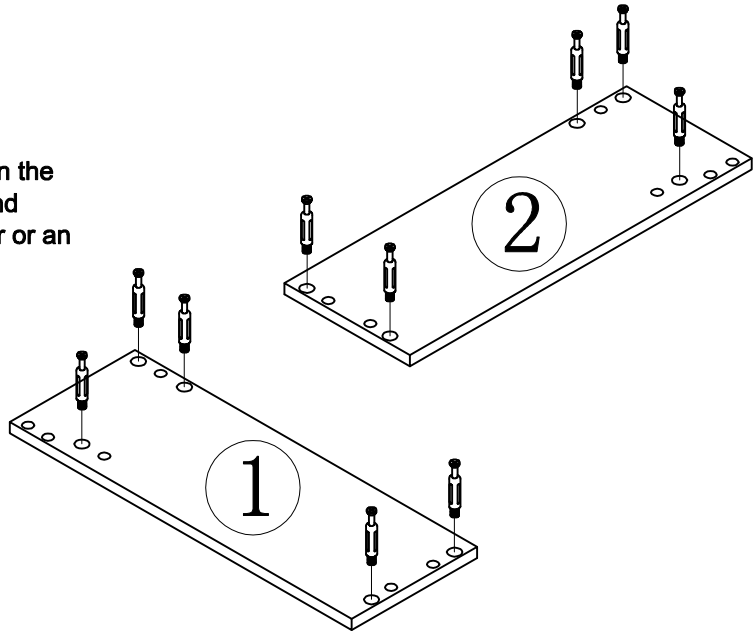

STEP 2

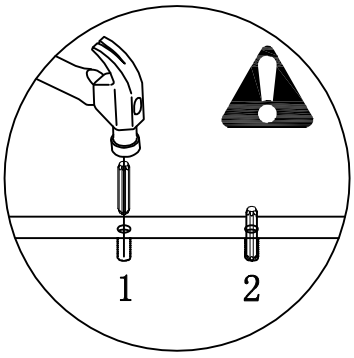



1.Strike the 08*40mm wood dowel pin into the 8m hole of the above panels with an iron hammer. Please note that the hole of the three-in-one connecting rod should also be 8mm. The hole of the three-in-one connecting rod connects to the hole of 15mm three-in-one eccentric wheel.

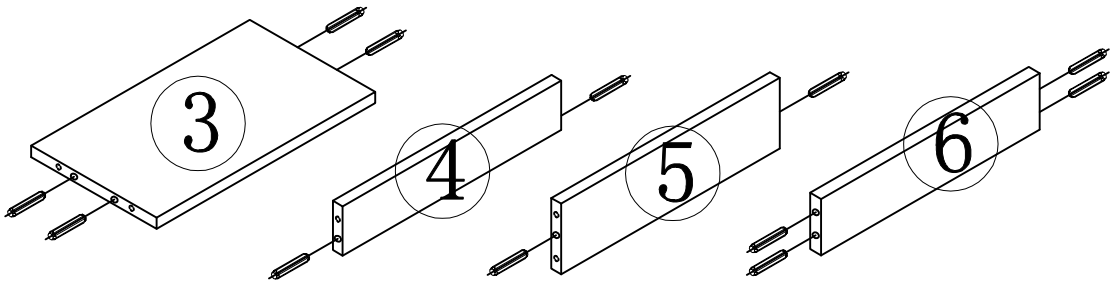


HARDWARE LIST	
8*40mm wood dowel pins D 12PCS	

STEP 3

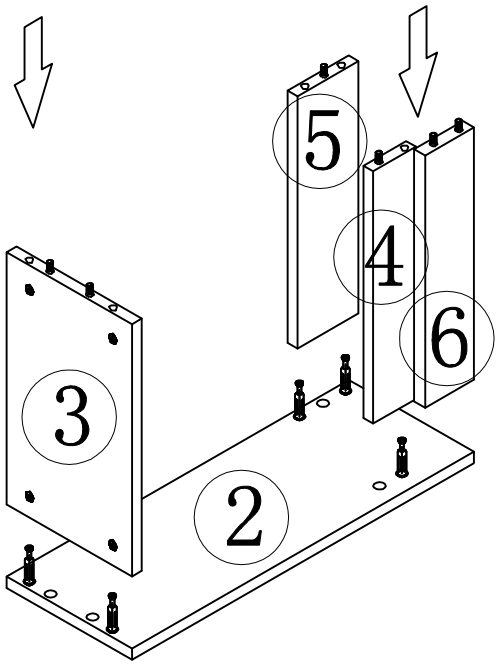




1.Connect No. 3-4-5-6 panel to No.2 panel tightly with the three-in-one eccentric wheel.




2.Cover the mounting hole of the eccentric wheel with a three-in-one sticker.


HARDWARE LIST		
Three-in-one eccentric wheel A 5PCS	Three-in-one sticker C 5PCS	

STEP 4

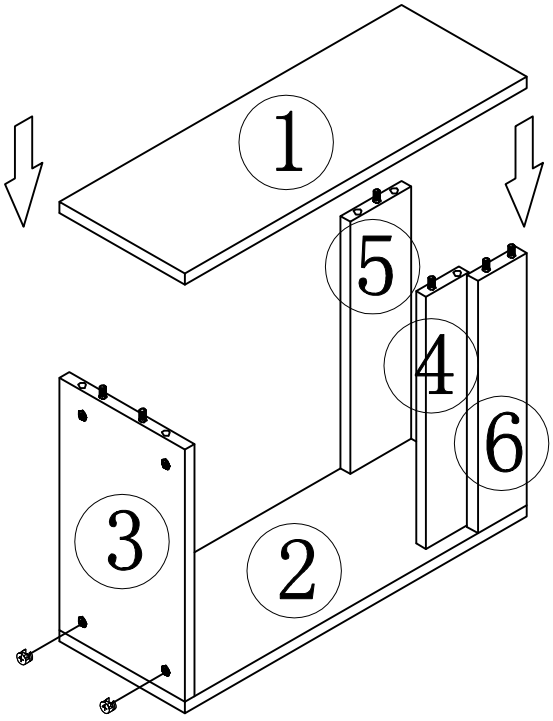





1.Connect No. 1 panel to No. 3-4-5-6 panel tightly with the three-in-one eccentric wheel.




2.Cover the mounting hole of the eccentric wheel with a three-in-one sticker.


HARDWARE LIST		
Three-in-one eccentric wheel A 5PCS	Three-in-one sticker C 5PCS	

STEP 5

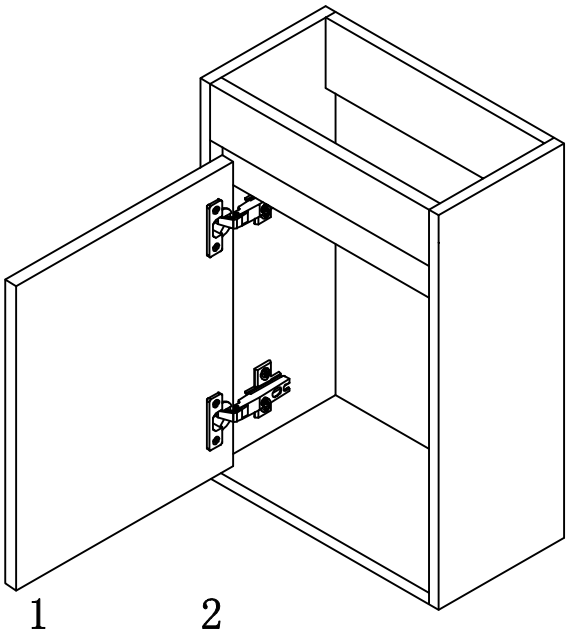





3.Install the hinge cup on the door panel to the hinge of the side panel.



1.Install the hinge cup to the door panel with 4*16mm screws.




2.Install the hinge to the side panel with 4*16mm screws.



4.Adjust the door panel clearance.

HARDWARE LIST		
4*16mm screw	Door hinge	
F 12PCS	E 2PCS	

STEP 6

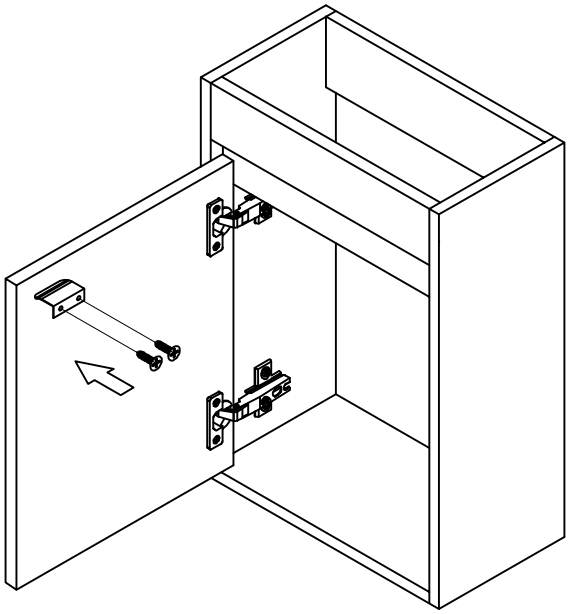

1.Install the door handle with 4*16mm screws.

HARDWARE LIST		
4*16mm screw	Door handle	
F 2PCS	G 1PCS	



Choking hazard-Small Parts： This unit contains small parts，not for children under 3 years.

Tip-over hazard： Secure finished unit to wall stud using L-Bracket and wall screw（#10*1.5"W/out provided). If a wall stud is not neccessible , Consault your local hardware store for appropriate mounting hardware . Failure to properly install will result in product collapse or tip-over. Serious injury can occur .