
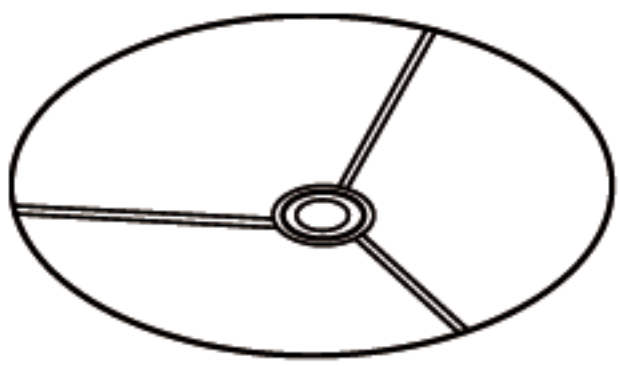
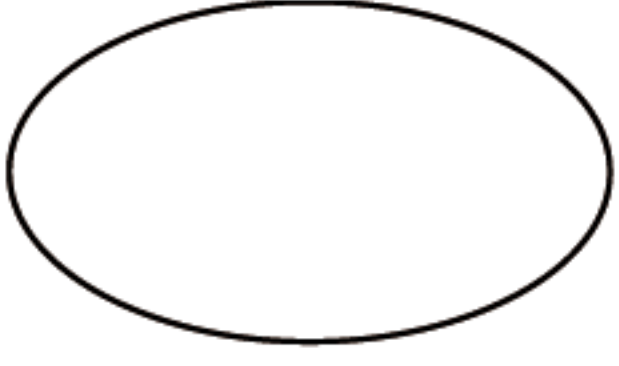



#1

Shade Assembly Instructions

a:panel	b:Ring	c:Ring
1 PC 	1 PC 	1 PC 


Step 1

Place the lampshade in plane and simultaneously roll parts b and c to adhere the lampshade Velcro

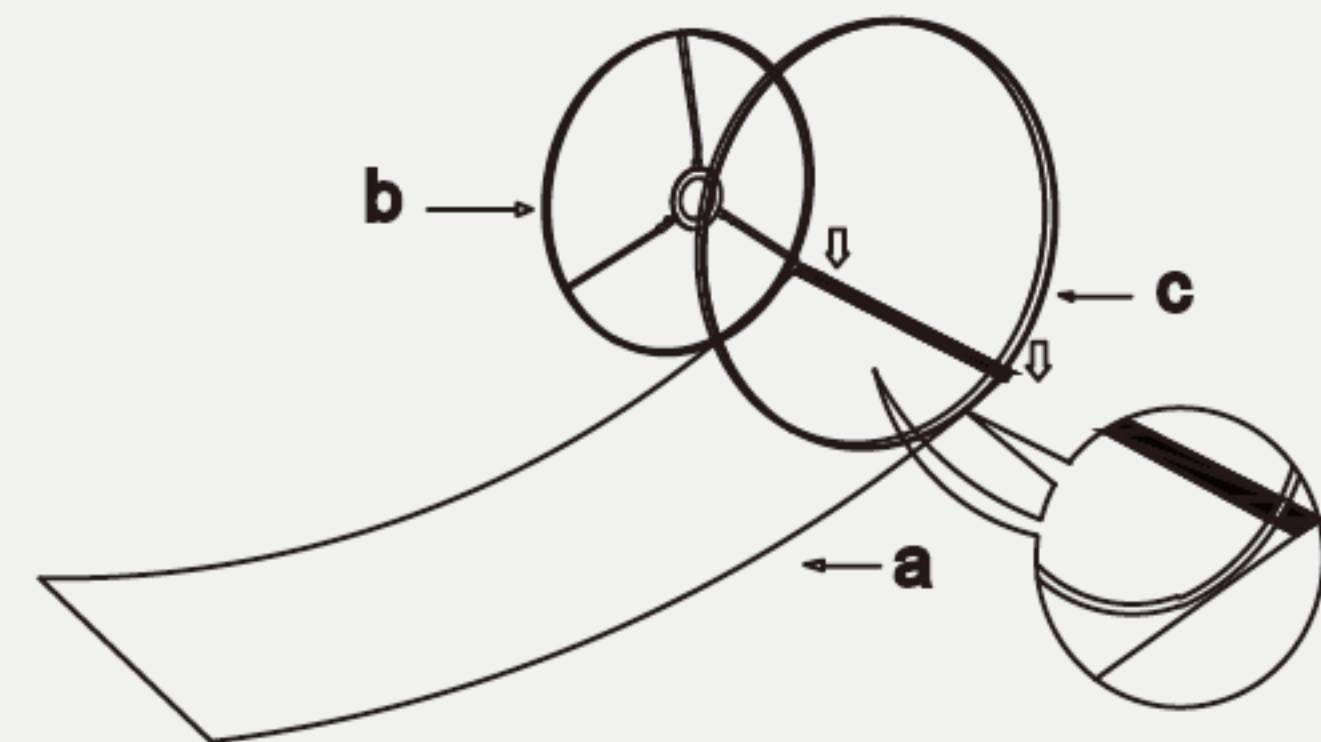


Step 2

Roll both rings all the way around and make sure all the velcro on the shade are secure onto both Rings.

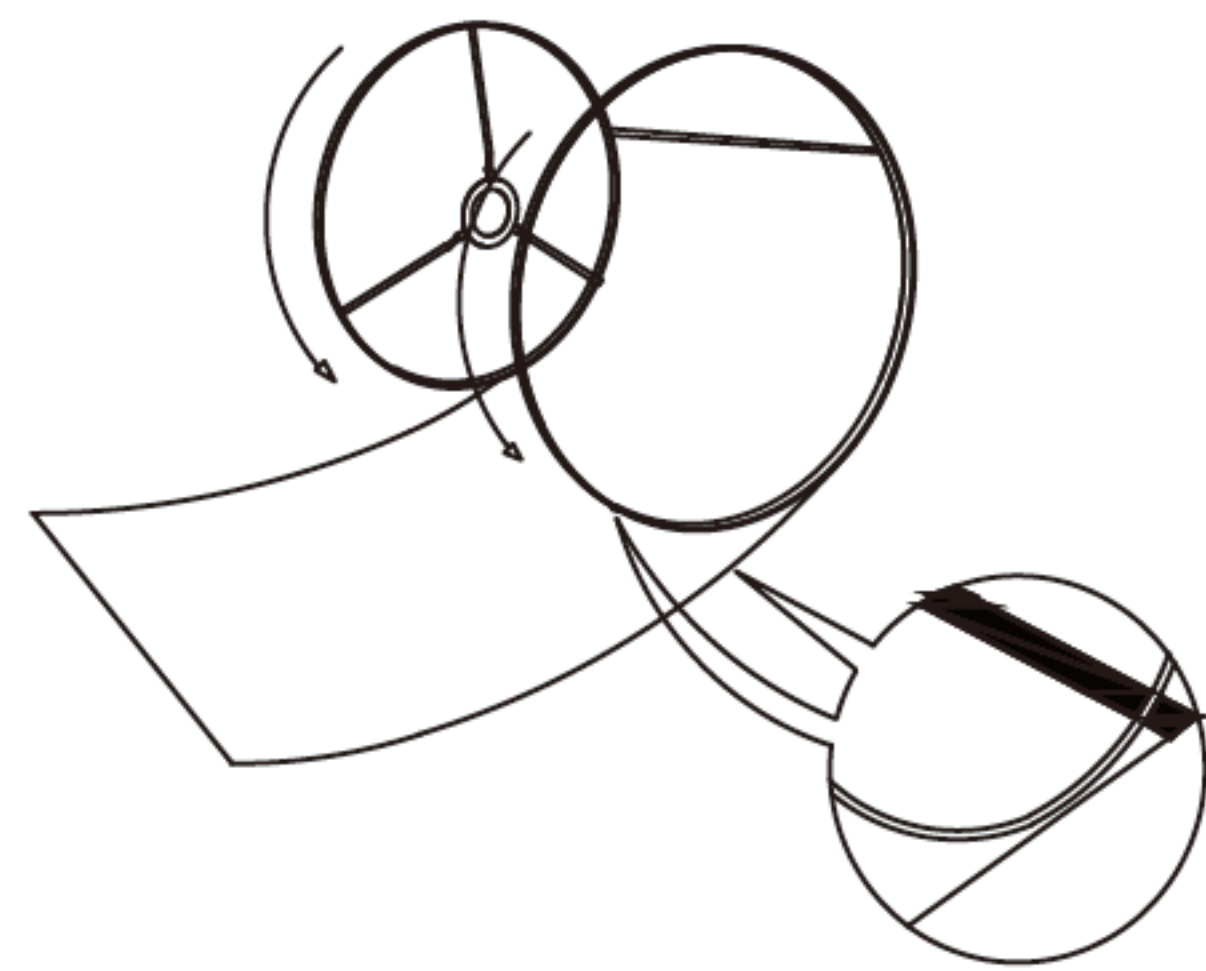


Step 3

Secure the shade by pressing along the velcro.

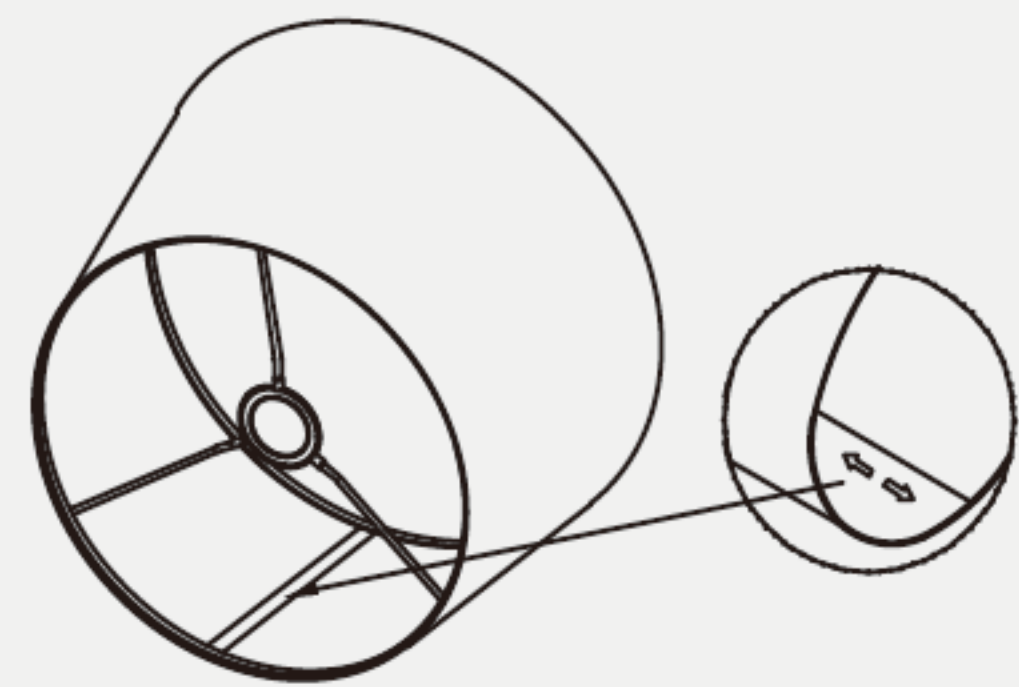

Step 4


Finished as above picture.

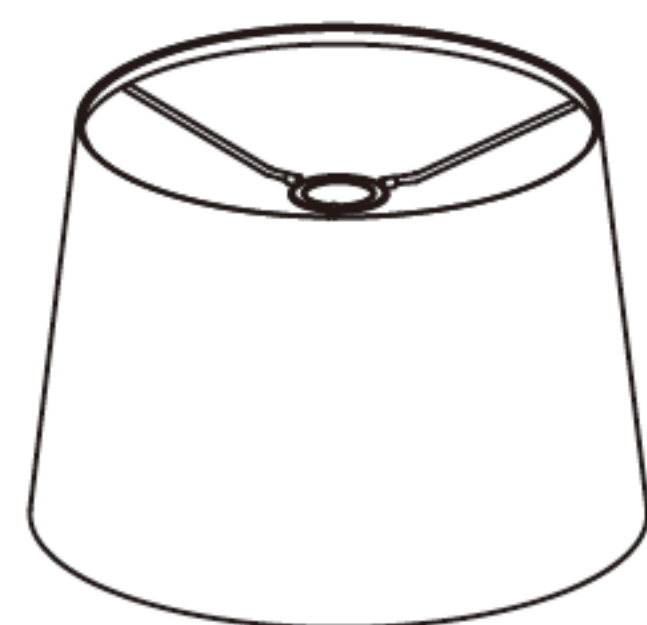

#2

Assembly Instructions

Lampshade adjustment angle needs to be adjusted according to the position of this cut.

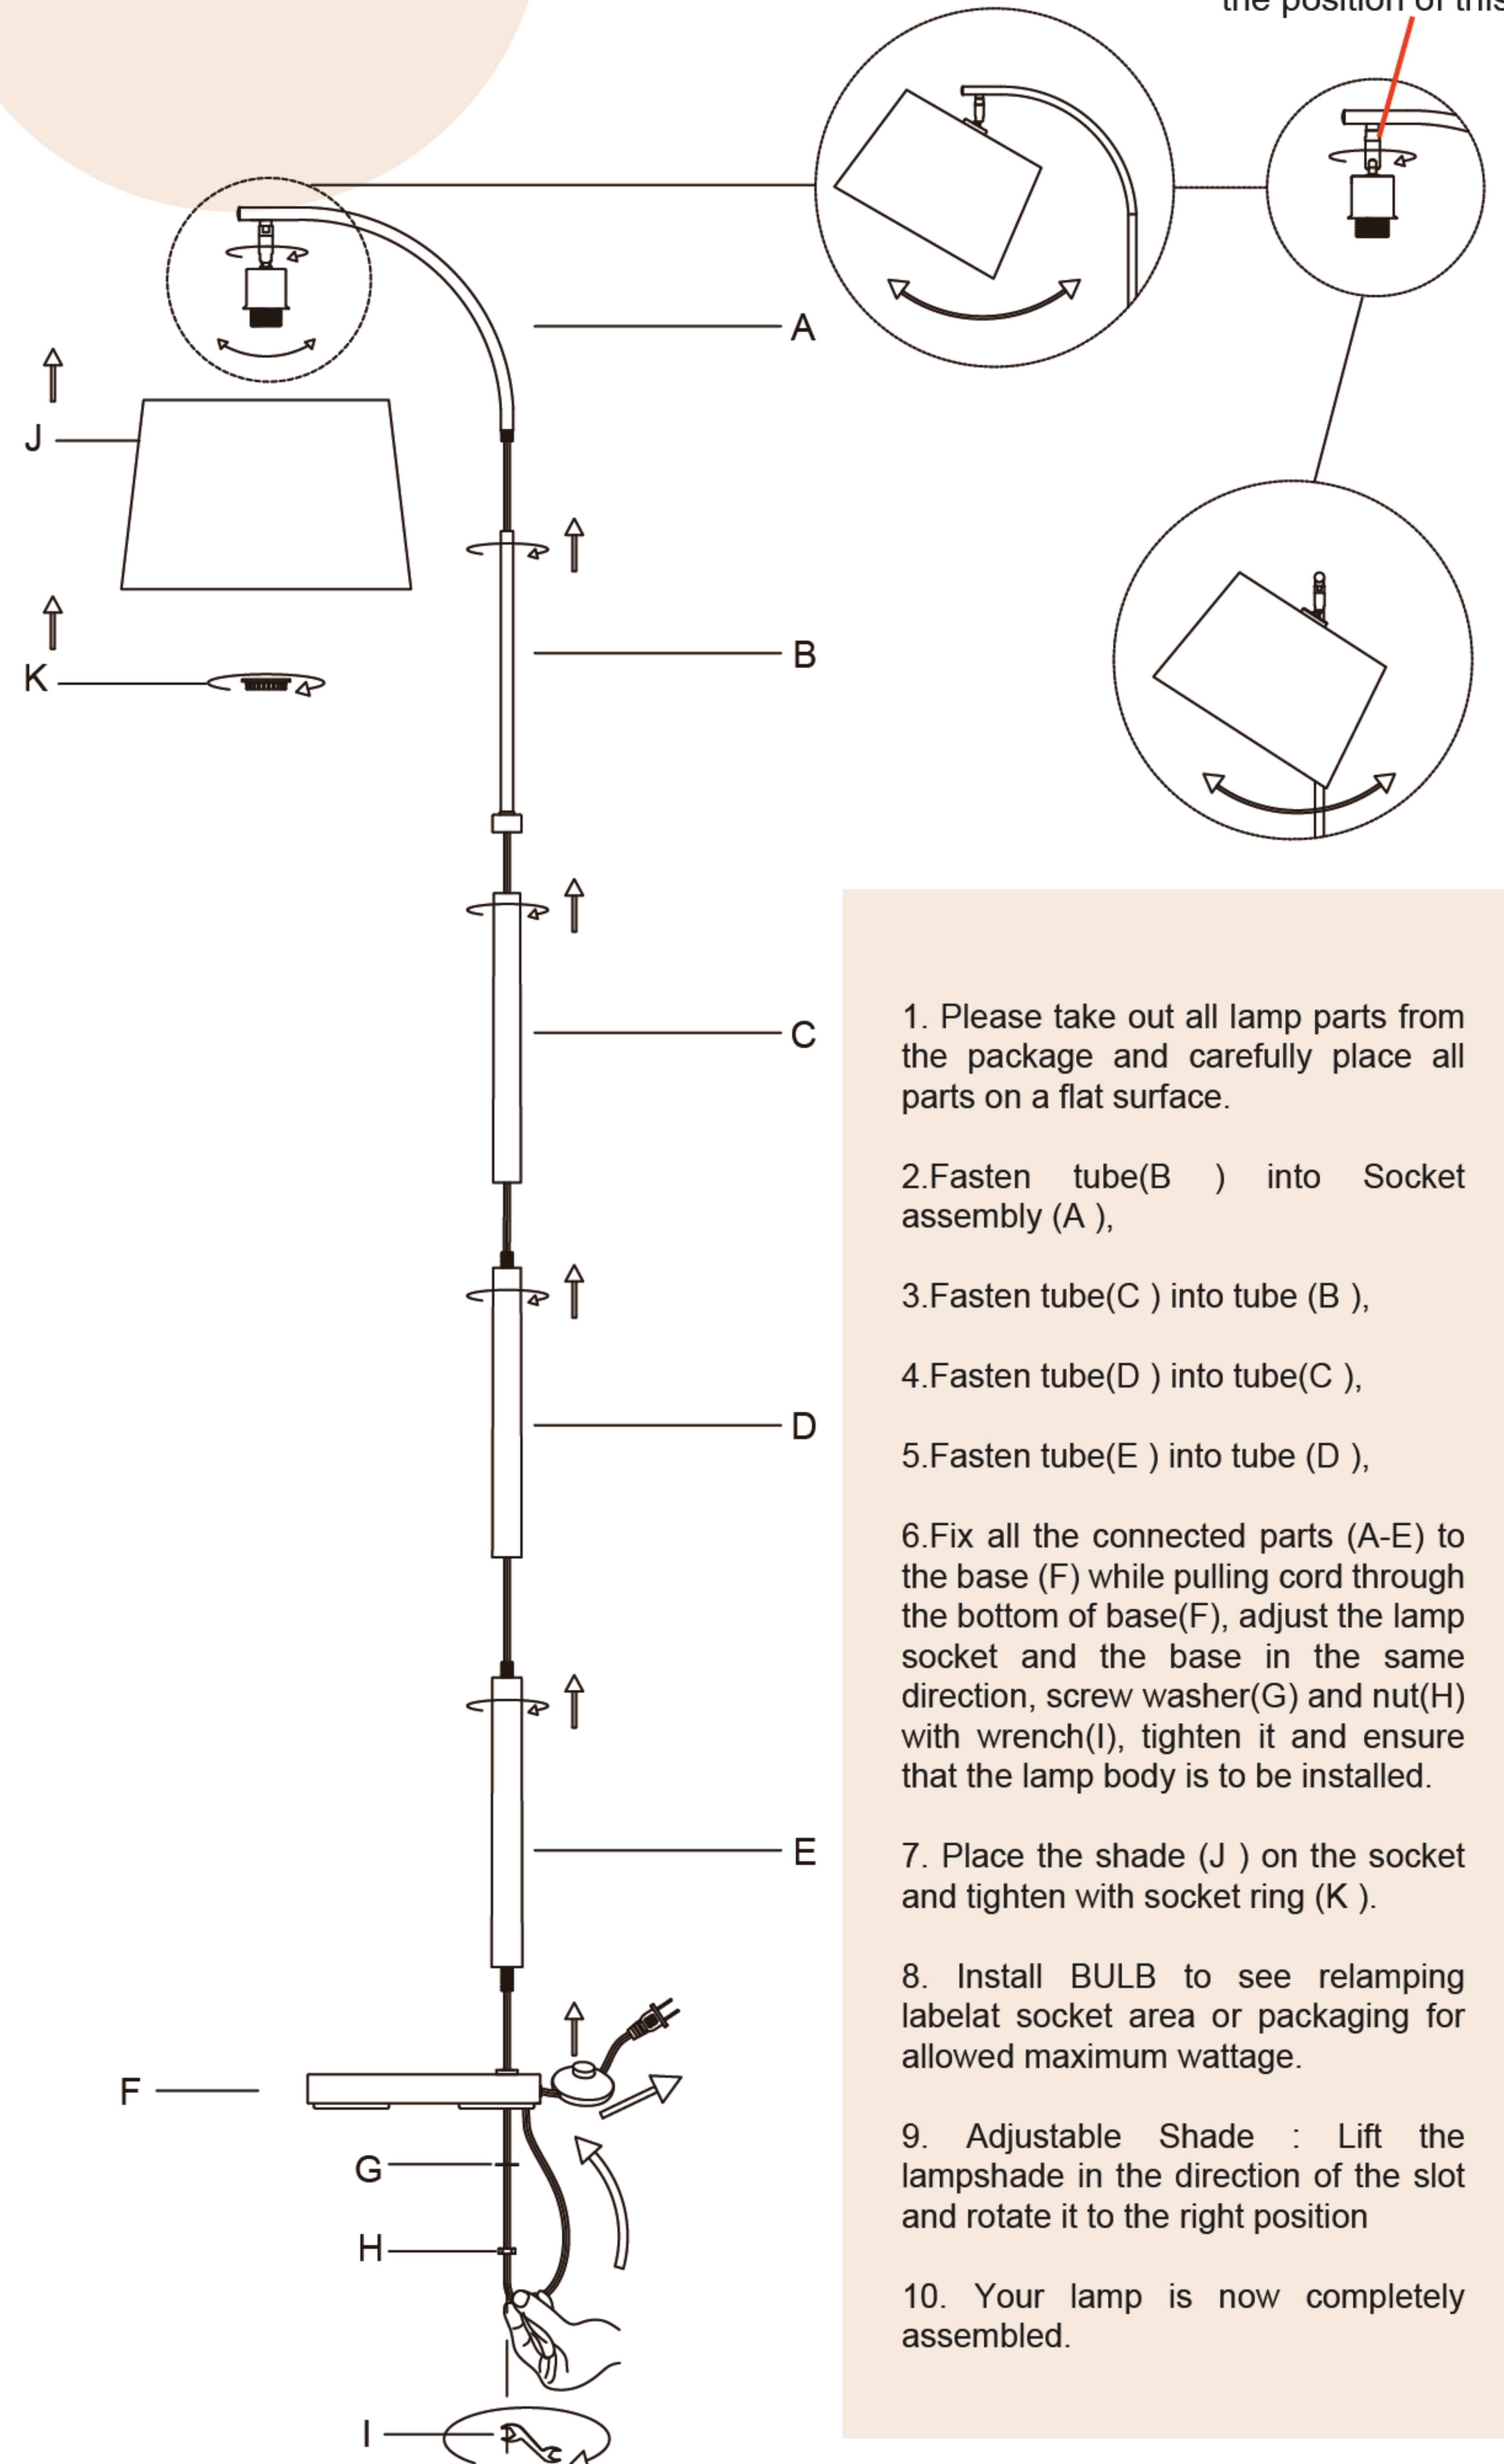

1. Please take out all lamp parts from the package and carefully place all parts on a flat surface.

2. Fasten tube(B) into Socket assembly (A),

3. Fasten tube(C) into tube (B),

4. Fasten tube(D) into tube(C),

5. Fasten tube(E) into tube (D),

6. Fix all the connected parts (A-E) to the base (F) while pulling cord through the bottom of base(F), adjust the lamp socket and the base in the same direction, screw washer(G) and nut(H) with wrench(I), tighten it and ensure that the lamp body is to be installed.

7. Place the shade (J) on the socket and tighten with socket ring (K).

8. Install BULB to see relamping label at socket area or packaging for allowed maximum wattage.

9. Adjustable Shade : Lift the lampshade in the direction of the slot and rotate it to the right position

10. Your lamp is now completely assembled.