


ASSEMBLY INSTRUCTIONS

for convertible crib

4 IN 1 CONVERTIBLE CRIB & CHANGING STATION COMBO

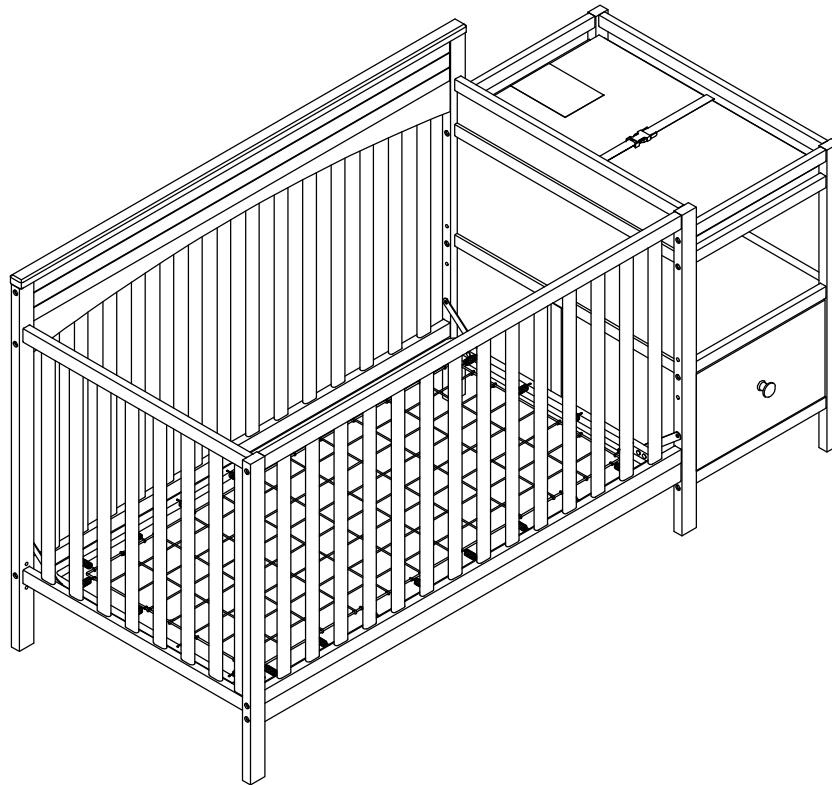

GUARDRAIL and CONVERSION KIT sold separately.
Please contact retailer

THIS PRODUCT CONFORMS TO THE APPLICABLE SECTION OF PUBLIC LAW 110-314
AND COMPLIES WITH THE REQUIREMENTS STATED IN 16 CFR 1219 AND 16 CFR 1217
(WHEN HARPER GUARDRAIL IS USED).

Thank you for your purchase!

Remove all parts and hardware from the box and lay on a carpeted or scratch -free work surface.

Do not dispose of any contents until assembly is completed.


Familiarize yourself with all exhibits and diagrams to facilitate the assembly of your crib.

TOOLS REQUIRED:


ALLEN KEY (included)




Screwdriver (not included)




PARTS ENCLOSED IN CARTON

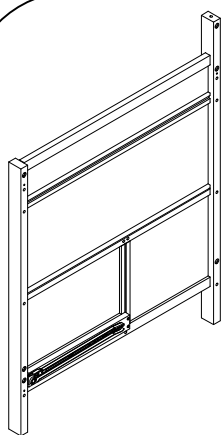


1. Common side (1 pc)

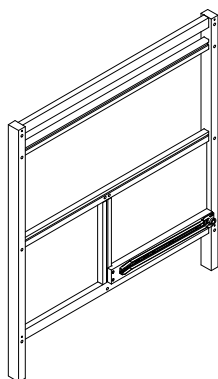


2. Changer end (1 pc)




3. Changer top rail (2 pcs)




4. Changer surface rail (2 pcs)




5. Changer middle rail (2 pcs)




6. Changer front bottom rail (1 pc)




7. Changer back bottom rail (1 pc)




8. Changer center top rail (1 pc)




9. Changer center bottom rail (1 pc)




10. Changer surface (1 pc)




11. Changer middle shelf (1 pc)




12. Changer center panel (1 pc)



13. Changer bottom panel (1 pc)




14. Changer pad (1 pc)




15. Male/Female belt section (1 pc)


PARTS ENCLOSED IN CARTON

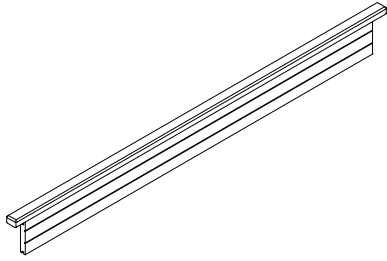


16. Crib top frame (1 pc)

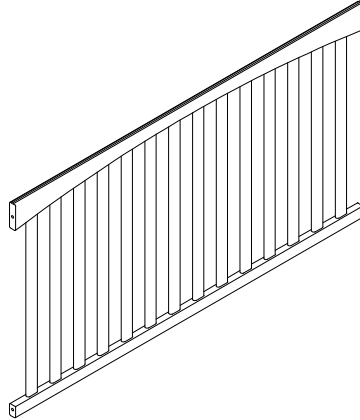

17. Crib back rail (1 pc)



18. Left crib side (1 pc)

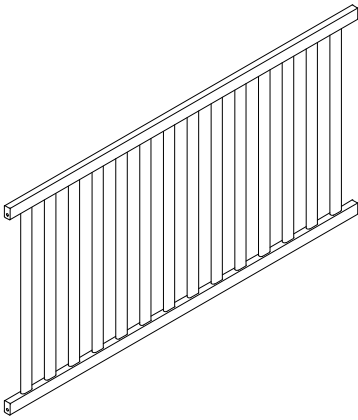


19. Crib front rail (1 pc)




20. Crib back post (1 pc)




21. Crib front post (1 pc)

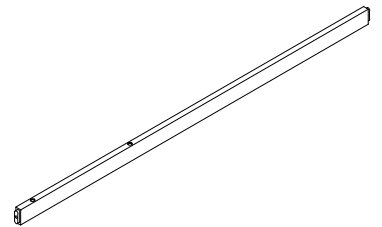


22. Stabilizer bar (1 pc)

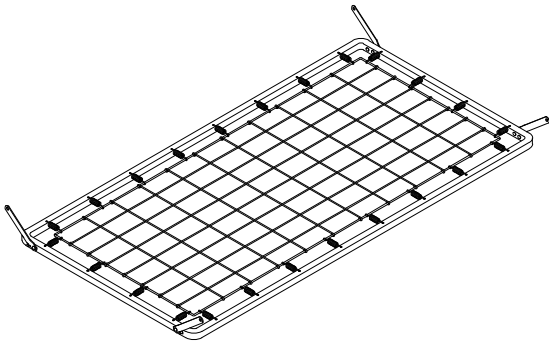


23. Mattress spring (1 pc)




24. Drawer front (1 pc)




25. Left drawer side (1 pc)



26. Right drawer side (1 pc)




27. Drawer back (1 pc)




28. Drawer bottom panel (1 pc)

HARDWARE


(A) Allen bolt 3 1/8" (78 mm) (10 pcs)




(B) Allen bolt 2 1/8" (55 mm) (20 pcs)




(C) Allen bolt 1 3/4" (45 mm) (2 pcs)




(D) Allen bolt 1 1/8" (30 mm) (2 pcs)




(E) Allen bolt 3/4" (20 mm) (2 pcs)




(F) Allen bolt 5/8" (15 mm) (4 pcs)




(G) Bolt 1" (25 mm) (1 pc)




(Q) Allen key (1 pc) (length may vary)



(R) Knob (1 pc)



(H) Barrel nut (12 pcs)




(J) Spring washer (34 pcs)




(K) Nylon washer (2 pcs)




(L) Hex nut (2 pcs)




(M) Metal pin Ø4x30mm (6 pcs)




(N) Wood dowel Ø8x30mm (4 pcs)



(O) Wood dowel Ø8x25mm (2 pcs)



(P) Screw 25mm (12 pcs)



Do not fully tighten all bolts until all parts are in place.
(please add an extra 1/2 revolution to the bolts when using spring washer after tightening)

STEP 1 " ASSEMBLY OF CHANGING STATION"


THIS STEP REQUIRES :

1. Common side (1 pc)
3. Changer top rail (2 pcs)
4. Changer surface rail (2 pcs)
5. Changer middle rail (2 pcs)
6. Changer front bottom rail (1 pc)
7. Changer back bottom rail (1 pc)
8. Changer center top rail (1 pc)
9. Changer center bottom rail (1 pc)

(Q) Allen key (1 pc)




(B) Allen bolt 2 1/8"(55 mm) (8 pcs)



(J) Spring washer (9 pcs)





(D) Allen bolt 1 1/8"(30 mm) (1 pc)



(M) Metal Pin (3 pcs)



(N) Wood dowel Ø8x30mm (2 pcs)

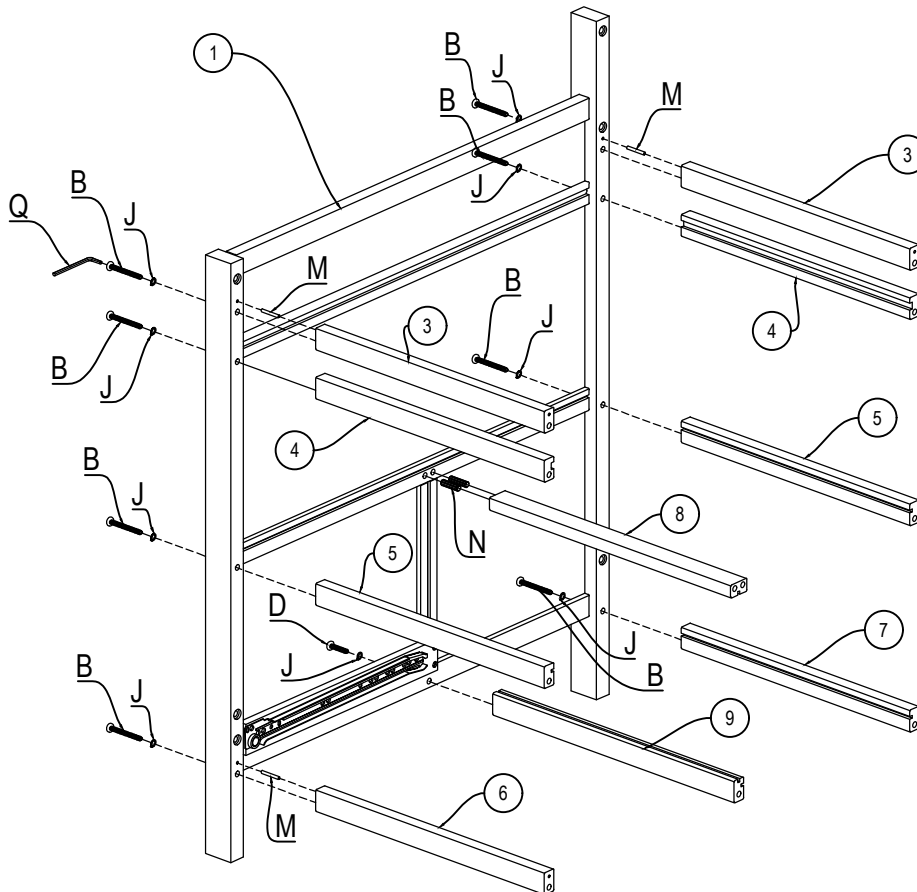


STEP 1 :

Attach Changer top rail (3), Changer surface rail (4), Changer middle rail (5), Changer front bottom rail (6), Changer back bottom rail (7), Changer center top rail (8) and Changer center bottom rail (9) to Common side (1) by using Metal pin (M), Wood dowel (N), Allen bolt (B), Allen bolt (D) and Spring washer (J). Tighten all bolts with Allen key (Q).

STEP 2 " ASSEMBLY OF CHANGING STATION"

THIS STEP REQUIRES :

- 10. Changer surface (1 pc)
- 11. Changer middle shelf (1 pc)
- 12. Changer center panel (1 pc)
- 13. Changer bottom shelf (1 pc)

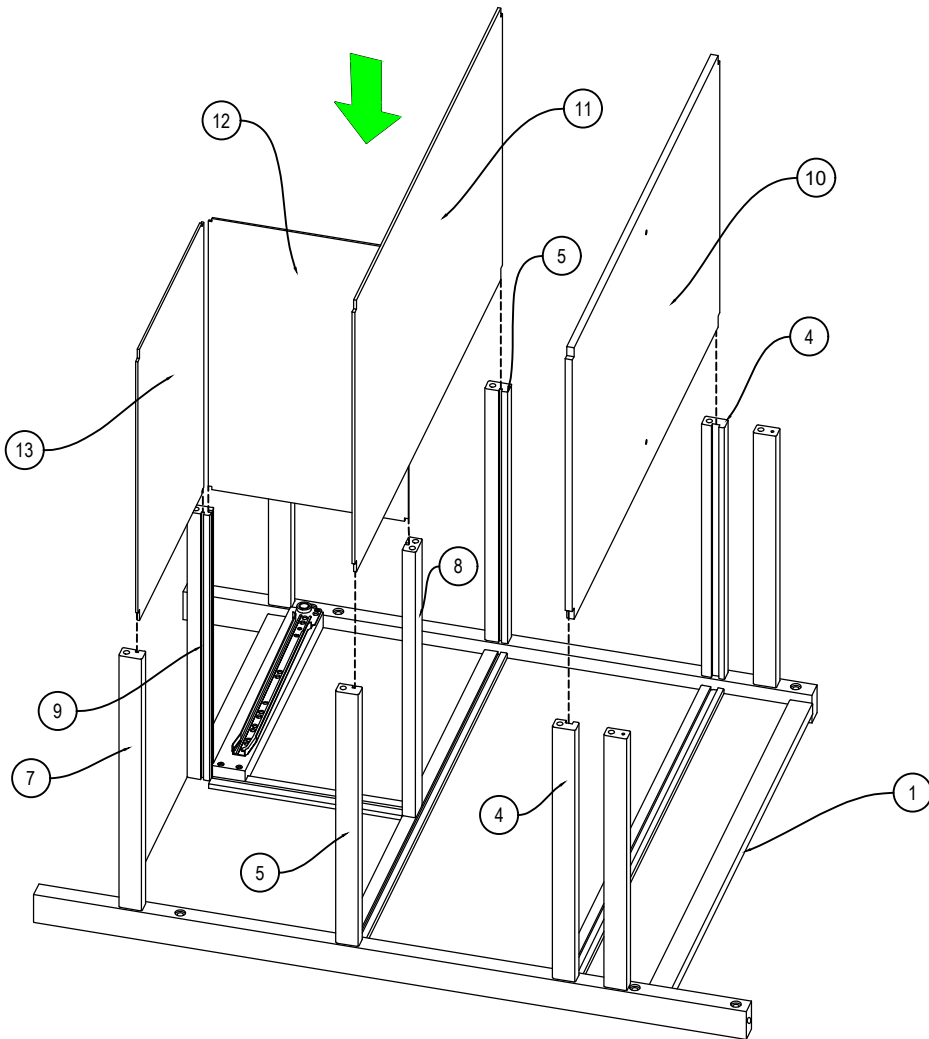

STEP 2 :

Lay Common side (1) on its side and loosely insert Changer surface (10), Changer middle shelf (11), Changer center panel (12) and Changer bottom shelf (13) as shown. Slide changer surface (10) into changer surface rail (4) grooves, slide changer middle shelf (11) into changer middle rail (5) grooves, slide changer center panel (12) into changer center top rail (8) groove and changer center bottom rail (9) groove, slide changer bottom shelf (13) into changer center bottom rail (9) groove and changer back bottom rail (7) groove as shown.

STEP 3 " ASSEMBLY OF CHANGING STATION"


THIS STEP REQUIRES :

2. Changer end (1 pc)

(Q) Allen key (1 pc)

(M) Metal Pin (3 pcs)


(B) Allen bolt 2 1/8"(55 mm) (8 pcs)






(J) Spring washer (9 pcs)



(D) Allen bolt 1 1/8"(30 mm) (1 pc)



(N) Wood dowel Ø8x30mm (2 pcs)

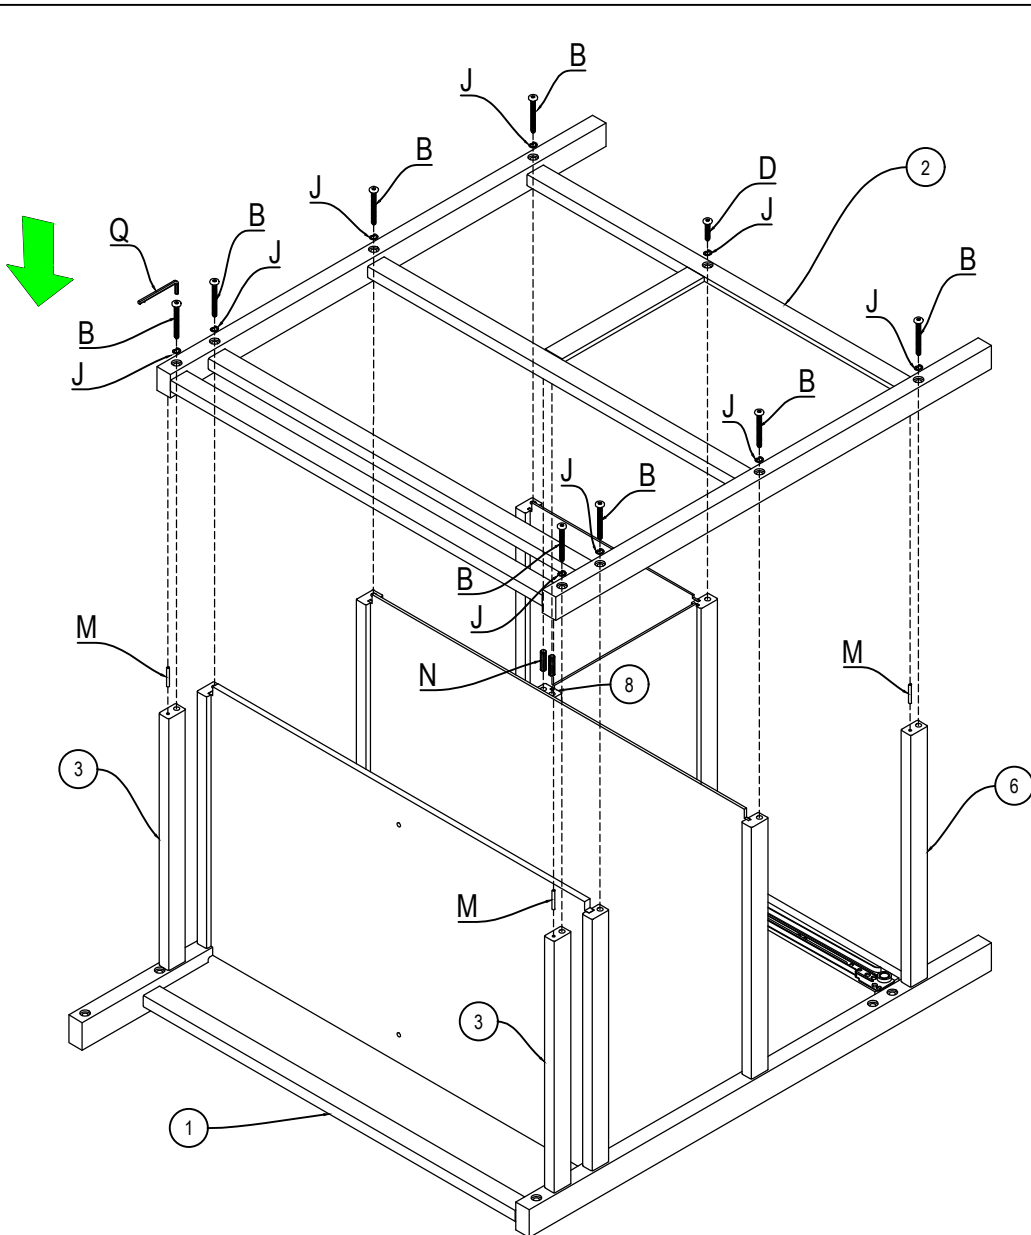

STEP 3 :

Attach Changer end (2) to the assembly from the previous step by using Metal pin (M), Wood dowel (N), Allen bolt (B), Allen bolt (D) and Spring washer (J). Tighten all bolts with Allen key (Q).


STEP 4 " ASSEMBLY OF CRIB"

THIS STEP REQUIRES :

- 16. Crib top frame (1 pc)
- 17. Crib back rail (1 pc)
- 18. Left crib side (1 pc)
- 20. Left back post (1 pc)
- 21. Left front post (1 pc)

(Q) Allen key (1 pc)


(A) Allen bolt 3 1/8" (78 mm) (3 pcs)




(J) Spring washer (5 pcs)



(C) Allen bolt 1 3/4" (45 mm) (2 pcs)




(O) Wood dowel Ø8x25mm (1 pc)




(H) Barrel nut (3 pcs)



STEP 4.1.

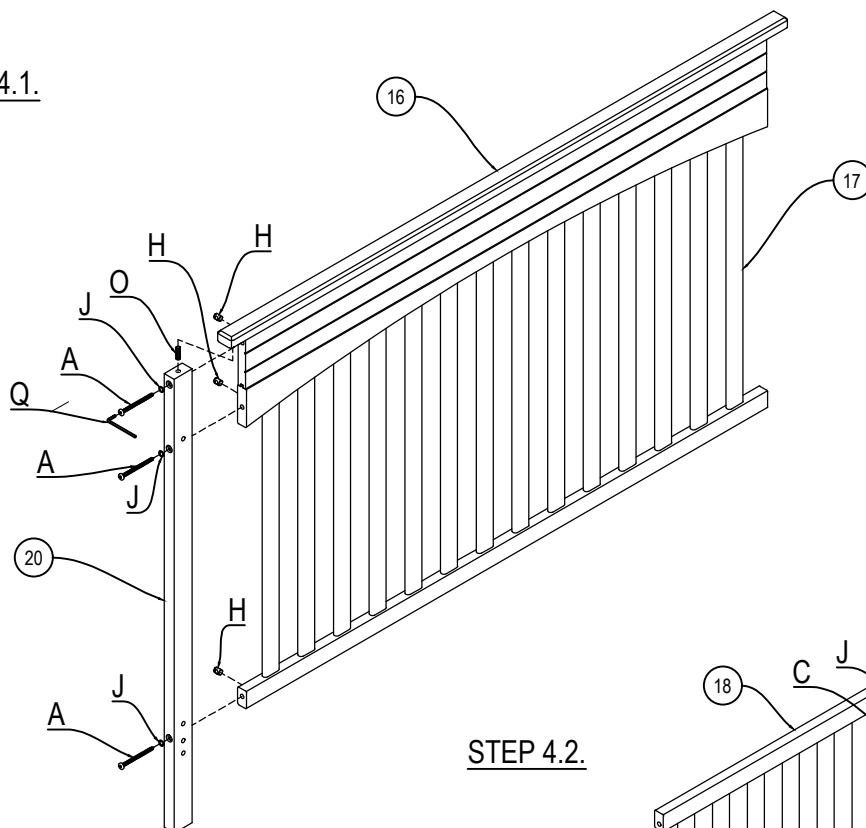

STEP 4.2.

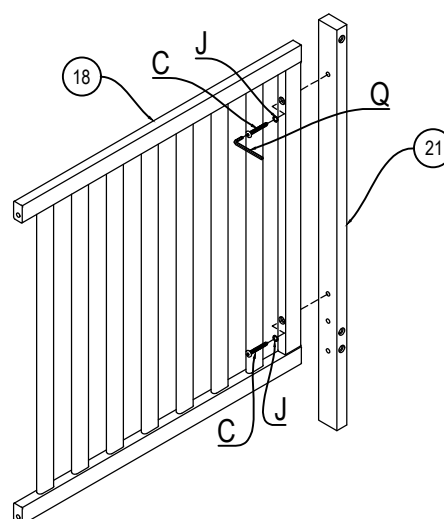

STEP 4.1 :

Assembly Left back post (20) to the hole on Crib top frame (16) and Crib back rail (17) by Wood dowel (O), Allen bolt (A), Spring washer (J) and Barrel Nut (H). Tighten all bolt by Allen Key (Q).

STEP 4.2 :


Assembly Left front post (21) to the hole on Left crib side (18) by Allen bolt (C), Spring washer (J) and Barrel Nut (H). Tighten all bolt by Allen Key (Q).

STEP 5 " ASSEMBLY OF CRIB"


THIS STEP REQUIRES :

(A) Allen bolt 3 1/8" (78 mm) (3 pcs)

(H) Barrel nut (3 pcs)

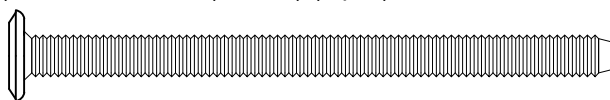



(Q) Allen key (1 pc)



(J) Spring washer (3 pcs)



(O) Wood dowel Ø8x25mm (1 pc)

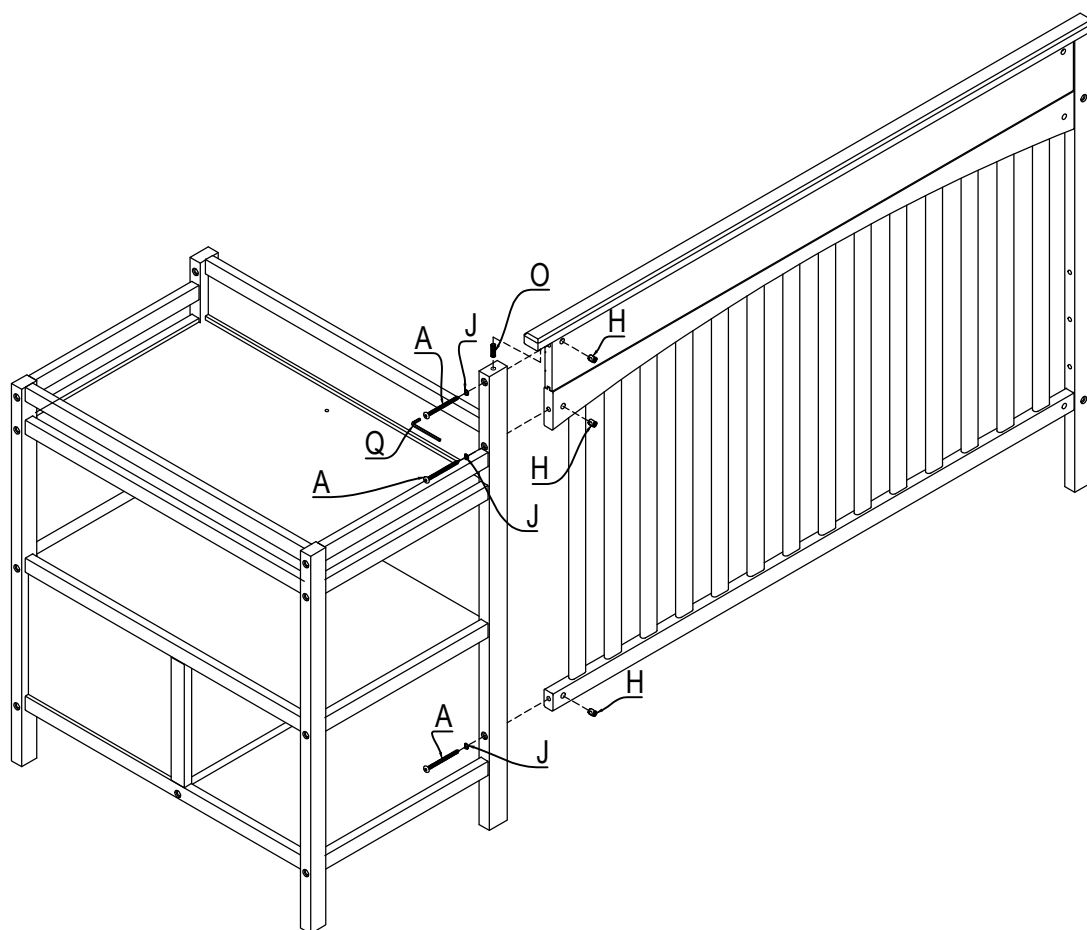


STEP 5 :

Attach crib back frame to common side by using Wood dowel (O), Allen bolt (A), Spring washer (J) and Barrel nut (H) as shown. Tighten all bolt by Allen Key (Q).

STEP 6 " ASSEMBLY OF CRIB"

THIS STEP REQUIRES :

(B) Allen bolt 2 1/8" (55 mm) (2 pcs)





(Q) Allen key (1 pc)



(J) Spring washer (2 pcs)



(H) Barrel nut (2 pcs)

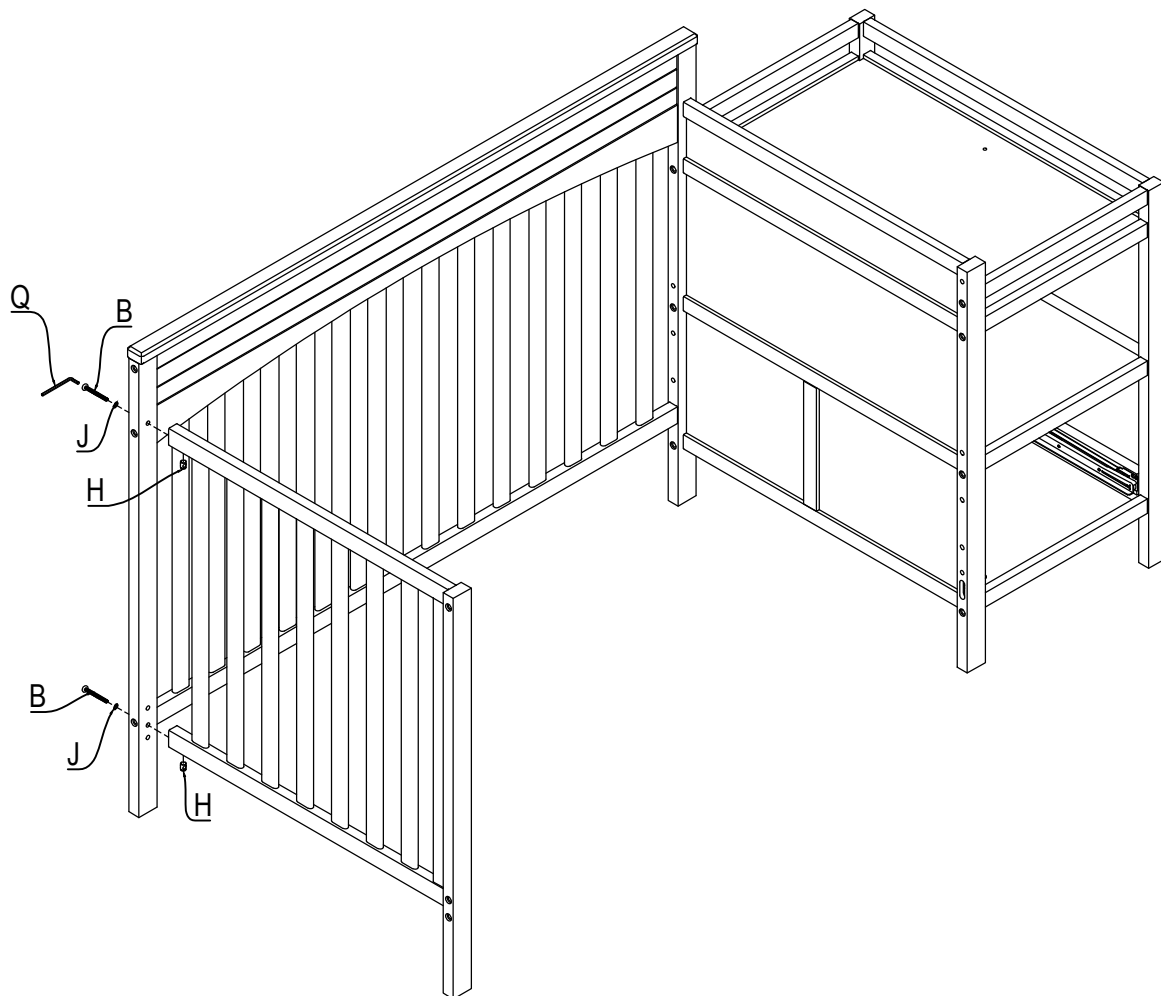

STEP 6 :


Attach left crib side to left back post by using Allen bolt (B), Spring washer (J) and Barrel nut (H) as shown. Tighten all bolt by Allen Key (Q).

STEP 7 " ASSEMBLY OF CRIB"

THIS STEP REQUIRES :

22. Stabilizer bar (1 pc)
23. Mattress spring (1 pc)

(A) Allen bolt 3 1/8" (78 mm) (2 pcs)




(J) Spring washer (2 pcs)




(Q) Allen key (1 pc)



(F) Allen bolt 5/8" (15 mm) (4 pcs)



(H) Barrel nut (2 pcs)

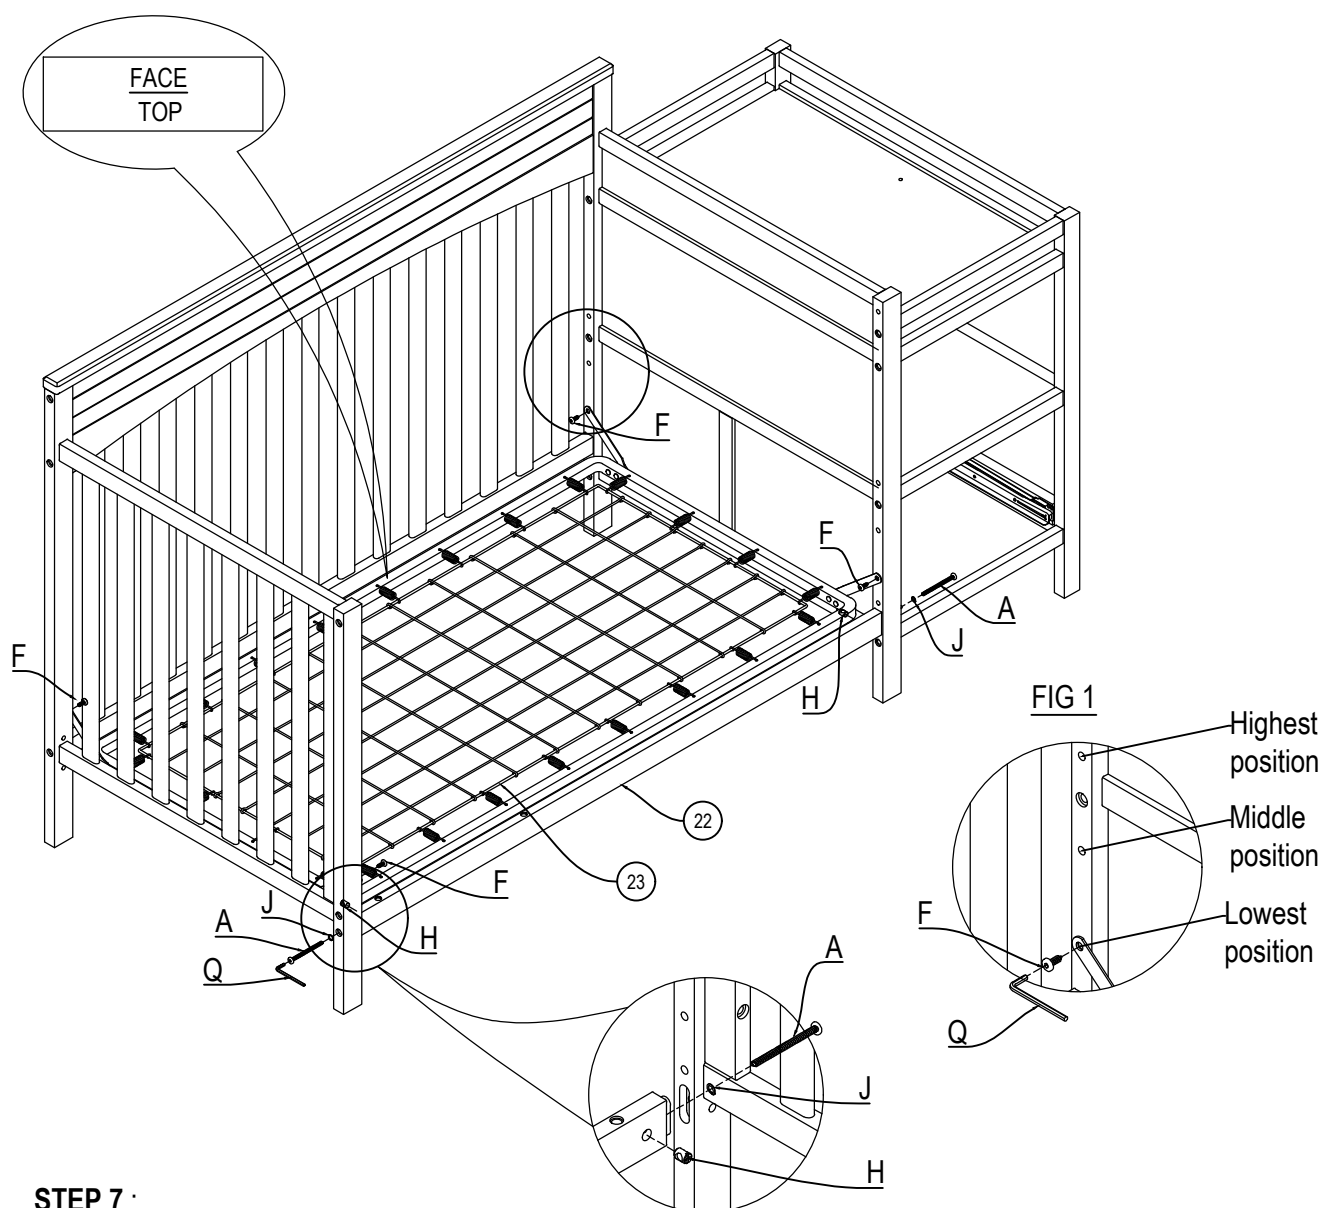

STEP 7 :

- Attach Stabilizer bar (22) to common side and left front post by using Allen bolt (A), Spring washer (J) and Barrel nut (H). Tighten all bolt by Allen Key (Q).
- Attach Mattress spring (23) to the crib by using Allen bolt (F). Tighten all bolt with Allen key (Q). See FIG.1 for height adjustment. Make sure the mattress spring is leveled after assembly.


STEP 8 " ASSEMBLY OF CRIB"

THIS STEP REQUIRES :

19. Crib front rail

(1 pc)

(A) Allen bolt 3 1/8" (78 mm) (2 pcs)

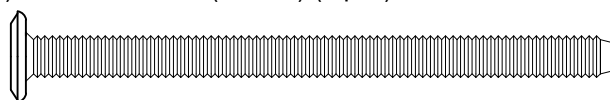


(J) Spring washer (4 pcs)




(Q) Allen key (1 pc)



(B) Allen bolt 2 1/8" (55 mm) (2 pcs)



(H) Barrel nut (2 pcs)

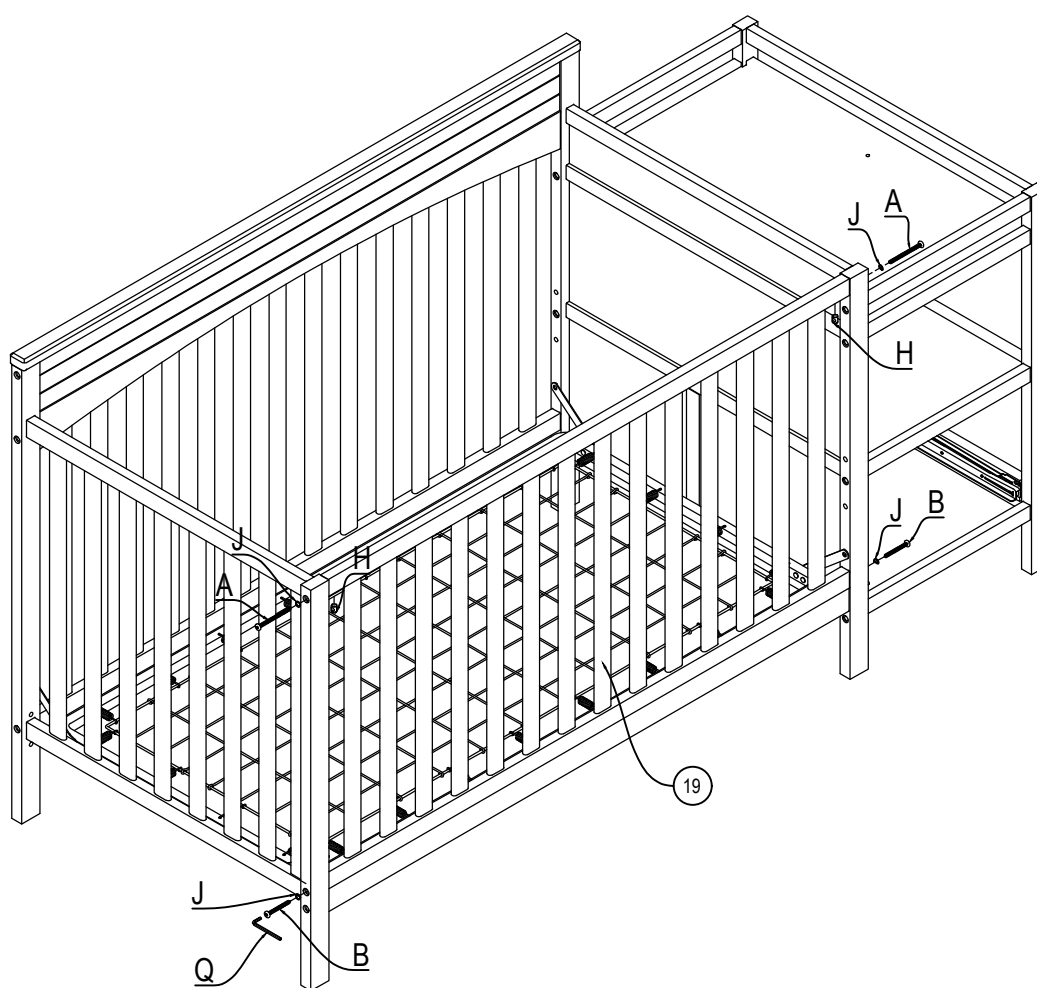

STEP 8 :


Attach Crib front rail (19) to common side and left front post by using Allen bolt (A), Allen bolt (B), Spring washer (J) and Barrel nut (H) as shown. Tighten all bolt by Allen Key (Q).

STEP 9 " ASSEMBLY OF DRAWER"


THIS STEP REQUIRES :

- 24. Drawer front (1 pc)
- 25. Left drawer side (1 pc)
- 26. Right drawer side (1 pc)
- 27. Drawer back (1 pc)
- 28. Drawer bottom panel (1 pc)


(P) Screw 25mm (12 pcs)








(R) Knob (1 pc)



(G) Bolt 1" (25 mm) (1 pc)



Screwdriver (not included)

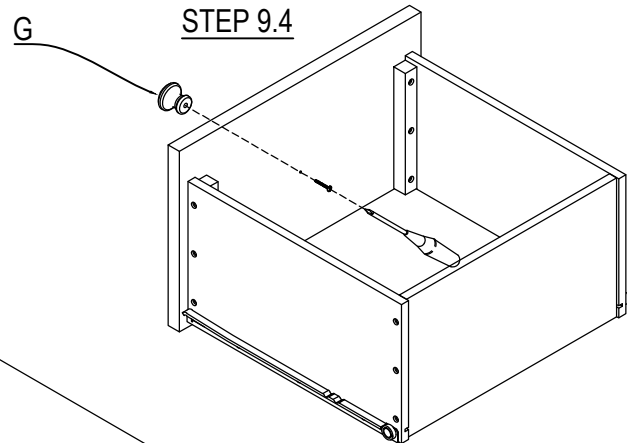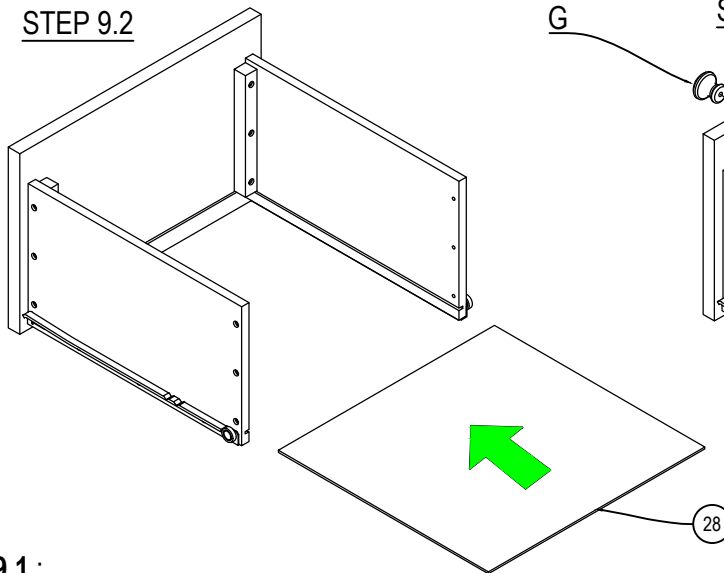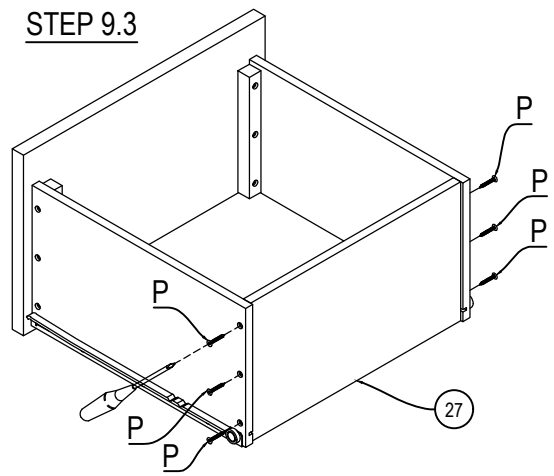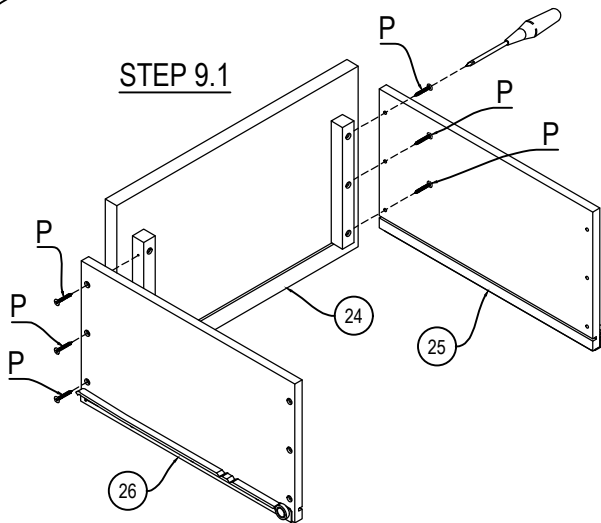

STEP 9.1 :

Attach Left drawer side (25) and Right drawer side (26) to Drawer front (24) with Screws (P). Tighten with the Screwdriver (not included).

STEP 9.2 :

Slide Drawer bottom panel (28) in the grooves on the left drawer side and right drawer side, into the groove on the drawer front.


STEP 9.3 :

Attach Drawer back (27) to drawer side ends with Screws (P). Tighten with the Screwdriver (not included).

STEP 9.4 :

Attach Knob (R) to drawer front with Bolt (G). Tighten with the Screwdriver (not included).

STEP 10 " ASSEMBLY OF DRAWER"

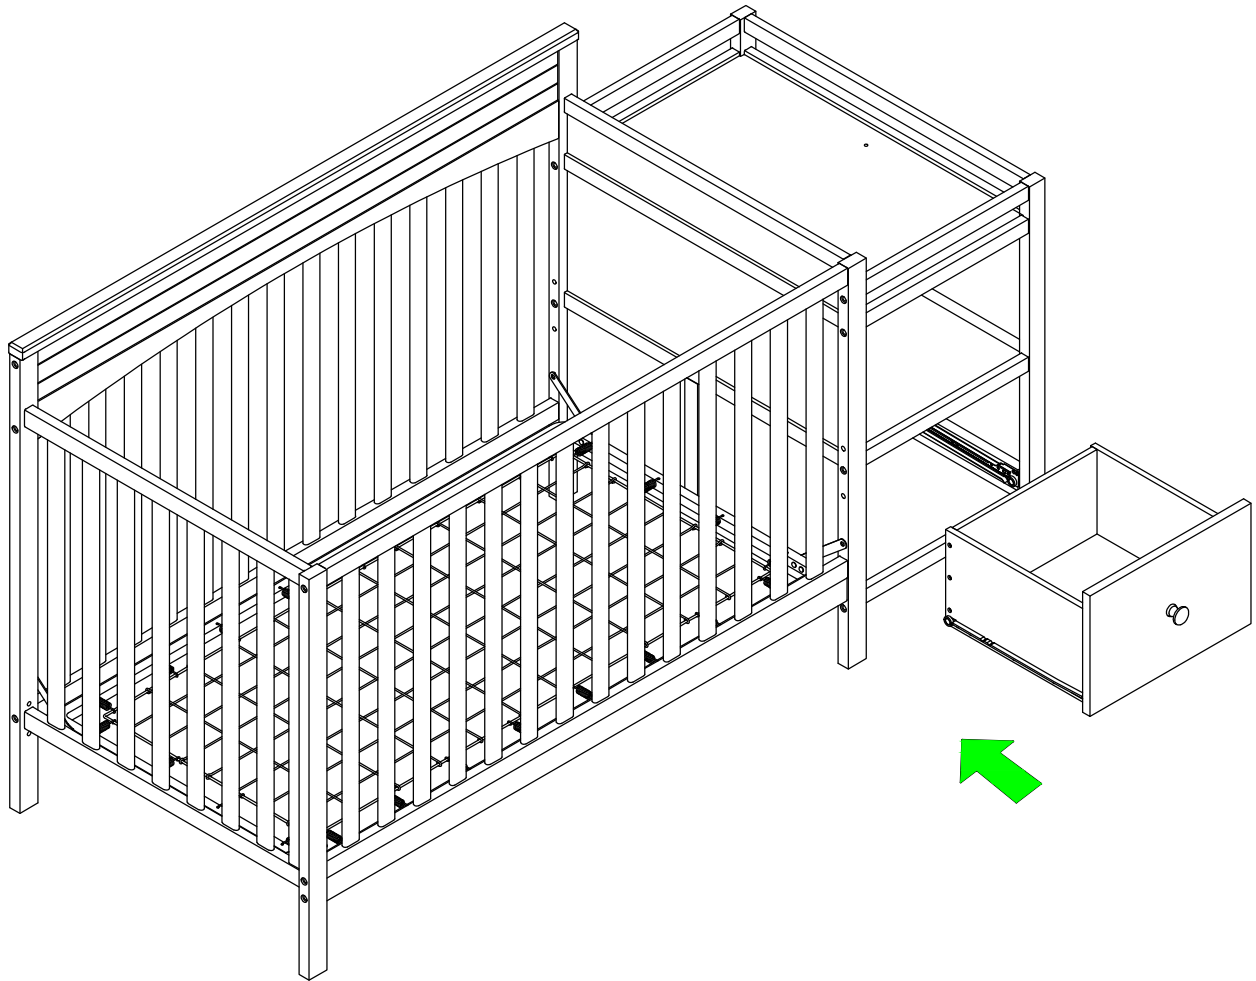

STEP 10 :

Assembly drawer box to the assembly crib as shown

STEP 11 " CHANGING PAD ATTACHMENT"


THIS STEP REQUIRES :

- 14. Changer pad (1 pc)
- 15. Male/Female belt section (1 pc)


(K) Nylon washer (2 pcs)




(E) Allen bolt 3/4" (20 mm) (2 pcs)



(Q) Allen key (1 pc)




(L) Hex nut (2 pcs)

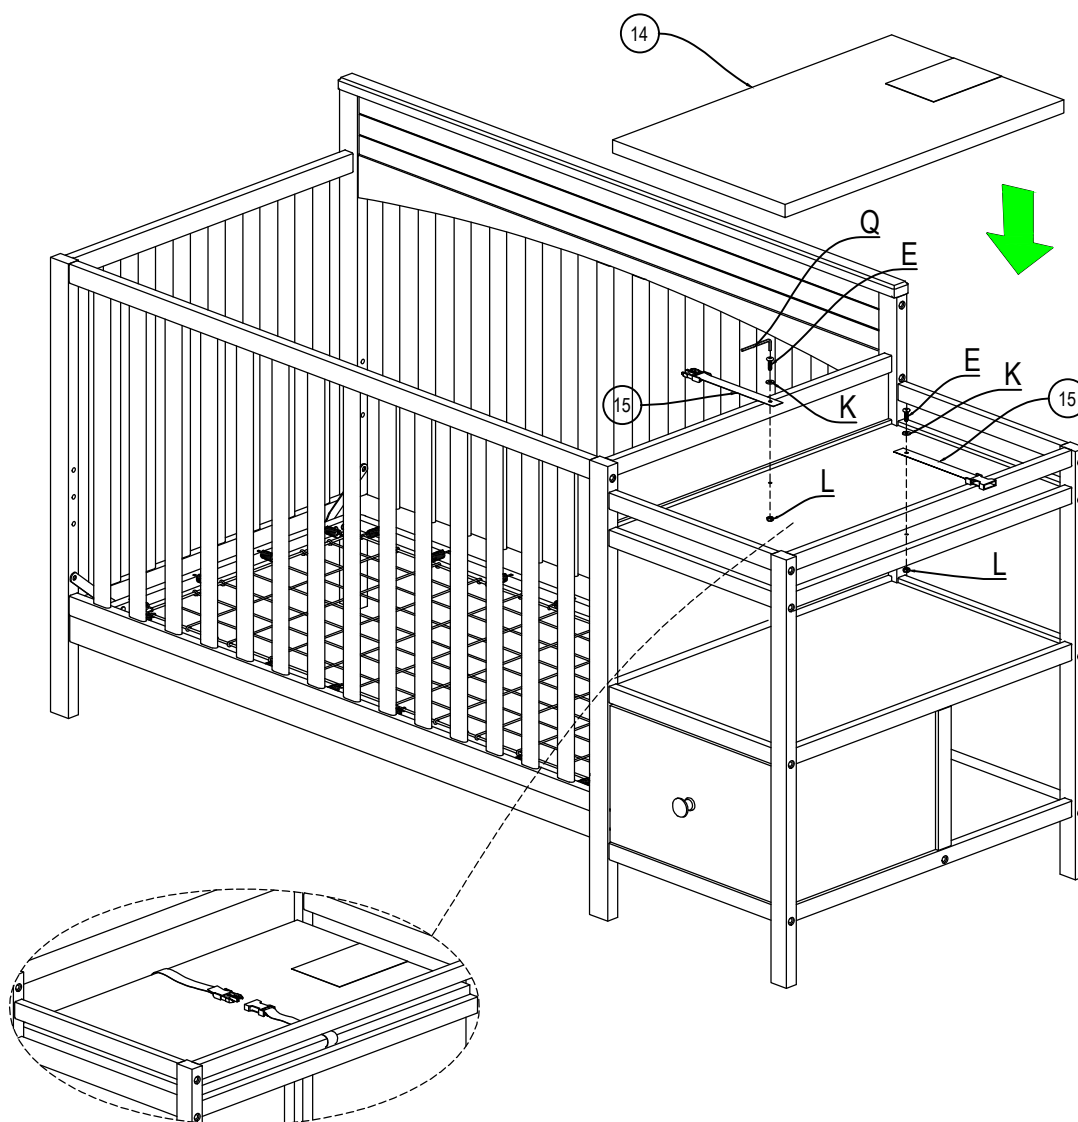

STEP 11 :

In sequence, insert Allen bolt (E) through Nylon washer (K) and male half of the belt (15). Continue through changer surface hole. Thread Hex nut (L) onto bolts from below the changer surface. Tighten bolt and hex nut with Allen key (Q). Repeat assembly for female half of the belt (15). Place Changer pad (14) on top of changer surface and bring belts around edges to lay on top of changer pad.

USING OF SECURING BELT

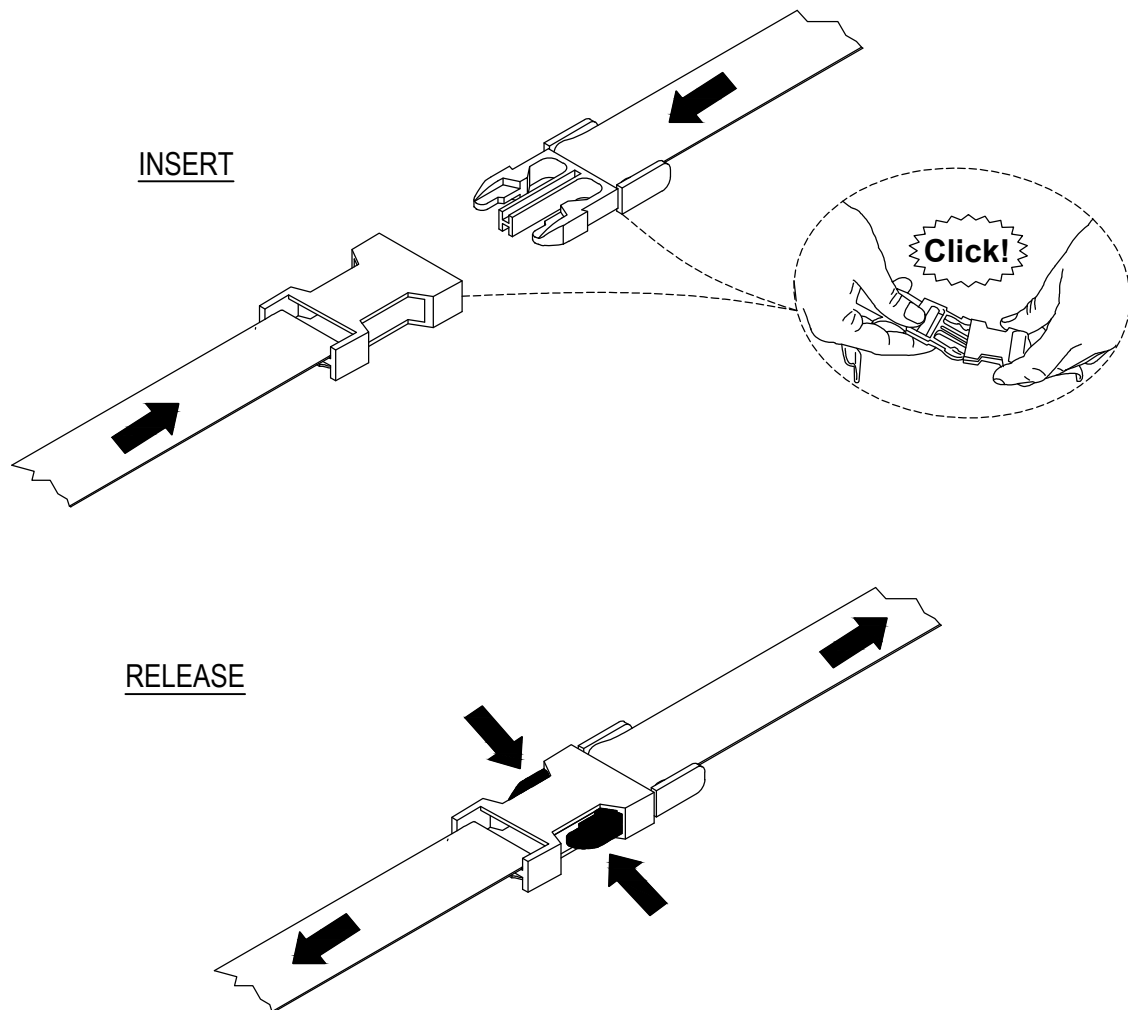


Belt is used to secure child while attended only,
NEVER leave child unattended

- Lay infant on Mattress
- Securing Belt is placed over the infant's torso.
- Insert the buckle ends of each belt into each other until a "CLICK" is heard and ends become locked together.
- Gently pull the free end of the belt strap to adjust a snug fit around the infant.
- To Release press in the sides and pull apart,

FURNITURE TIPOVER RESTRAINT

WARNING

Use of tip-over restraints may only reduce, but not eliminate, the risk of tip-over. Do not attempt to screw into the wallboard only. You must screw into a wood wall stud or other wood structure such as securely attached baseboard. If your wall is not wood stud construction, see your local hardware store or home center for a wall anchor system that will hold a pull force of 50 LBS in your wall type. If you are unsure of how to locate the wood stud, or of what type of wall you have, contact a professional contractor.

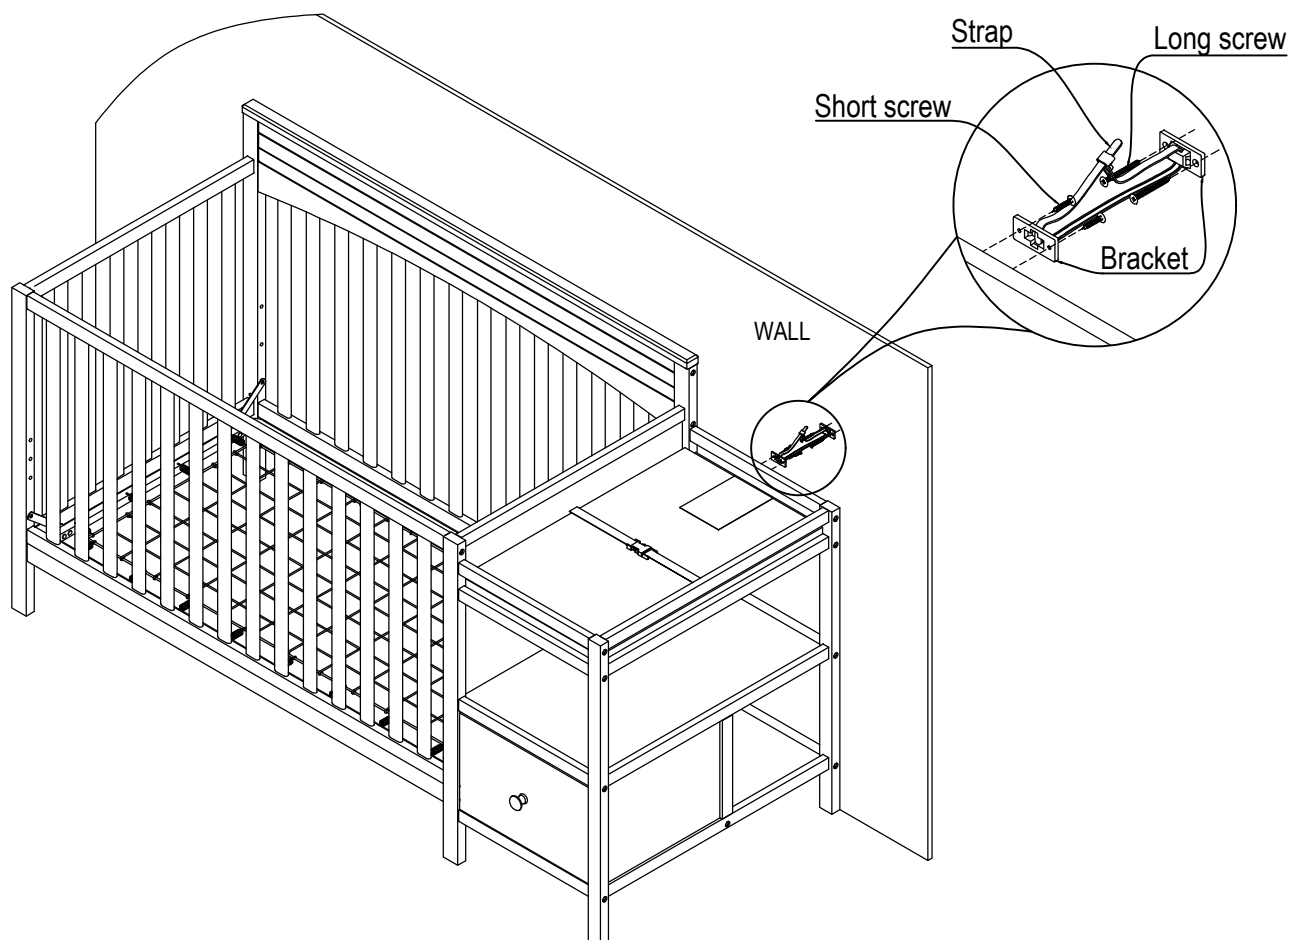

CAUTION: Tipping furniture may injure young children. Use of this tipping restraint hardware is highly recommended. When properly installed this hardware could provide protection against the unexpected tipping of furniture due to improper use.

- Attach one of the mounting brackets securely to the back top edge of the furniture using the short screw.
- Find the stud in the wall and mark the location on the wall for mounting the second bracket using long screw approximately 2" below the bracket mounted to the edge of the furniture.
- Place the furniture so the bracket on the back edge is in line with the bracket on the wall.
- Lace an end of the nylon restraint strap down through each bracket. Bring both ends together and slide the beaded end of the strap through the key hole shaped slot in the other end tightly. Pull down on the beaded end until it snaps locks into the keyhole.
- Check to make sure the strap is securely laced and locked to the brackets.

 **“CAUTION: ANY MATTRESS USED IN THIS CRIB MUST BE AT LEAST 27 1/4 INCHES (69 CM) BY 51 5/8 INCHES (131 CM) WITH A THICKNESS NOT EXCEEDING 6 INCHES (15 CM). THE DIMENSIONS OF THE MATTRESS SHALL BE TAKEN FROM SEAM TO SEAM OR EDGE TO EDGE WHERE APPROPRIATE.”**

WARNING!

- READ ALL INSTRUCTIONS BEFORE ASSEMBLING CRIB.

KEEP INSTRUCTIONS FOR FUTURE USE.

- FAILURE TO FOLLOW THESE WARNINGS AND THE ASSEMBLY INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.
- INFANTS CAN SUFFOCATE ON SOFT BEDDING. NEVER ADD A PILLOW OR COMFORTER. NEVER PLACE ADDITIONAL PADDING UNDER AN INFANT.
- TO REDUCE THE RISK OF **SIDS**, PEDIATRICIANS RECOMMEND HEALTHY INFANTS BE PLACED ON THEIR BACKS TO SLEEP, UNLESS OTHERWISE ADVISED BY YOUR PHYSICIAN.

STRANGULATION HAZARD:

- STRINGS CAN CAUSE STRANGULATION! **DO NOT** PLACE ITEMS WITH A STRING AROUND A CHILD'S NECK, SUCH AS HOOD STRINGS OR PACIFIER CORDS. **DO NOT** SUSPEND STRINGS OVER A CRIB OR ATTACH STRINGS TO TOYS.
- TO HELP PREVENT STRANGULATION TIGHTEN ALL FASTENERS. A CHILD CAN TRAP PARTS OF THE BODY OR CLOTHING ON LOOSE FASTENERS.
- **DO NOT** PLACE CRIB NEAR WINDOW WHERE CORDS FROM BLINDS OR DRAPES MAY STRANGLE A CHILD.

FALL HAZARD:

- WHEN CHILD IS ABLE TO PULL TO A STANDING POSITION, SET MATTRESS TO LOWEST POSITION AND REMOVE BUMPER PADS, LARGE TOYS AND OTHER OBJECTS THAT COULD SERVE AS STEPS FOR CLIMBING OUT.
- STOP USING CRIB WHEN CHILD BEGINS TO CLIMB OUT OR REACHES THE HEIGHT OF 35 IN (89 CM). THE CHILD SHOULD BE PLACED IN A YOUTH OR REGULAR BED.
- CHECK THIS PRODUCT FOR DAMAGED HARDWARE, LOOSE JOINTS, LOOSE BOLTS OR OTHER FASTENERS, MISSING PARTS OR SHARP EDGES, BEFORE AND AFTER ASSEMBLY AND FREQUENTLY DURING USE. SECURELY TIGHTEN LOOSE BOLTS AND OTHER FASTENERS. **DO NOT** USE CRIB IF ANY PARTS ARE MISSING, DAMAGED OR BROKEN.

- **DO NOT** USE A WATER MATTRESS WITH THIS CRIB.

WARNING!

- IF REFINISHING, USE A NON-TOXIC FINISH SPECIFIED FOR CHILDREN'S PRODUCTS.
- FOLLOW WARNINGS ON ALL PRODUCTS IN A CRIB.
UPON COMPLETION OF ASSEMBLY, BE SURE ALL SCREWS, BOLTS AND FASTENING DEVICES HAVE BEEN SECURELY TIGHTENED. A FREQUENT CHECK SHOULD BE MADE.
- WHEN STORING CRIB, USE CAUTION AS EXTREME CHANGE IN TEMPERATURE OR HUMIDITY CAN COMPROMISE THE FINISHING QUALITY OF CRIB, MAKING IT EXTREMELY DANGEROUS TO YOUR CHILD . STORE THE CRIB IN A CLEAN DRY PLACE.
- USE CAUTION WHEN A VAPORIZER OR HUMIDIFIER IS IN USE. ALWAYS AIM VAPOR AWAY FROM THE CRIB AS WELL AS ANY OTHER WOODEN FURNITURE. PROLONGED PERIODS OF HUMIDITY IN STORAGE AS WELL AS THE HOME CAN COMPROMISE THE FINISHING QUALITY OF CRIB.
- AVOID USING VAPORIZERS AND HUMIDIFIER FOR PROLONGED PERIODS OF TIME.
- PLEASE DISPOSE ALL PACKAGING AND PLASTIC BAGS.
- PLEASE CLEAN THE CRIB WITH A DRY CLOTH AND USE MILD WOOD POLISH IF REQUIRED.
- NEVER USE PLASTIC SHIPPING BAGS OR OTHER PLASTIC FILM AS MATTRESS COVERS BECAUSE THEY CAN CAUSE SUFFOCATION.
- INFANTS CAN SUFFOCATE IN GAPS BETWEEN CRIB SIDES AND A MATTRESS THAT IS TOO SMALL.

CANADIAN WARNING

- DO NOT USE THIS CRIB IF YOU CAN NOT EXACTLY FOLLOW THE INSTRUCTION THAT COMES WITH IT.
- DO NOT USE THIS CRIB FOR A CHILD WHO CAN CLIMB OUT OF IT OR WHO IS TALLER THAN 89 CM.
- DO NOT PLACE ANY CORD, STRAP OR SIMILAR ITEM IN OR NEAR THIS CRIB THAT COULD BECOME WRAPPED AROUND A CHILD'S NECK.
- DO NOT PLACE THIS CRIB NEAR A WINDOW OR A PATIO DOOR WHERE A CHILD COULD REACH THE CORD OF A BLIND OR A CURTAIN AND BE STRANGLER.
- CHECK THIS CRIB REGULARLY BEFORE USING IT AND DO NOT USE IT IF ANY PARTS ARE LOOSE OR MISSING OR IF THERE ARE ANY SIGNS OF DAMAGE. DO NOT SUBSTITUTE PARTS. CONTACT M DESIGN VILLAGE IF REPLACEMENT PARTS OR ADDITIONAL INSTRUCTIONS ARE NEEDED.
- CHILDREN CAN SUFFOCATE ON SOFT BEDDING. DO NOT PLACE PILLOWS, COMFORTERS OR SOFT MATTRESSES IN THIS CRIB.
- USE A CRIB MATTRESS THAT IS NO THICKER THAN 15 CM AND IS OF SUCH A SIZE THAT, WHEN IT IS PUSHED FIRMLY AGAINST ANY SIDE OF CRIB, IT DOES NOT LEAVE A GAP OF MORE THAN 3 CM BETWEEN THE MATTRESS AND ANY PART OF ANY OTHER SIDES OF THE CRIB.

 **CAUTION:** ANY PAD USED IN THIS CHANGING STATION MUST BE AT LEAST 16.93 INCHES BY 27.5 INCHES (43 CM X 70 CM) WITH A THICKNESS NOT EXCEEDING 1 INCH (2.54 CM).

 WARNING
FOR CHANGING STATION USE

- READ ALL INSTRUCTIONS BEFORE ASSEMBLING THIS CHANGING STATION.


KEEP INSTRUCTIONS FOR FUTURE USE.

- FAILURE TO FOLLOW THESE WARNINGS AND THE ASSEMBLY INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.
- **DO NOT** USE THIS CHANGING STATION AS A CHANGING AREA IF THE RAILS ARE LOOSE, BROKEN OR MISSING.
- **DO NOT** USE THE CHANGING STATION IF IT IS DAMAGED OR BROKEN.
- **DO NOT** ALLOW THE CHILD OR CHILDREN TO CLIMB ON THIS CHANGING STATION.
- UPON COMPLETION OF ASSEMBLY, BE SURE ALL SCREWS, BOLTS AND FASTENING DEVICES HAVE BEEN TIGHTENED SECURELY. A FREQUENT CHECK SHOULD BE MADE OF ALL SCREWS, BOLTS AND FASTENING DEVICES AND TIGHTEN IF NEEDED.
- **DO NOT** USE THIS CHANGING TABLE AS A CHANGING AREA WHEN THE SECURITY BELTS ARE MISSING OR NOT PROPERLY SECURED.
- THIS PRODUCT IS NOT INTENDED TO BE USED AS A CHANGING STATION WITHOUT THE CHANGING PAD AND SECURING BELT. USE OF THE PRODUCT WITHOUT THE CHANGING PAD AND SECURING BELT MAY RESULT IN DEATH OR SERIOUS INJURY TO YOUR CHILD FROM FALLING. FOLLOW ALL INSTRUCTIONS ON ATTACHING AND USING THE SECURING BELT.
- **CAUTION:** THE PAD INTENDED FOR USE ON THE CHANGING TOPPER SHALL HAVE MINIMUM DIMENSIONS OF 16.93 INCHES BY 27.5 INCHES (43 CM X 70 CM) WITH A THICKNESS NOT EXCEEDING 1 INCH (2.54 CM).
- THE MAXIMUM WEIGHT SHALL NOT BE GREATER THAN 30 LB (13.6 KG).
- PLEASE CLEAN THE CHANGING TOPPER WITH A DRY CLOTH AND USE MILD WOOD POLISH IF REQUIRED.

FALL HAZARD: CHILDREN HAVE SUFFERED SERIOUS INJURIES AFTER FALLING FROM CHANGING TABLE. FALLS CAN HAPPEN QUICKLY

- **STAY** IN ARM'S REACH OF YOUR CHILD.
- **NEVER** LEAVE CHILD UNATTENDED.
- **DO NOT** USE CHANGING TABLE, ADD-ON CHANGING UNIT, OR CONTOURED CHANGING PAD IF IT IS DAMAGED OR BROKEN.

ASSEMBLY INSTRUCTIONS
for toddler bed
4 IN 1 CONVERTIBLE CRIB
& CHANGING STATION COMBO

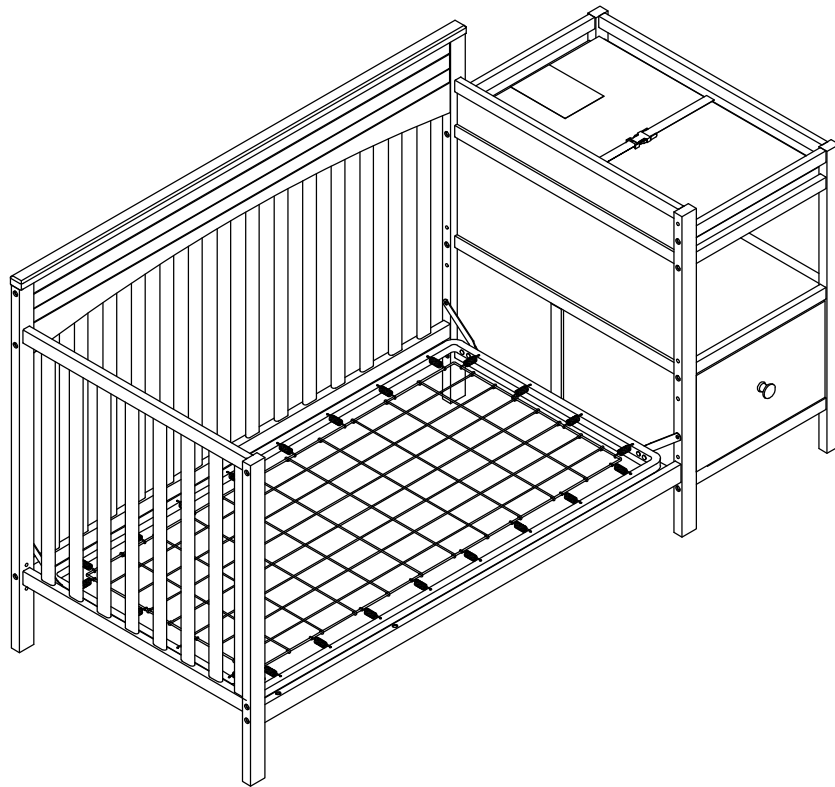


STEP 1 " UNINSTALL CRIB FRONT RAIL "

THIS STEP REQUIRES :

(Q) Allen key (1 pc) (length may vary)



FIG 1

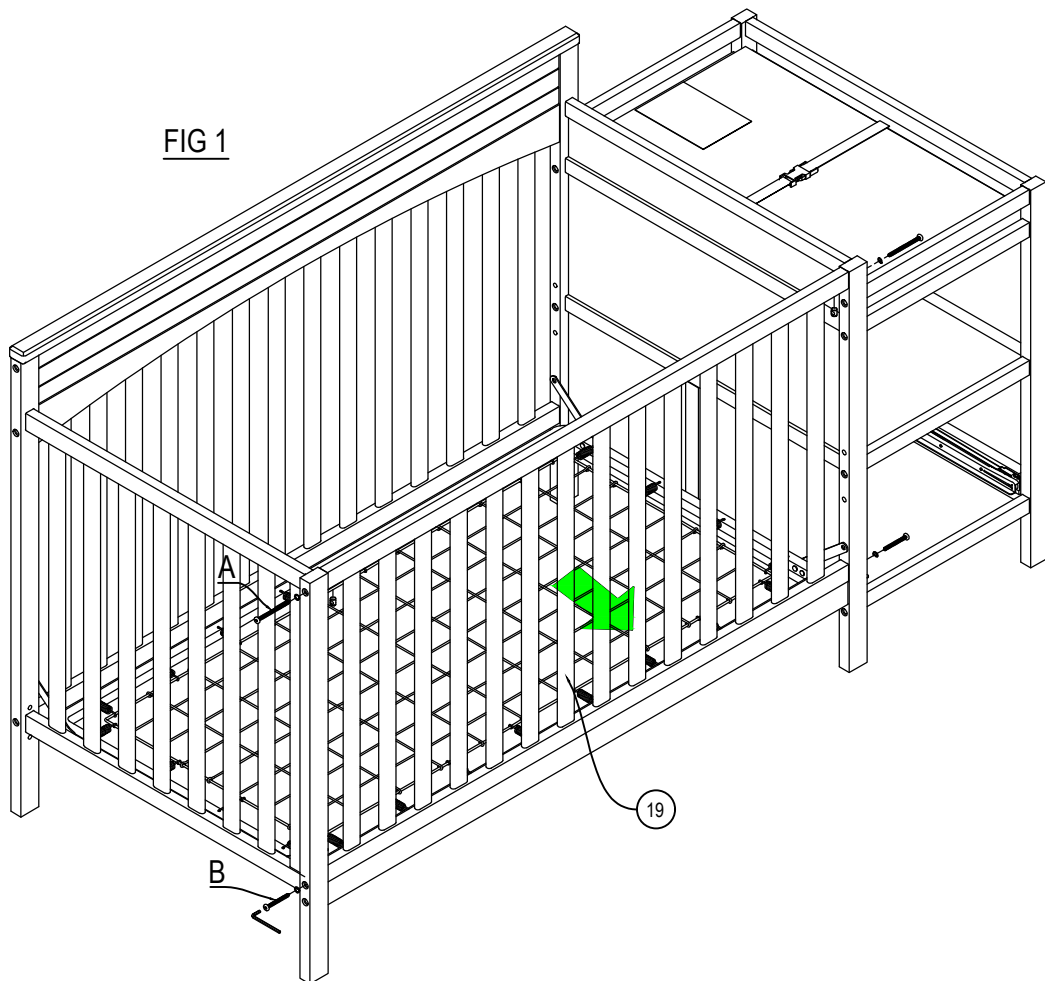

STEP 1 :

Remove the Crib front rail (19) from the crib by unscrewing (2 pcs) Allen bolt (A) and (2 pcs) Allen bolt (B) as shown in FIG.1.

STEP 1 " MATTRESS SUPPORT HEIGHT ADJUSTMENT "

THIS STEP REQUIRES :

(Q) Allen key (1 pc) (length may vary)



FIG 3


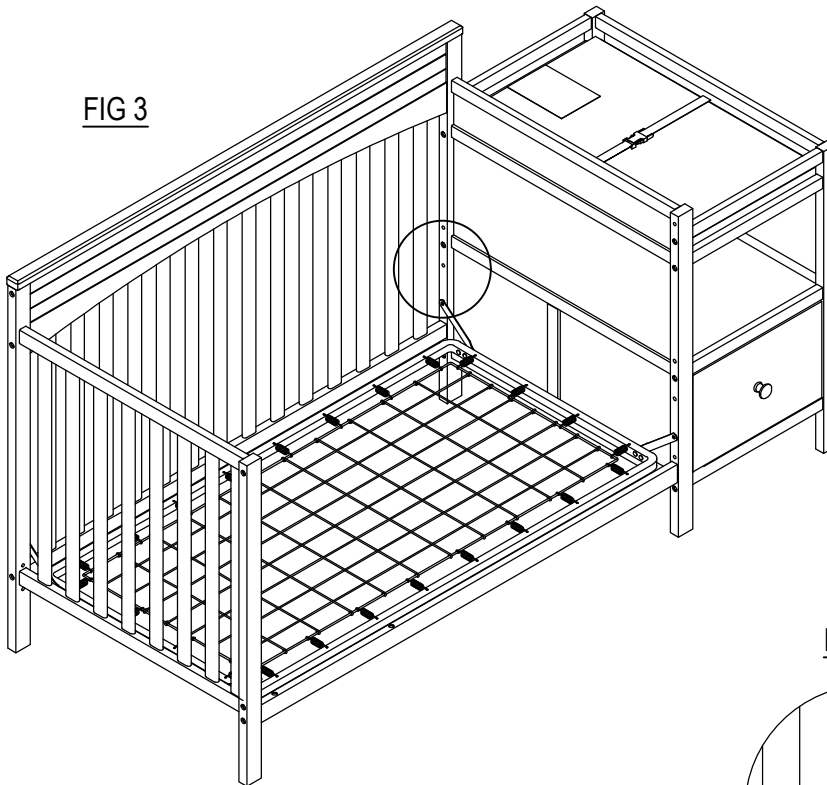


FIG 2

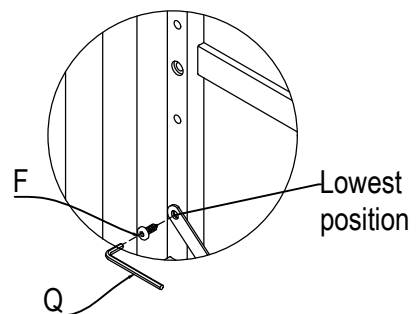

STEP 2 :

- Remove the Allen bolt 9/16"(15 mm) (F) on the Mattress spring.
- Move Mattress spring to the lowest position as shown in FIG.2.
- Attach the Allen bolt 9/16"(15 mm) (F) on the lowest hole.
- Tighten all bolts with Allen key (Q).
- Final position as shown in FIG.3.

 **“CAUTION: ANY MATTRESS USED IN THIS CRIB MUST BE AT LEAST 27 1/4 INCHES (69 CM) BY 51 5/8 INCHES (131 CM) WITH A THICKNESS NOT EXCEEDING 6 INCHES (15 CM). THE DIMENSIONS OF THE MATTRESS SHALL BE TAKEN FROM SEAM TO SEAM OR EDGE TO EDGE WHERE APPROPRIATE.”**

 WARNING!

FOR TODDLER BED USE

- READ ALL INSTRUCTIONS BEFORE ASSEMBLING TODDLER BED.

KEEP INSTRUCTIONS FOR FUTURE USE.

- FAILURE TO FOLLOW THESE WARNINGS AND THE ASSEMBLY INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH FROM ENTRAPMENT OR STRANGULATION.
- **CAUTION:** THE MATTRESS INTENDED FOR USE ON THE BED SHALL BE A FULL-SIZE CRIB MATTRESS HAVING MINIMUM DIMENSION OF 51 5/8 INCHES (1310 MM) IN LENGTH AND 27 1/4 INCHES (690 MM) IN WIDTH AND NOT EXCEEDING 6 INCHES (150 MM) IN THICKNESS. THE DIMENSION OF THE MATTRESS SHALL BE TAKEN FROM SEAM TO SEAM OR EDGE TO EDGE WHERE APPROPRIATE.
- THE MINIMUM AGE OF THE INTENDED USER SHALL NOT BE LESS THAN 15 MONTHS AND THE MAXIMUM WEIGHT SHALL NOT BE GREATER THAN 50 LB (22.7 KG).
- **GUARDRAIL (SOLD SEPARATELY) MUST BE USED** WHEN CRIB USED AS A TODDLER BED TO AVOID THE FORMATION OF A GAP BETWEEN THE MATTRESS AND THE BED THAT COULD CAUSE AN ENTRAPMENT.
- **DO NOT** PLACE BED NEAR WINDOWS WHERE CORDS FROM BLINDS OR DRAPES MAY STRANGLE A CHILD.
- **DO NOT** PLACE ITEMS WITH A STRING, CORD, OR RIBBON AROUND A CHILD'S NECK, SUCH AS HOOD STRINGS OR PACIFIER CORDS.
- **DO NOT** SUSPEND STRINGS OVER A TODDLER BED FOR ANY REASON.
- WHEN STORING TODDLER BED USE CAUTION AS EXTREME CHANGE IN TEMPERATURE OR HUMIDITY CAN COMPROMISE THE TODDLER BED MAKING IT EXTREMELY DANGEROUS TO YOUR CHILD. STORE THE TODDLER BED IN A CLEAN DRY PLACE.
- USE CAUTION WHEN A VAPORIZER OR HUMIDIFIER IS IN USE. ALWAYS AIM VAPOR AWAY FROM THE TODDLER BED AS WELL AS ANY OTHER WOODEN FURNITURE. PROLONGED PERIODS OF HUMIDITY IN STORAGE AS WELL AS THE HOME CAN COMPROMISE THE TODDLER BED.
- AVOID USING VAPORIZERS AND HUMIDIFIER FOR PROLONGED PERIODS OF TIME.
- PLEASE DISPOSE ALL PACKAGING AND PLASTIC BAGS.
- PLEASE CLEAN THE TODDLER BED WITH A DRY CLOTH AND USE MILD WOOD POLISH IF REQUIRED.
- **PREVENT BURNS.** KEEP BED AWAY FROM OPEN FIRES AND OTHER HEAT SOURCES.
- CHECK THIS PRODUCT FOR DAMAGED HARDWARE, LOOSE JOINTS, LOOSE BOLTS OR OTHER FASTENERS, MISSING PARTS OR SHARP EDGES BEFORE AND AFTER ASSEMBLY AND FREQUENTLY DURING USE. SECURELY TIGHTEN LOOSE BOLTS AND OTHER FASTENERS. **DO NOT** USE CRIB IF ANY PARTS ARE MISSING, DAMAGED OR BROKEN.

WARNING ENTRAPMENT/STRANGULATION HAZARD

- INFANTS HAVE DIED IN TODDLER BEDS FROM ENTRAPMENT AND STRANGULATION.
- FAILURE TO FOLLOW THESE WARNINGS AND THE ASSEMBLY INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.
- **NEVER** USE BED WITH CHILDREN UNDER 15 MONTHS.
- **NEVER** PLACE BED NEAR WINDOWS WHERE CORDS FROM BLINDS OR DRAPES MAY STRANGLE A CHILD.

WARNING

INFANTS HAVE DIED IN TODDLER BEDS FROM ENTRAPMENT.

- OPENINGS IN AND BETWEEN BED PARTS CAN ENTRAP HEAD AND NECK OF A SMALL CHILD.
- **NEVER** USE BED WITH CHILDREN YOUNGER THAN 15 MONTHS.
- **ONLY** USE FULL-SIZE CRIB MATTRESS OF THE RECOMMENDED SIZE.
- **ALWAYS** FOLLOW ASSEMBLY INSTRUCTIONS.

WARNING

STRANGULATION HAZARD

- **NEVER** PLACE BED NEAR WINDOWS WHERE CORDS FROM BLINDS OR DRAPES MAY STRANGLE A CHILD.
- **NEVER** SUSPEND STRINGS OVER BED.
- **NEVER** PLACE ITEMS WITH A STRING, CORD, OR RIBBON, SUCH AS HOOD STRINGS OR PACIFIER CORDS, AROUND A CHILD'S NECK. THESE ITEMS MAY CATCH ON BED PARTS