

# ASSEMBLY INSTRUCTIONS

## (Box 1)

BOX OF HEADBOARD & FOOTBOARD

No	ITEM	Qty
A	Headboard	1 pc
B	Footboard	1 pc
C	Headboard Leg (L/R)	2 pcs
D	Bed Slats	4 pcs
E	Bed Slats Support 30x30x225mm	4 pcs

## (Box 2)

BOX OF SIDE RAIL


No	ITEM	Qty
F	Side Rail	2 pcs

## (Box 1)


HARDWARE LIST (HEADBOARD)

No	ITEM	Qty
1	JCBC M6 x 30mm	6 pcs
2	SPRING WASHER 1/4" Rbw	6 pcs
3	Flat Washer 1/4"ID x 13mmOD Blk	6 pcs
4	ALLEN KEY m4x65mm Blk	1 pc
5	CSK M4 x 32mm	8 pcs


**STEP 1 :** Attach Head Board Leg ( C ) to Head Board ( A ) as shown using JCBC BOLT ( 1 ) with Spring Washer (2), Flat washer (3) and securing with ALLEN KEY ( 4 ).

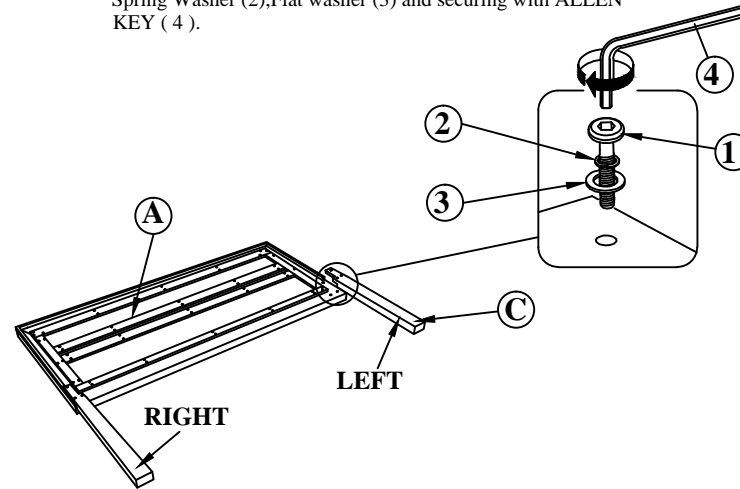


**STEP 2 :** Hook SIDE RAIL (F) TO HEAD BOARD closely and push down to fit. repeat step 2 with other end of rail to hook onto FOOTBOARD.

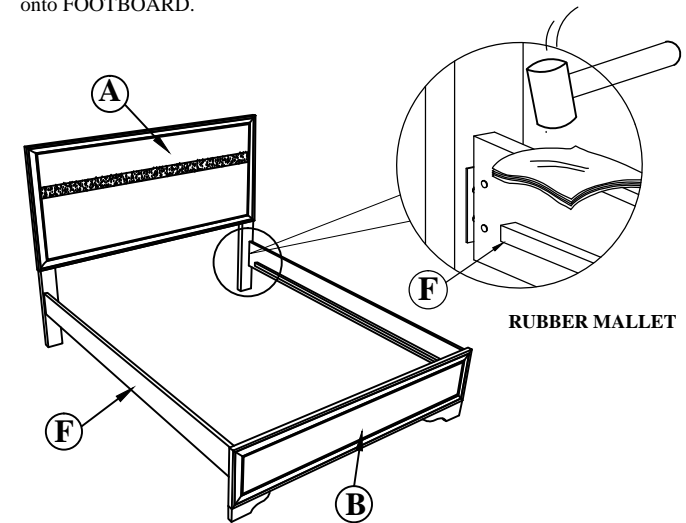

**STEP 2 :** Fix the Bed Slat Support Leg ( E ), to Bed Slat ( D ) as shown. Install the bed slat ( D ) to side rail ( F ) and tighten with Csk Screw ( 5 ) as per diagram shown. (NOTE: THE SETUP MUST DONE AT THE DECIDED LOCATION FOR THE BED TO OBTAIN PERFECT STABILITY)

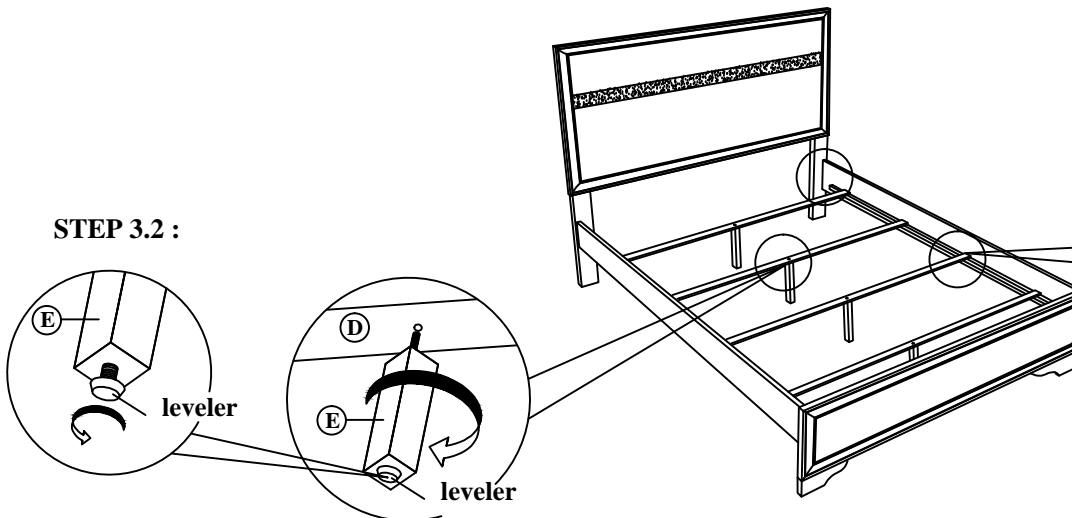

## STEP 3.1 :

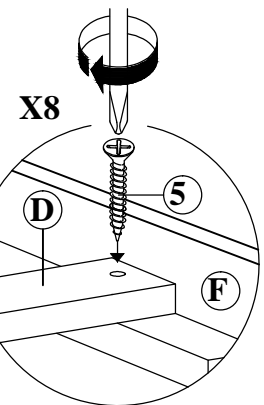

## STEP 3.2 :

Fix Slat (D) flush against Side Rail (F) using screw driver & CSK screw (5).

NOTE : MUST TIGHTEN SCREWS PERIODCALLY.SCREW NATURALLY LOOSEN WITH USE.CHECK TIGHTNESS OF ALL SCREW EVERY 6-8 WEEKS.