




STUDIO STYLE INSTALLATION INSTRUCTIONS

REV.2-BON-8473-0924

**MODELS:
RTA-ST32FD
RTA-ST36FD
RTA-ST48FD**

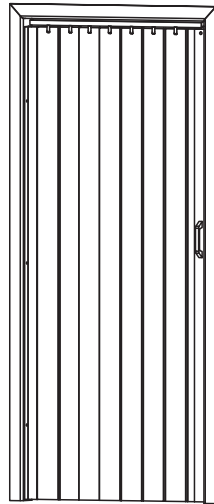












Thank you for purchasing our product








P.1	RTA-ST32FD, RTA-ST36FD, RTA-ST48FD	P.1
-----	------------------------------------	-----

<p>Do a quick inventory of all the parts and hardware listed below.</p> 	<p>For Support, installation questions & Replacement Parts within the 48 Contiguous United States:</p> <p>Please email us at: support@rtaproducts.com</p> 	<p>Replacement Parts for International Customers & AK-HI-PR orders: RTA Products will replace the part free of charge, while the customer is responsible for shipping costs plus any International local taxes or duties.</p>
---	---	---

PARTS LIST

A x1	Folding door	
B x1	Top track	
C x2	Handle	
D (*)	Track glides	 (*) Quantities vary by model
E x1	Metal plate	
F x1	Square top glide	
G x2	Pin	
H x1	Lubricant	
A-S x6	M3x12	
B-S x10	M3x22	
C-S x1 Set	Connector (Chicago screw)	

NOTE: This product does not include any tools, you will need to have the following available during the installation:			
Measurement tape 	Electric hand saw 	Power driver with Phillips bits (recommended) 	Pencil 
			Shears 

ASSEMBLY STEPS



WE RECOMMEND TO PLACE THE PIECES OVER BLANKETS OR TABLECLOTHS TO PROTECT THEIR FINISH DURING INSTALLATION.

STEP 1





This step
requires of
2 persons

- Measure the WIDTH of your doorway.
- Mark on the top track **B** the same width **MINUS 4 mm** than that of the doorway.
- Use a hand saw to cut the track **B** at the marked point.

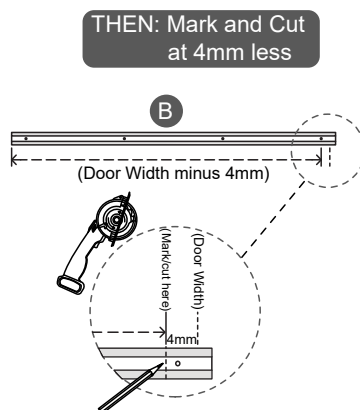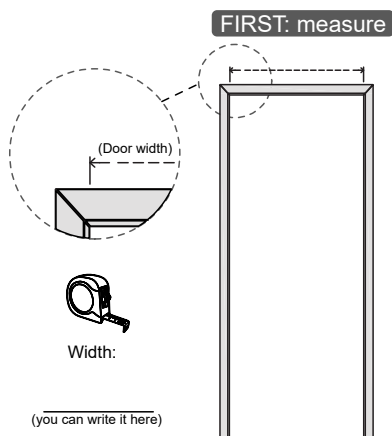


STEP 2

Install the handles **C** to both sides of the folding door **A** using the pins **G** to connect them to the door. Please note that the handles will connect and stay connected by pressure.

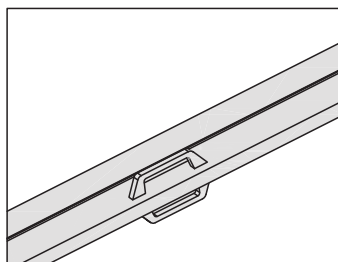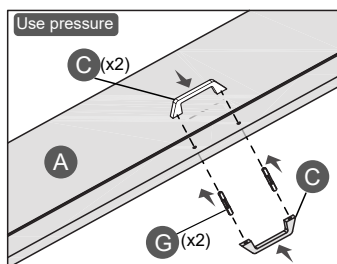

STEP 3

FIRST install the track glides **D** at the top of the folding door **A** by snapping them through the hole.
THEN install the square top glide **F** to the lead edge of the door **A** and secure it with the connector **C-S**.

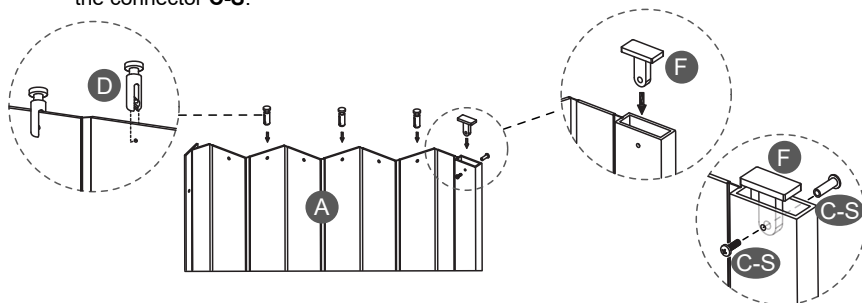


BELOW INSTRUCTIONS ARE ONLY IF YOUR DOOR FRAME IS SHORTER THAN 80"

Otherwise, skip and continue to step 4.

ONLY IF NECESSARY FOLLOW THE INSTRUCTIONS BELOW TO ADJUST THE FOLDING DOOR'S HEIGHT.

ONLY if the height of you door's frame is less than the standard 80 inches, and our folding door does not fit heightwise:

1. Measure the height of your door frame.
2. Mark at the bottom of the folding door **A**, 5 mm less than the door frame's height.
3. Use a pair of strong shears to remove the excess from the bottom of the folding door.

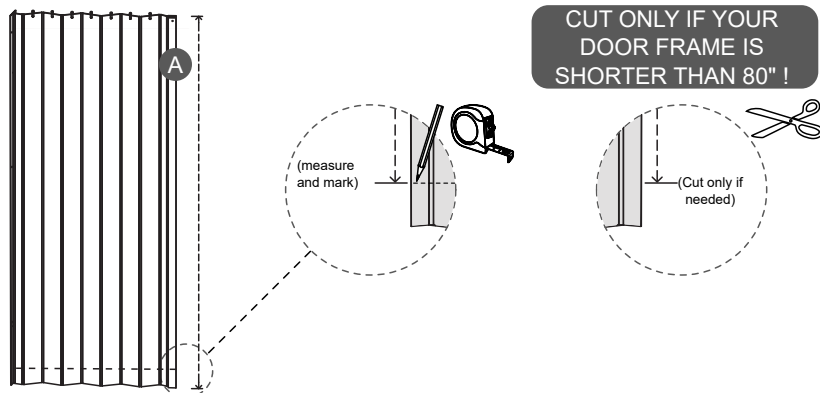



STEP 4






This step
requires of
2 persons

- FIRST, position and hold the top track **B** in the center of the door frame, leaving 2mm of space on both sides between the track and the door jambs, and use one screw **B-S** to fix one end of the track **B**.
- THEN, pivot the top track **B** outwards and carefully slide the folding door **A** into the track.
- THEN, swing the top track **B** back into position, reseed the folding door **A**, and use more screws **B-S** to fix the top track.
- LASTLY, apply a few drops of lubricant **H** to the top track **B** and slide the door **A** back and forth to allow the lubricant to spread evenly along the track.




FIRST

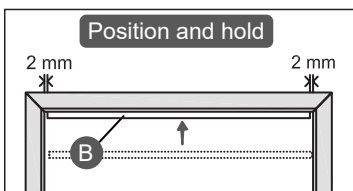


THEN

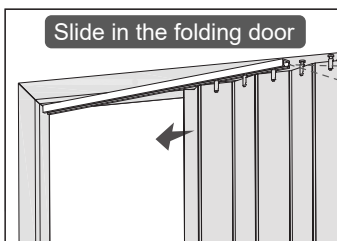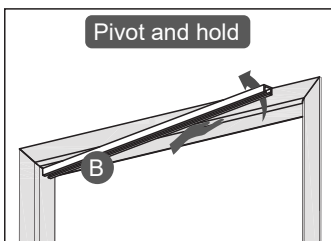

THEN

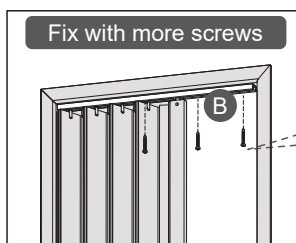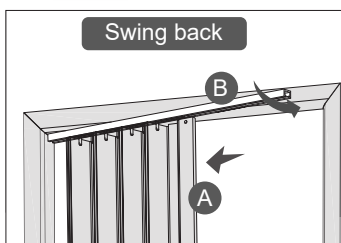

LAST

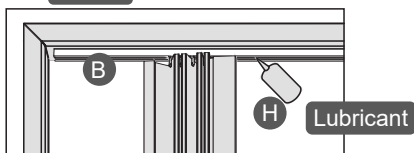


STEP 5




This step
requires of
2 persons

- FIRST close the folding door **A** on both sides to prepare for the final installation.
- THEN, on the side with edge that has the handle, make two small marks on the door frame where the metal plate **E** would go, but make sure it is at the same level as the magnets on the door.
- THEN, use screws **B-S** to attach the metal plate **E** to the door frame.
- LASTLY, on the other side align the door **A** centered on the door frame, and use screws **A-S** to fix **A** to the door frame.


FIRST: Close the
folding door

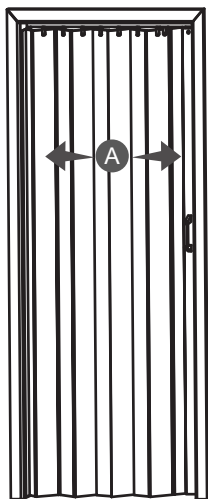

THEN: Install the
plate E

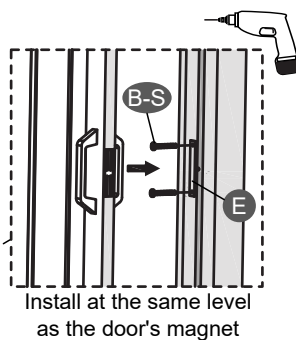

LAST: Secure the
door A on other side

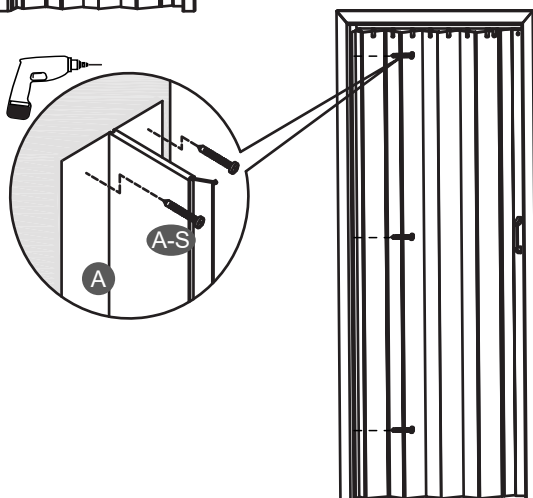

WARNINGS, CARE AND MAINTENANCE


To avoid the risk of suffocation to children and pets, dispose of the plastic bags immediately after the installation is done.




Use a soft bristled brush to dust.




Be mindful of small children to avoid their fingers getting caught in the door.

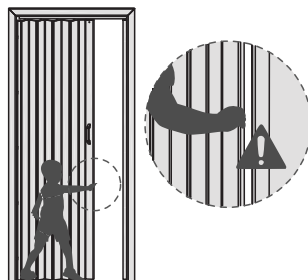

Clean with a cloth lightly damped in a solution of mild soap and water.

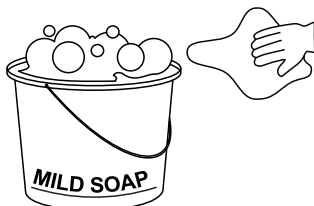

Do not force the door to open or close if it feels stuck or hard to open/close. Instead, apply a little lubricant to the rollers on the top track and try opening or closing again.

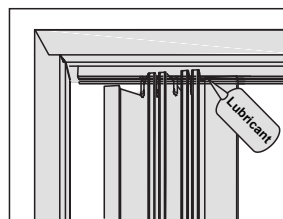

Do not use solvents or abrasive materials.



WARRANTY



LIMITED 1 YEAR WARRANTY

For details on the Warranty Policy, please visit online:
www.technihome.com