

### Features


- Acrylic
- Rectangular shape
- Drop-in
- Pump with air switch and grounding-type plug-in cord
- 6 individually adjustable ProFlex® hydro-massage jets
- Molded lumbar supports and armrests
- 60" (1524 mm) x 42" (1067 mm) x 21" (533 mm)

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASME A112.19.7
- ASTM E162
- ASTM E662
- UL 1795

### BATH WHIRLPOOL WITH CUSTOM PUMP K-1112-CB

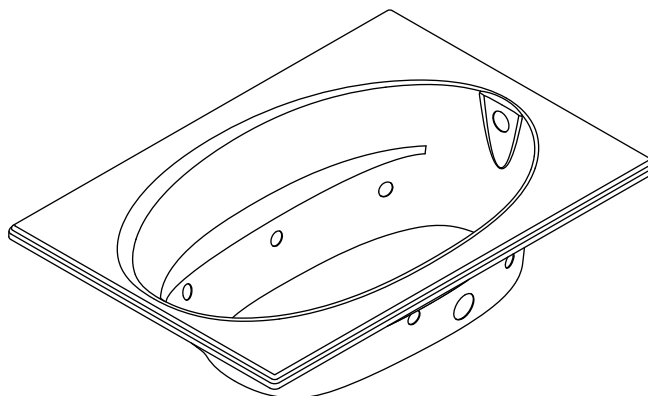

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

| Model                        | Description                                                           | Colors/Finishes             |                                     |
|------------------------------|-----------------------------------------------------------------------|-----------------------------|-------------------------------------|
| K-1112-CB                    | Bath whirlpool with custom pump                                       | <input type="checkbox"/> 0  | <input type="checkbox"/> Other_____ |
| <b>Recommended Accessory</b> |                                                                       |                             |                                     |
| K-7166                       | Pop-up bath drain – above or through-the-floor installation <b>OR</b> | <input type="checkbox"/> CP | <input type="checkbox"/> Other_____ |
| K-11677                      | Adjustable trip lever bath drain – through-the-floor installation     | <input type="checkbox"/> CP | <input type="checkbox"/> Other_____ |
| <b>Optional Accessories</b>  |                                                                       |                             |                                     |
| K-9696                       | Jet trim kit – metal finishes                                         | <input type="checkbox"/> CP | <input type="checkbox"/> Other_____ |

### Product Specification

The acrylic bath whirlpool shall be 60" (1524 mm) in length, 42" (1067 mm) in width, and 21" (533 mm) in height. Product shall be drop-in and rectangular shape. Product shall have 6 individually adjustable ProFlex hydro-massage jets and a pump with air switch and grounding-type plug-in cord. Product shall have molded lumbar supports and armrests. Bath whirlpool shall be Kohler Model K-1112-CB-\_\_\_\_\_.

# WINDWARD®

## Technical Information

|                                                 |                                      |
|-------------------------------------------------|--------------------------------------|
| Fixture*:                                       |                                      |
| Bathing well:                                   |                                      |
| Basin area, bottom                              | 43" (1092 mm) x 20-1/2" (521 mm)     |
| Basin area, top                                 | 53-1/2" (1359 mm) x 32-1/8" (816 mm) |
| Weight                                          | 110 lbs (50 kg)                      |
| To overflow:                                    |                                      |
| Water depth                                     | 15" (381 mm)                         |
| Capacity                                        | 57 gal (215.9 L)                     |
| * Approximate measurements for comparison only. |                                      |

|                                       |  |
|---------------------------------------|--|
| Drop-in cut-out dimensions:           |  |
| 58-1/2" (1486 mm) x 40-1/2" (1029 mm) |  |

|         |     |    |     |
|---------|-----|----|-----|
| Pump:   | V   | Hz | A   |
| 1-speed | 120 | 60 | 7.5 |

|                                    |          |
|------------------------------------|----------|
| Minimum access panel pump/control: |          |
| 20" (508 mm) W x 15" (381 mm) H    | required |

## Required Electrical Service

Dedicated circuit required, protected with a Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz


Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.

## Installation Notes

Install this product according to the installation guide.



Floor support under the whirlpool must provide for a minimum of 35 lbs/square foot (171 kg/square meter) loading.

If installing a rim-mount faucet, make sure there is no interference with the drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

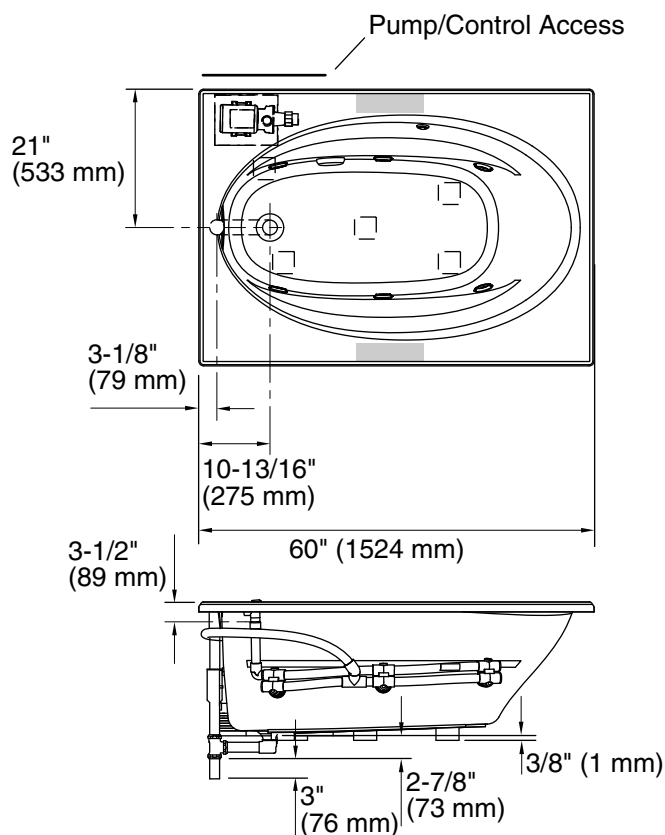

No change in measurements if connected with drain illustrated. (K-11677)

Recommended faucet area

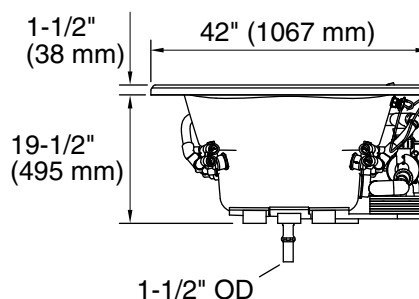

## Product Diagram