


97148 Product Installation Instructions

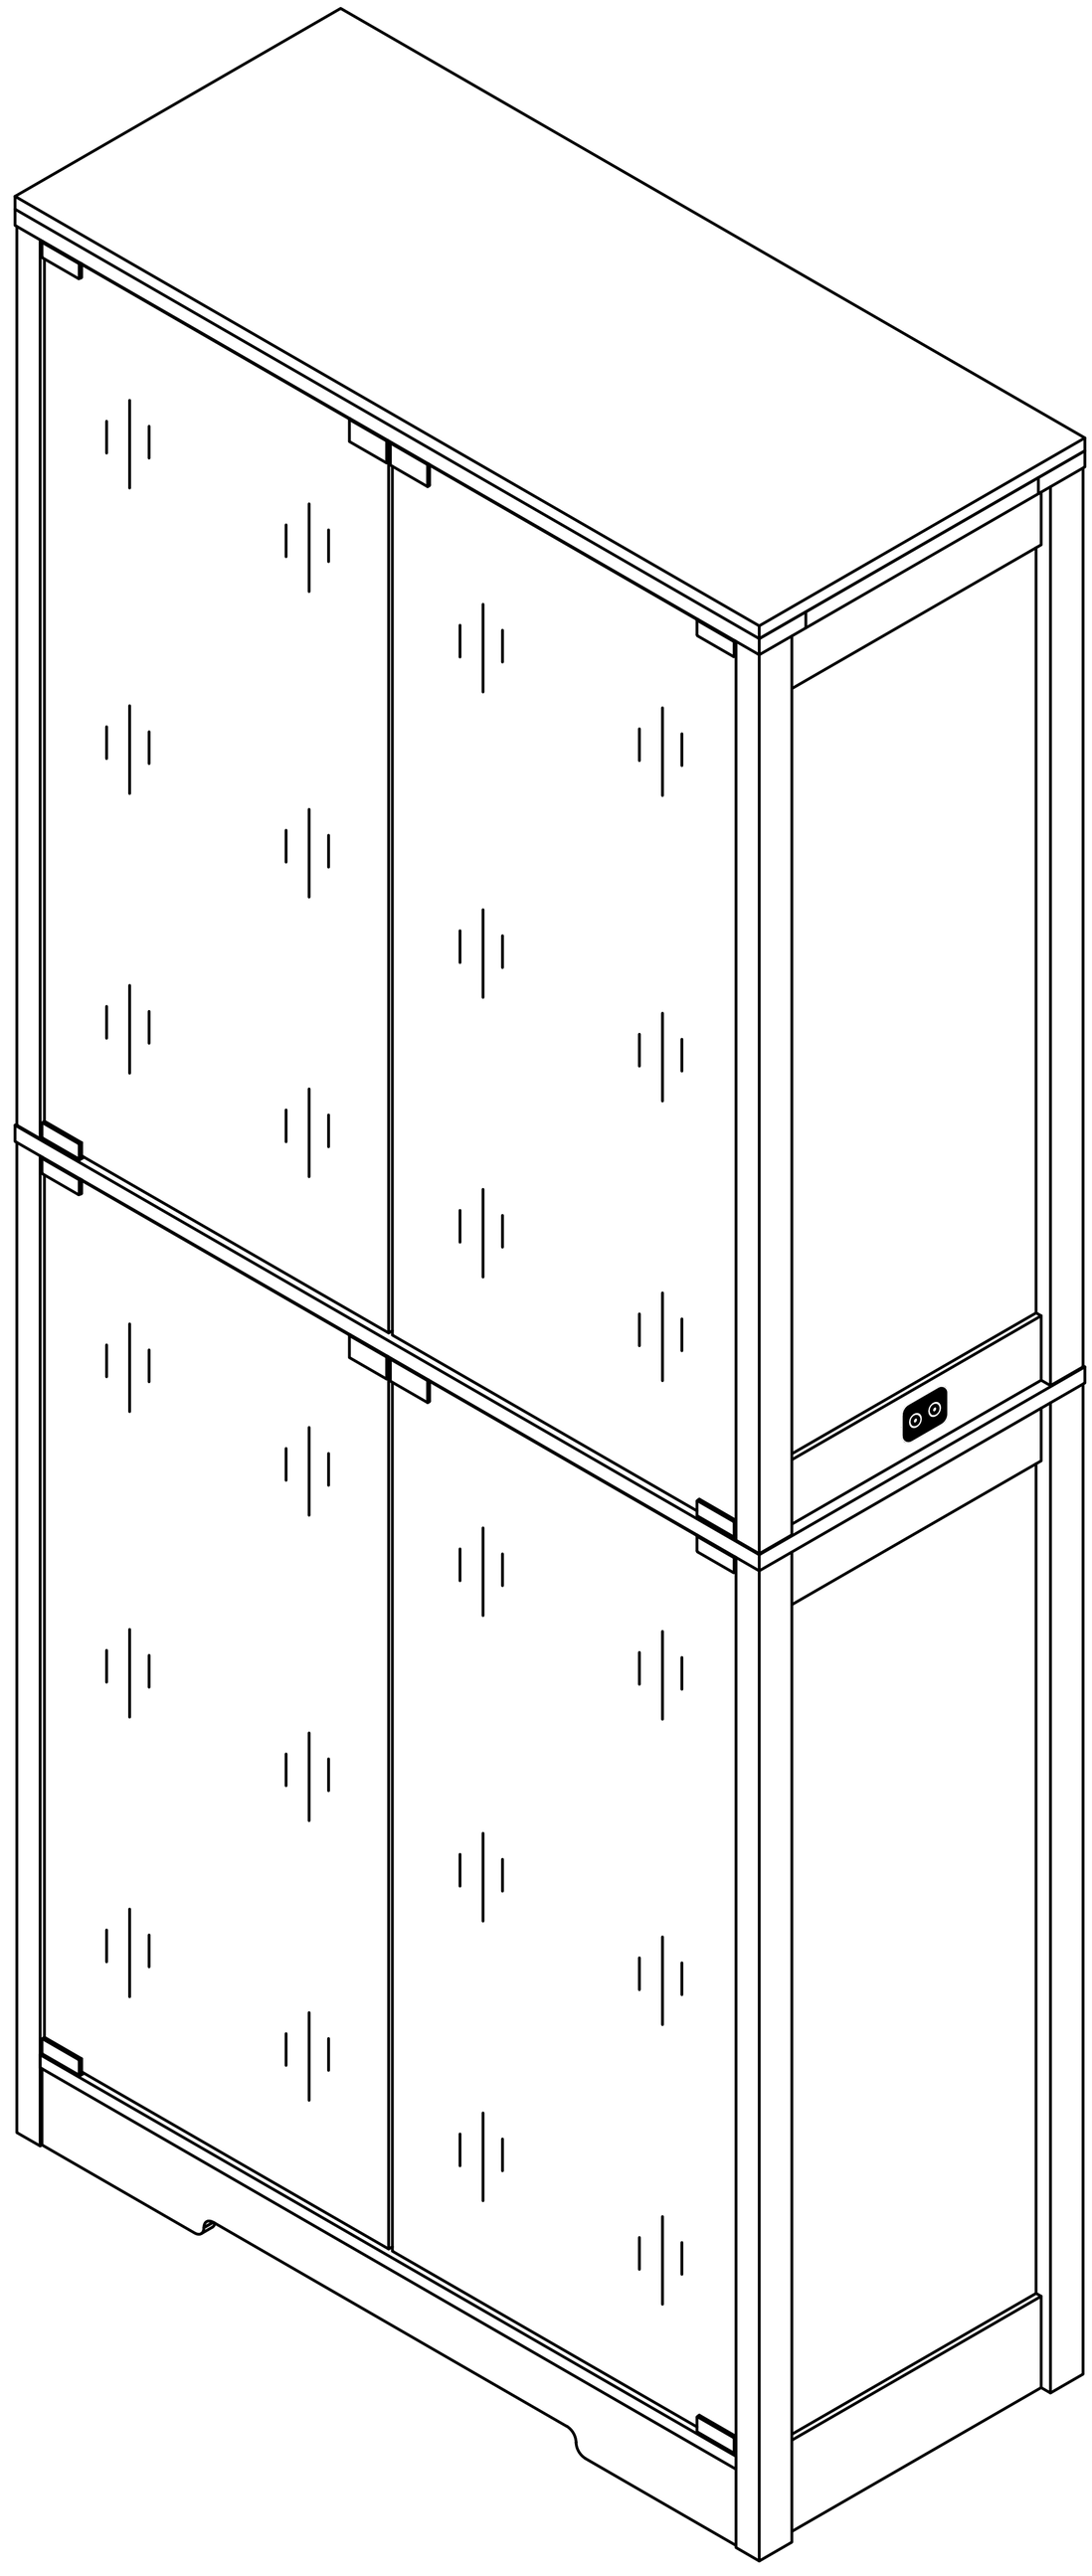


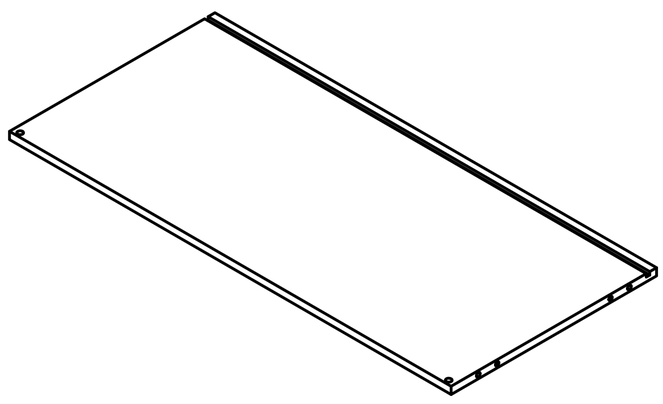


Ax1

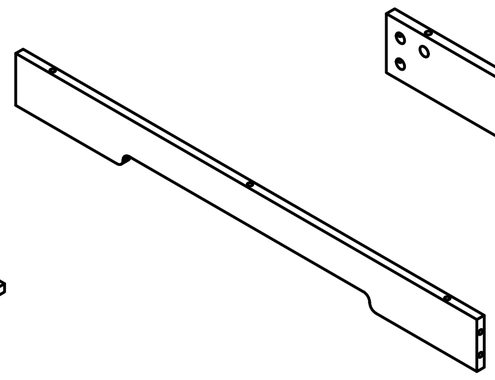


Bx1

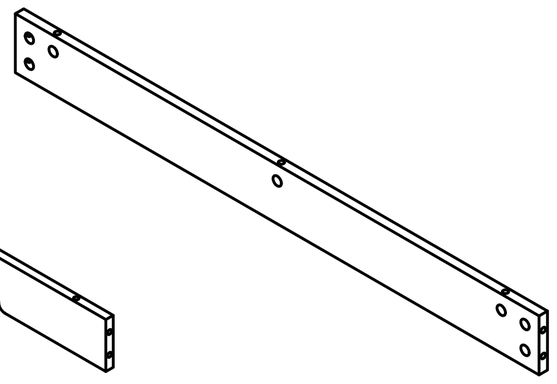


Cx1

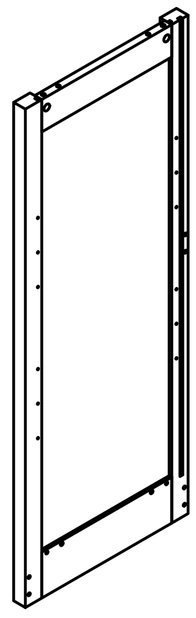


Dx1

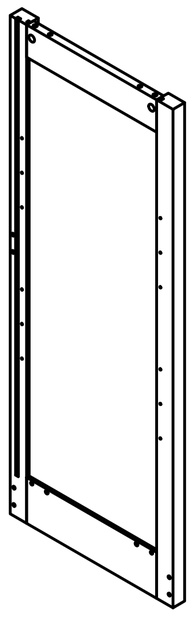


Ex1

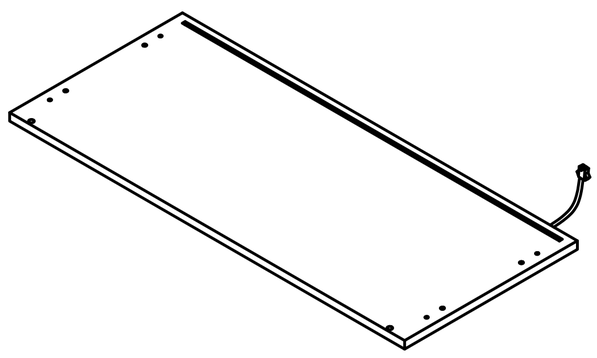


Fx1

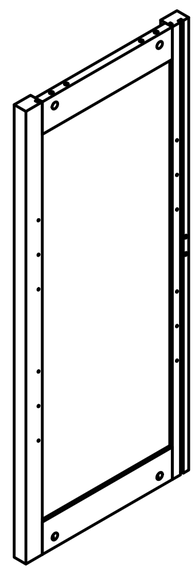


Gx1

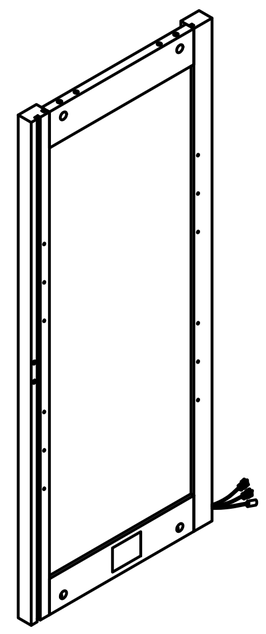


Hx1

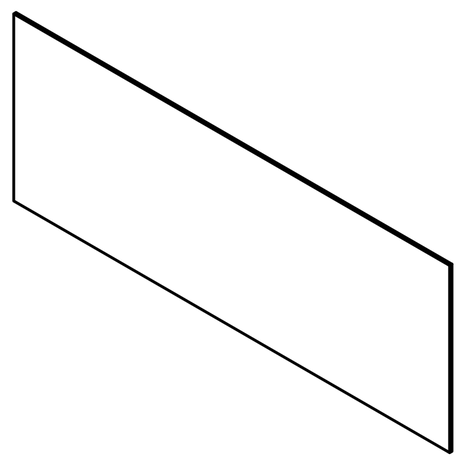


Ix6

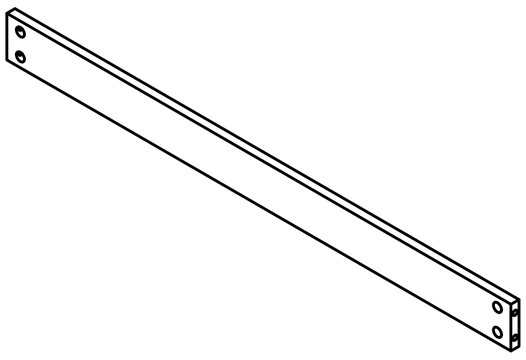


Jx2

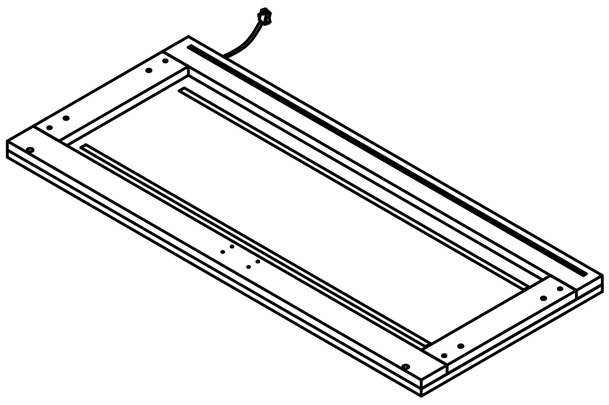

Kx1

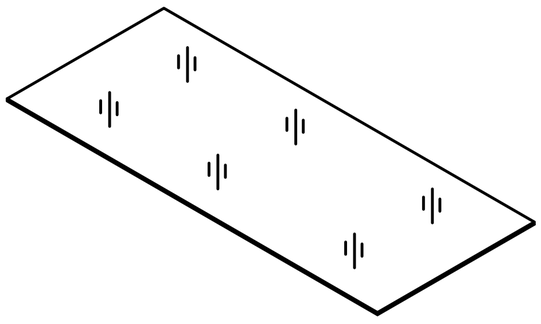









Lx4

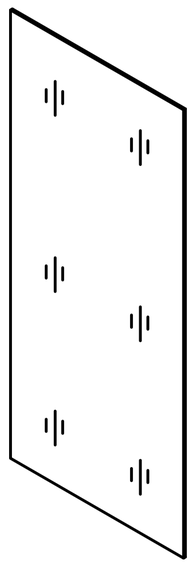


Mx4

1


Accessories list

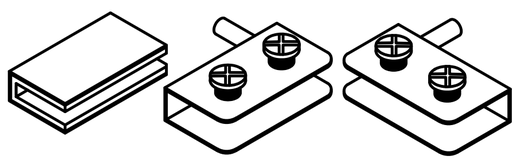①		Two in one screw (6x28mm)	38pcs +4pcs
②		Two in one nut (10x12mm)	38pcs +4pcs
③		Wood chipping (6x30mm)	16pcs +4pcs
④		Non-slip pads	6pcs
⑤		Backboard card strip(746mm)	4pcs
⑥		Fixing clip & screw (3x16mm)	24pcs +2pcs
⑦		Wire clamp	2pcs +1pcs
⑧		Laminate support nail	16pcs +1pcs
⑨		Rebound device & Screw (3x16mm)	8pcs +2pcs / 2pcs
		Rubber ring	8pcs
		Iron sheet & Hinge	4pcs
		AC/DC Adapter (12V⎓3.0A)	1pcs

⑪ Anti Fall Hardware

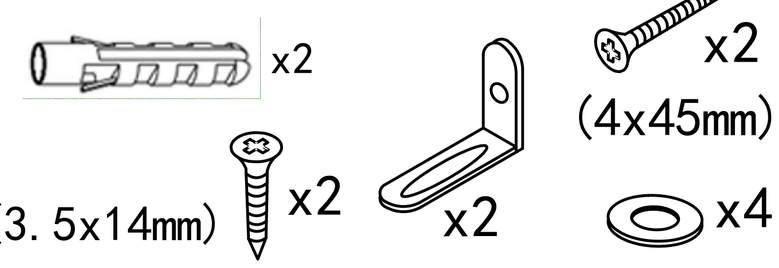


Double-head screwdriver, use as required

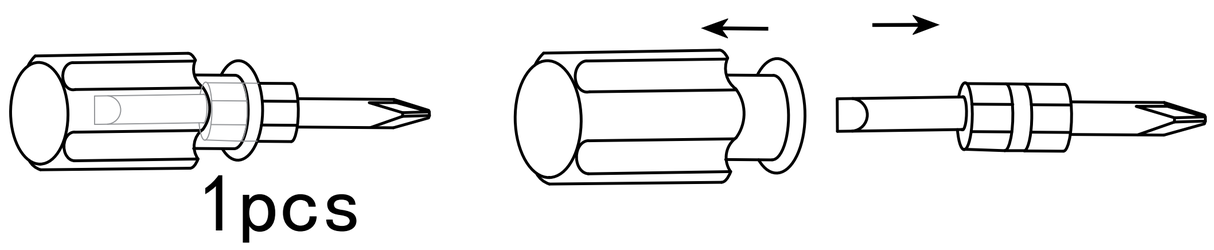


1pcs

Product structure decomposition

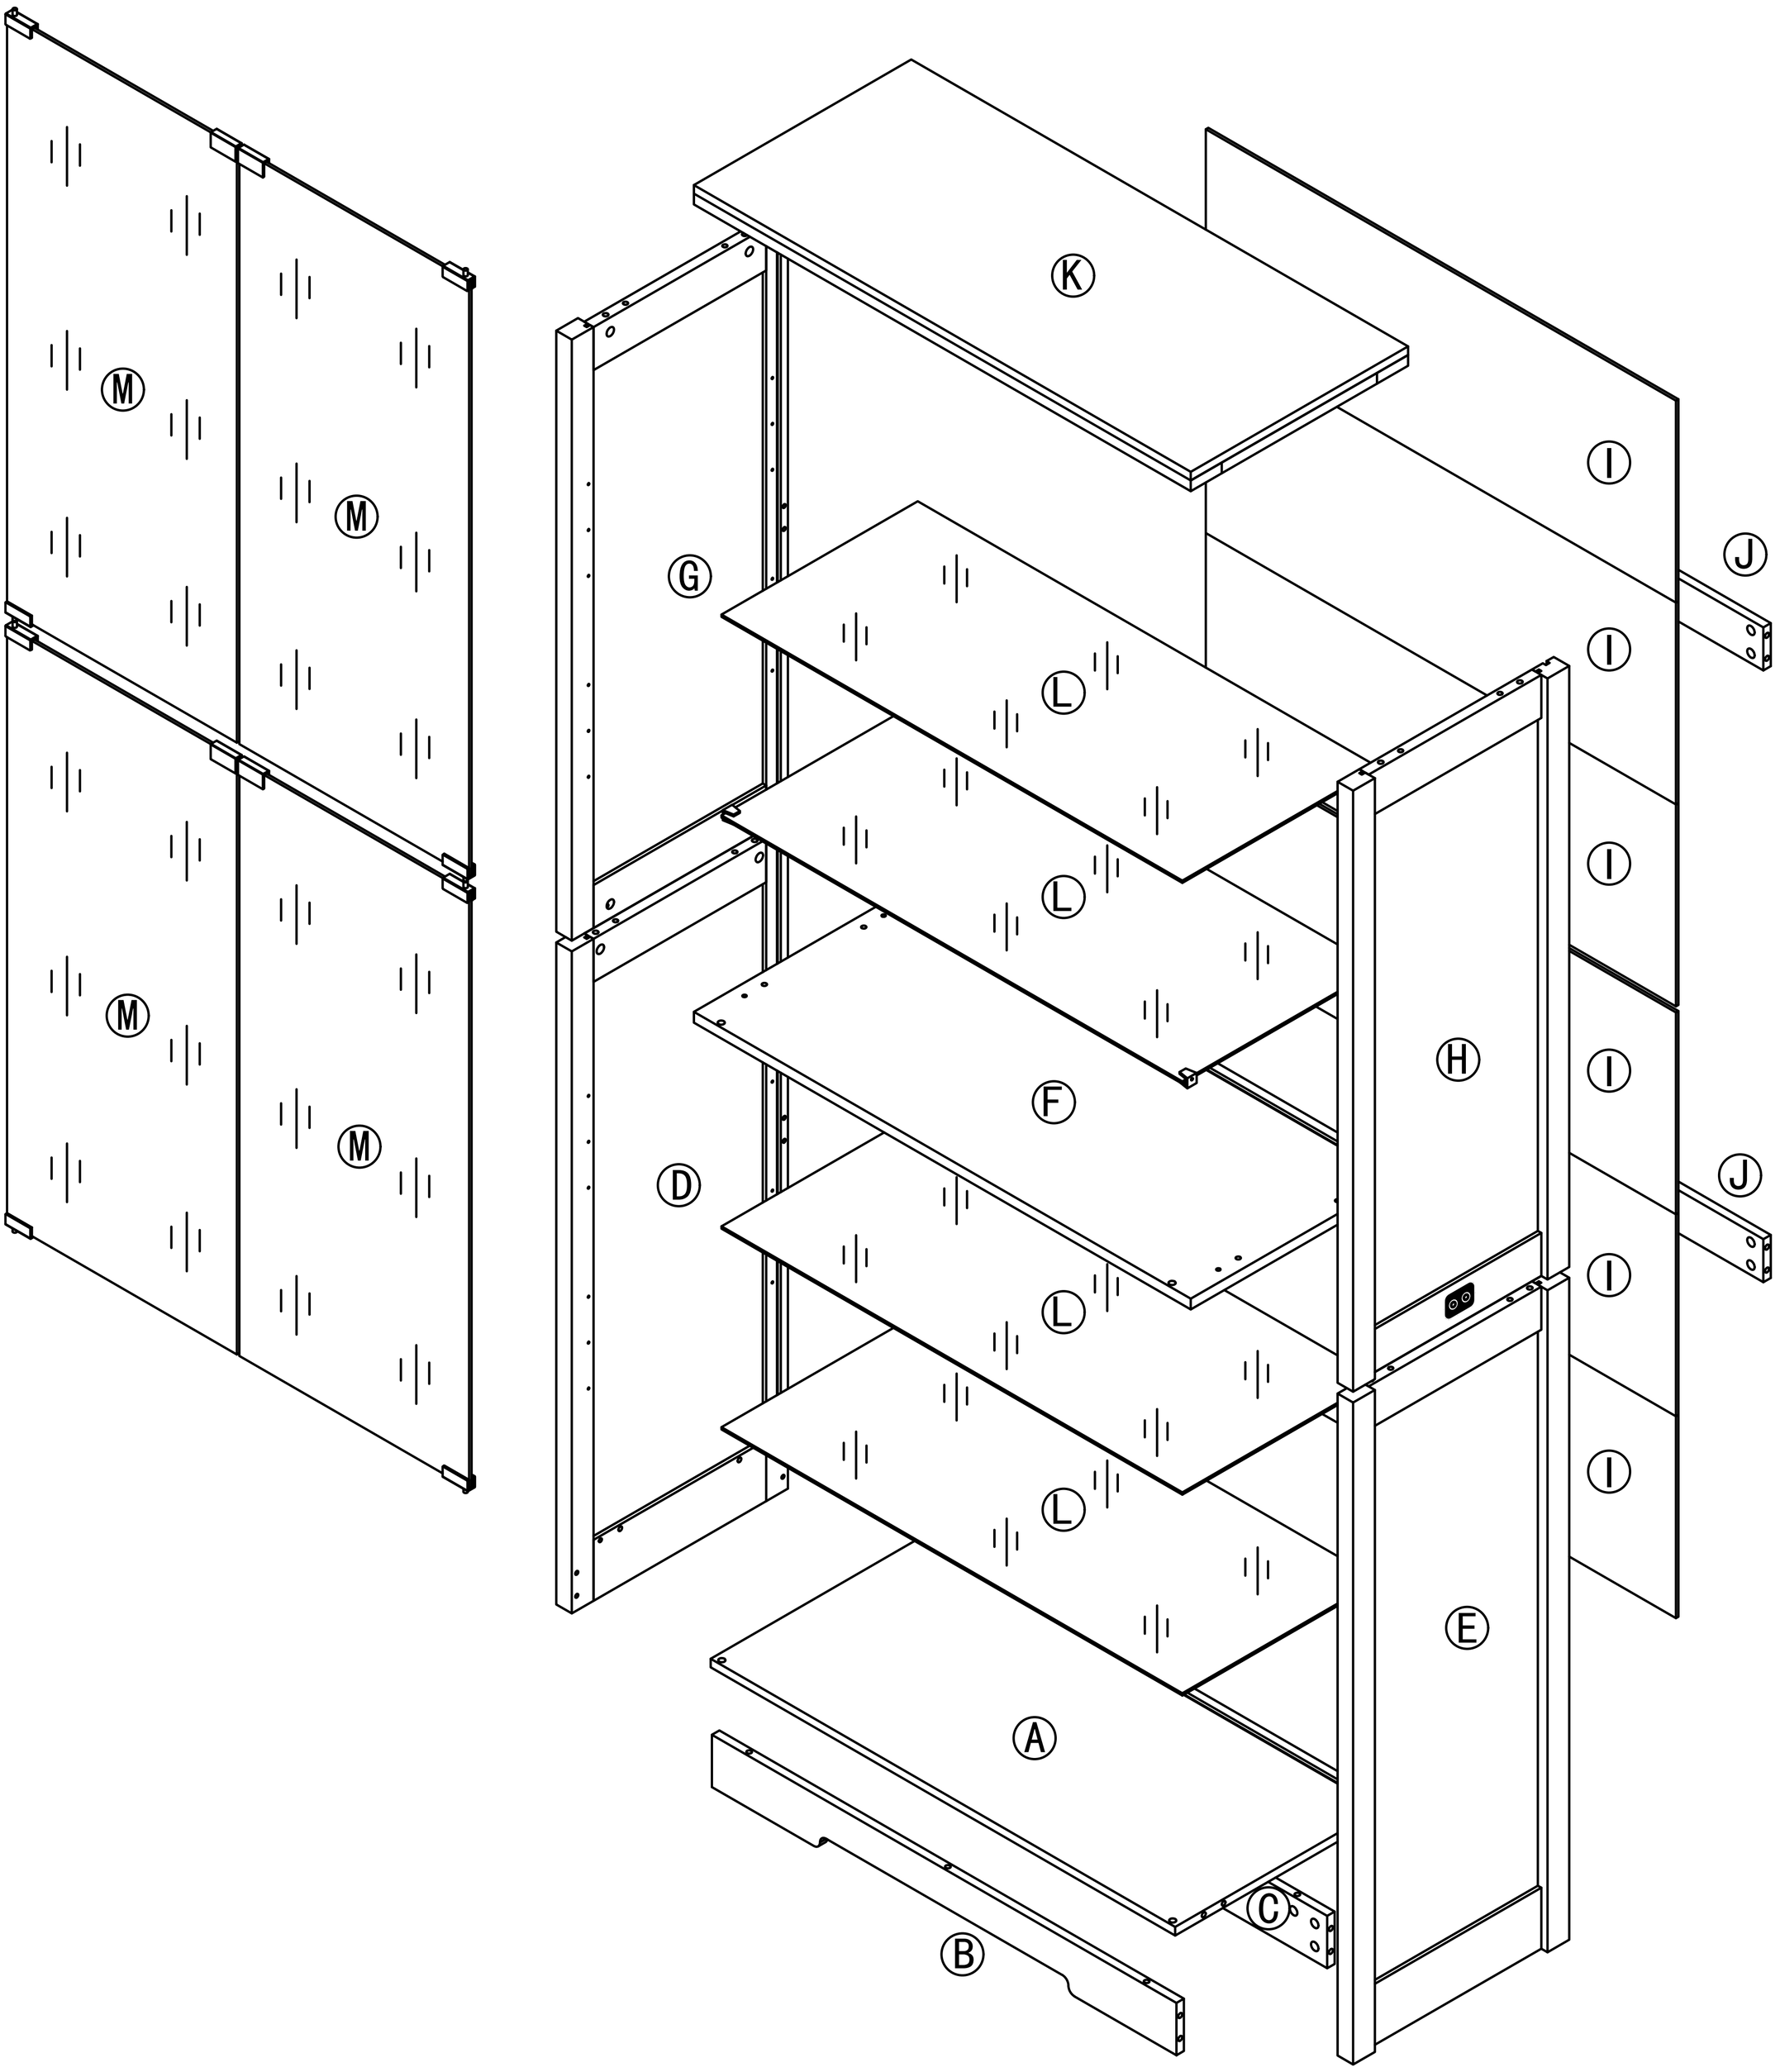


Use parts ① and ②


Step1

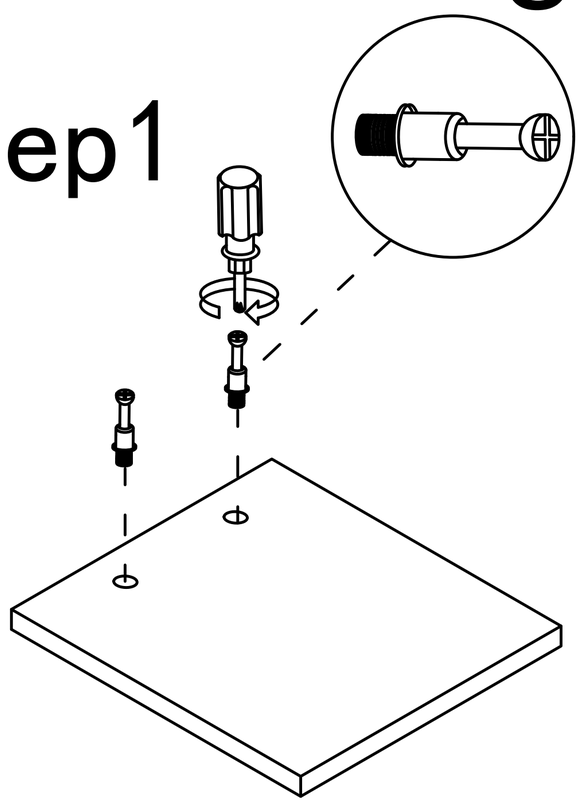


Step2

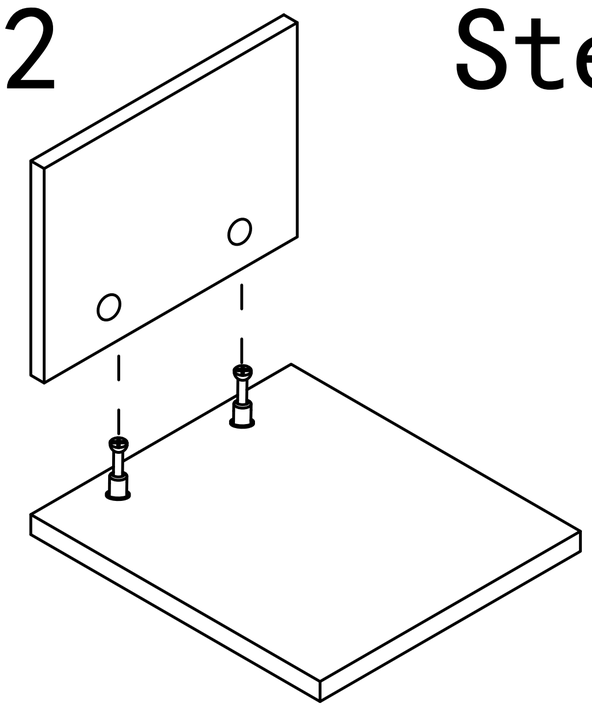


Step3

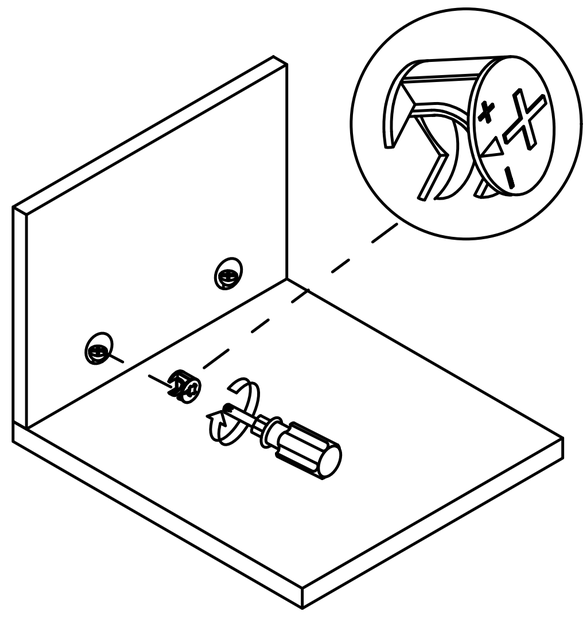

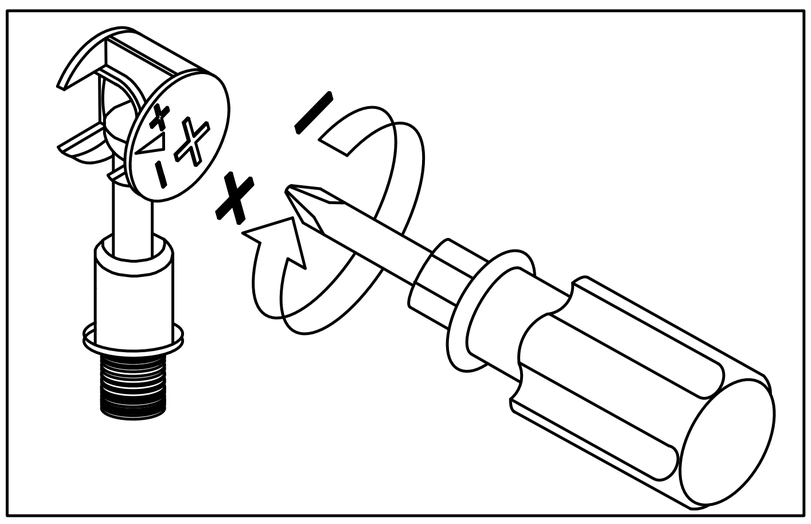



Use a screwdriver to lock in the direction of the "+" sign

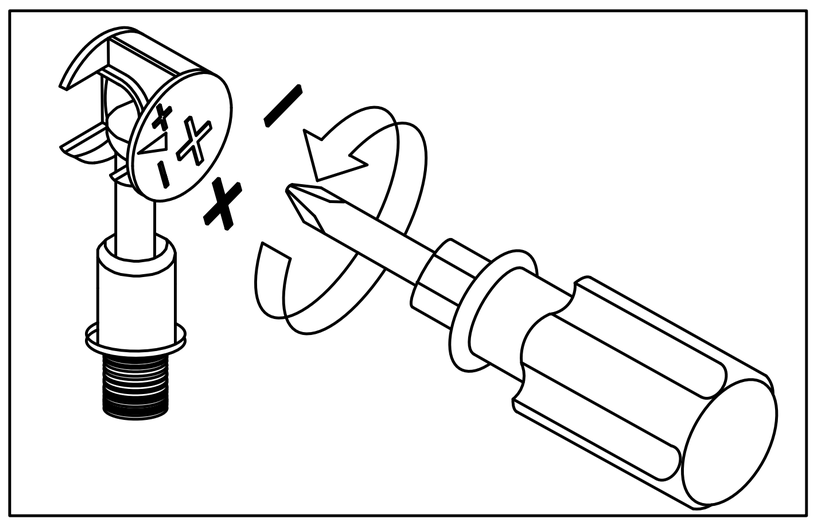


Disassemble along the direction of "-" sign


Step 1

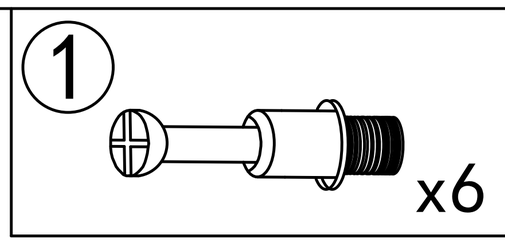

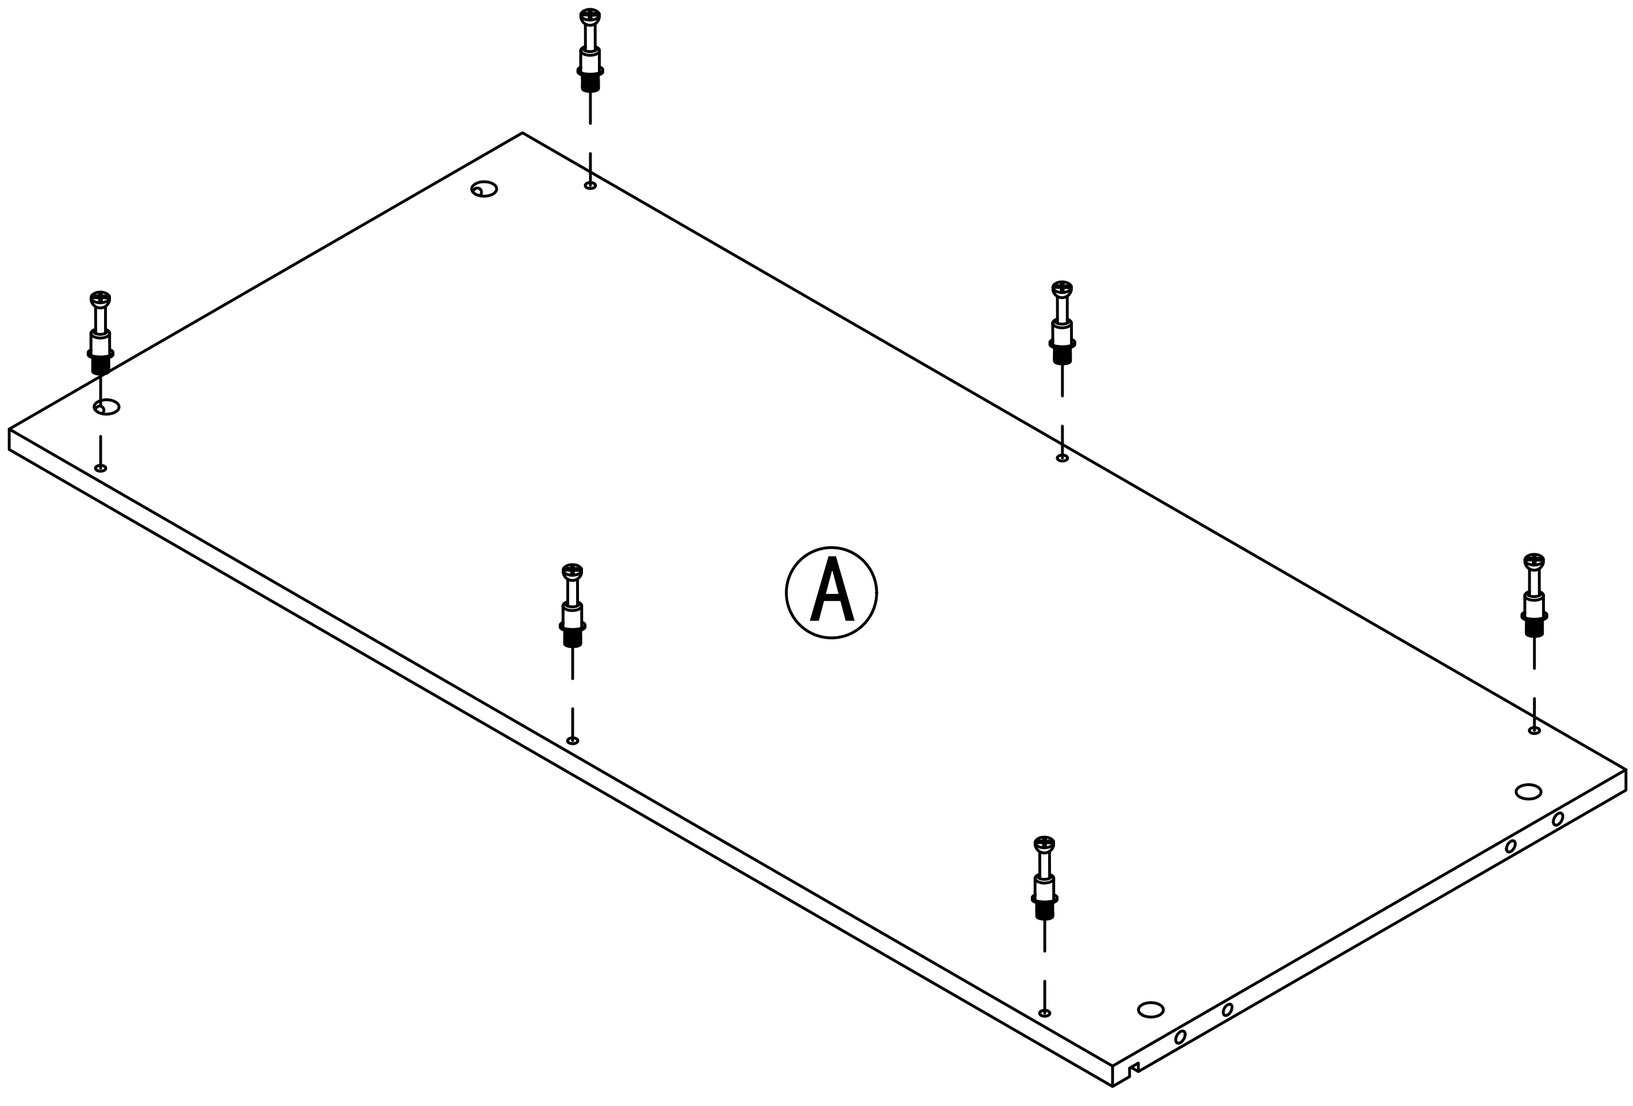



Step 2

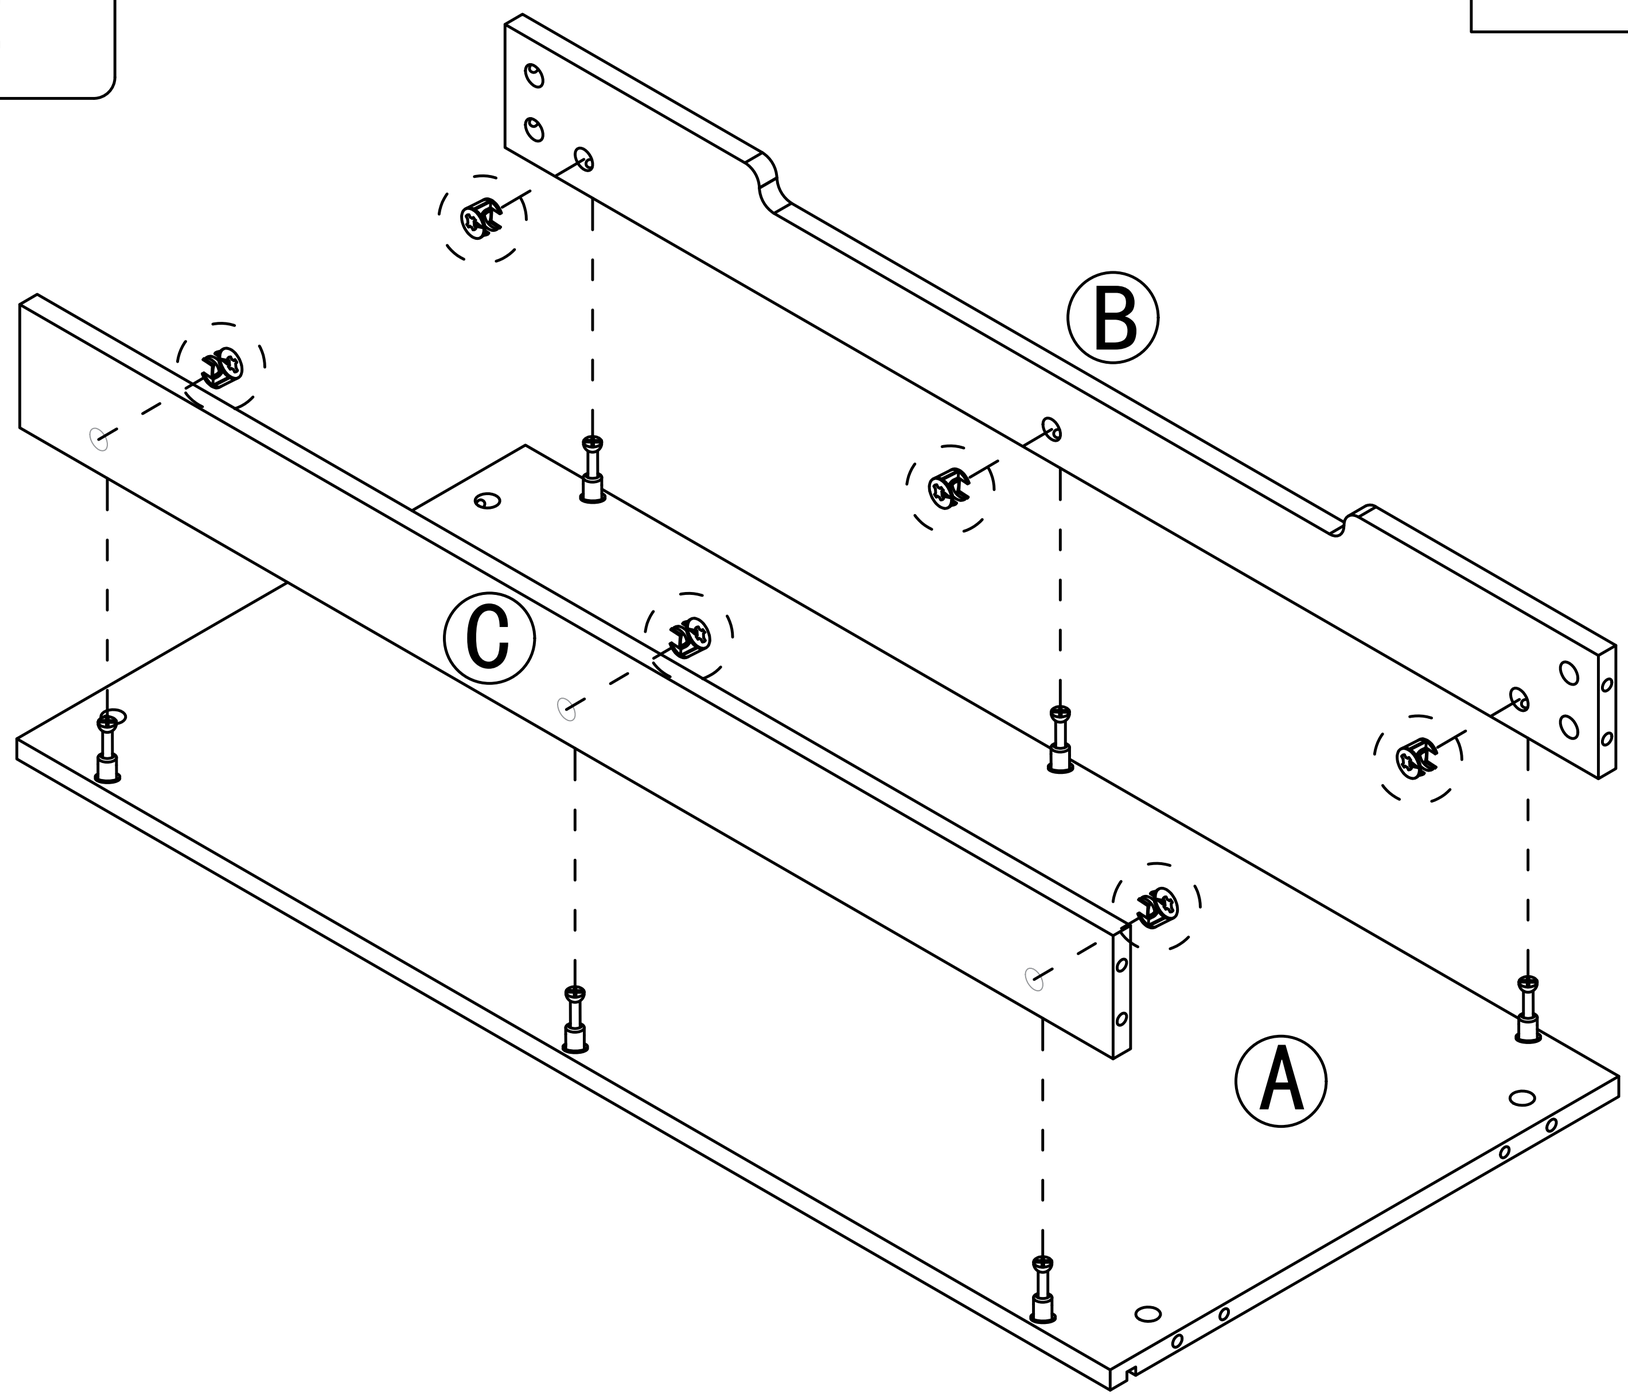

2  x6


Step 3

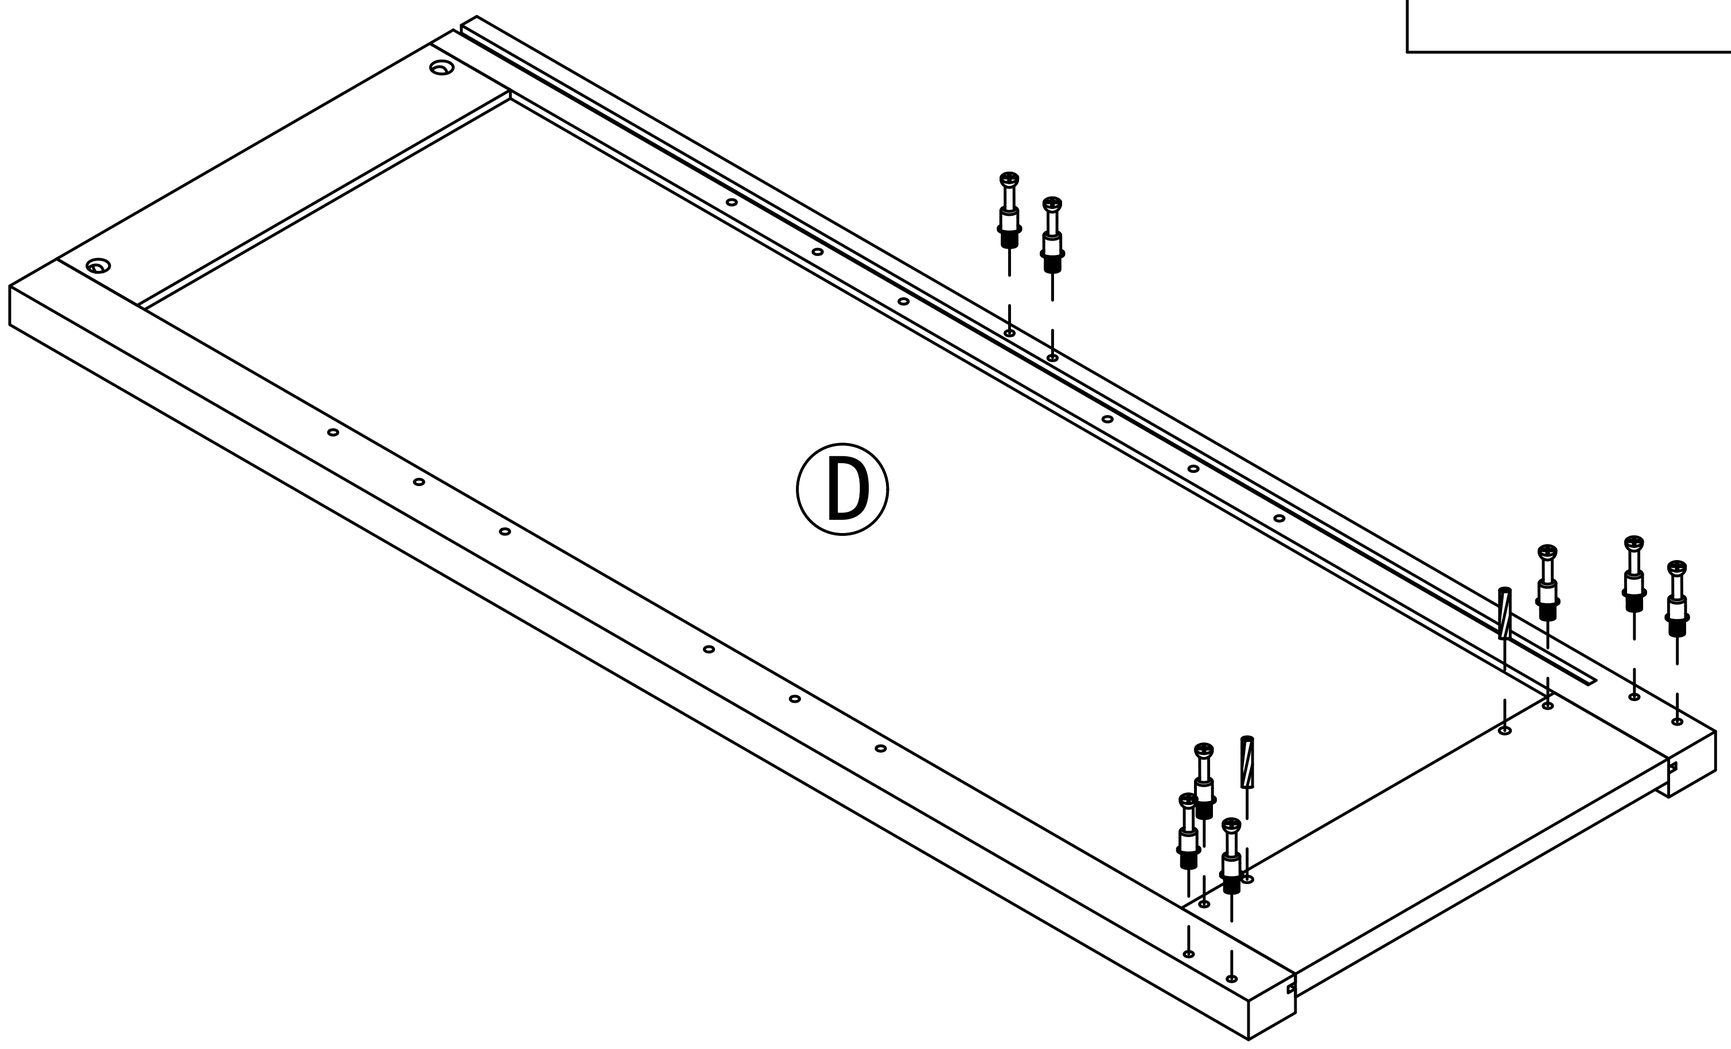


1  x8


3  x2

Step 4

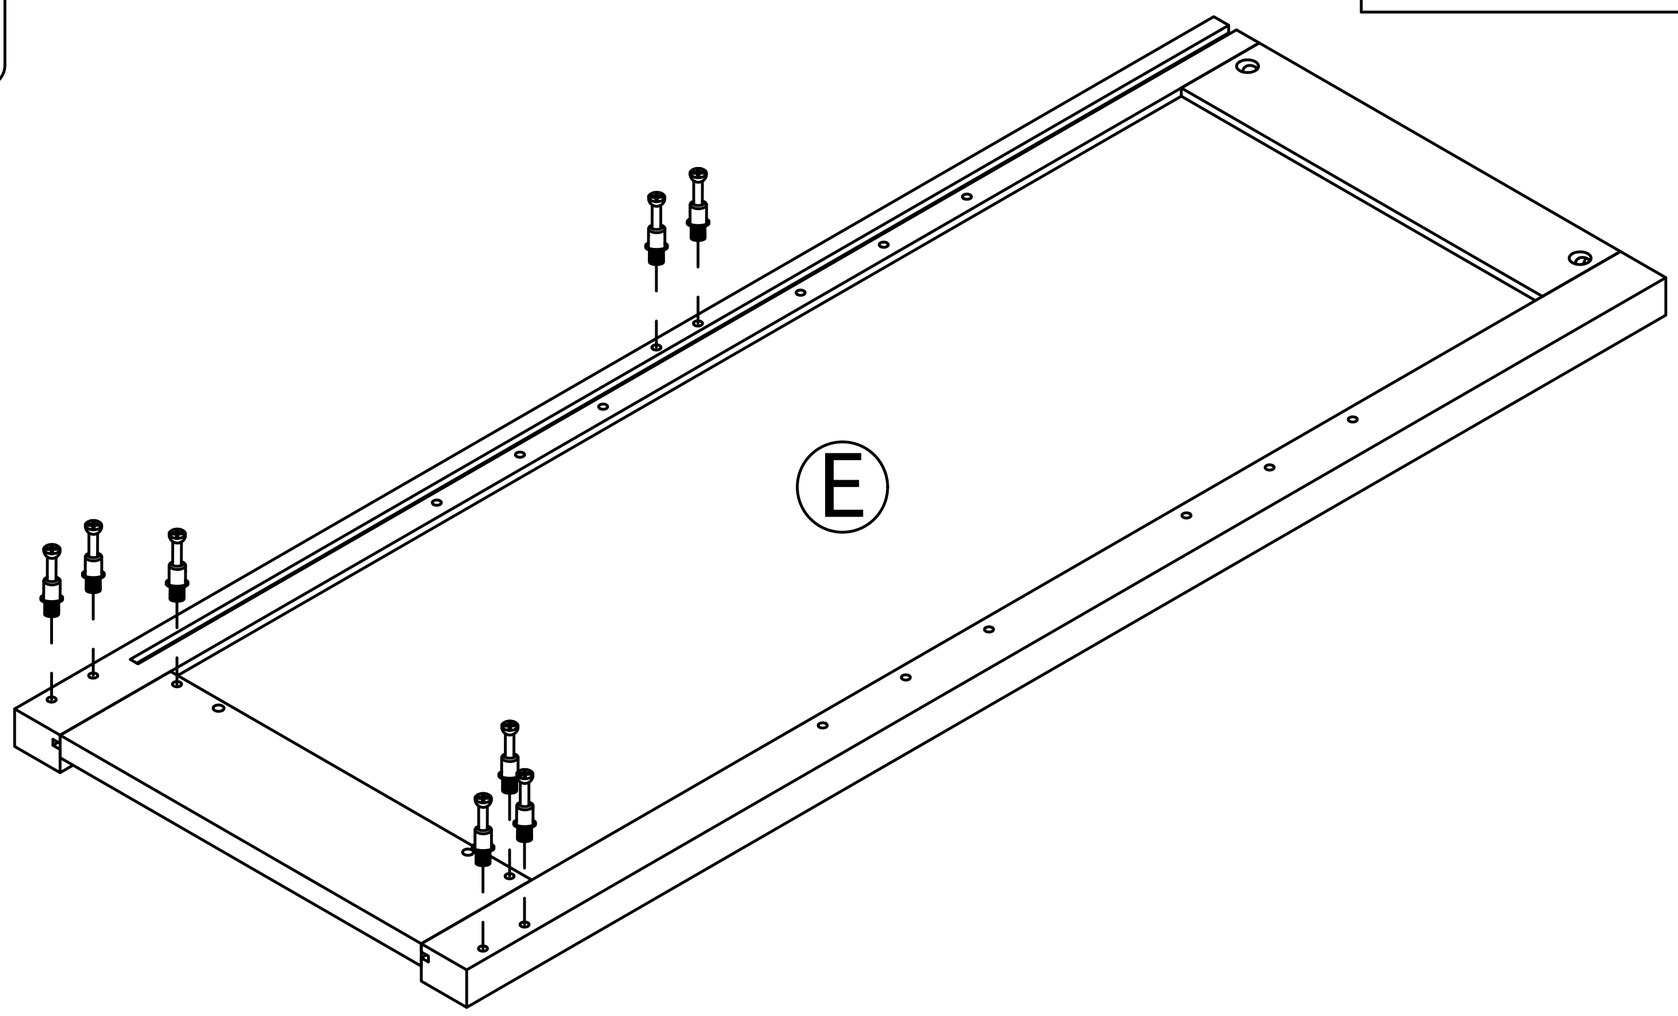

1  x8

Step 5

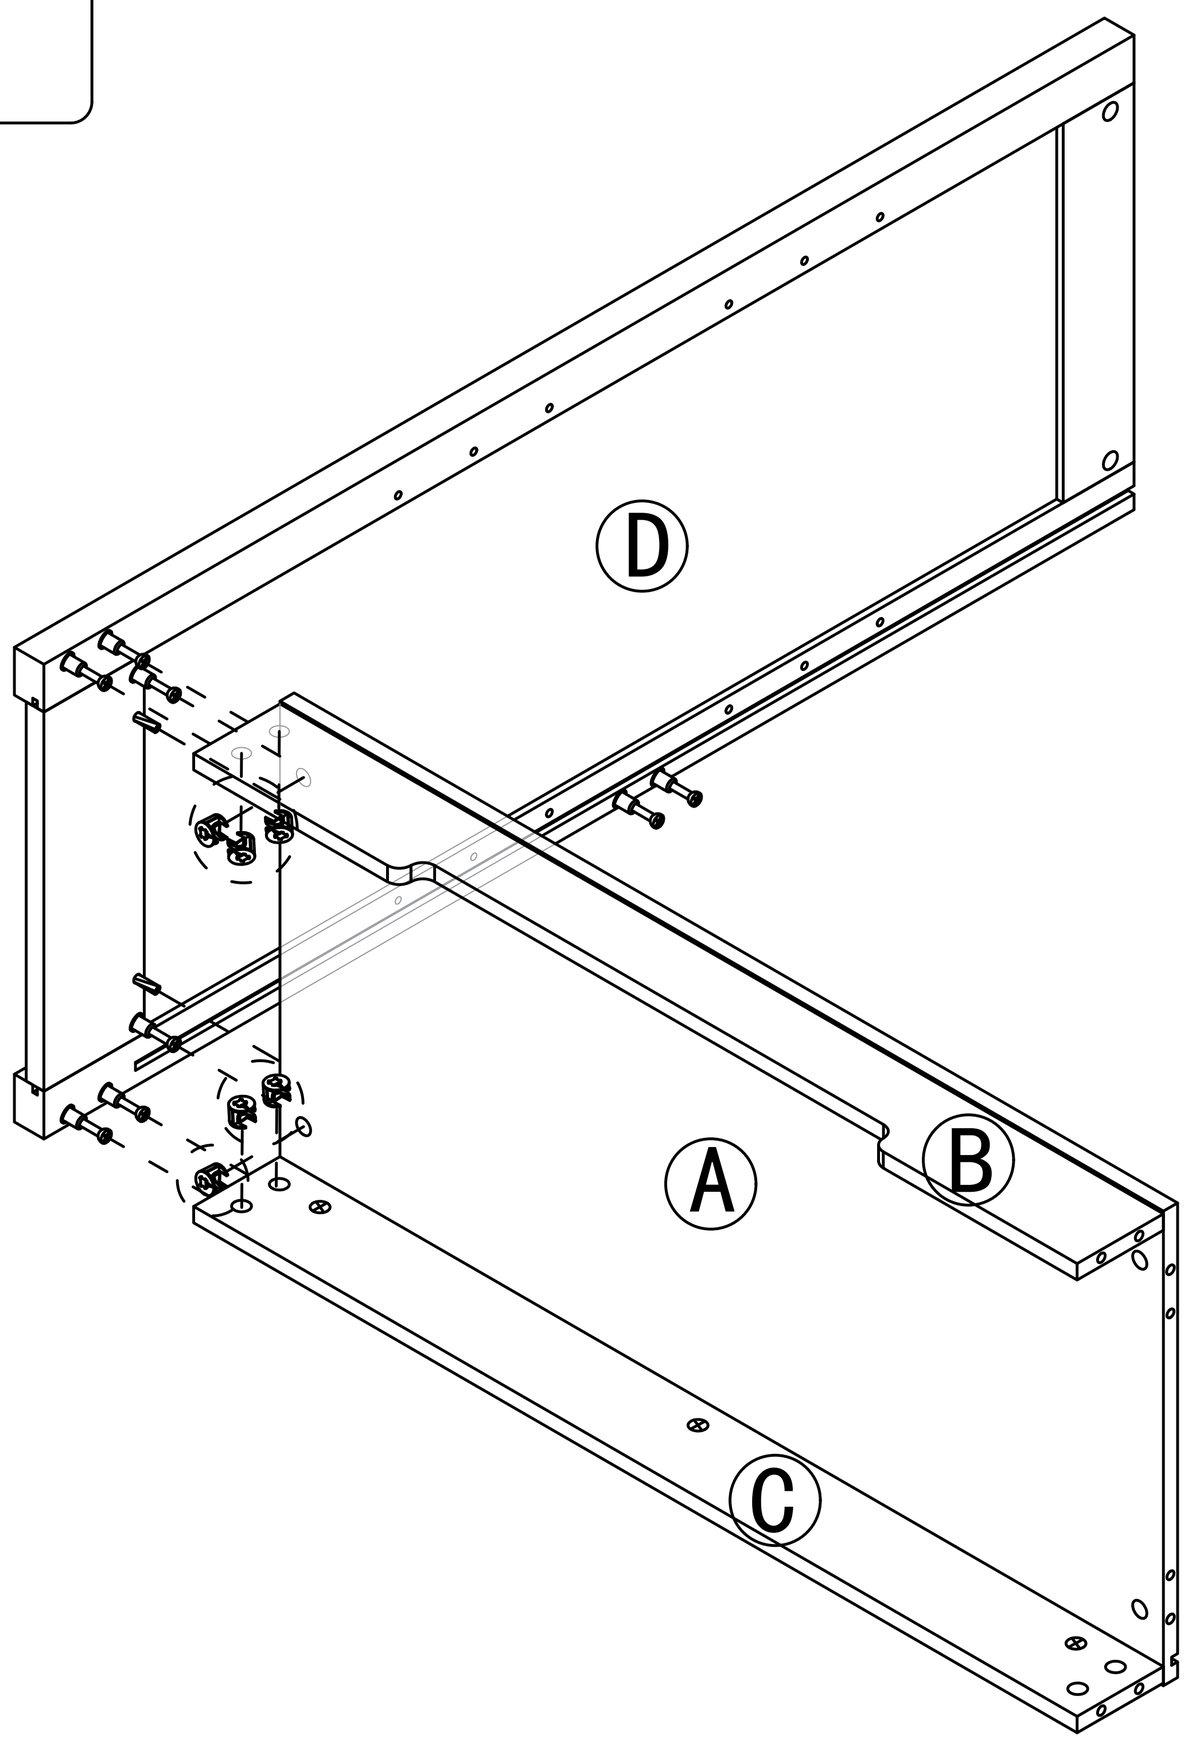


2  x6


Step 6




x2

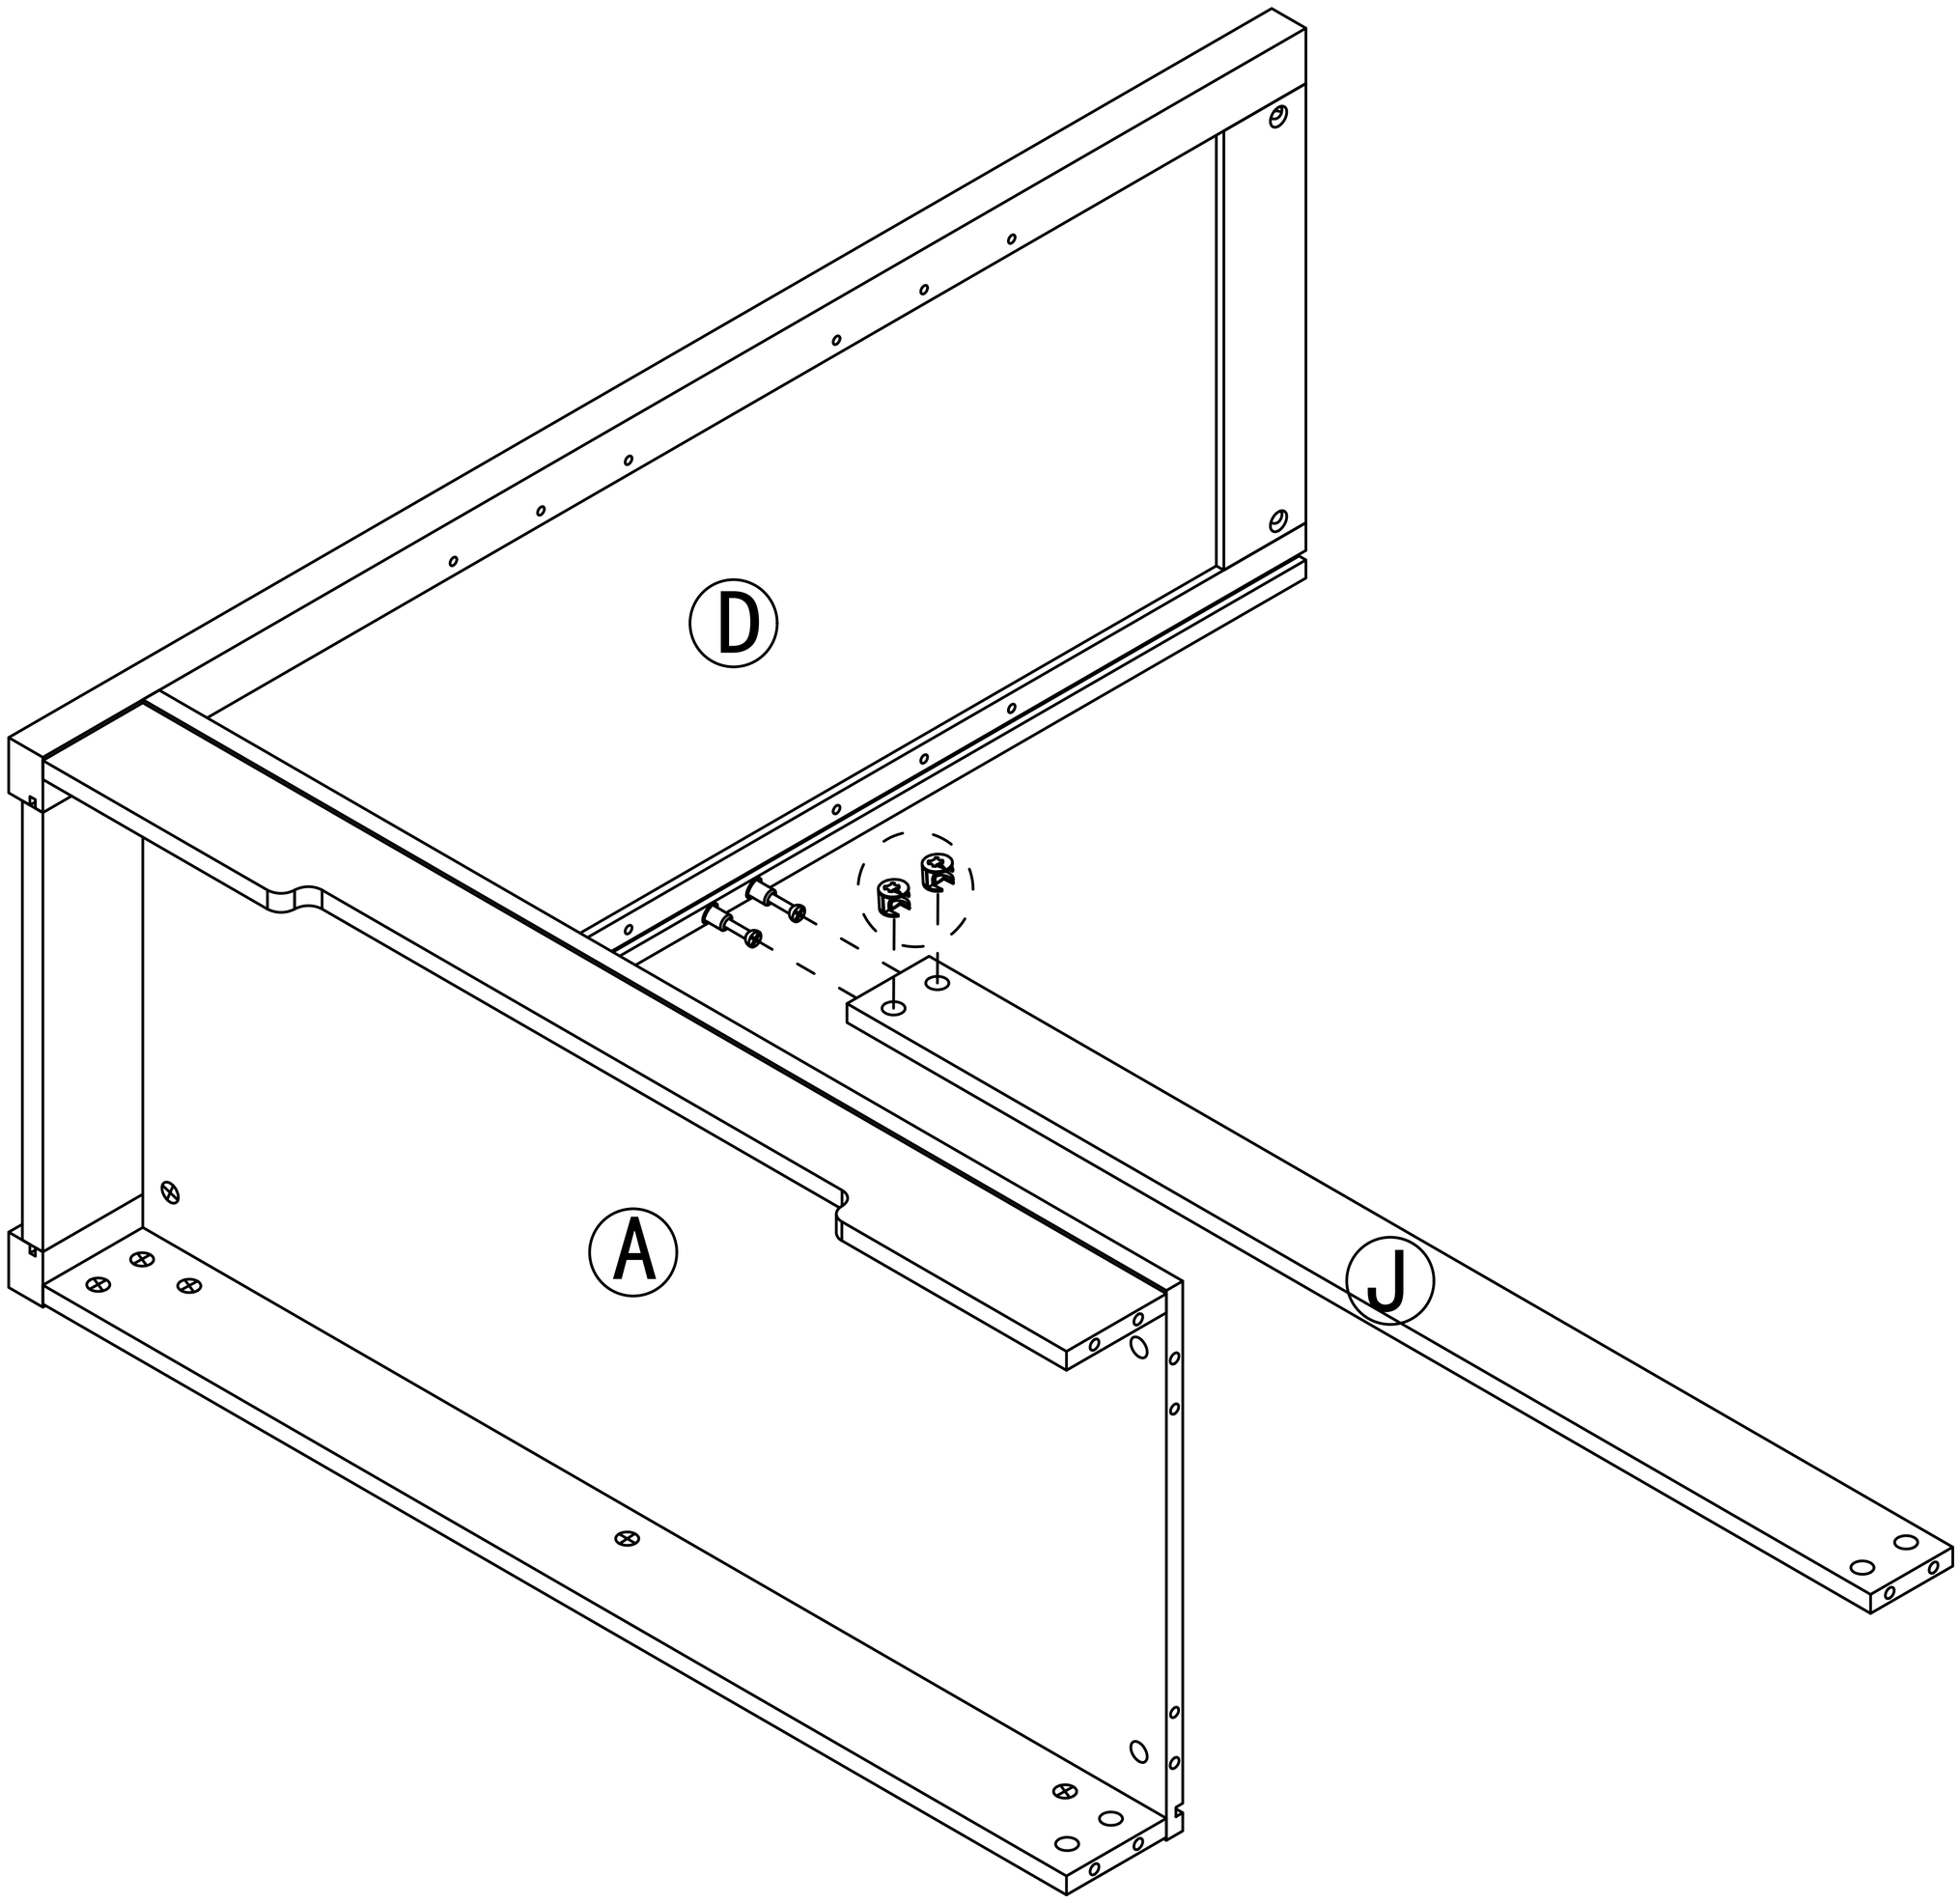


Step 7

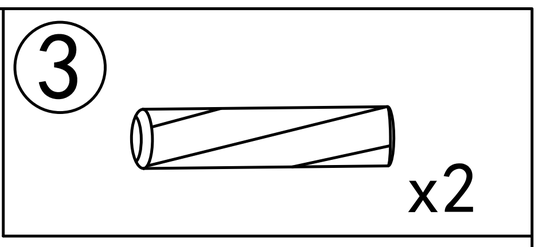


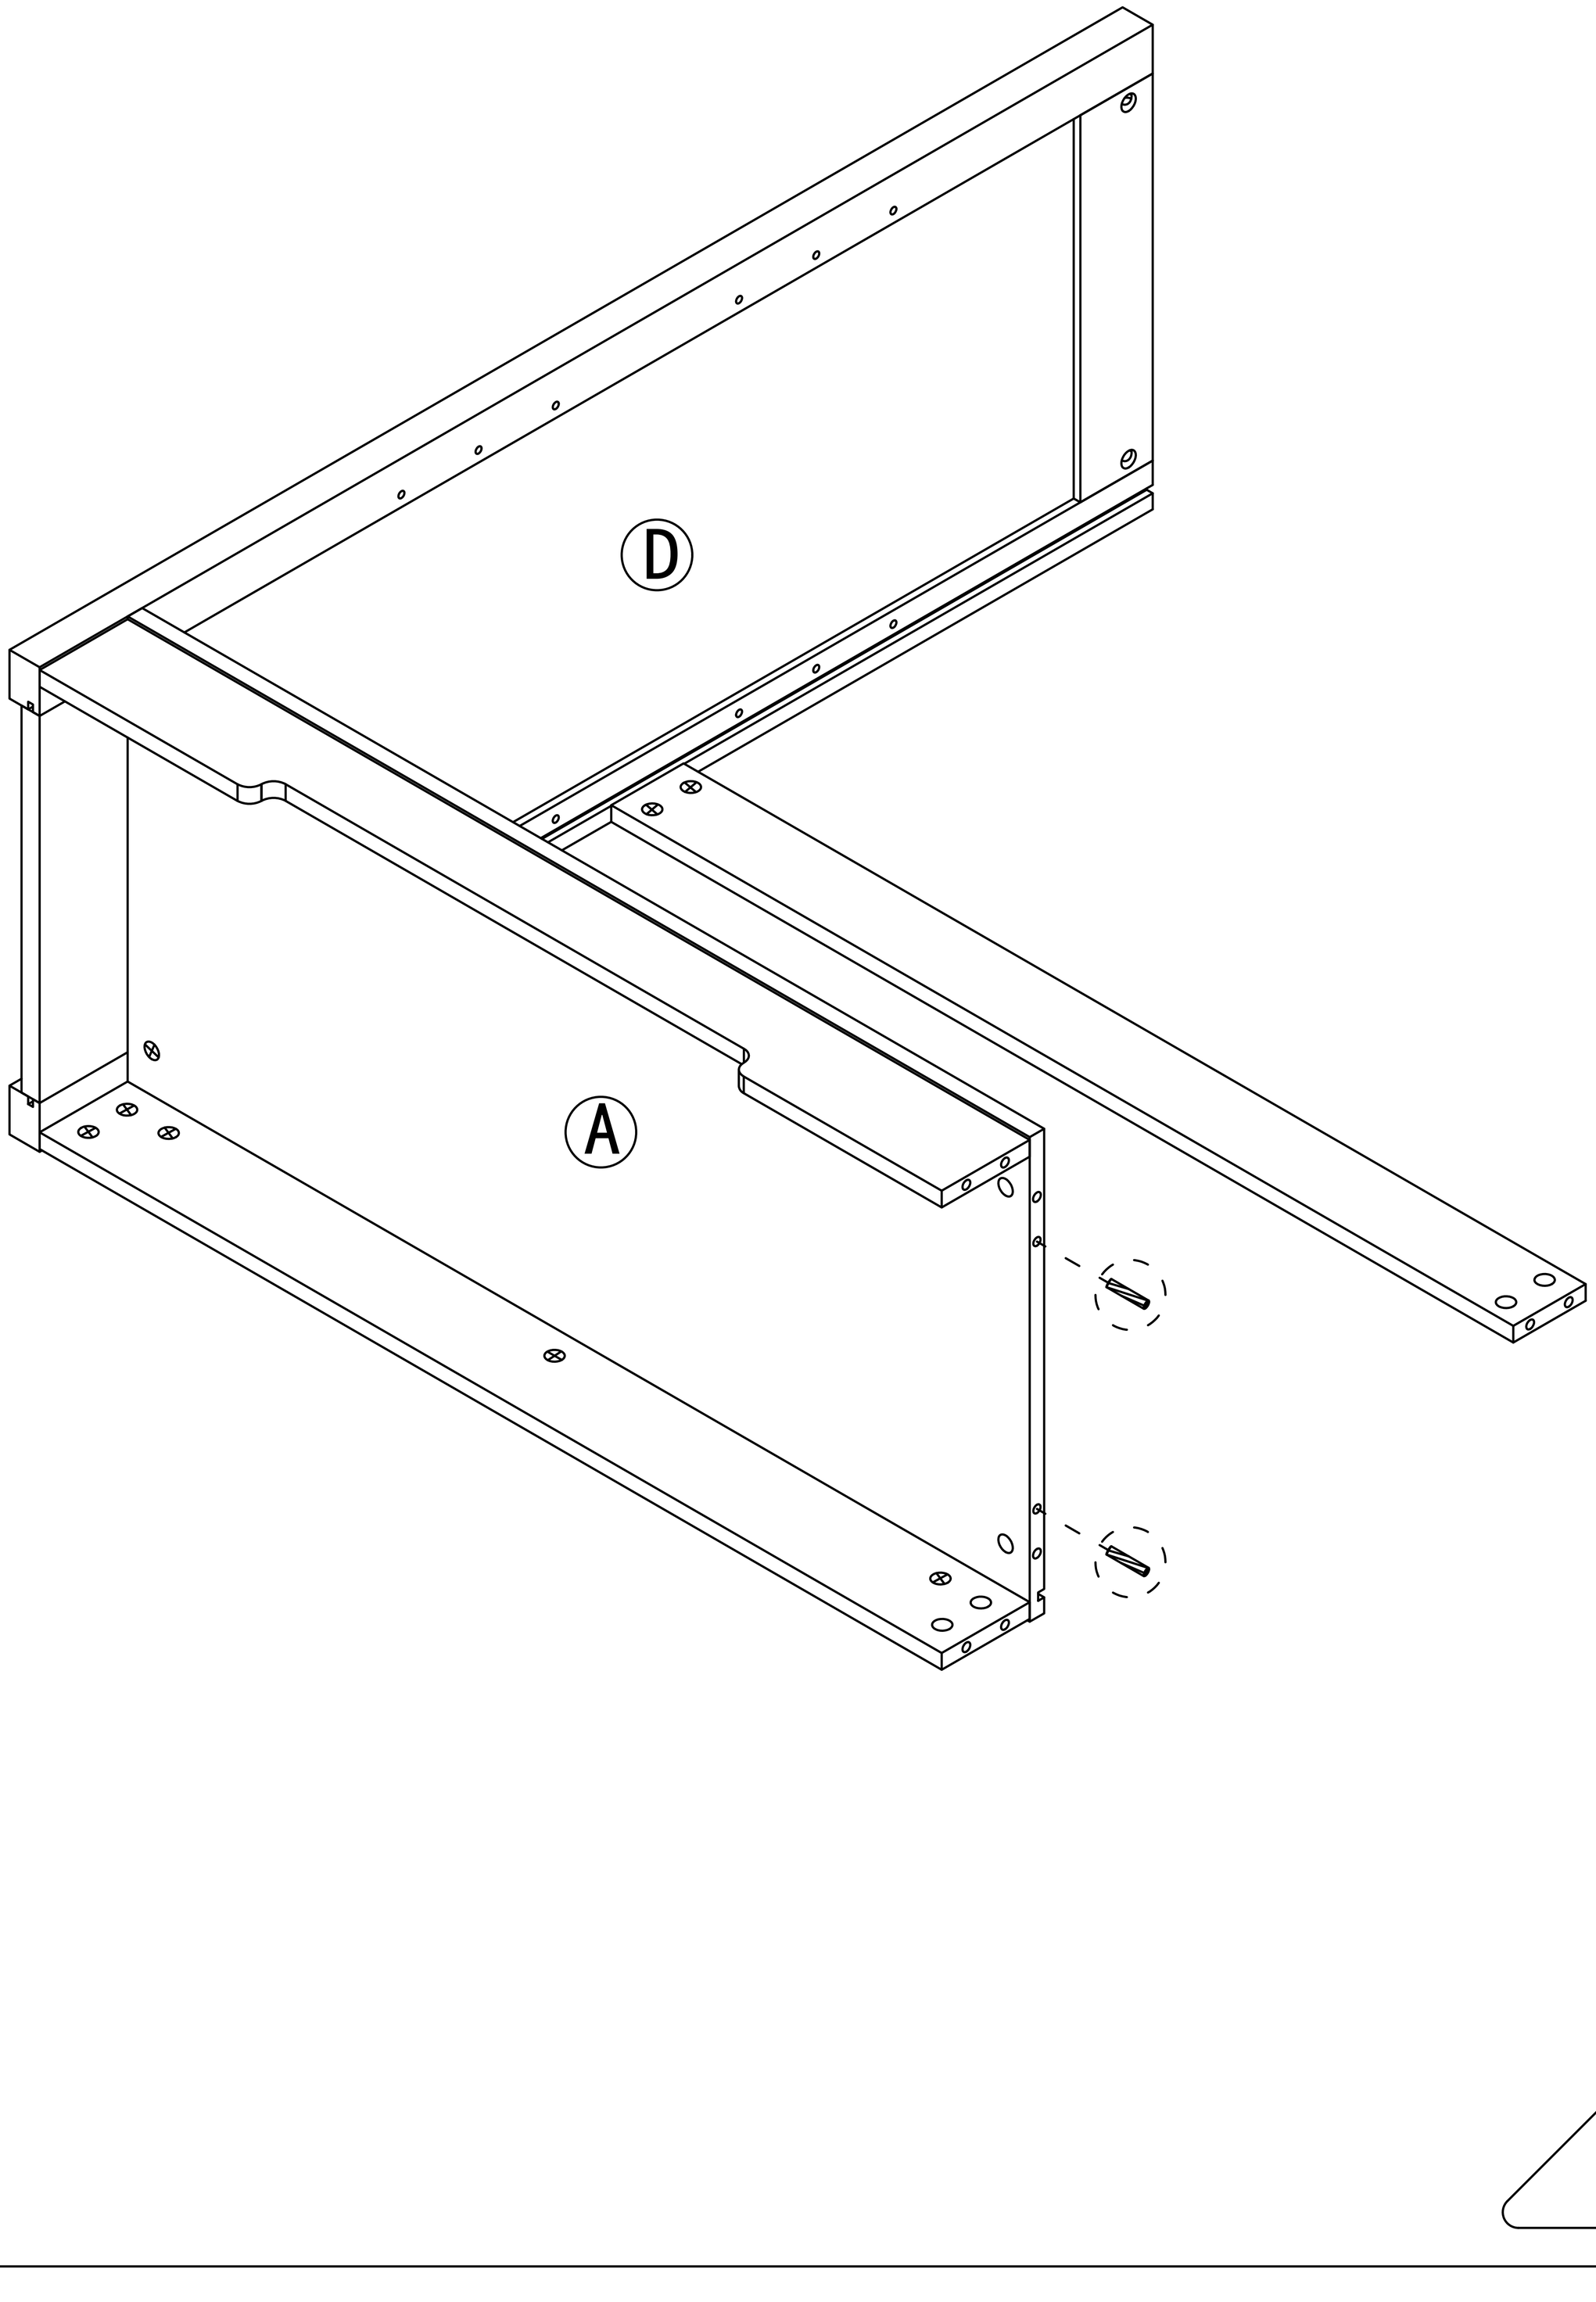


Step 8




x8

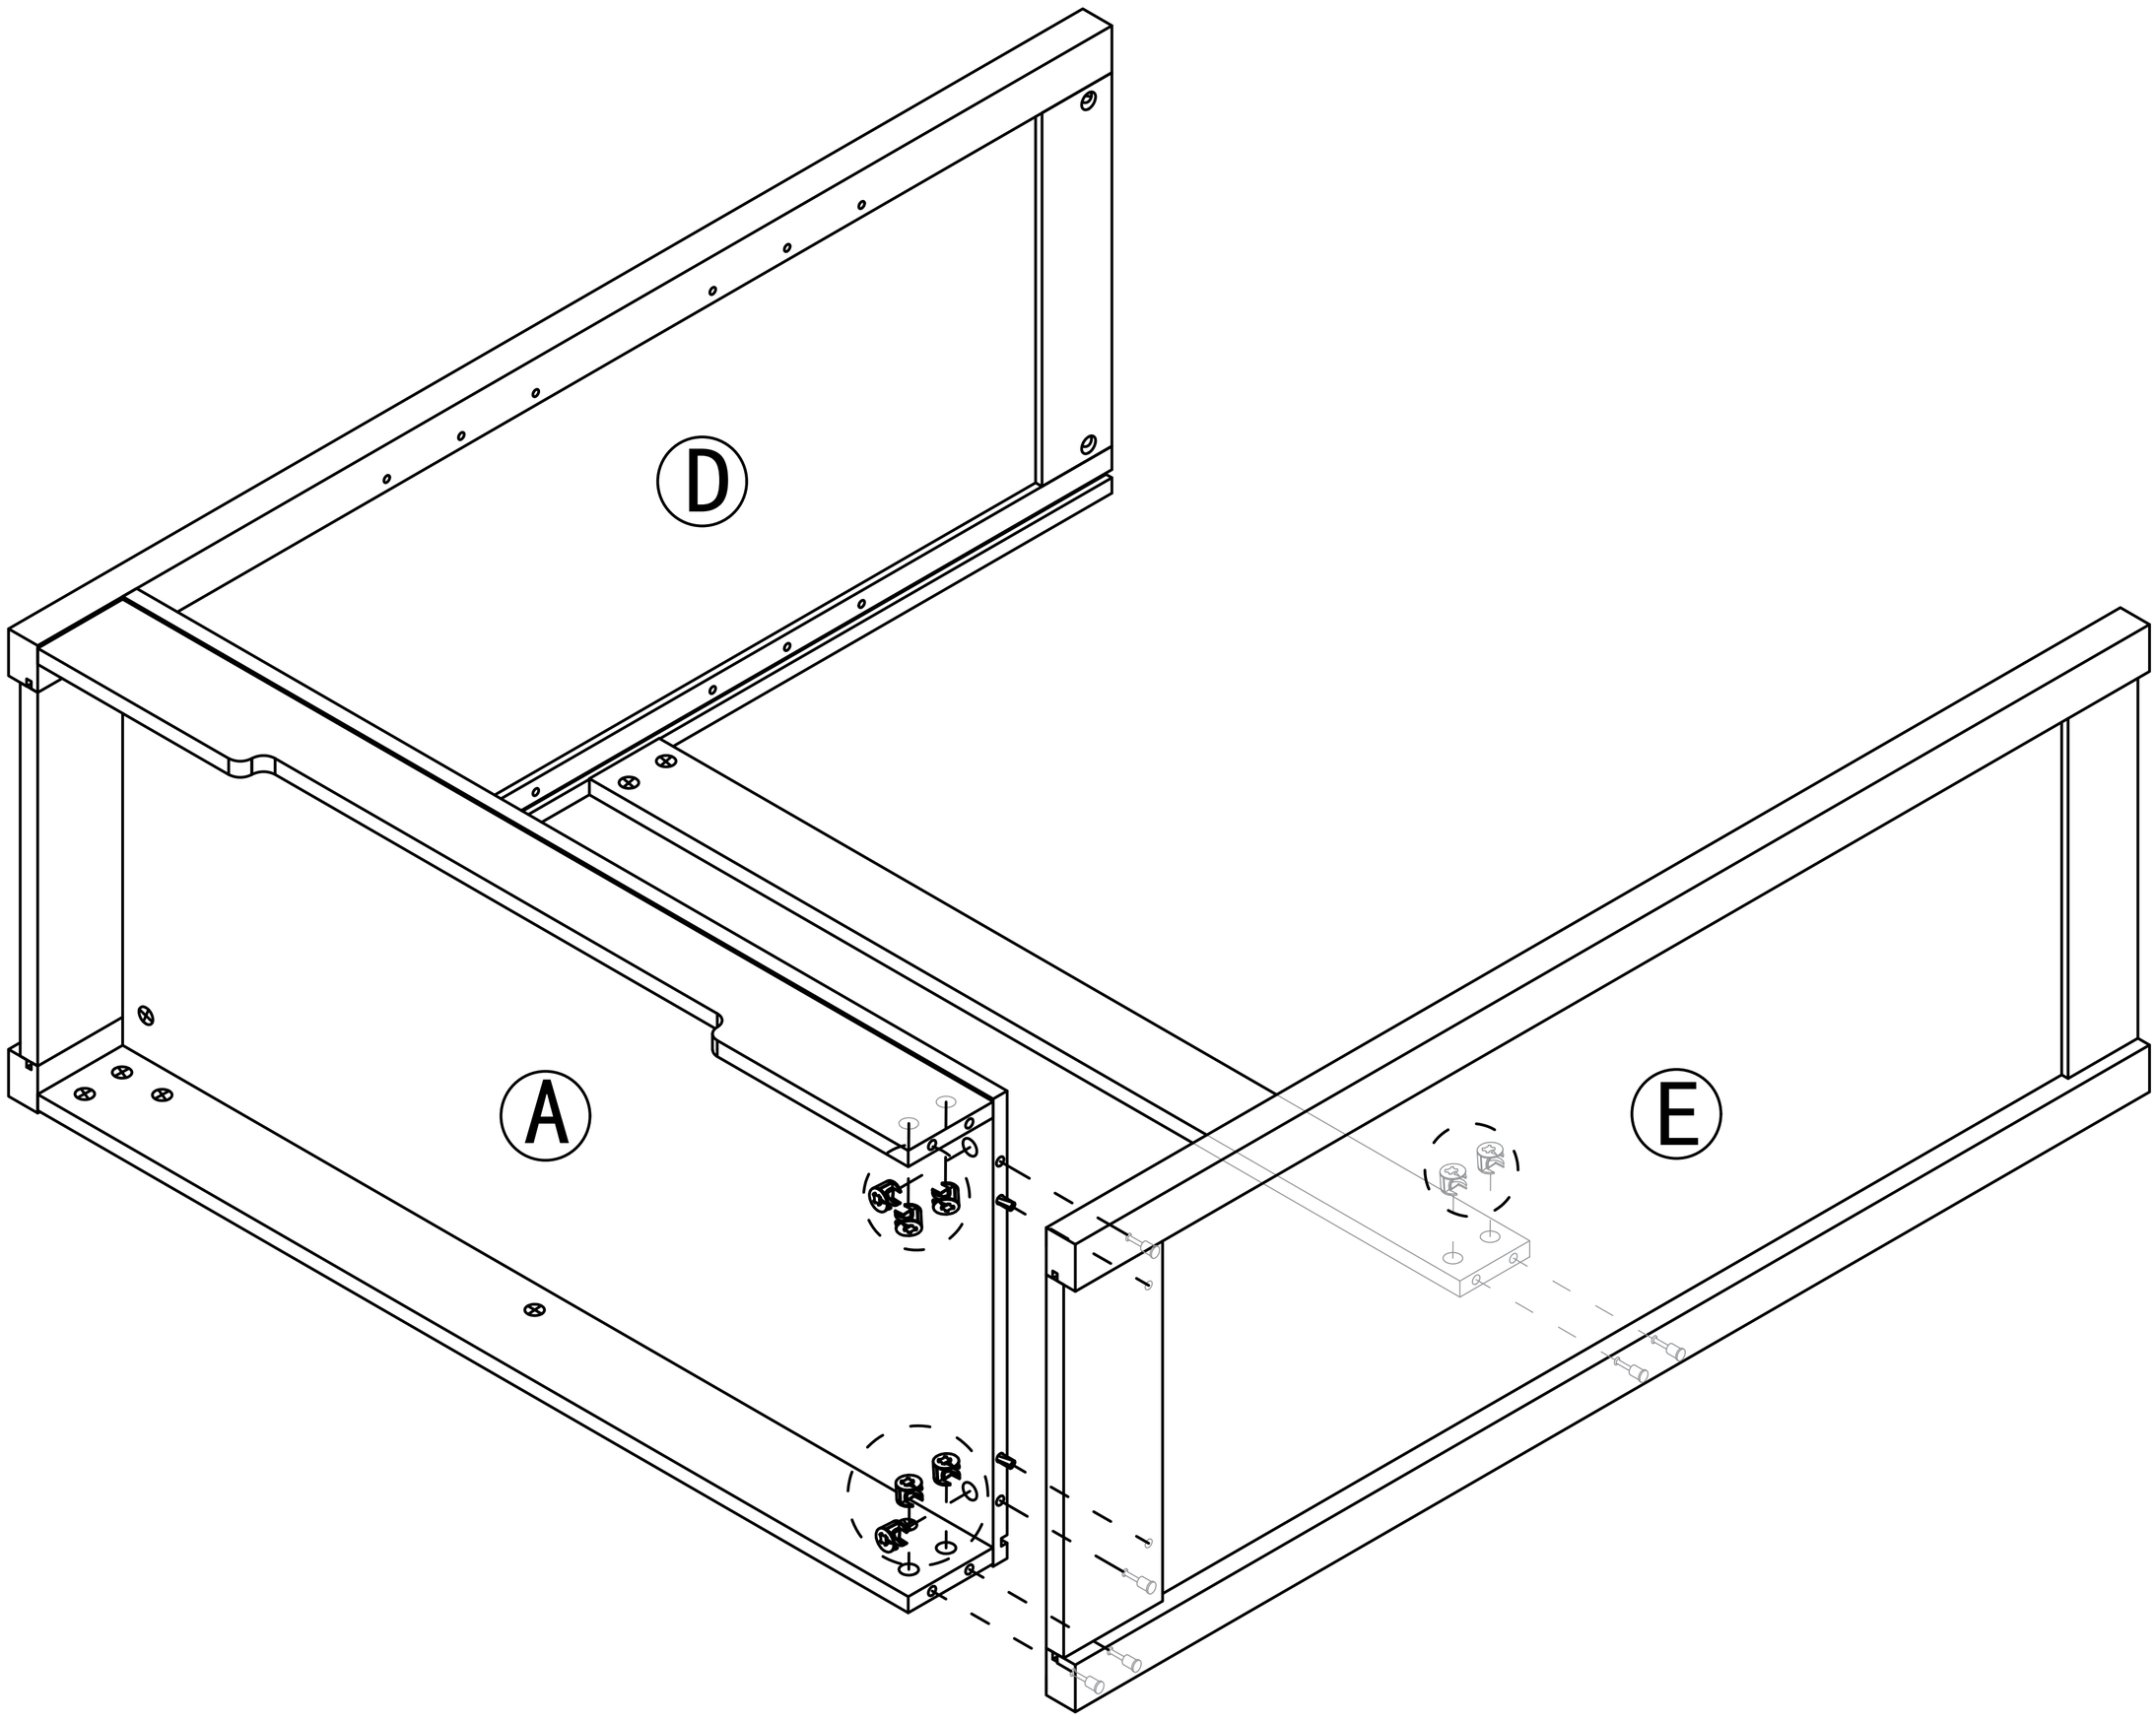


Step 9

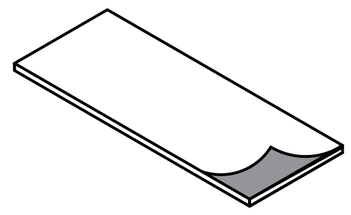④  x6

Tear off release paper and stick the black foot pad on the board

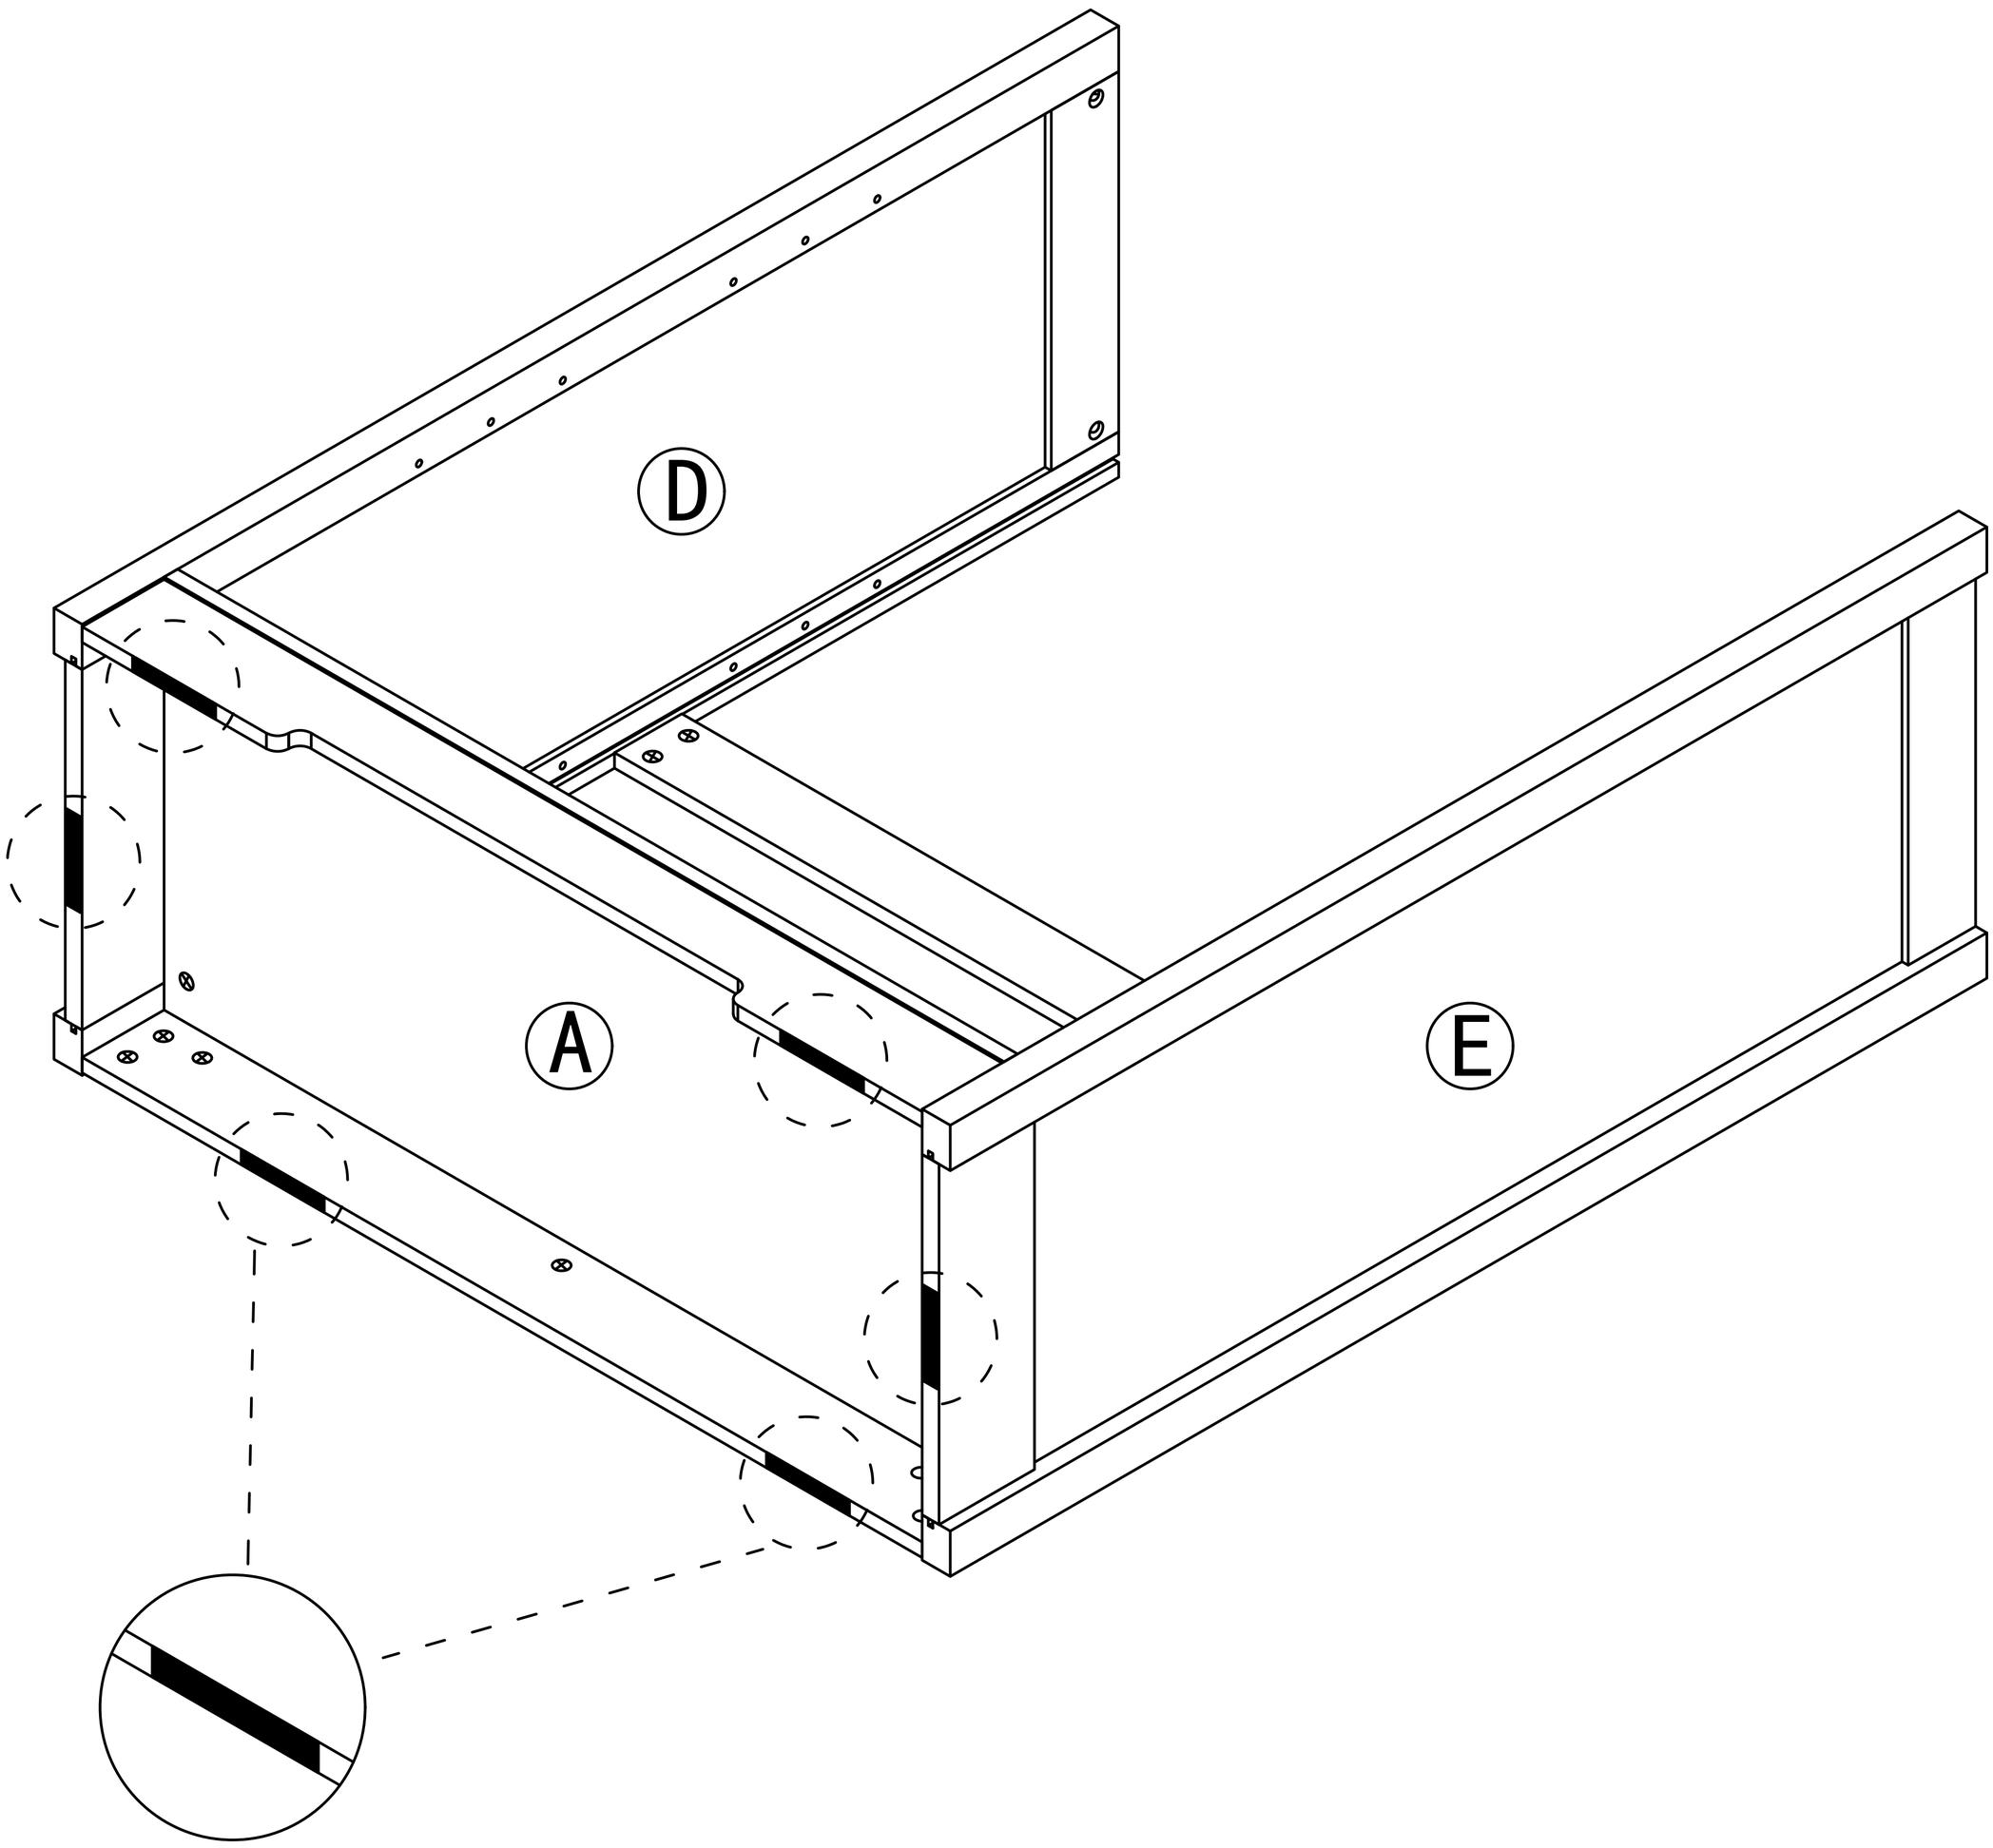



Step 10

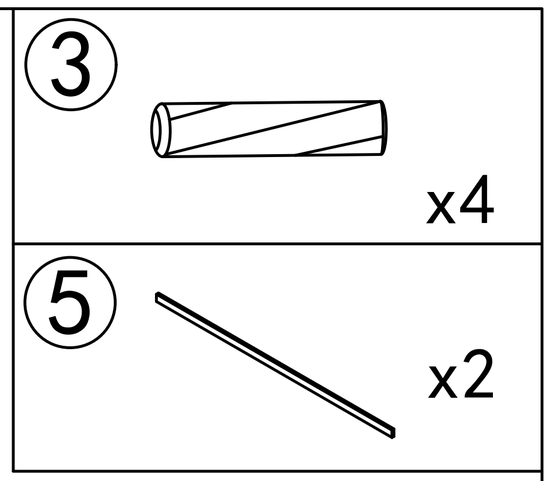


Place the "I" board, Backboard card strip, and "I" board in order


Step 11

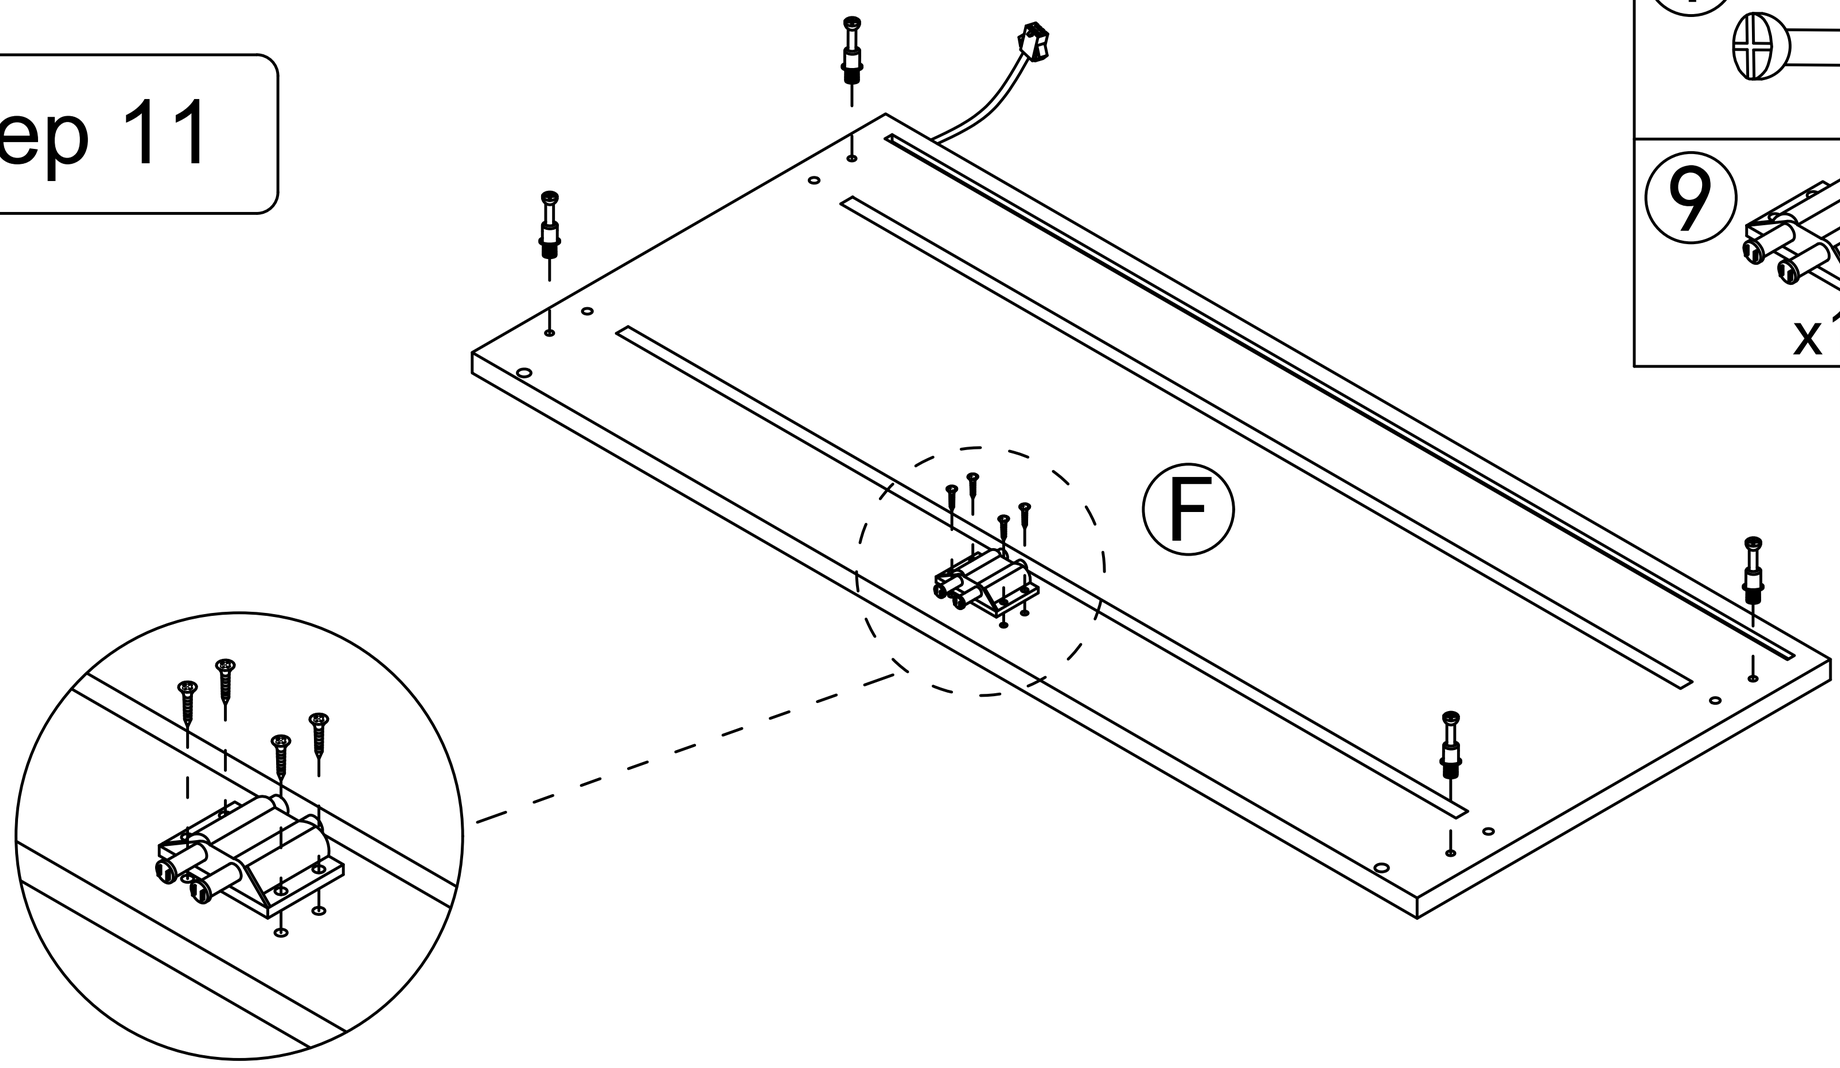

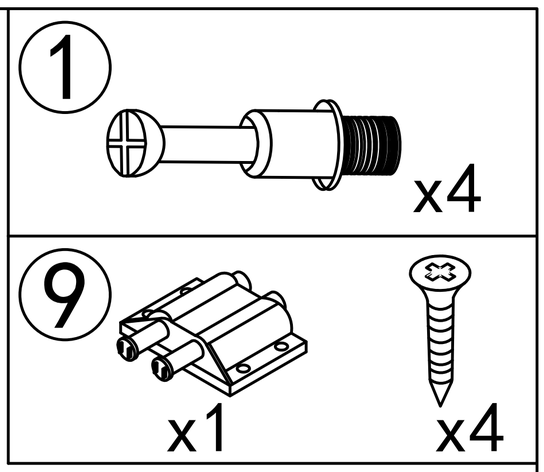



Step 12

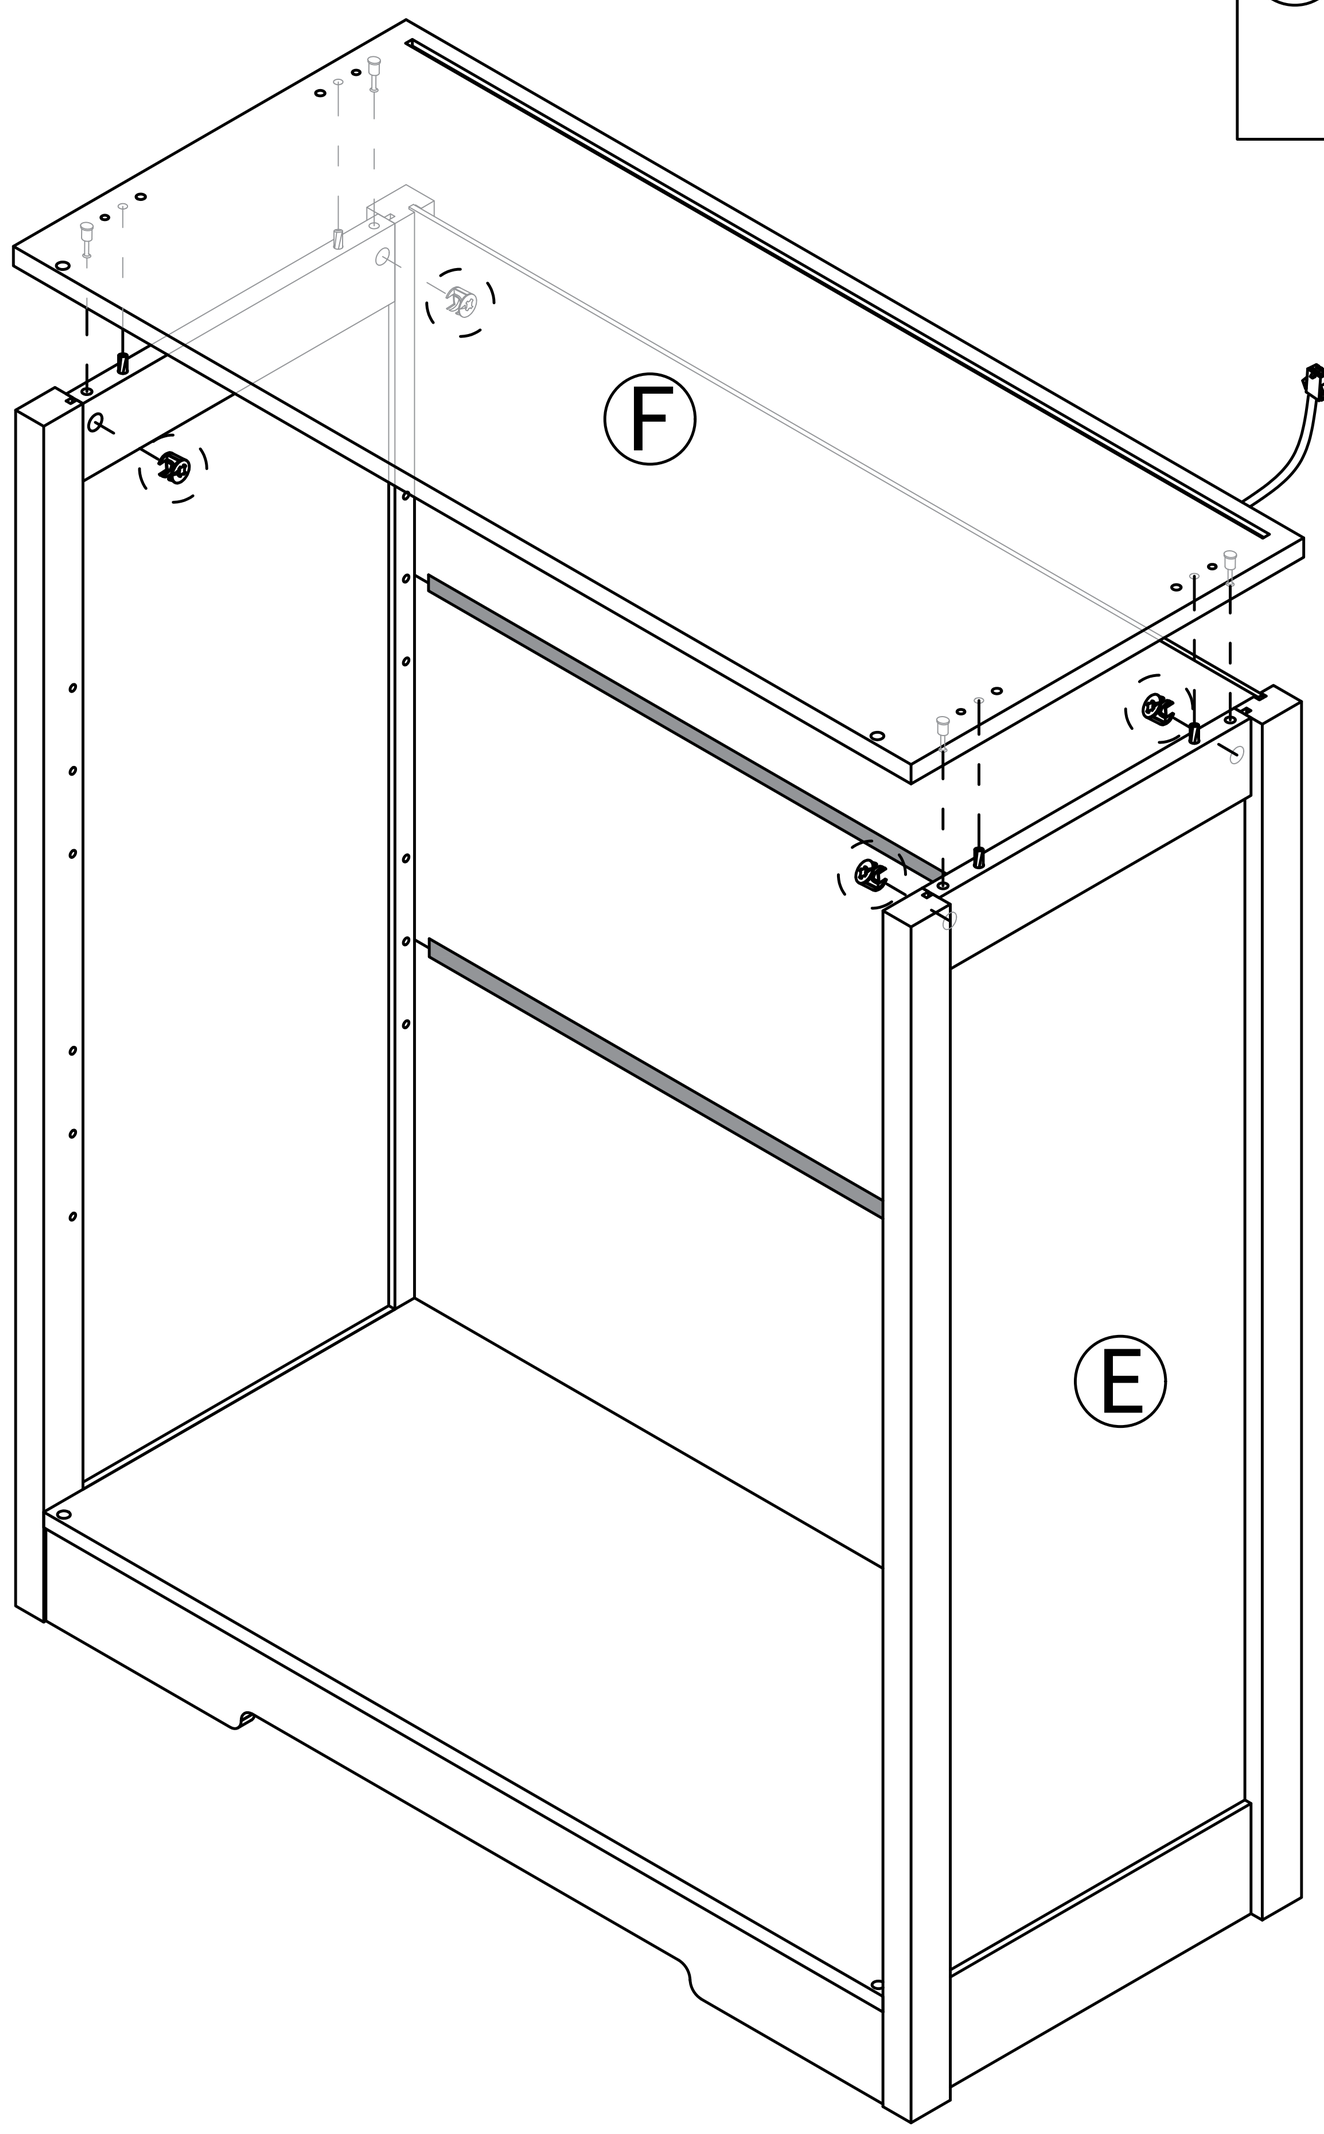

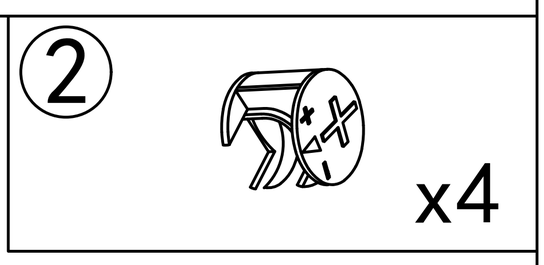



Step 13

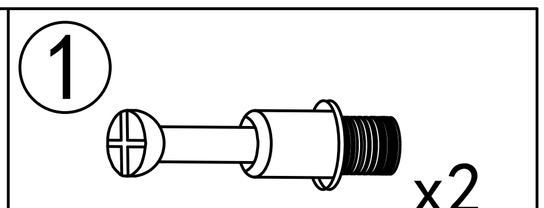

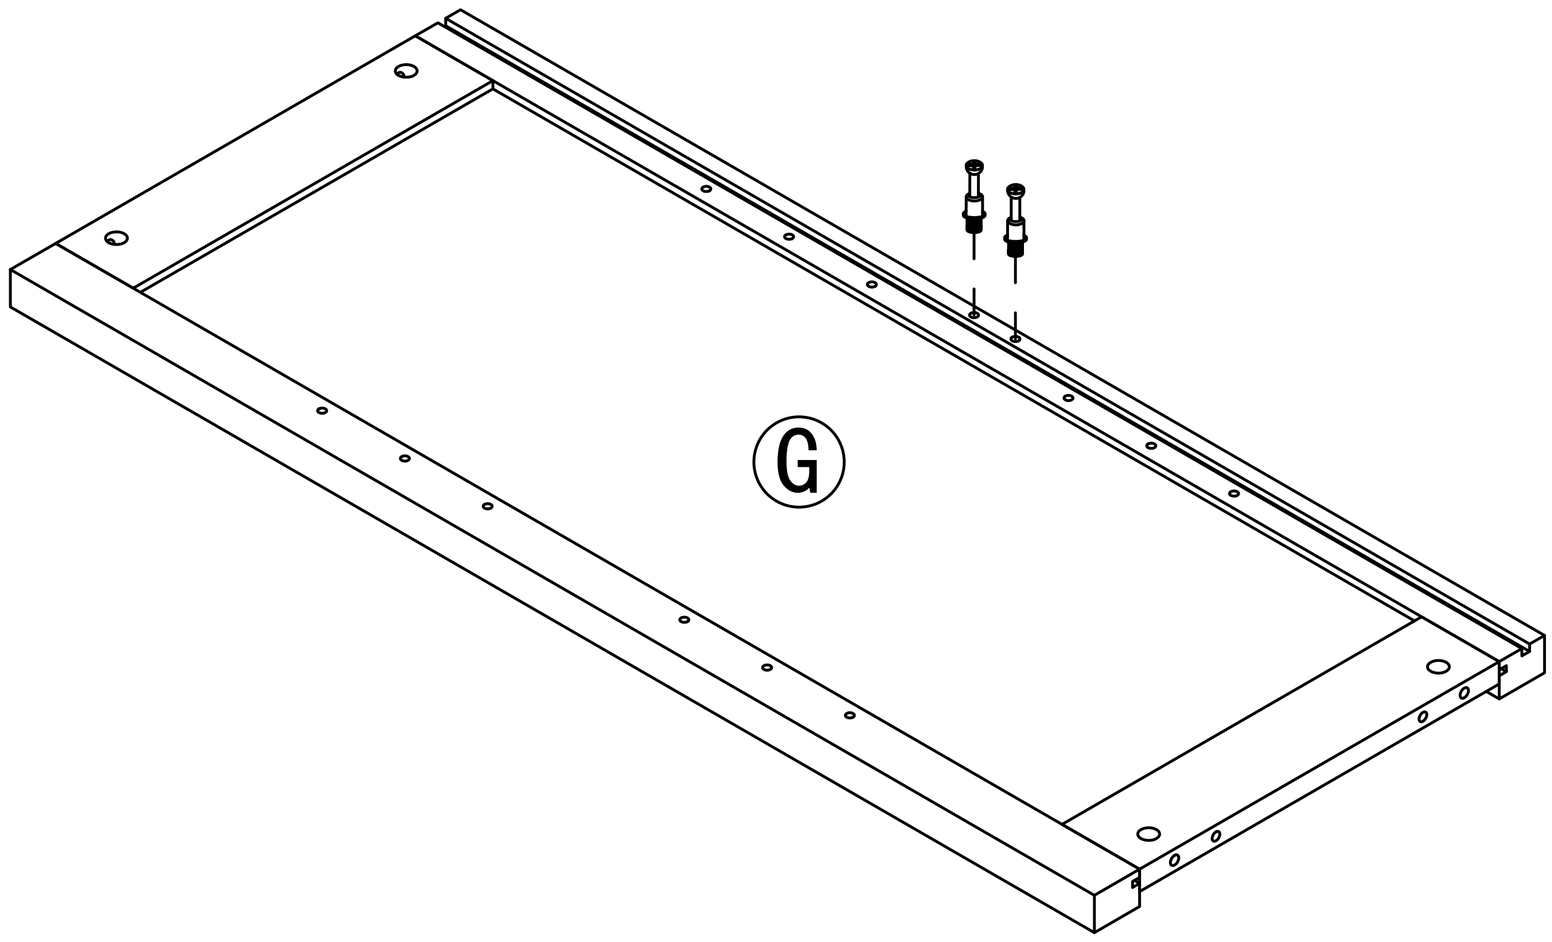



Step 14

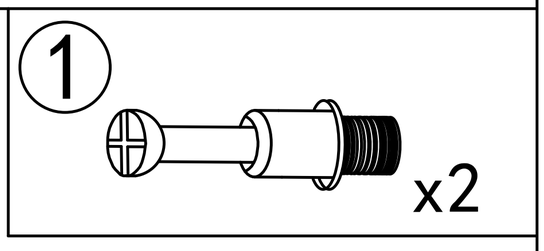

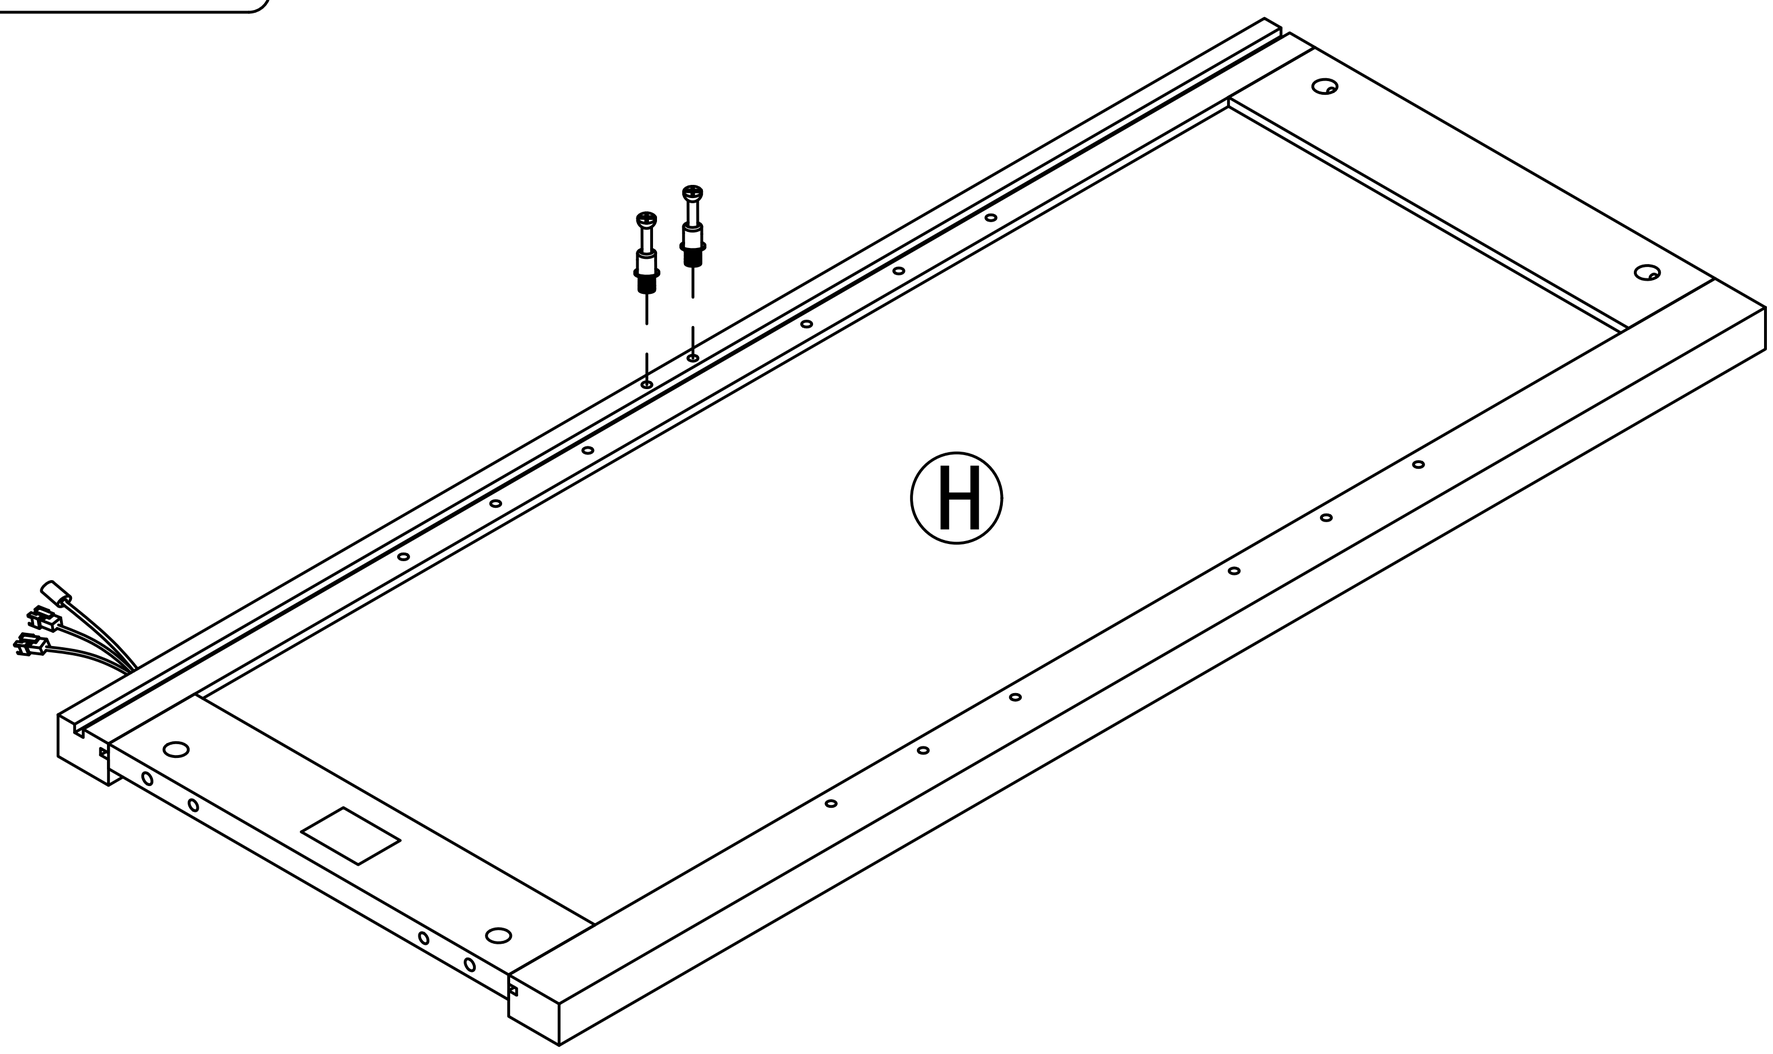

Step 15


2  x2

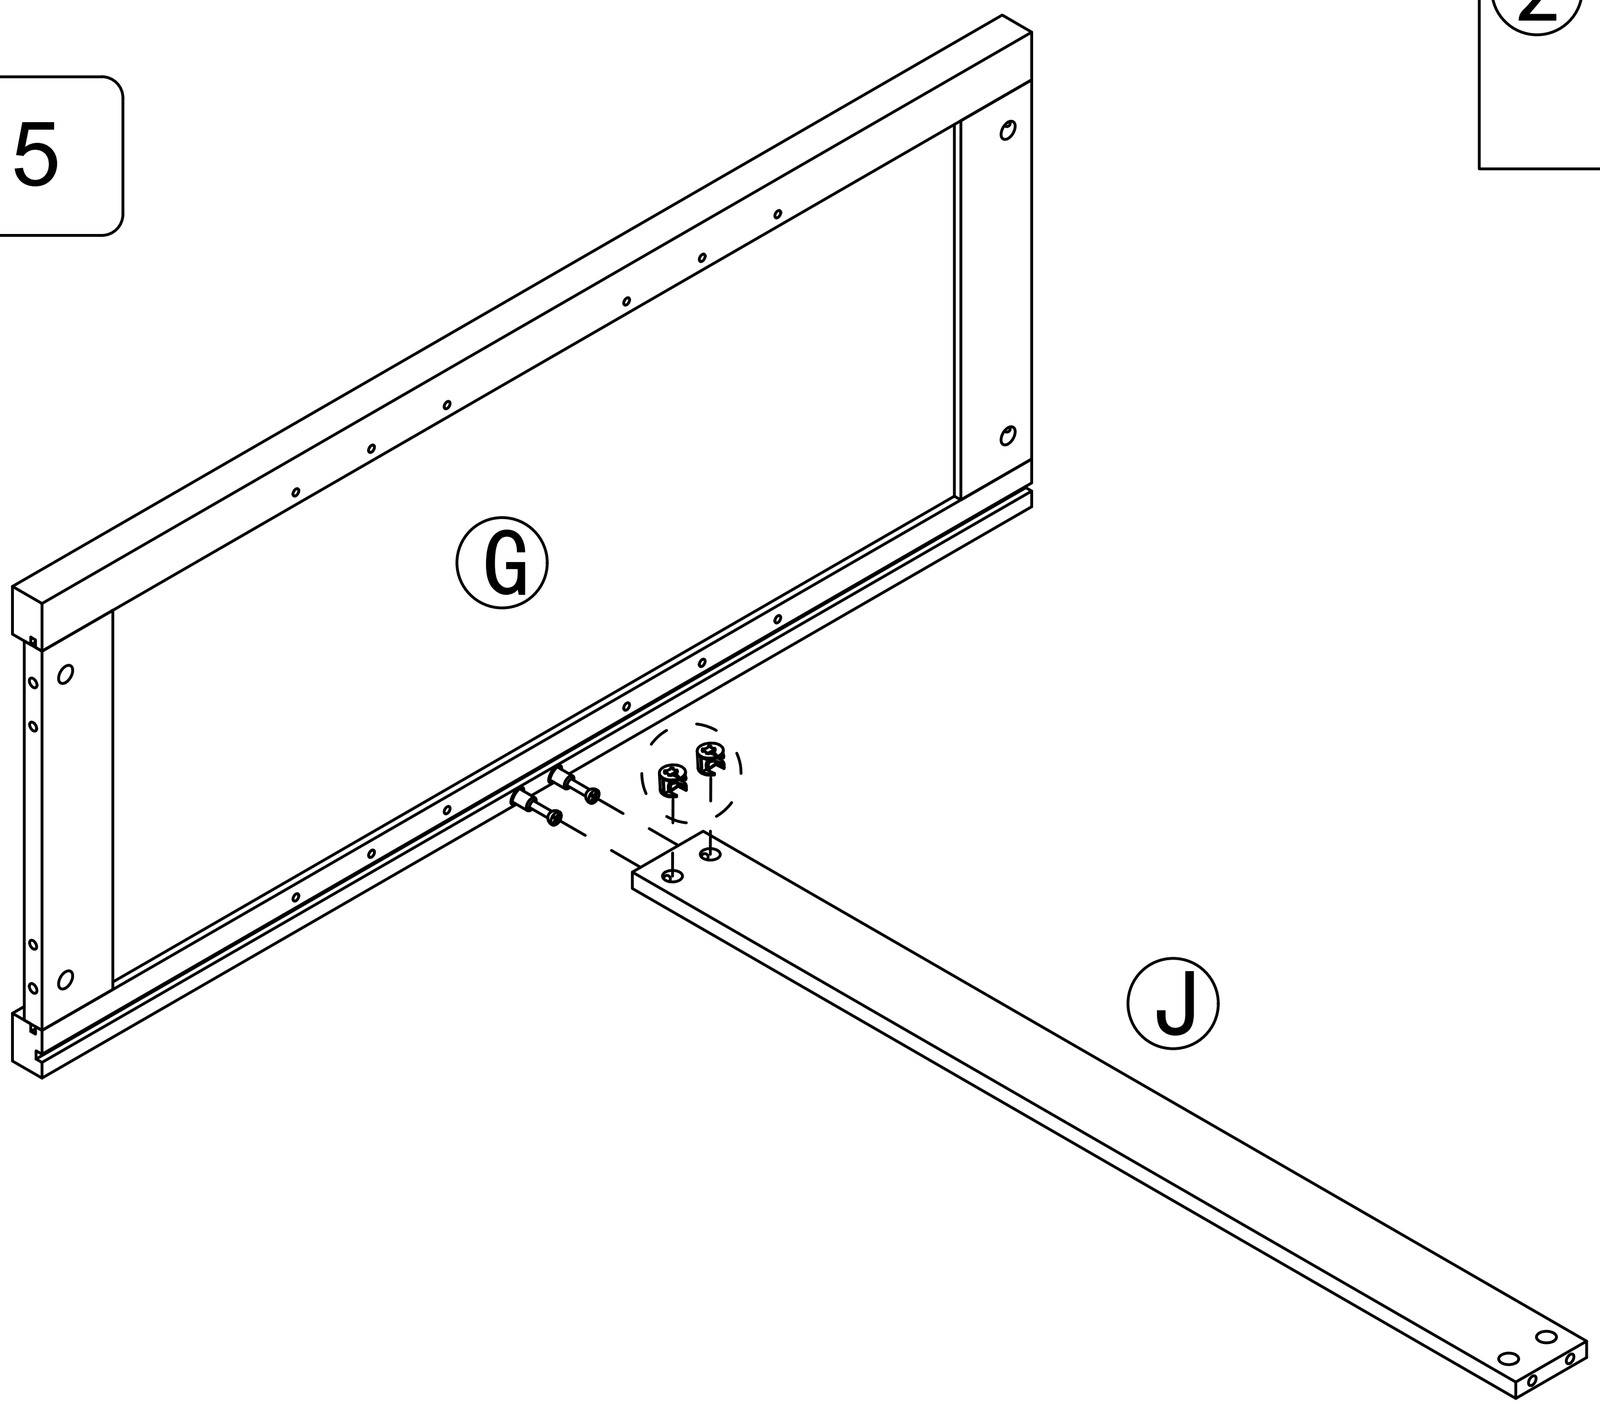


Step 16


2  x2


Step 17

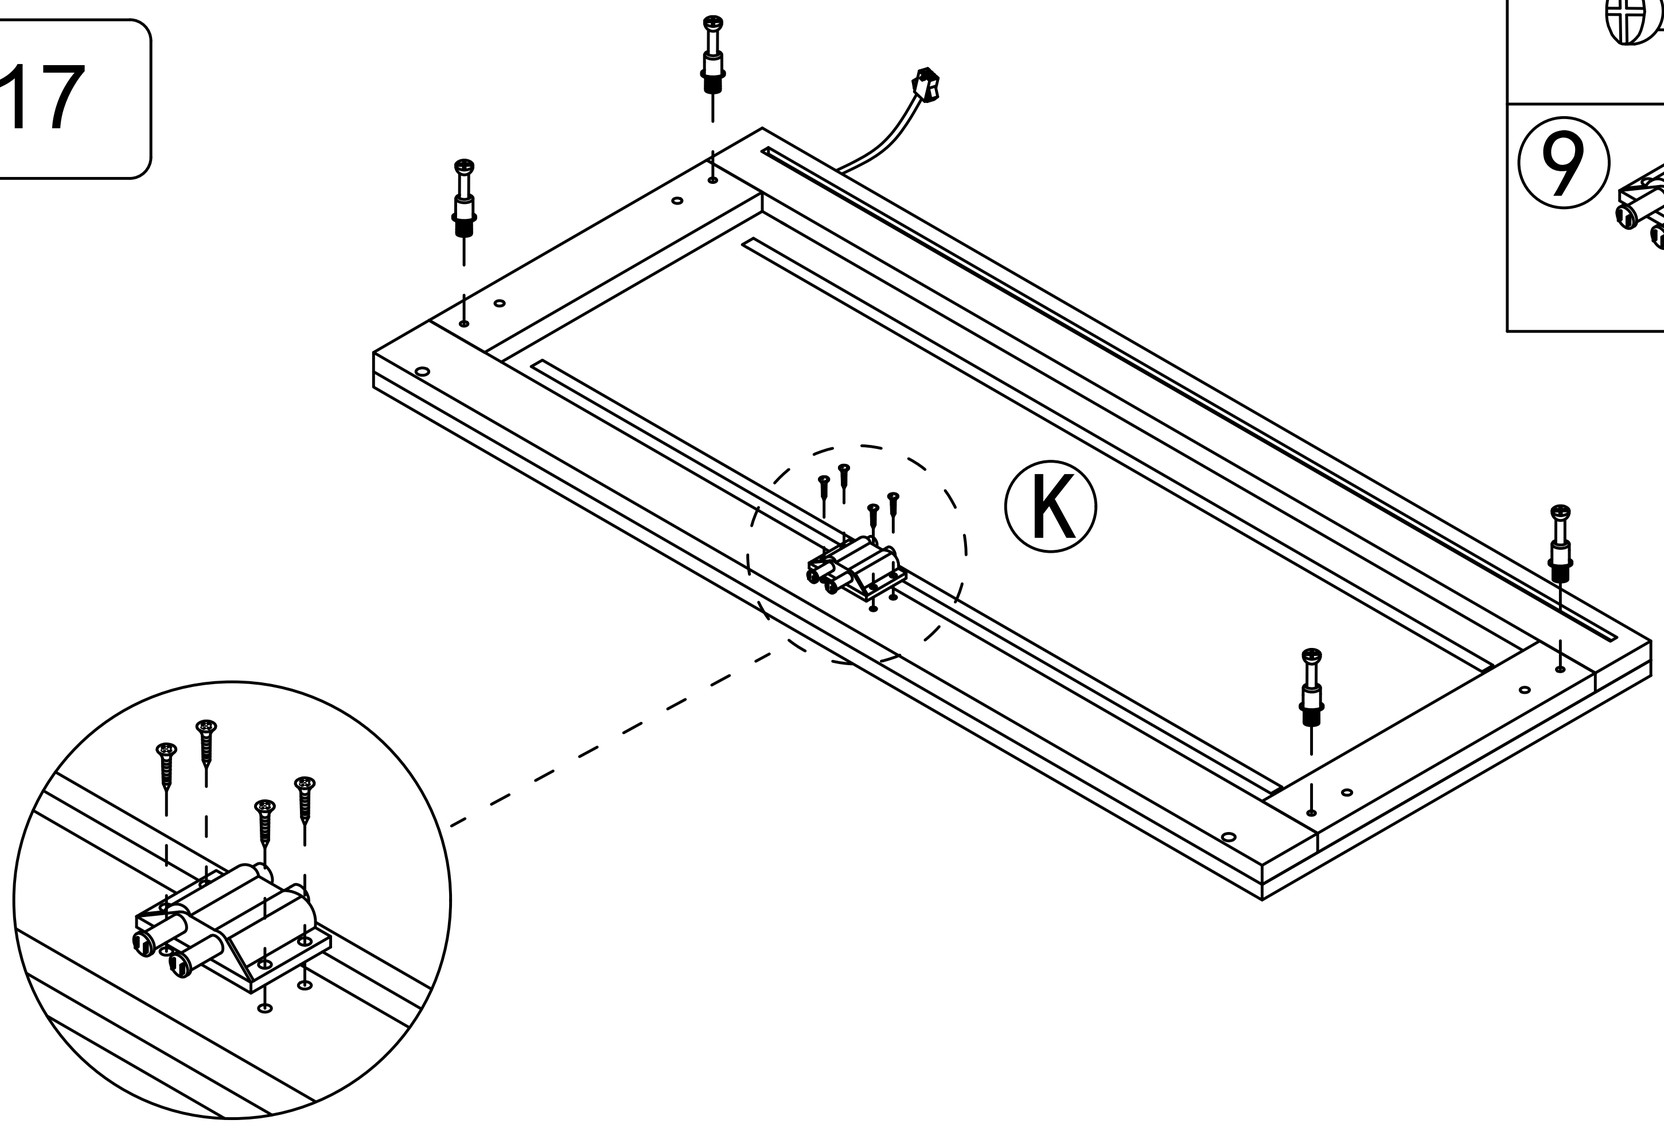


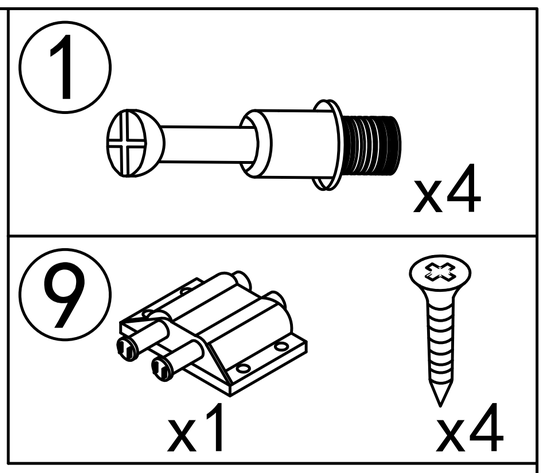

Step 18

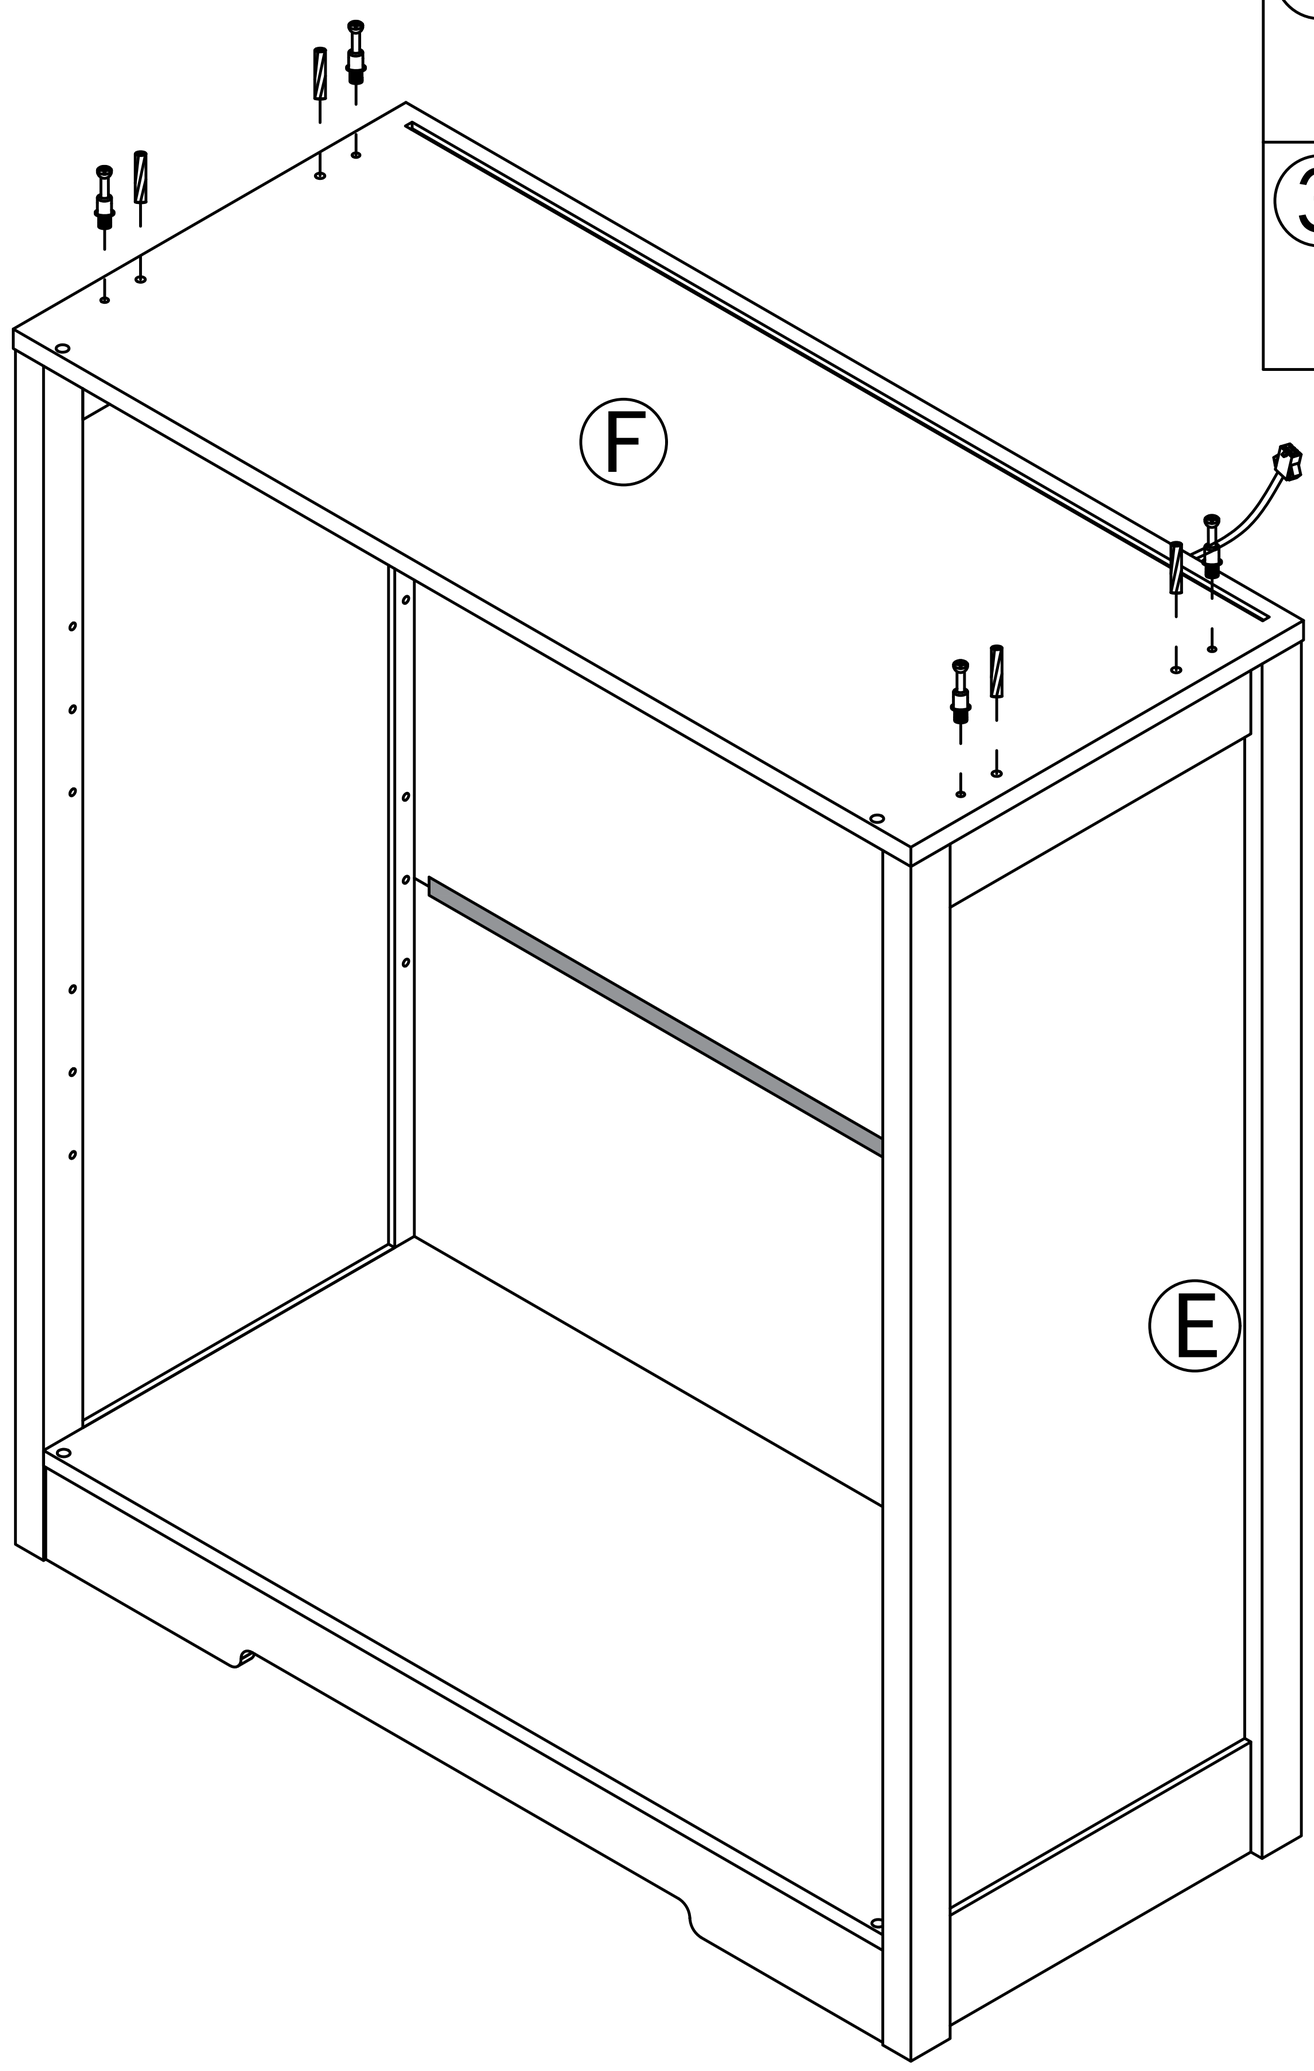


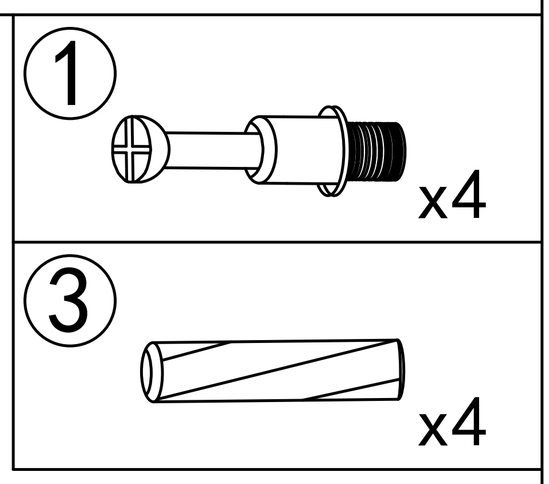


2  x4

Step 19


It is recommended that two people work together to install the structural wood panels.

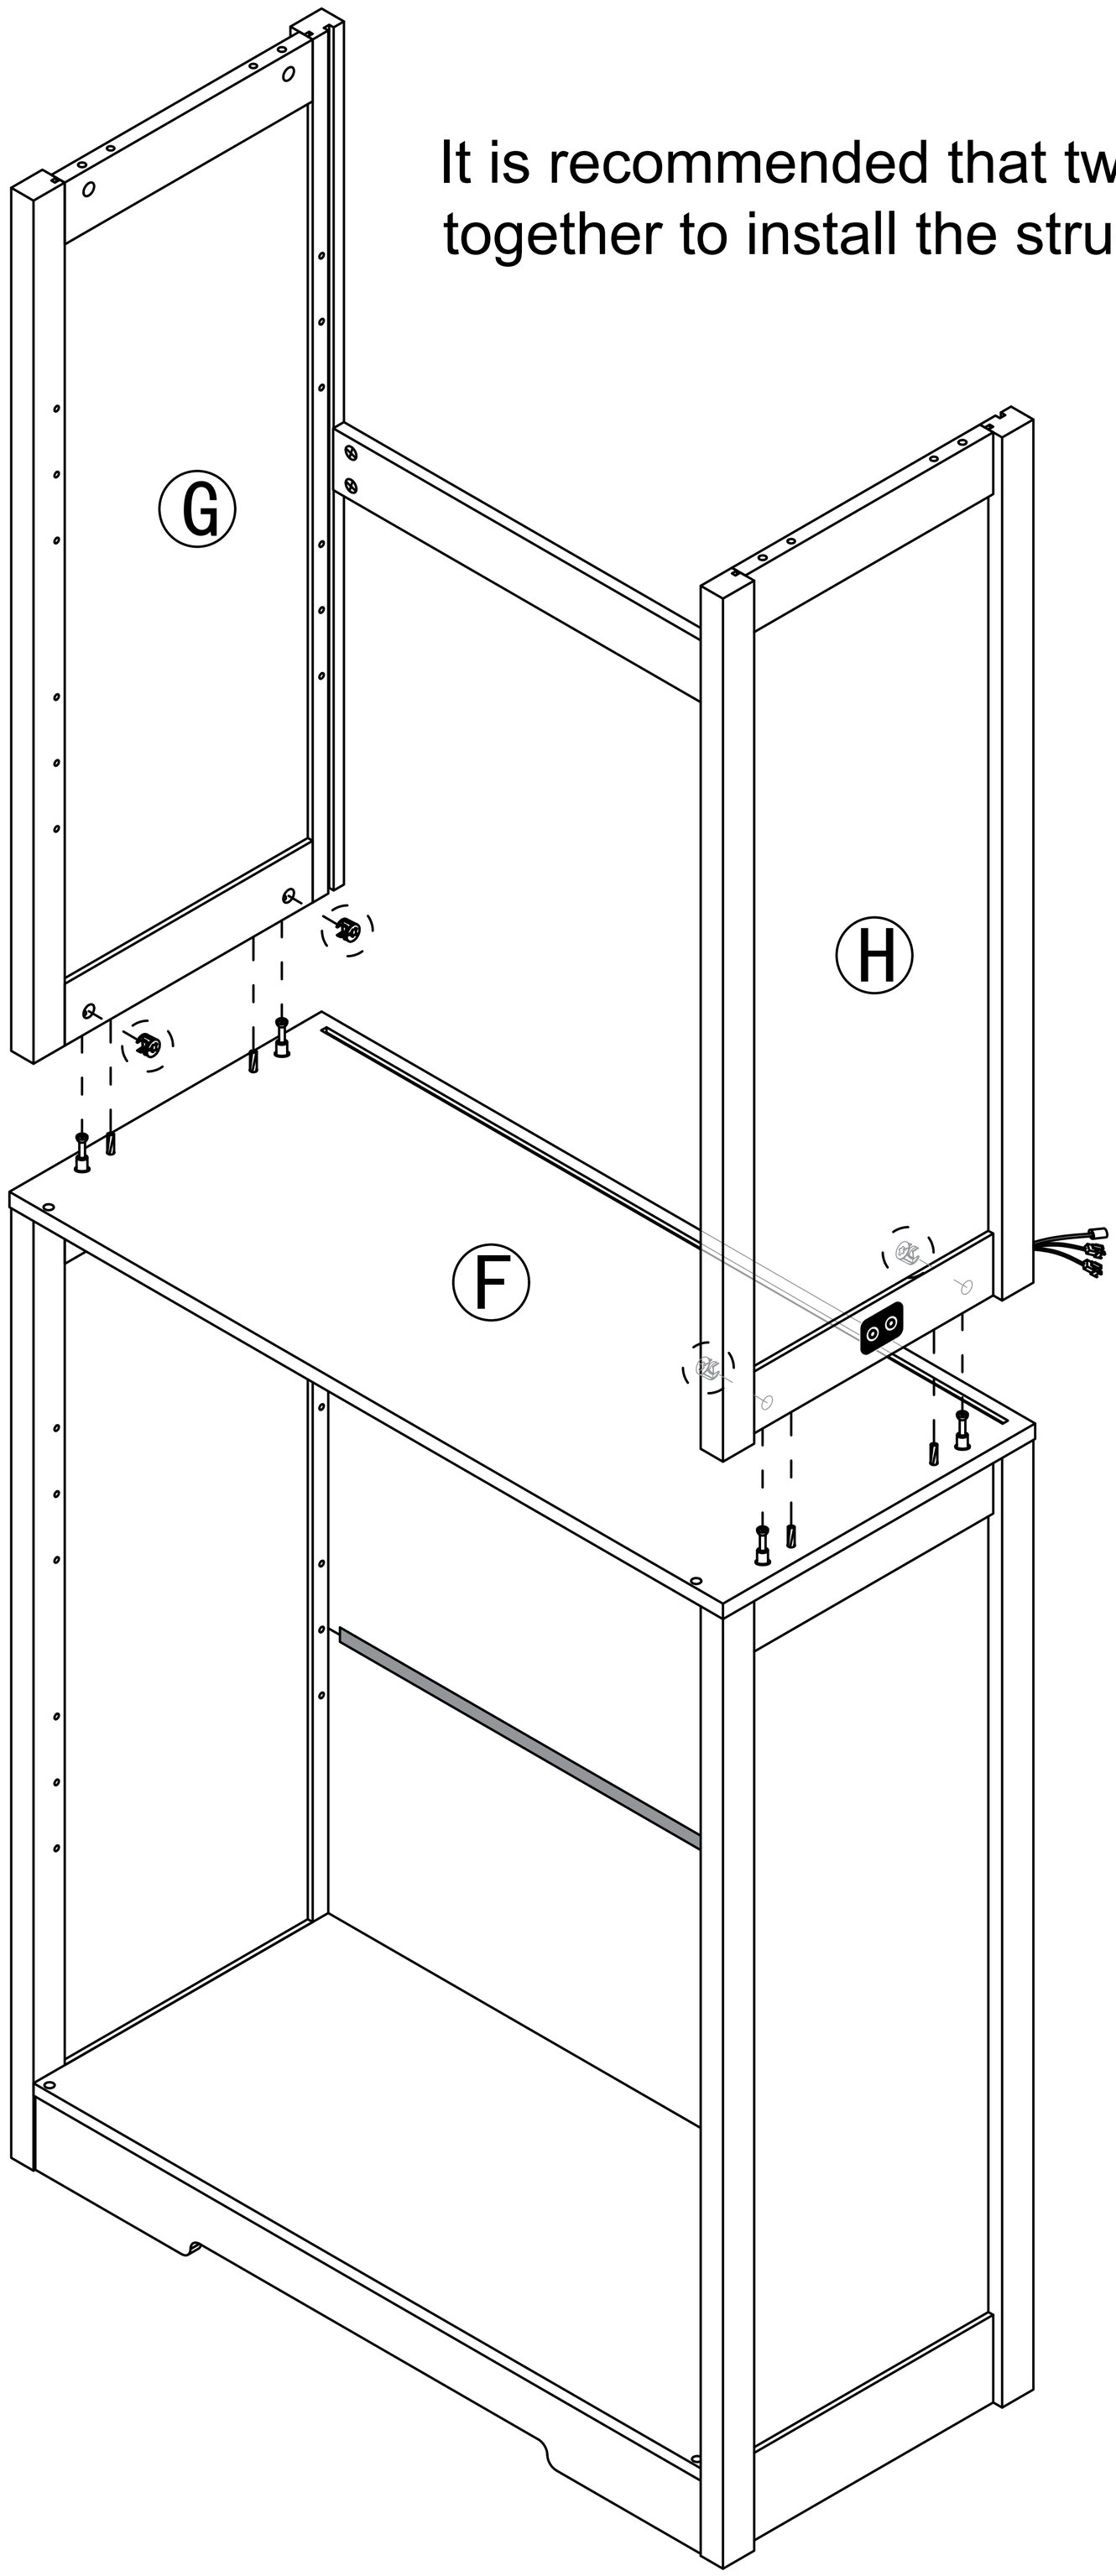

Step 20

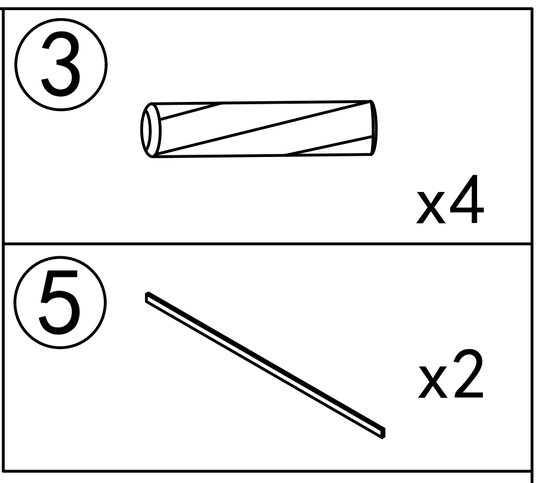


Place the "I" board, Backboard card strip, and "I" board in order

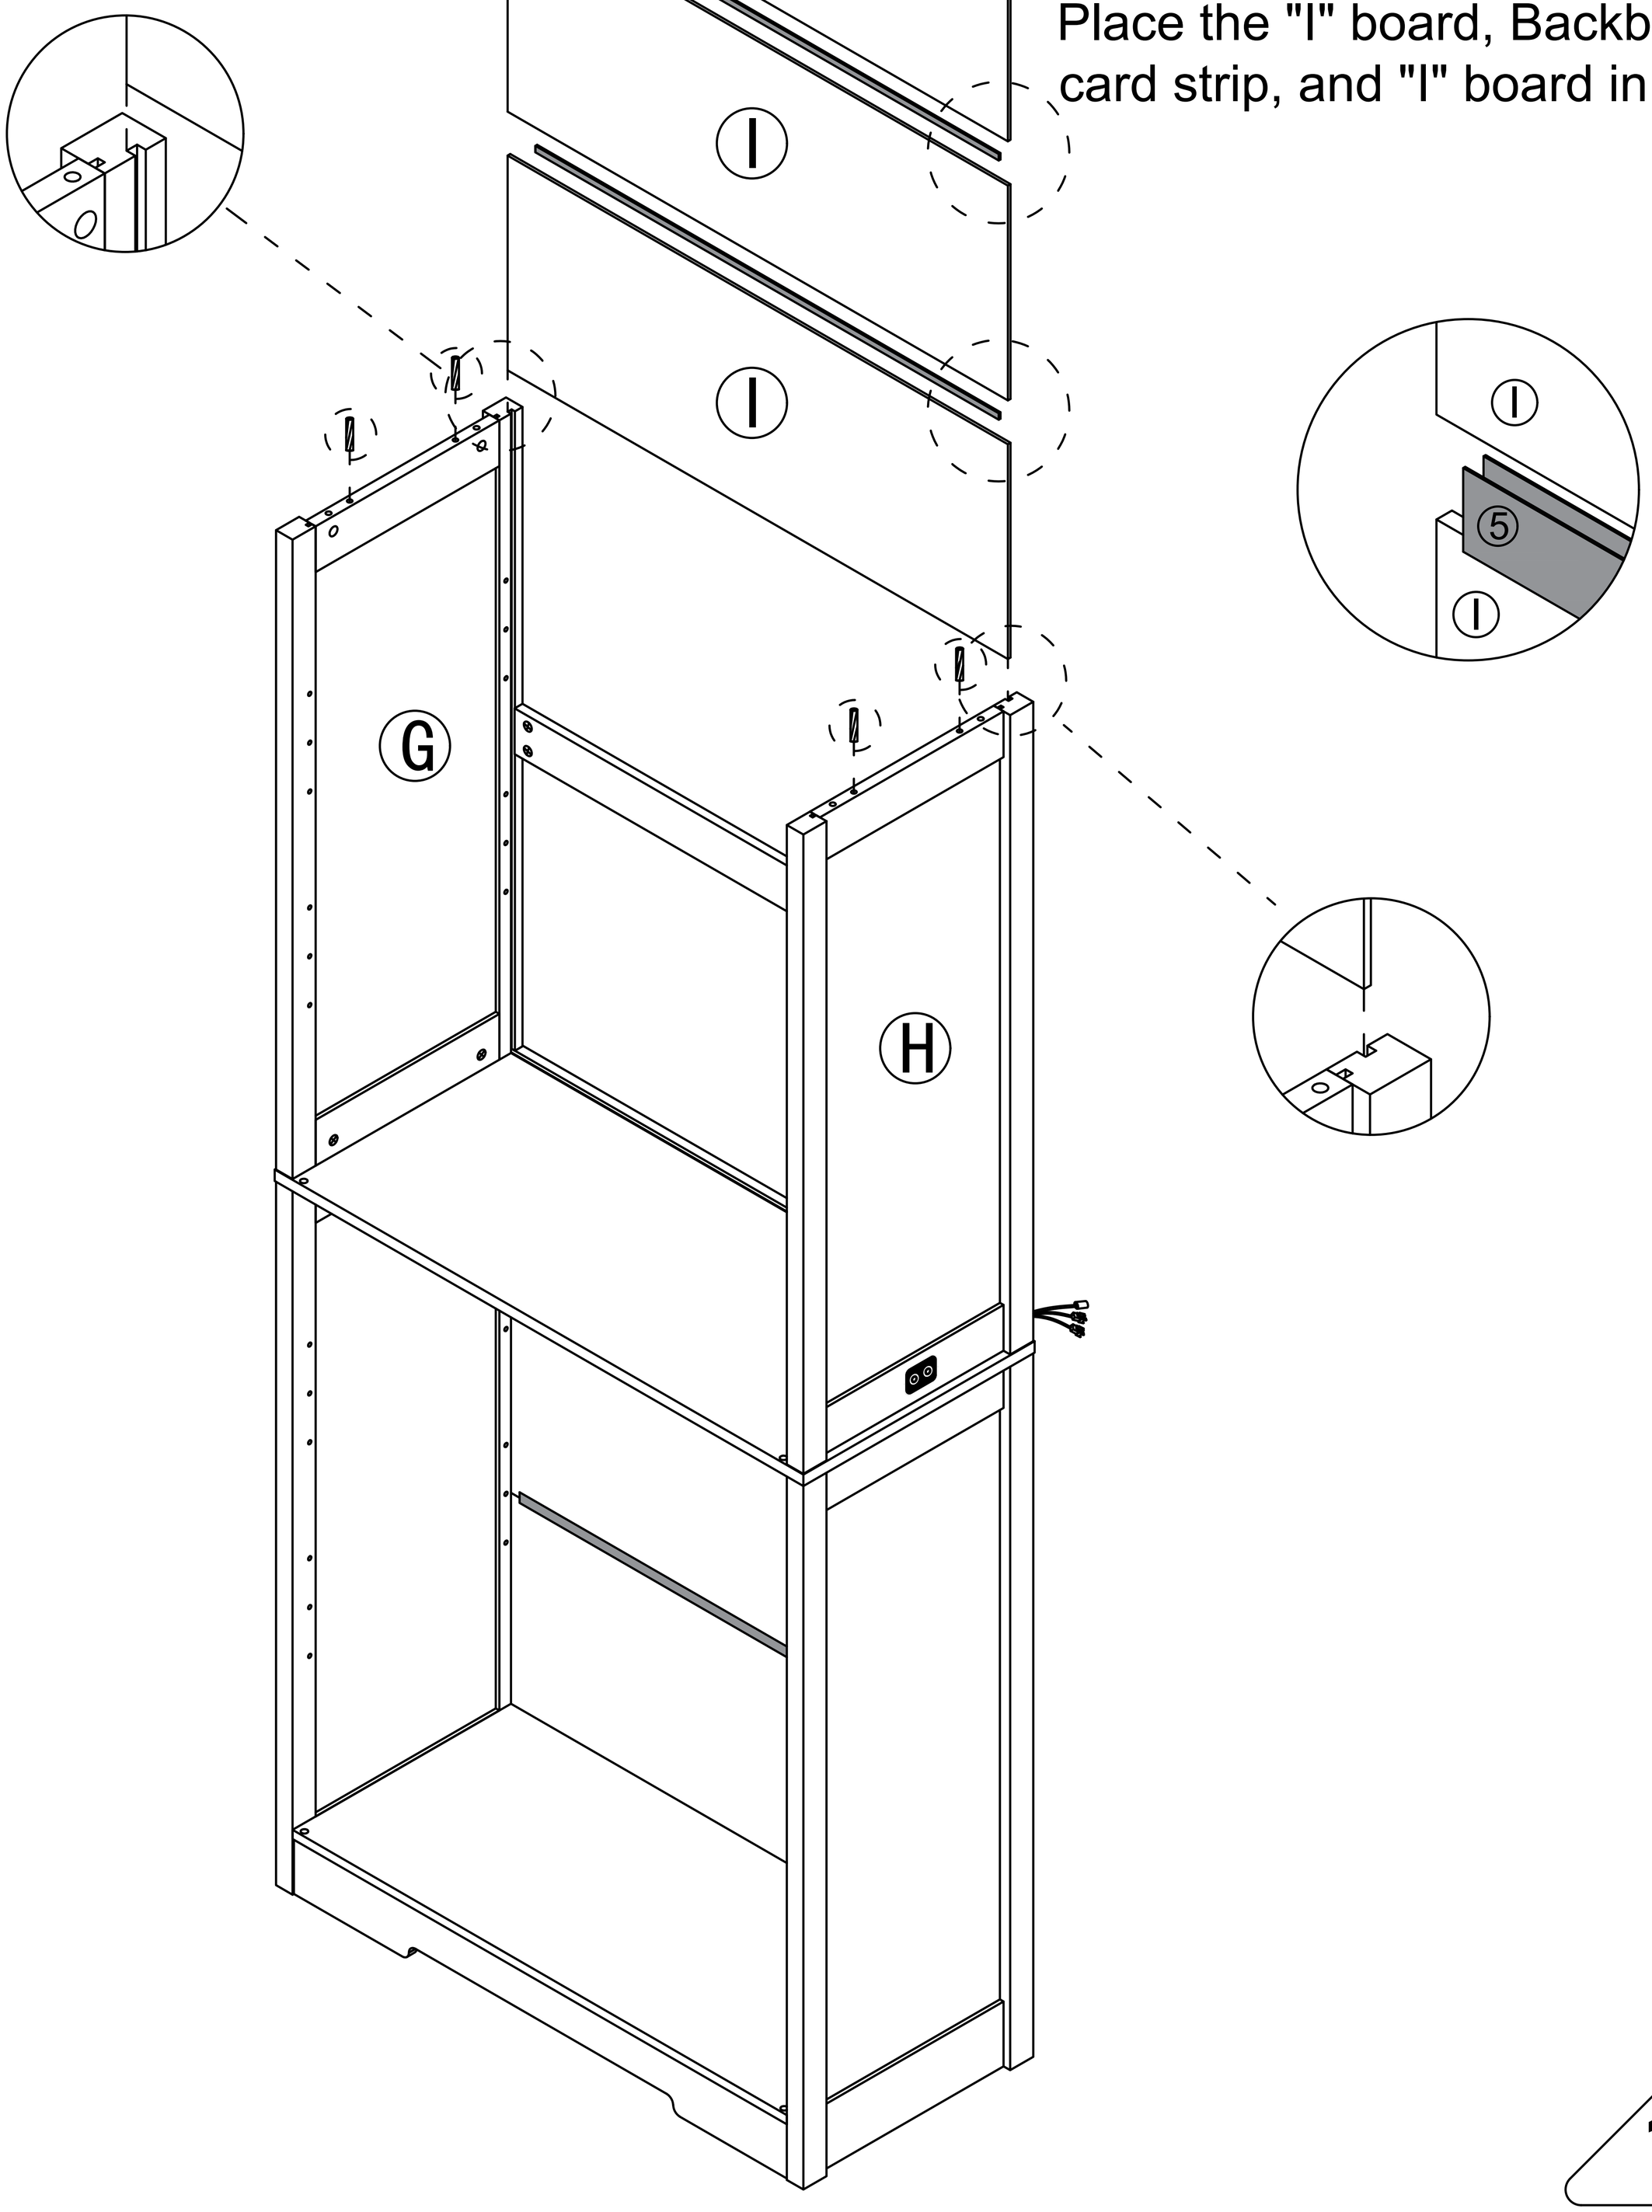


Step 21

2




x4

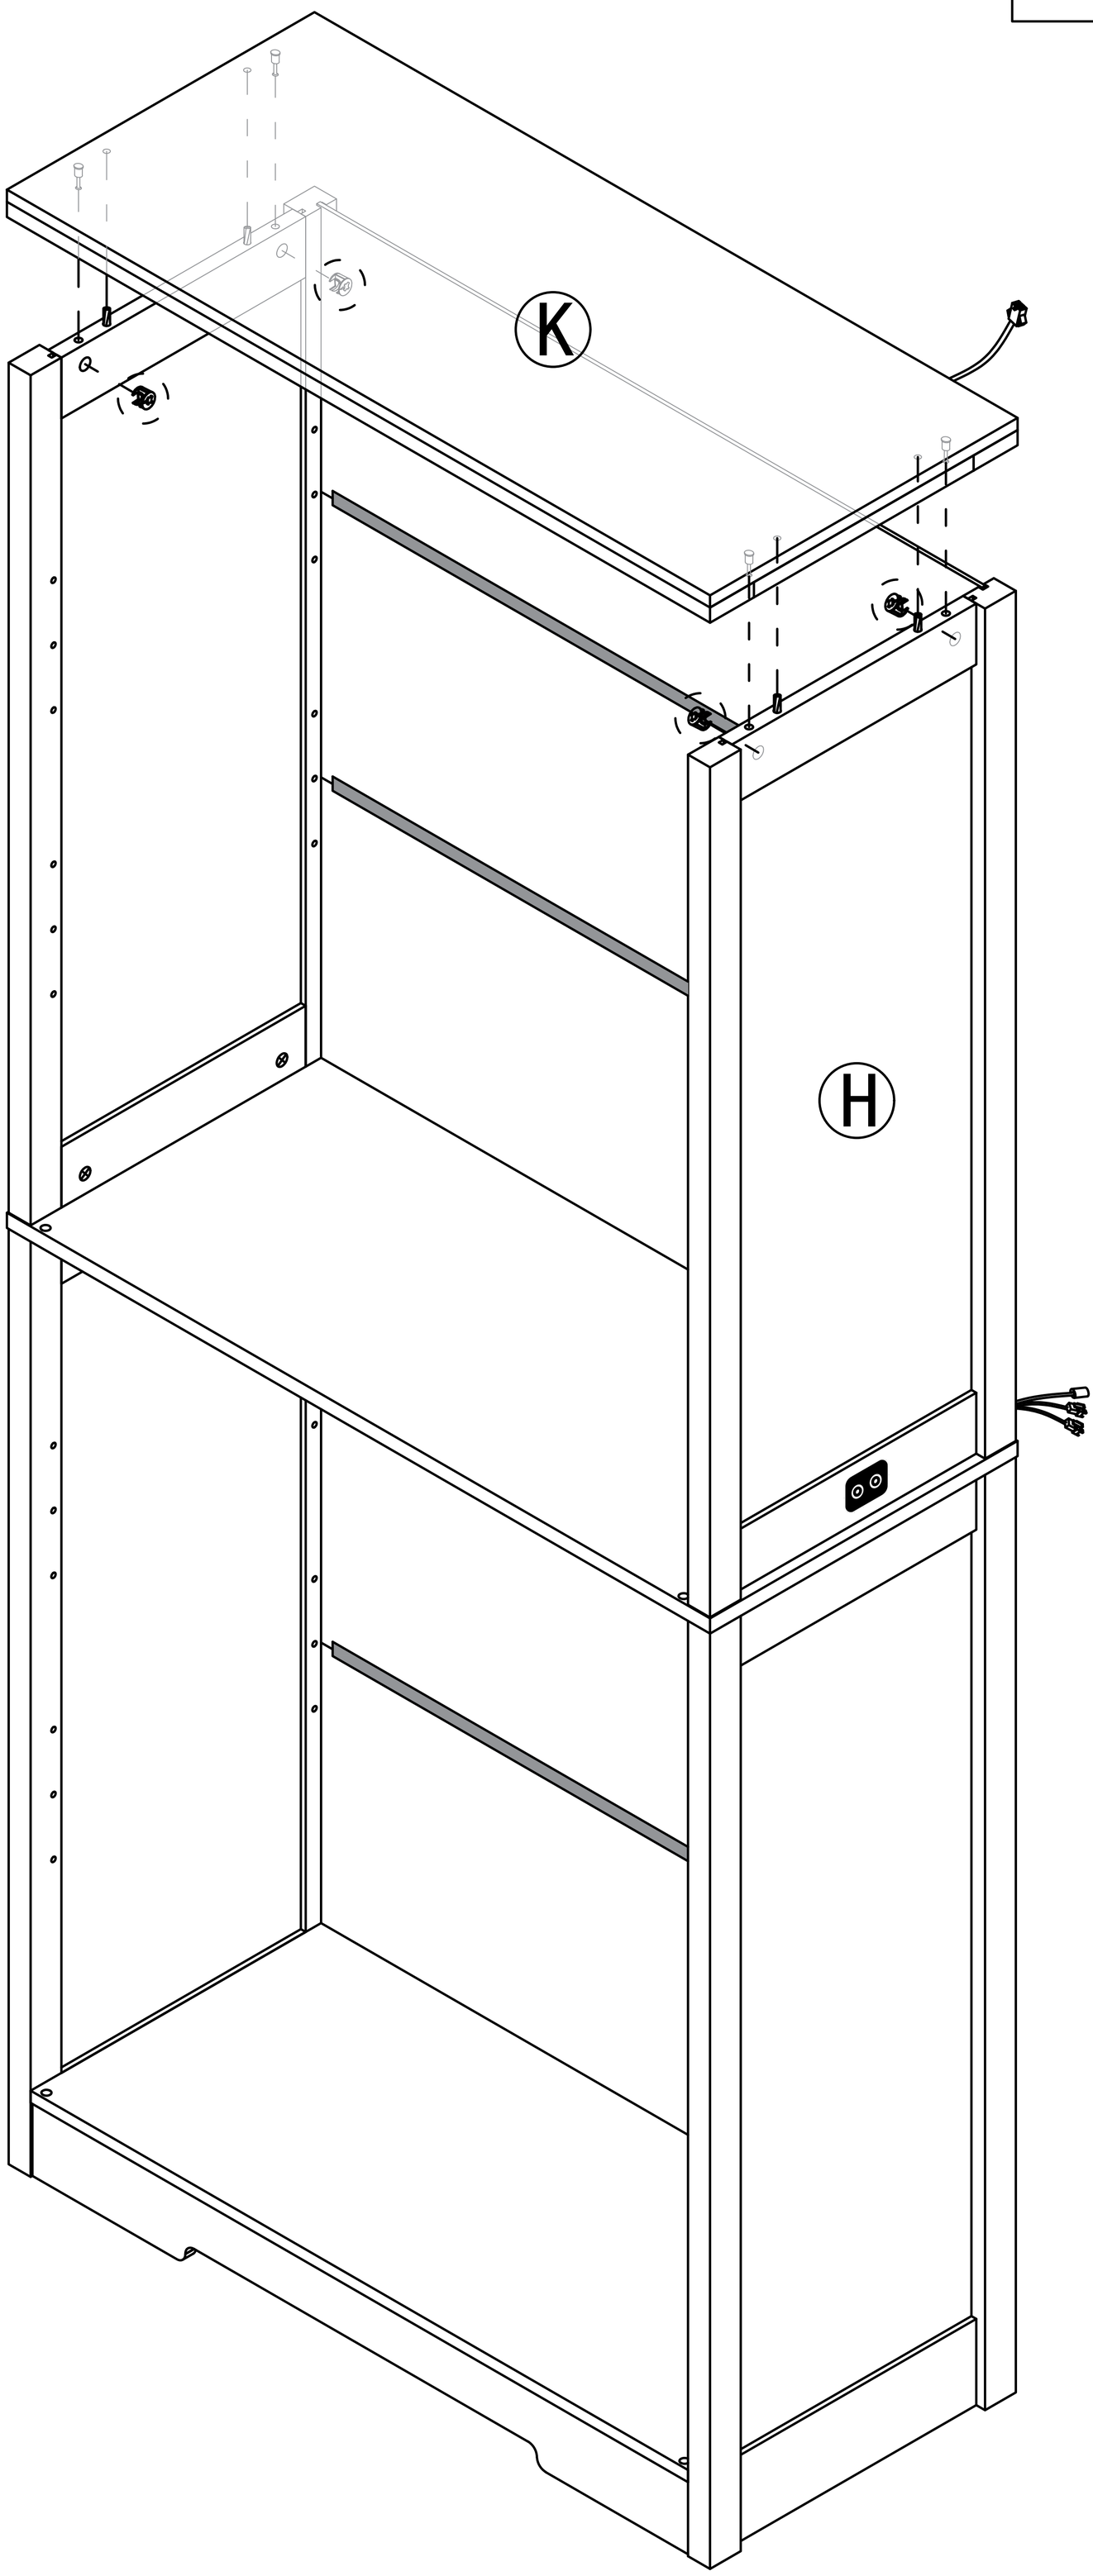


Step 22

8 x16

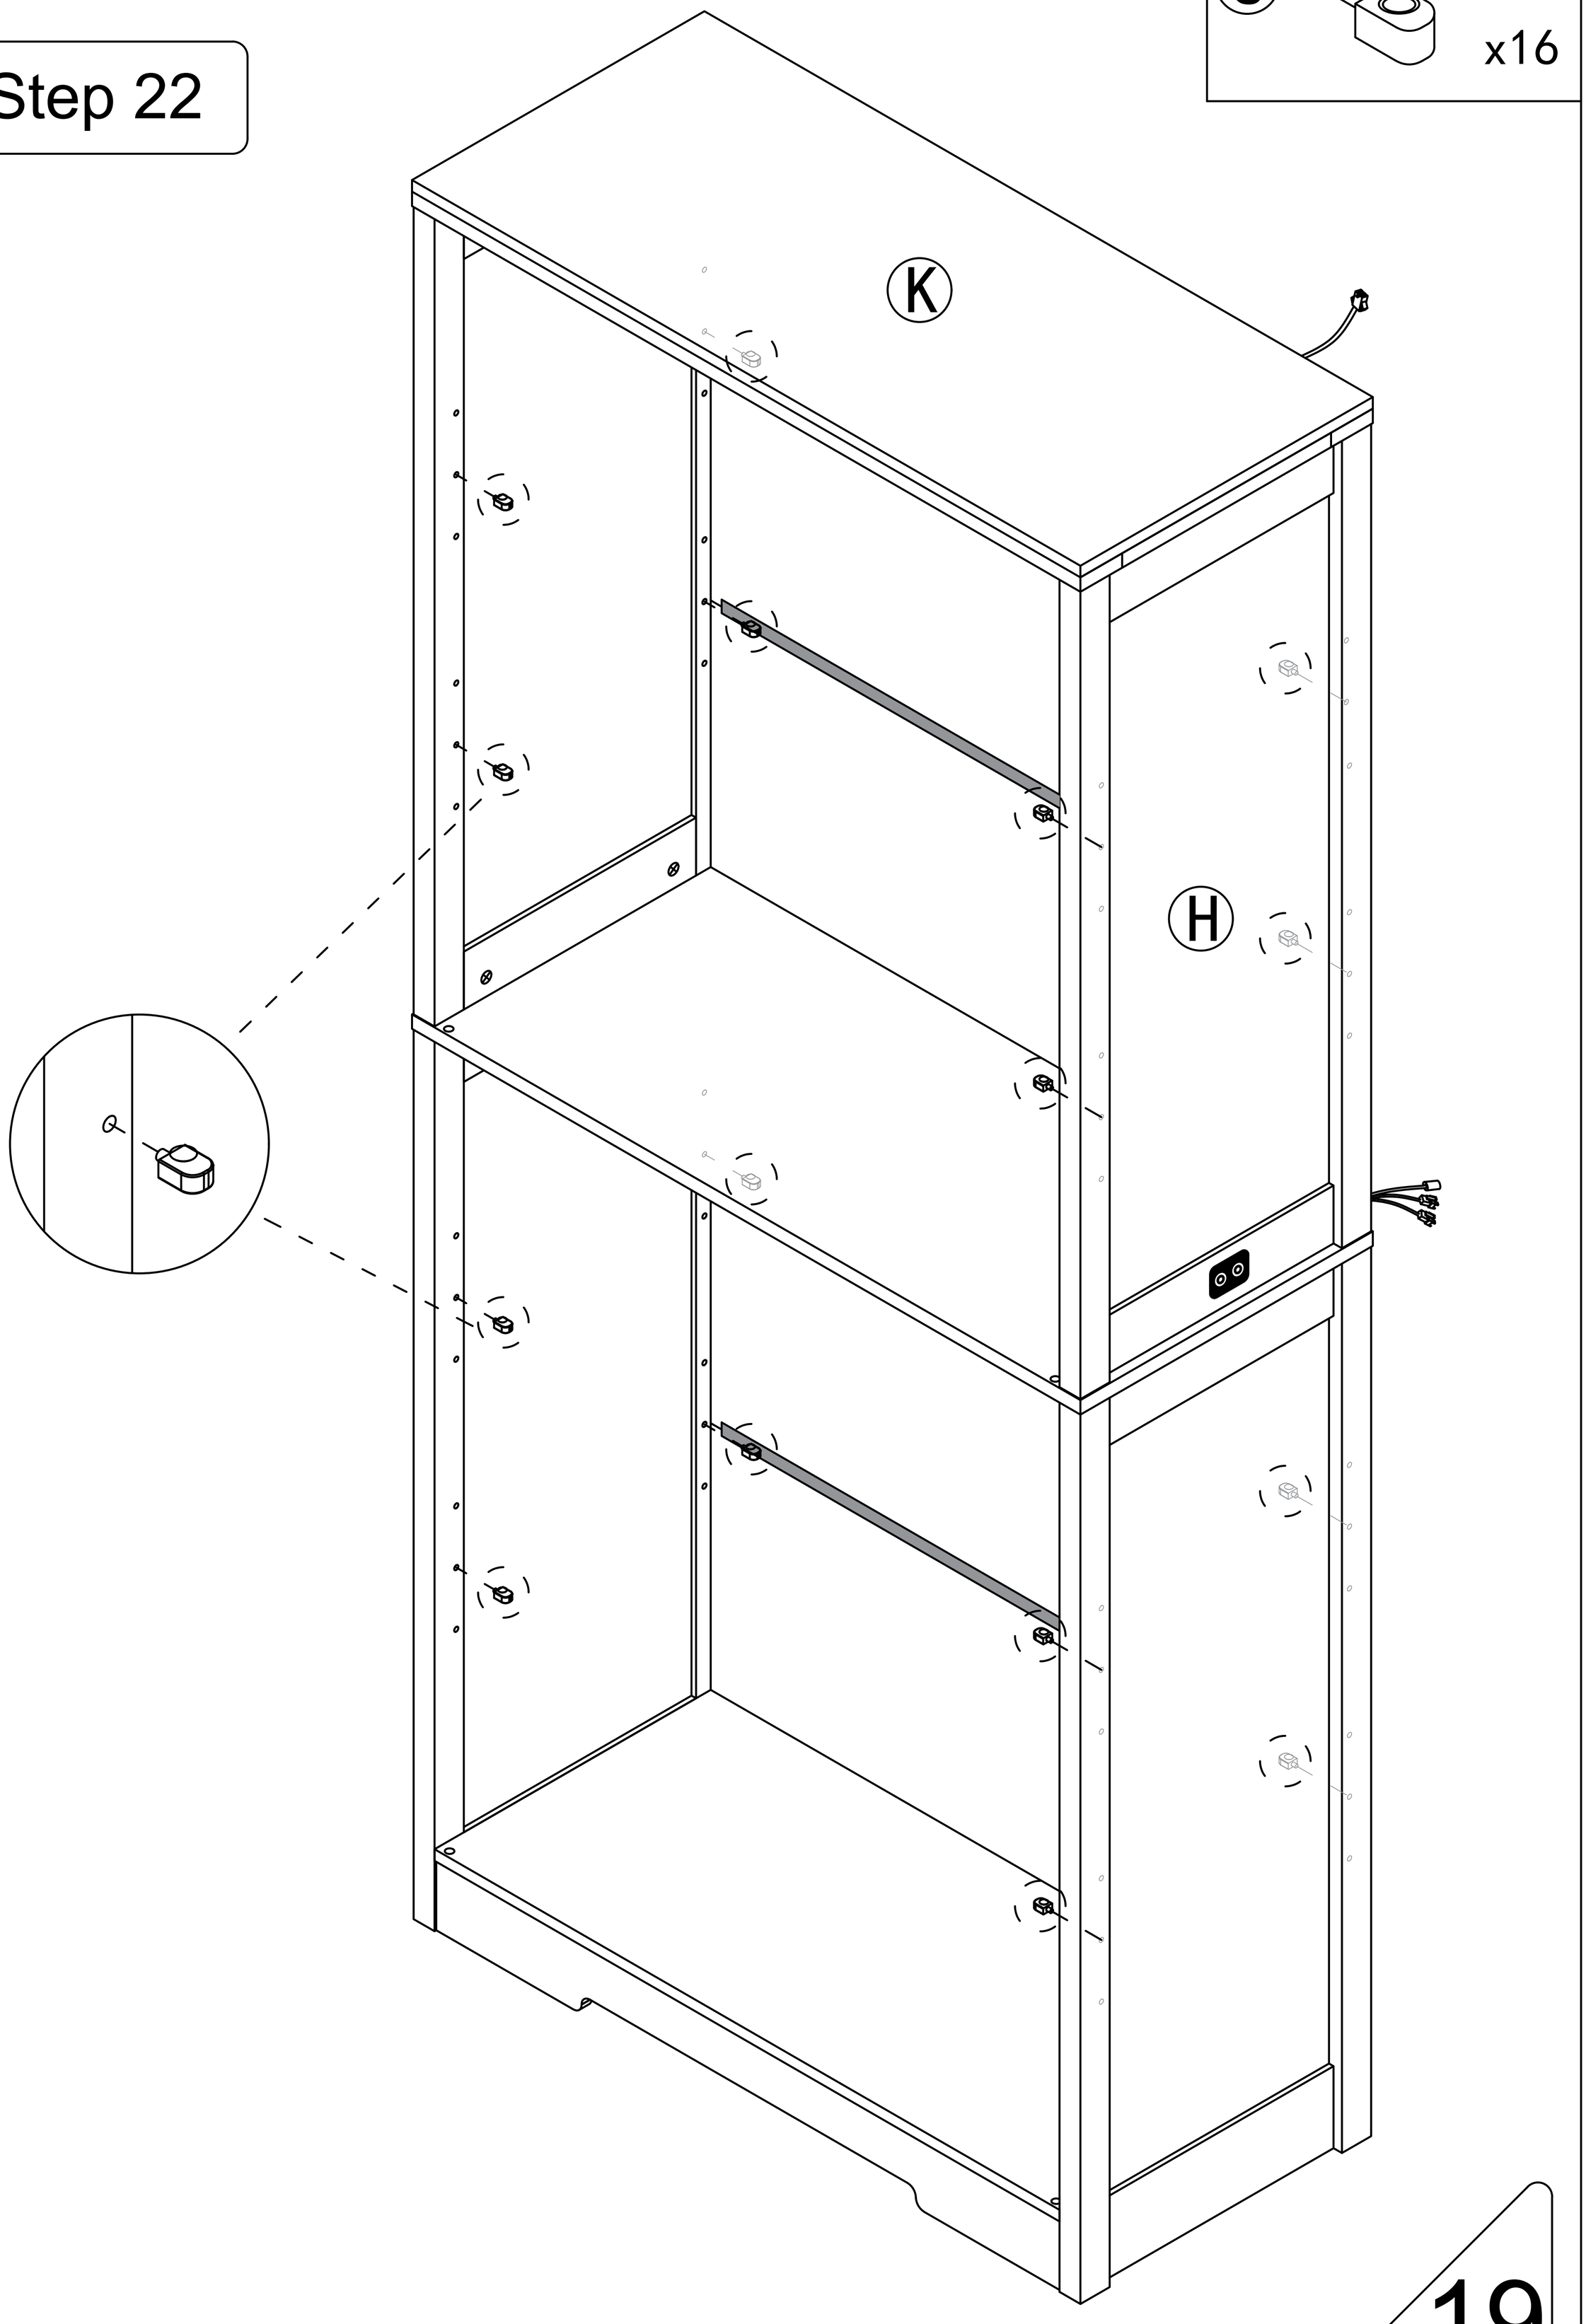


Step 23

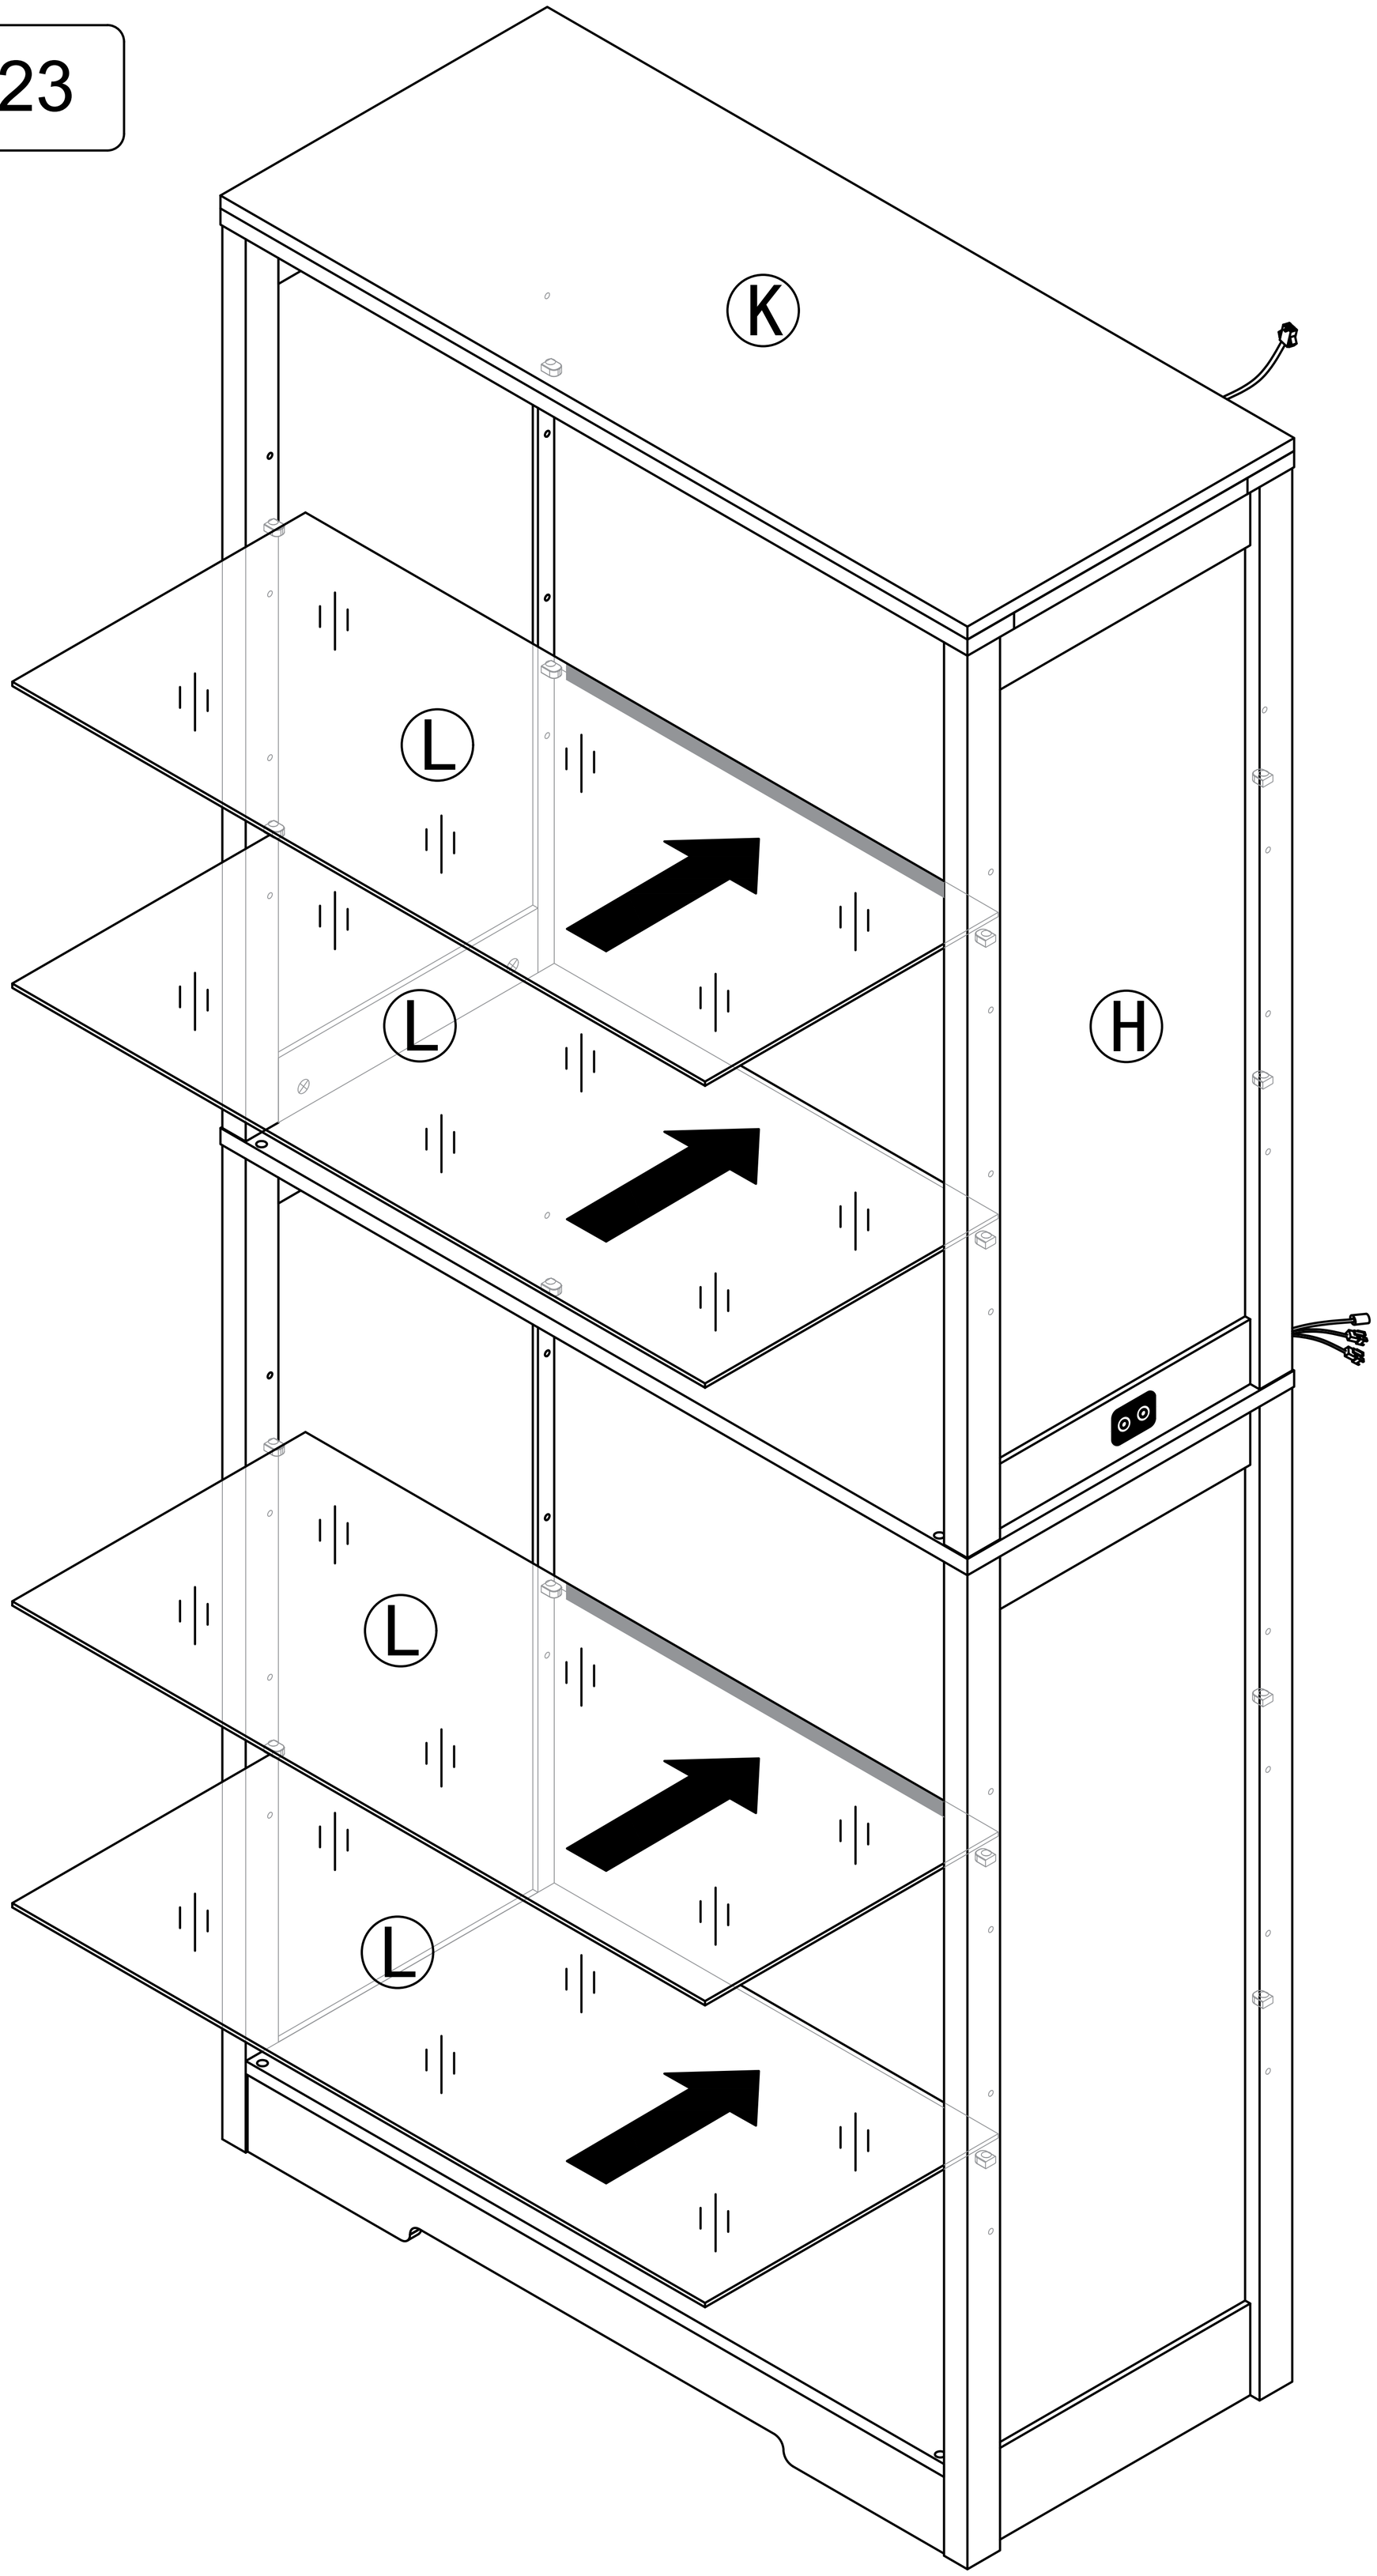


Step 24


First, completely unscrew the screws on the parts

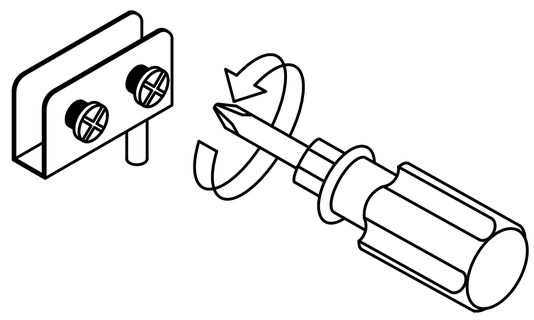


Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

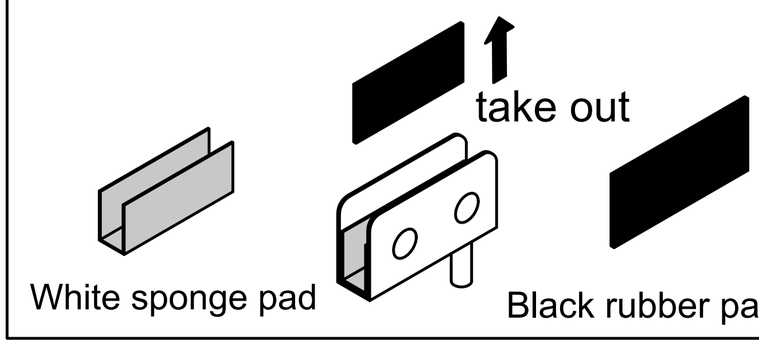


9



x2



x2

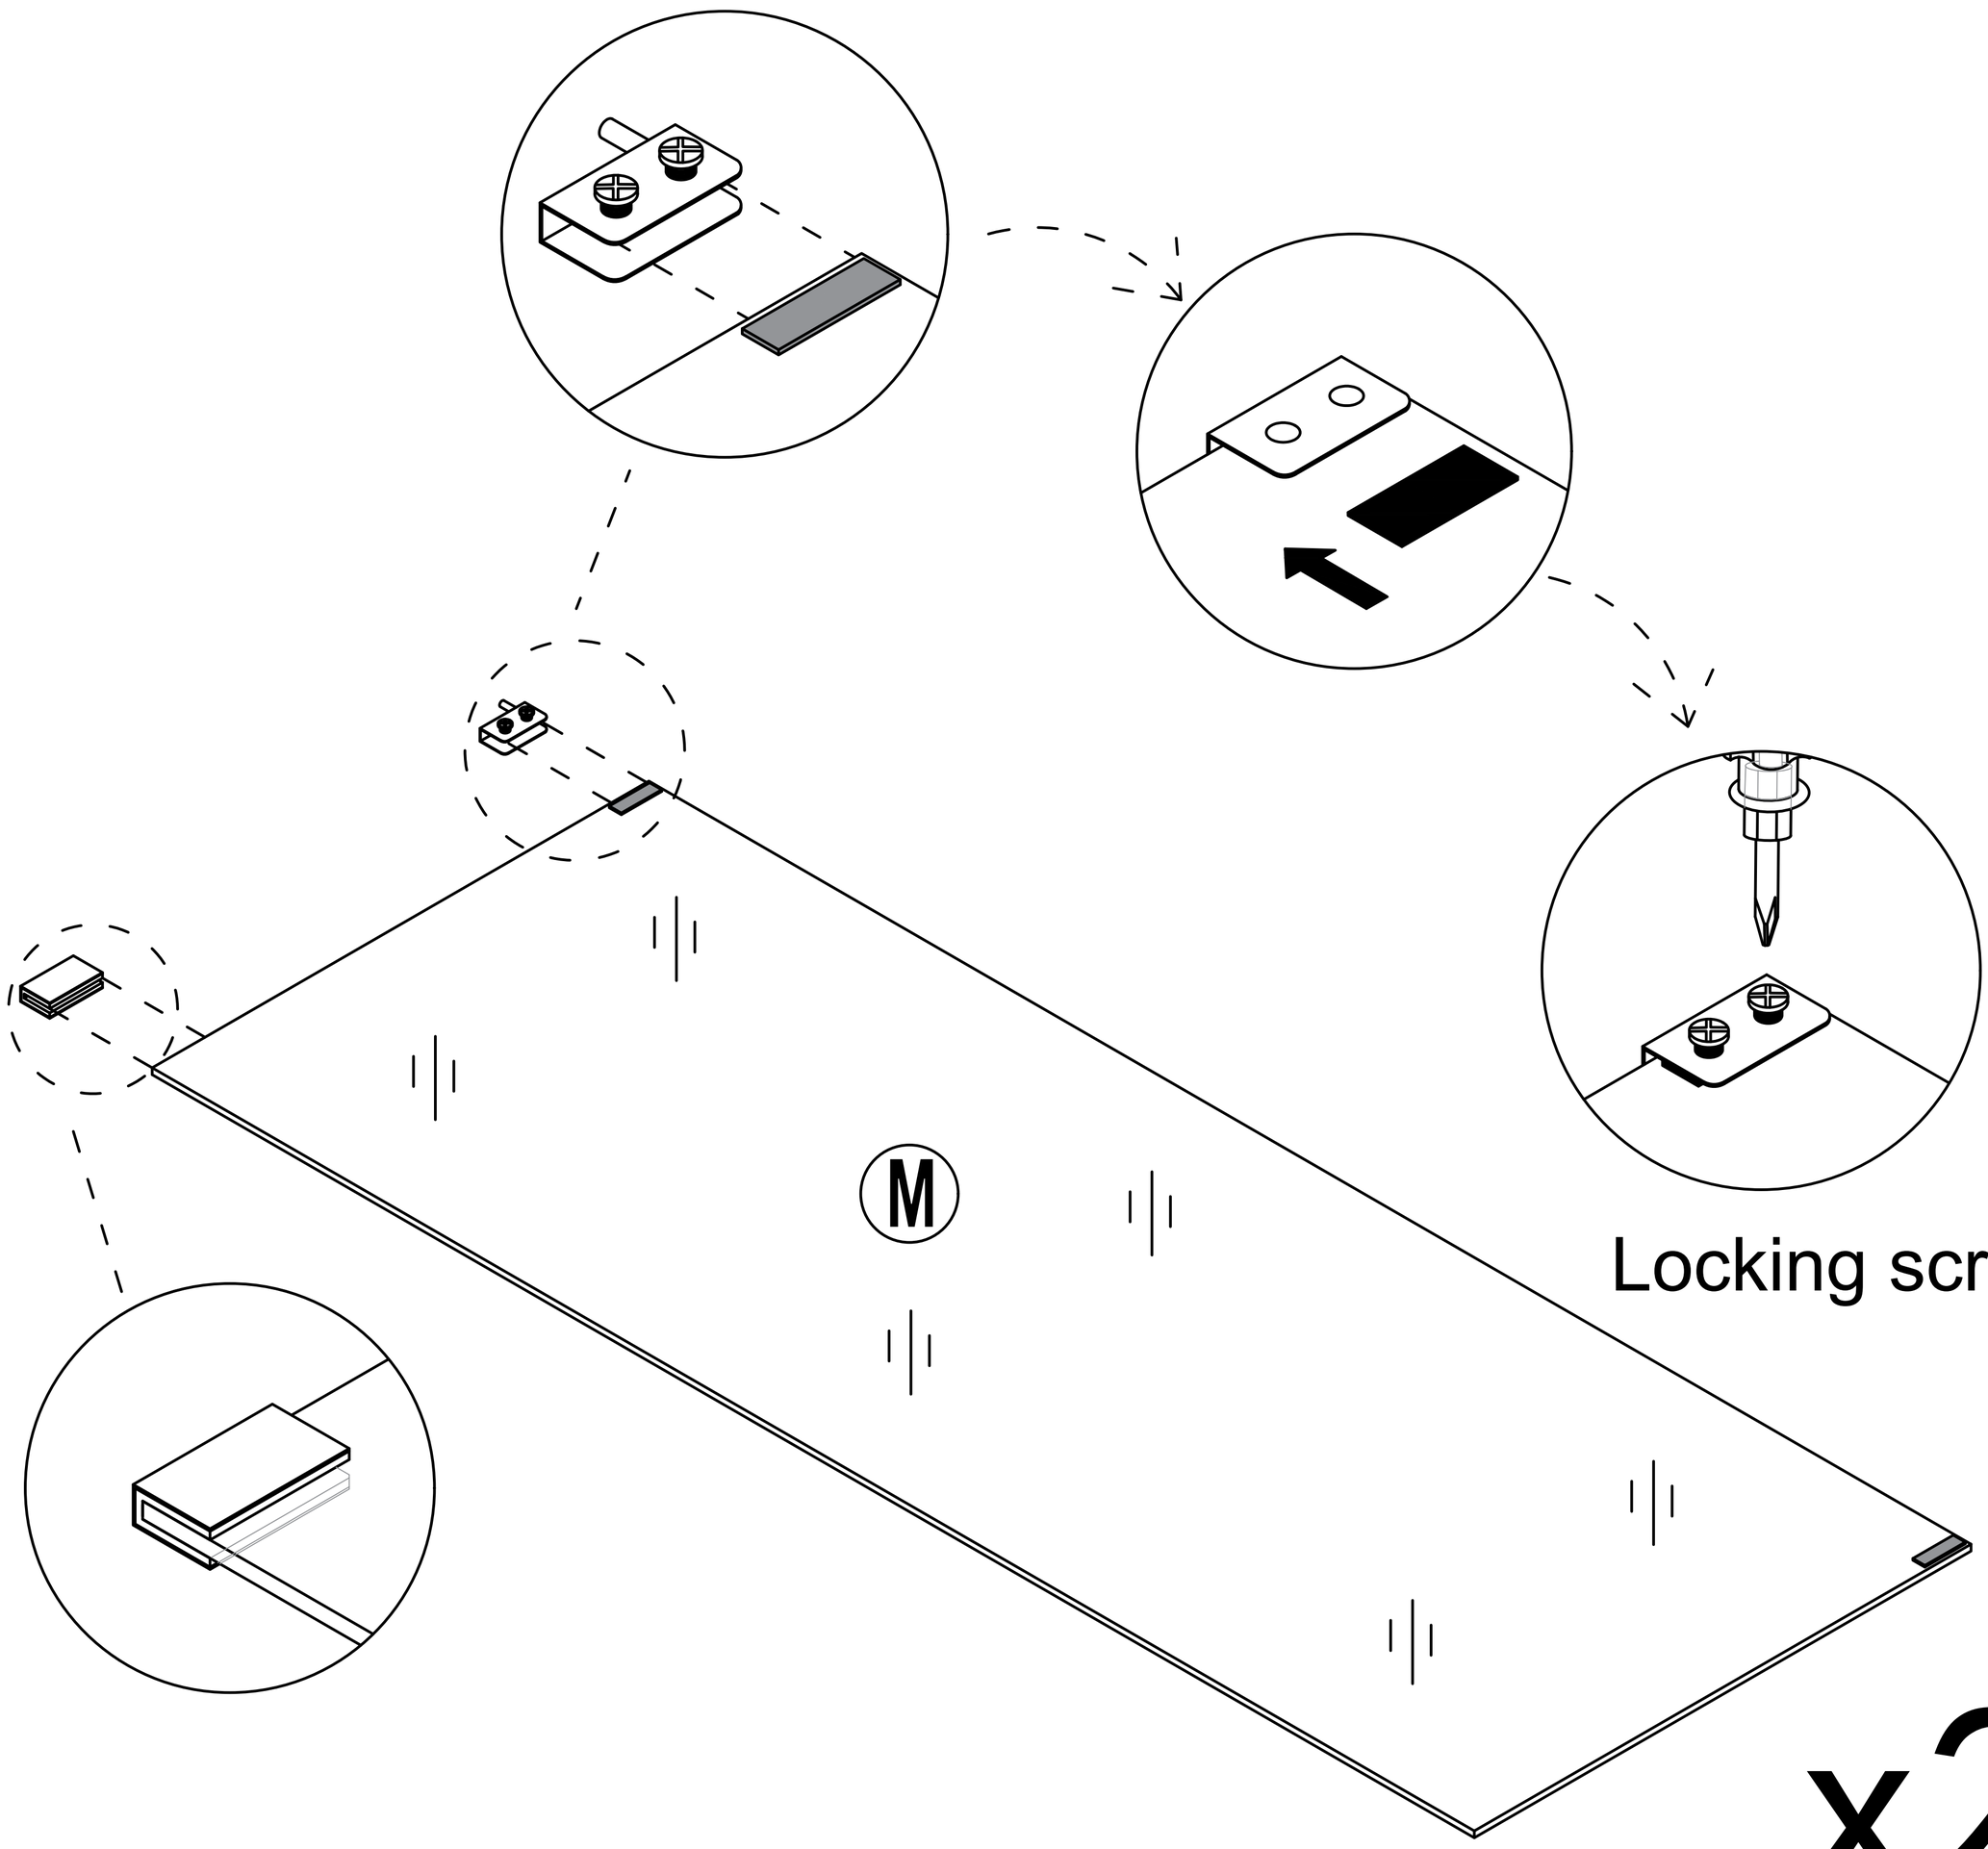


Locking screw


x2

Pay attention to the direction of the door hinge,
rotate the screws to compress the black gasket,
and do not place it in the opposite direction

Place the black gasket on the side
where the screws are installed

Step 25

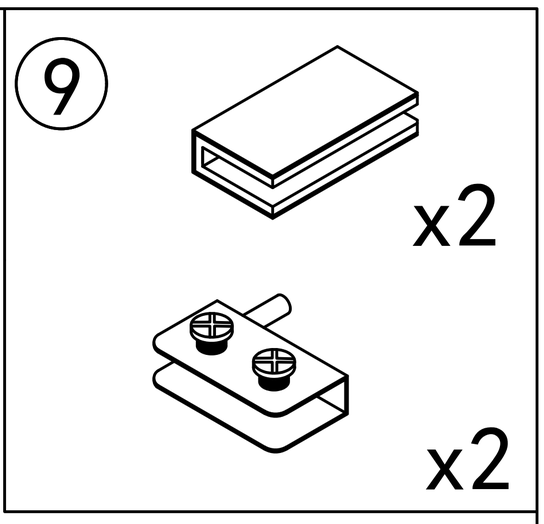


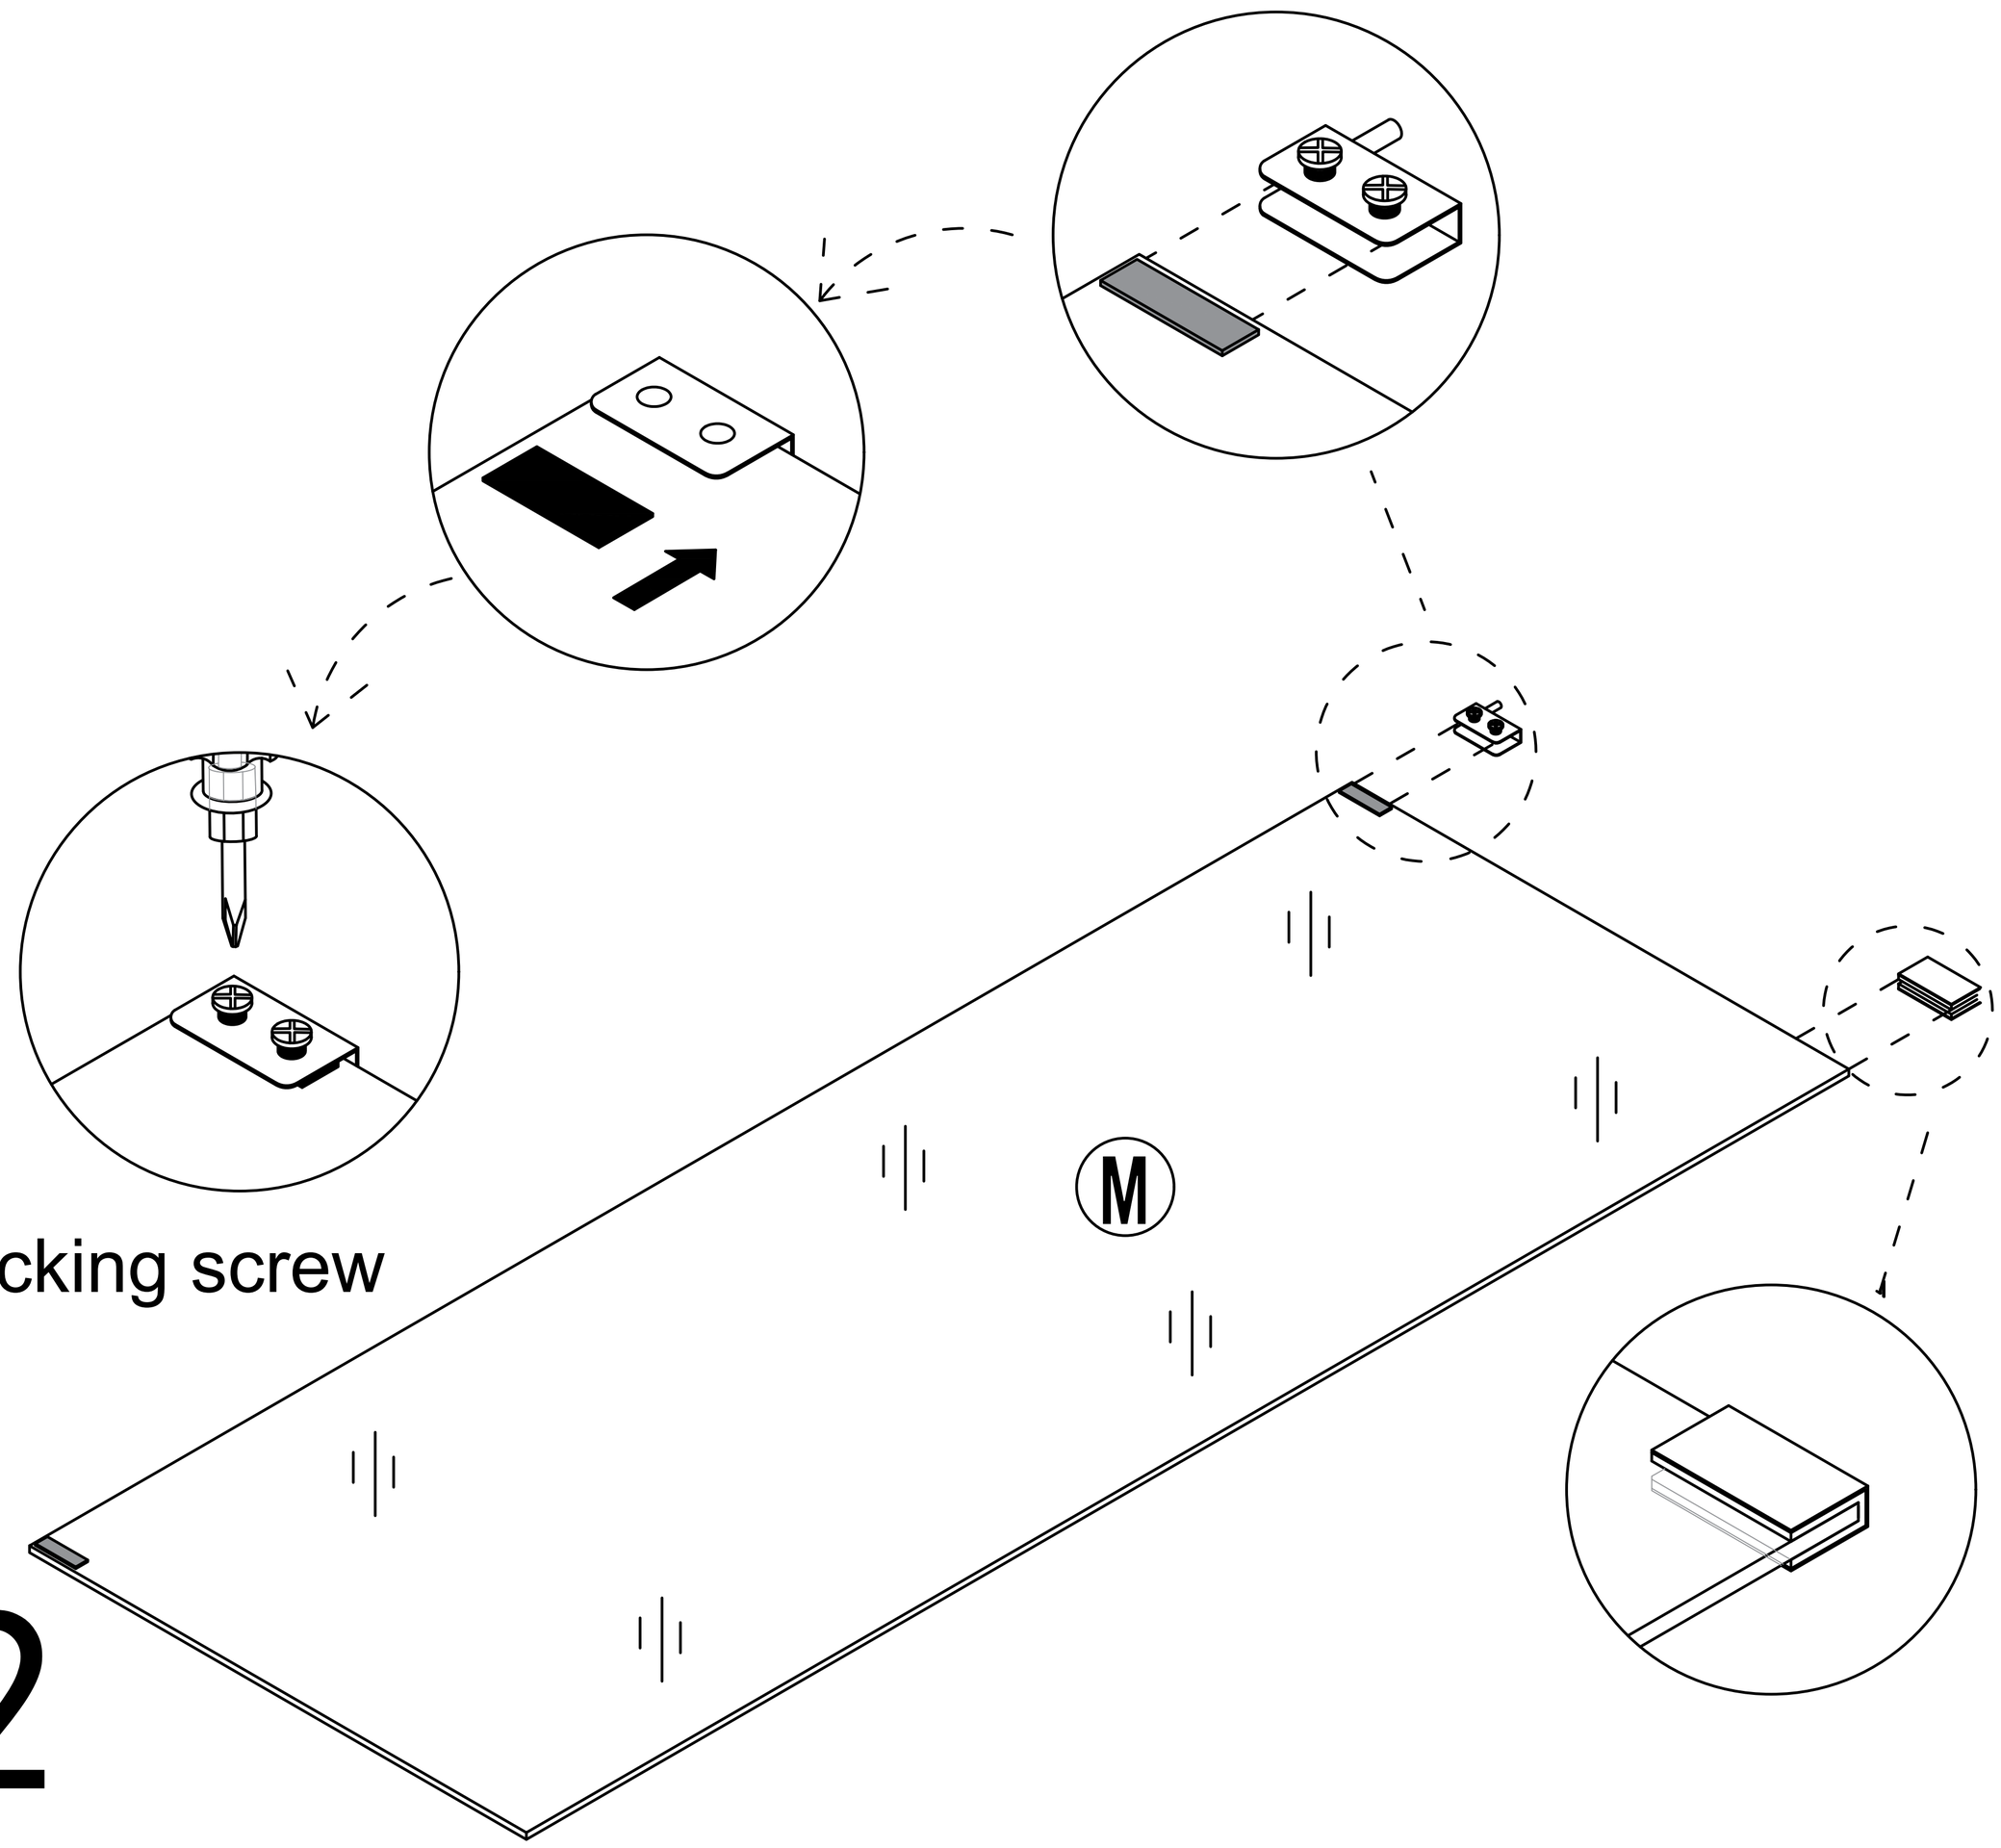


Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed


Step 26

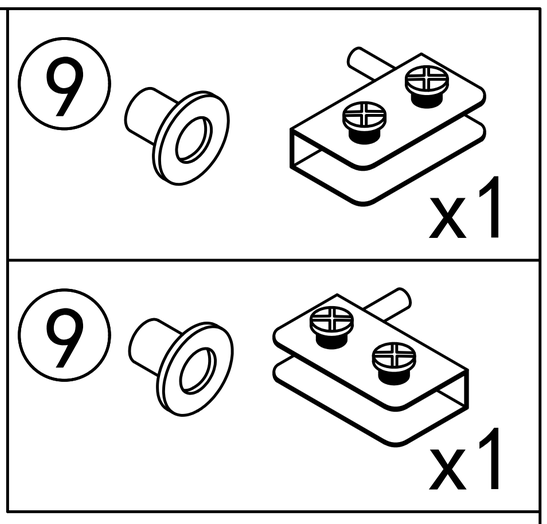

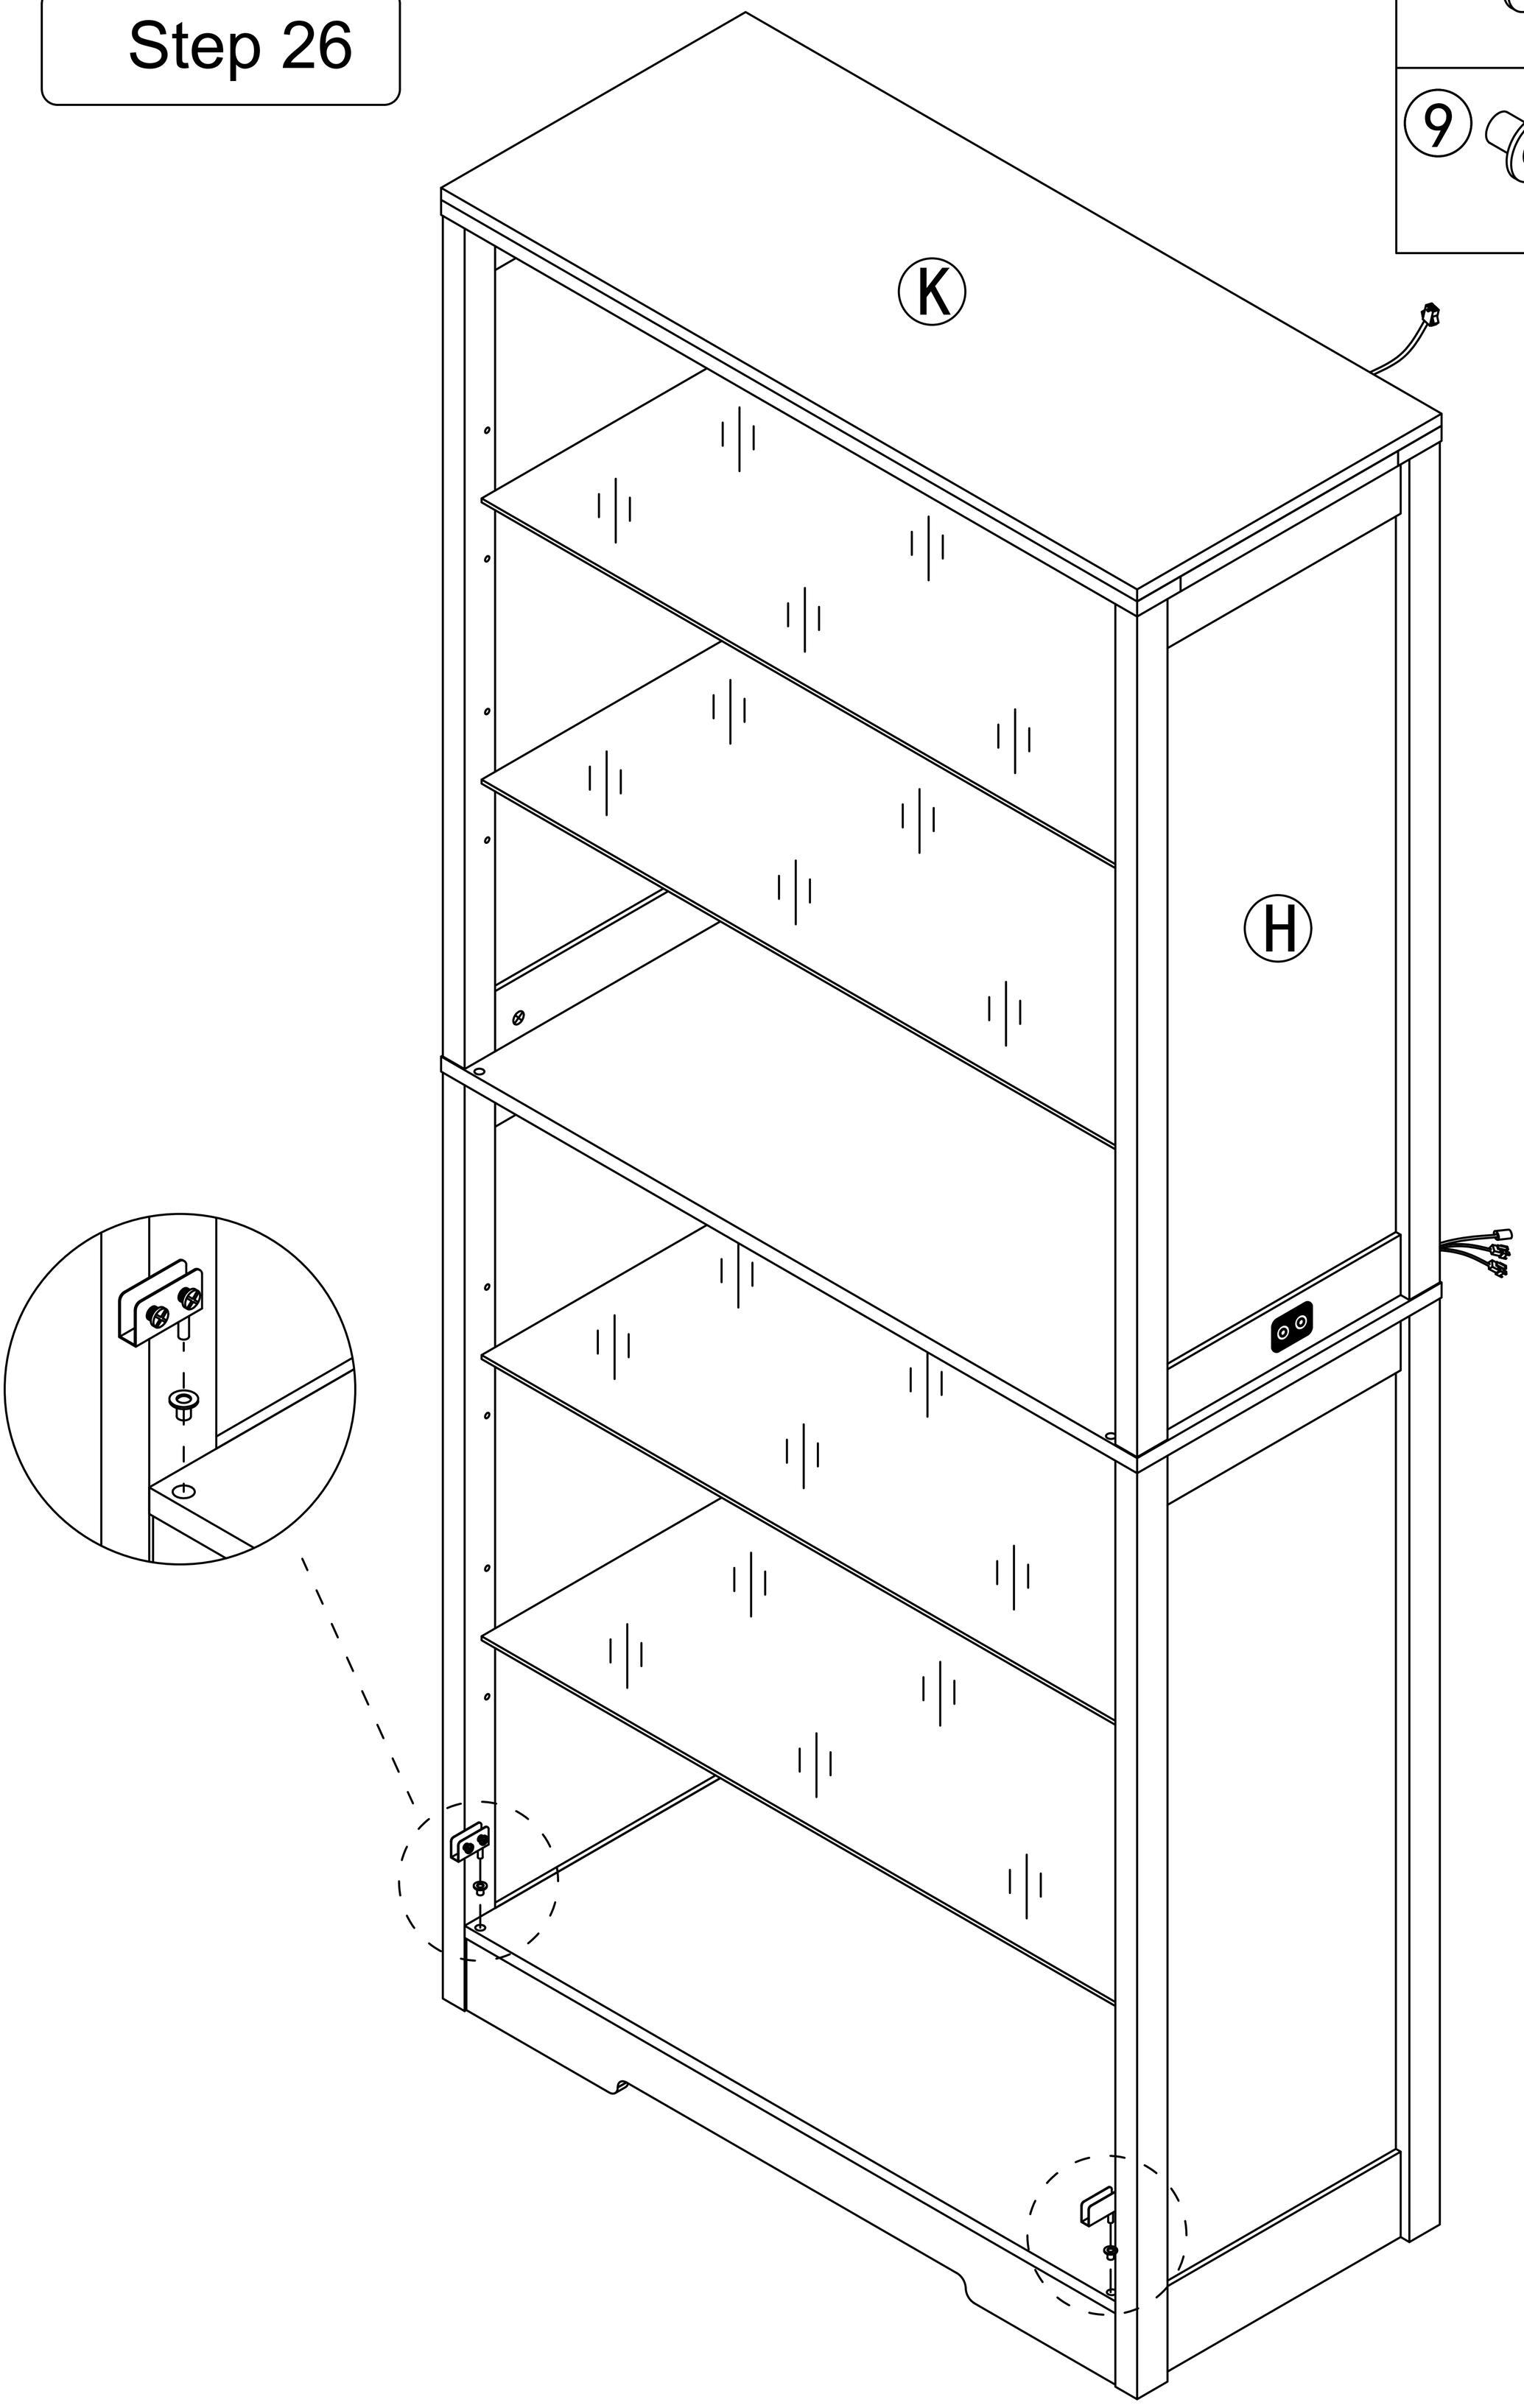


Step 27


Pay attention to the direction of
the door hinge during installation



When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.

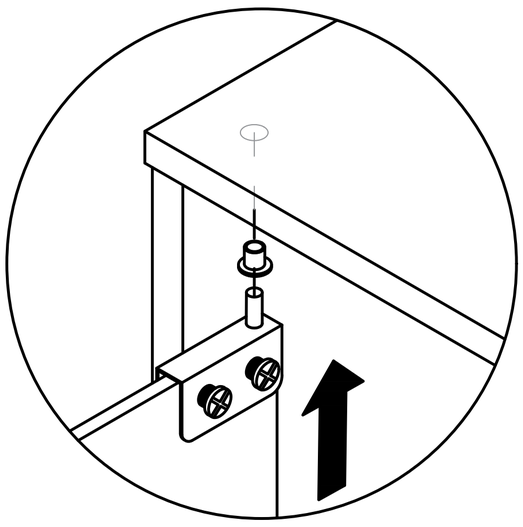


first

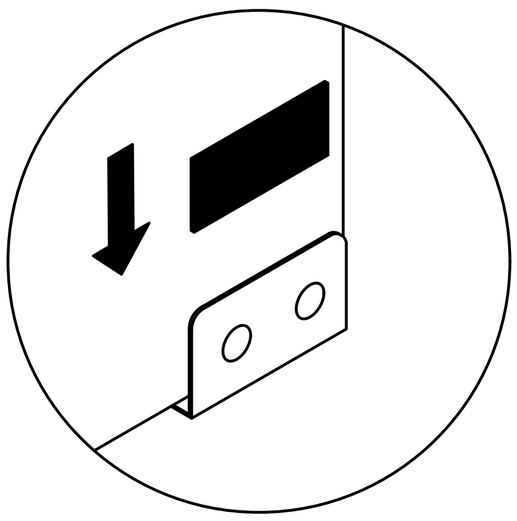


second

After installing the glass door, place the black gasket on the side where the screws are installed

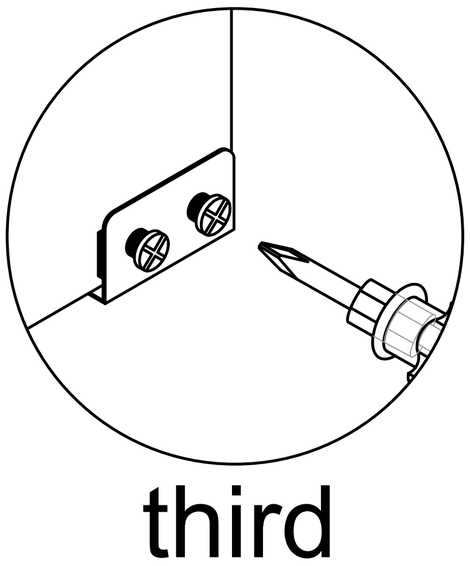



third

Locking screw

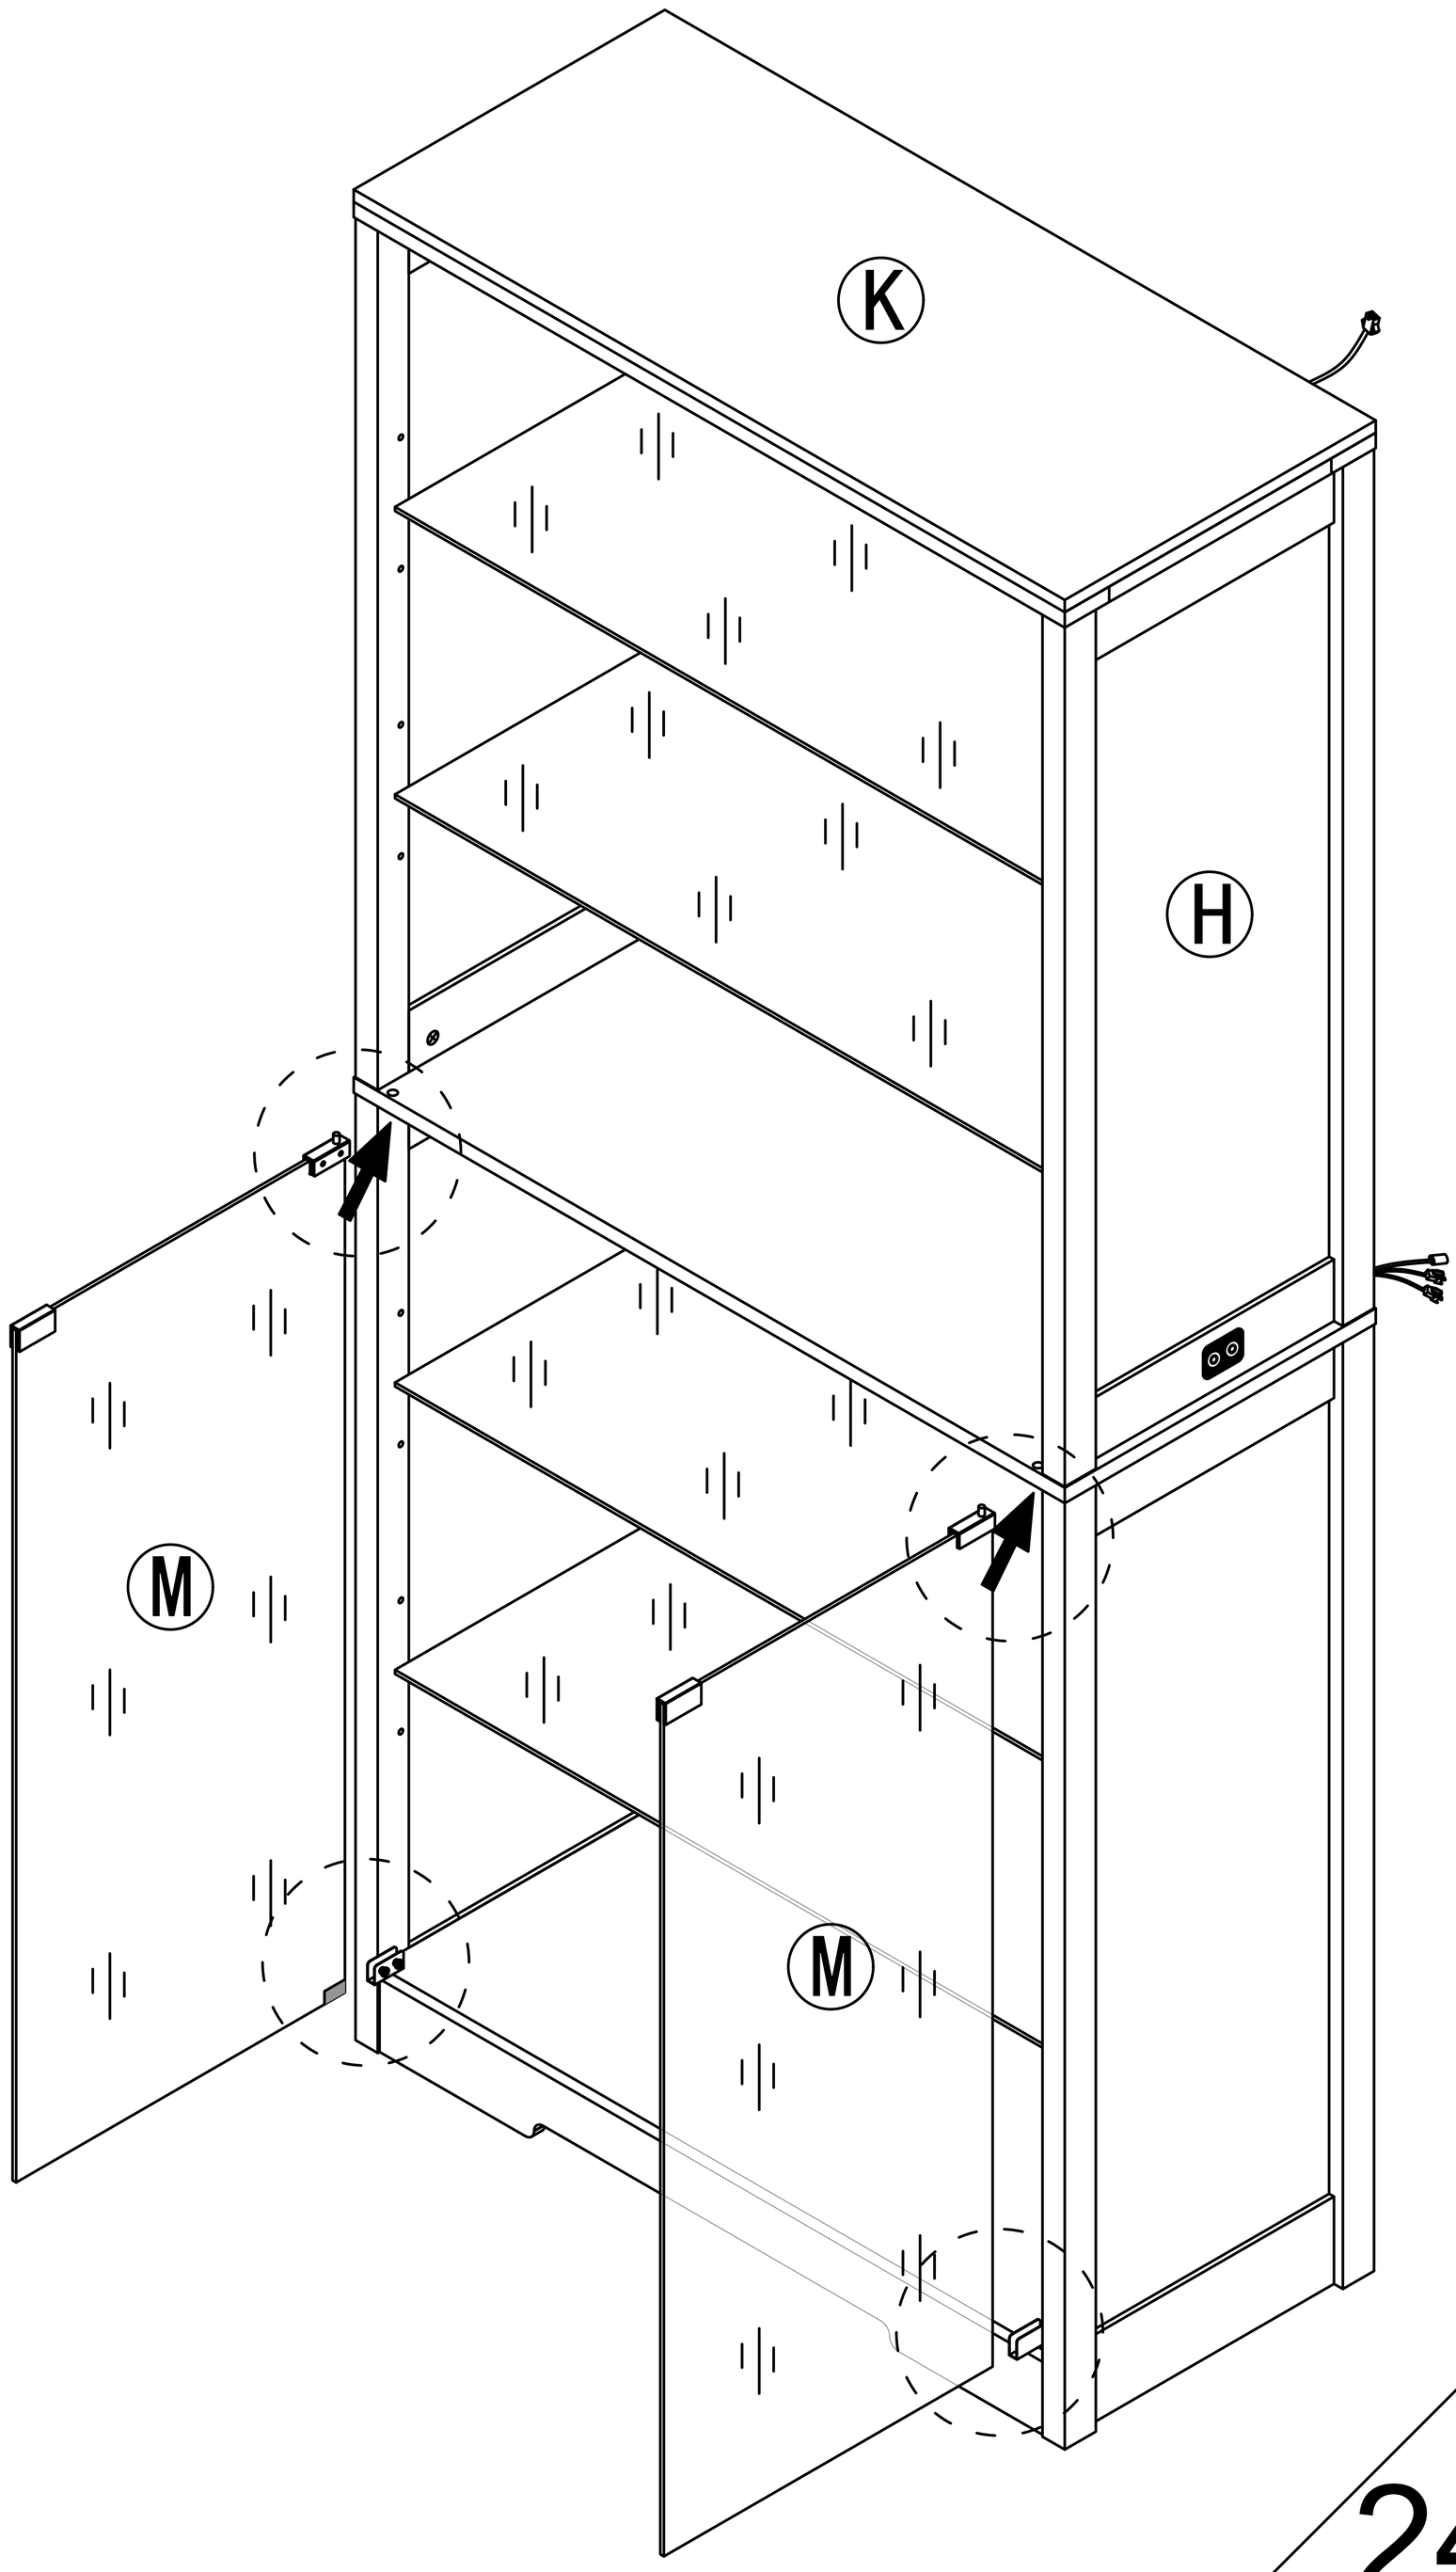


Step 28

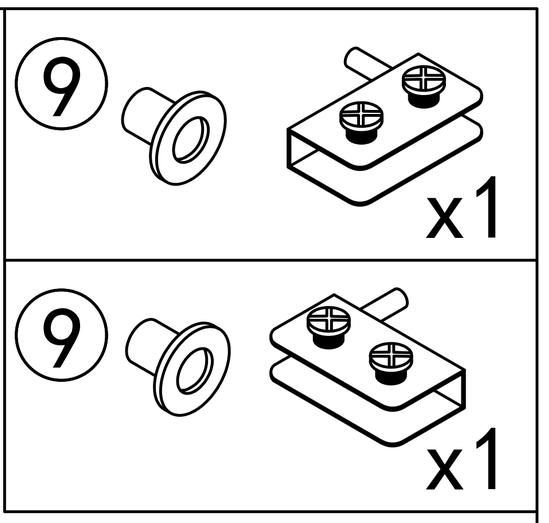

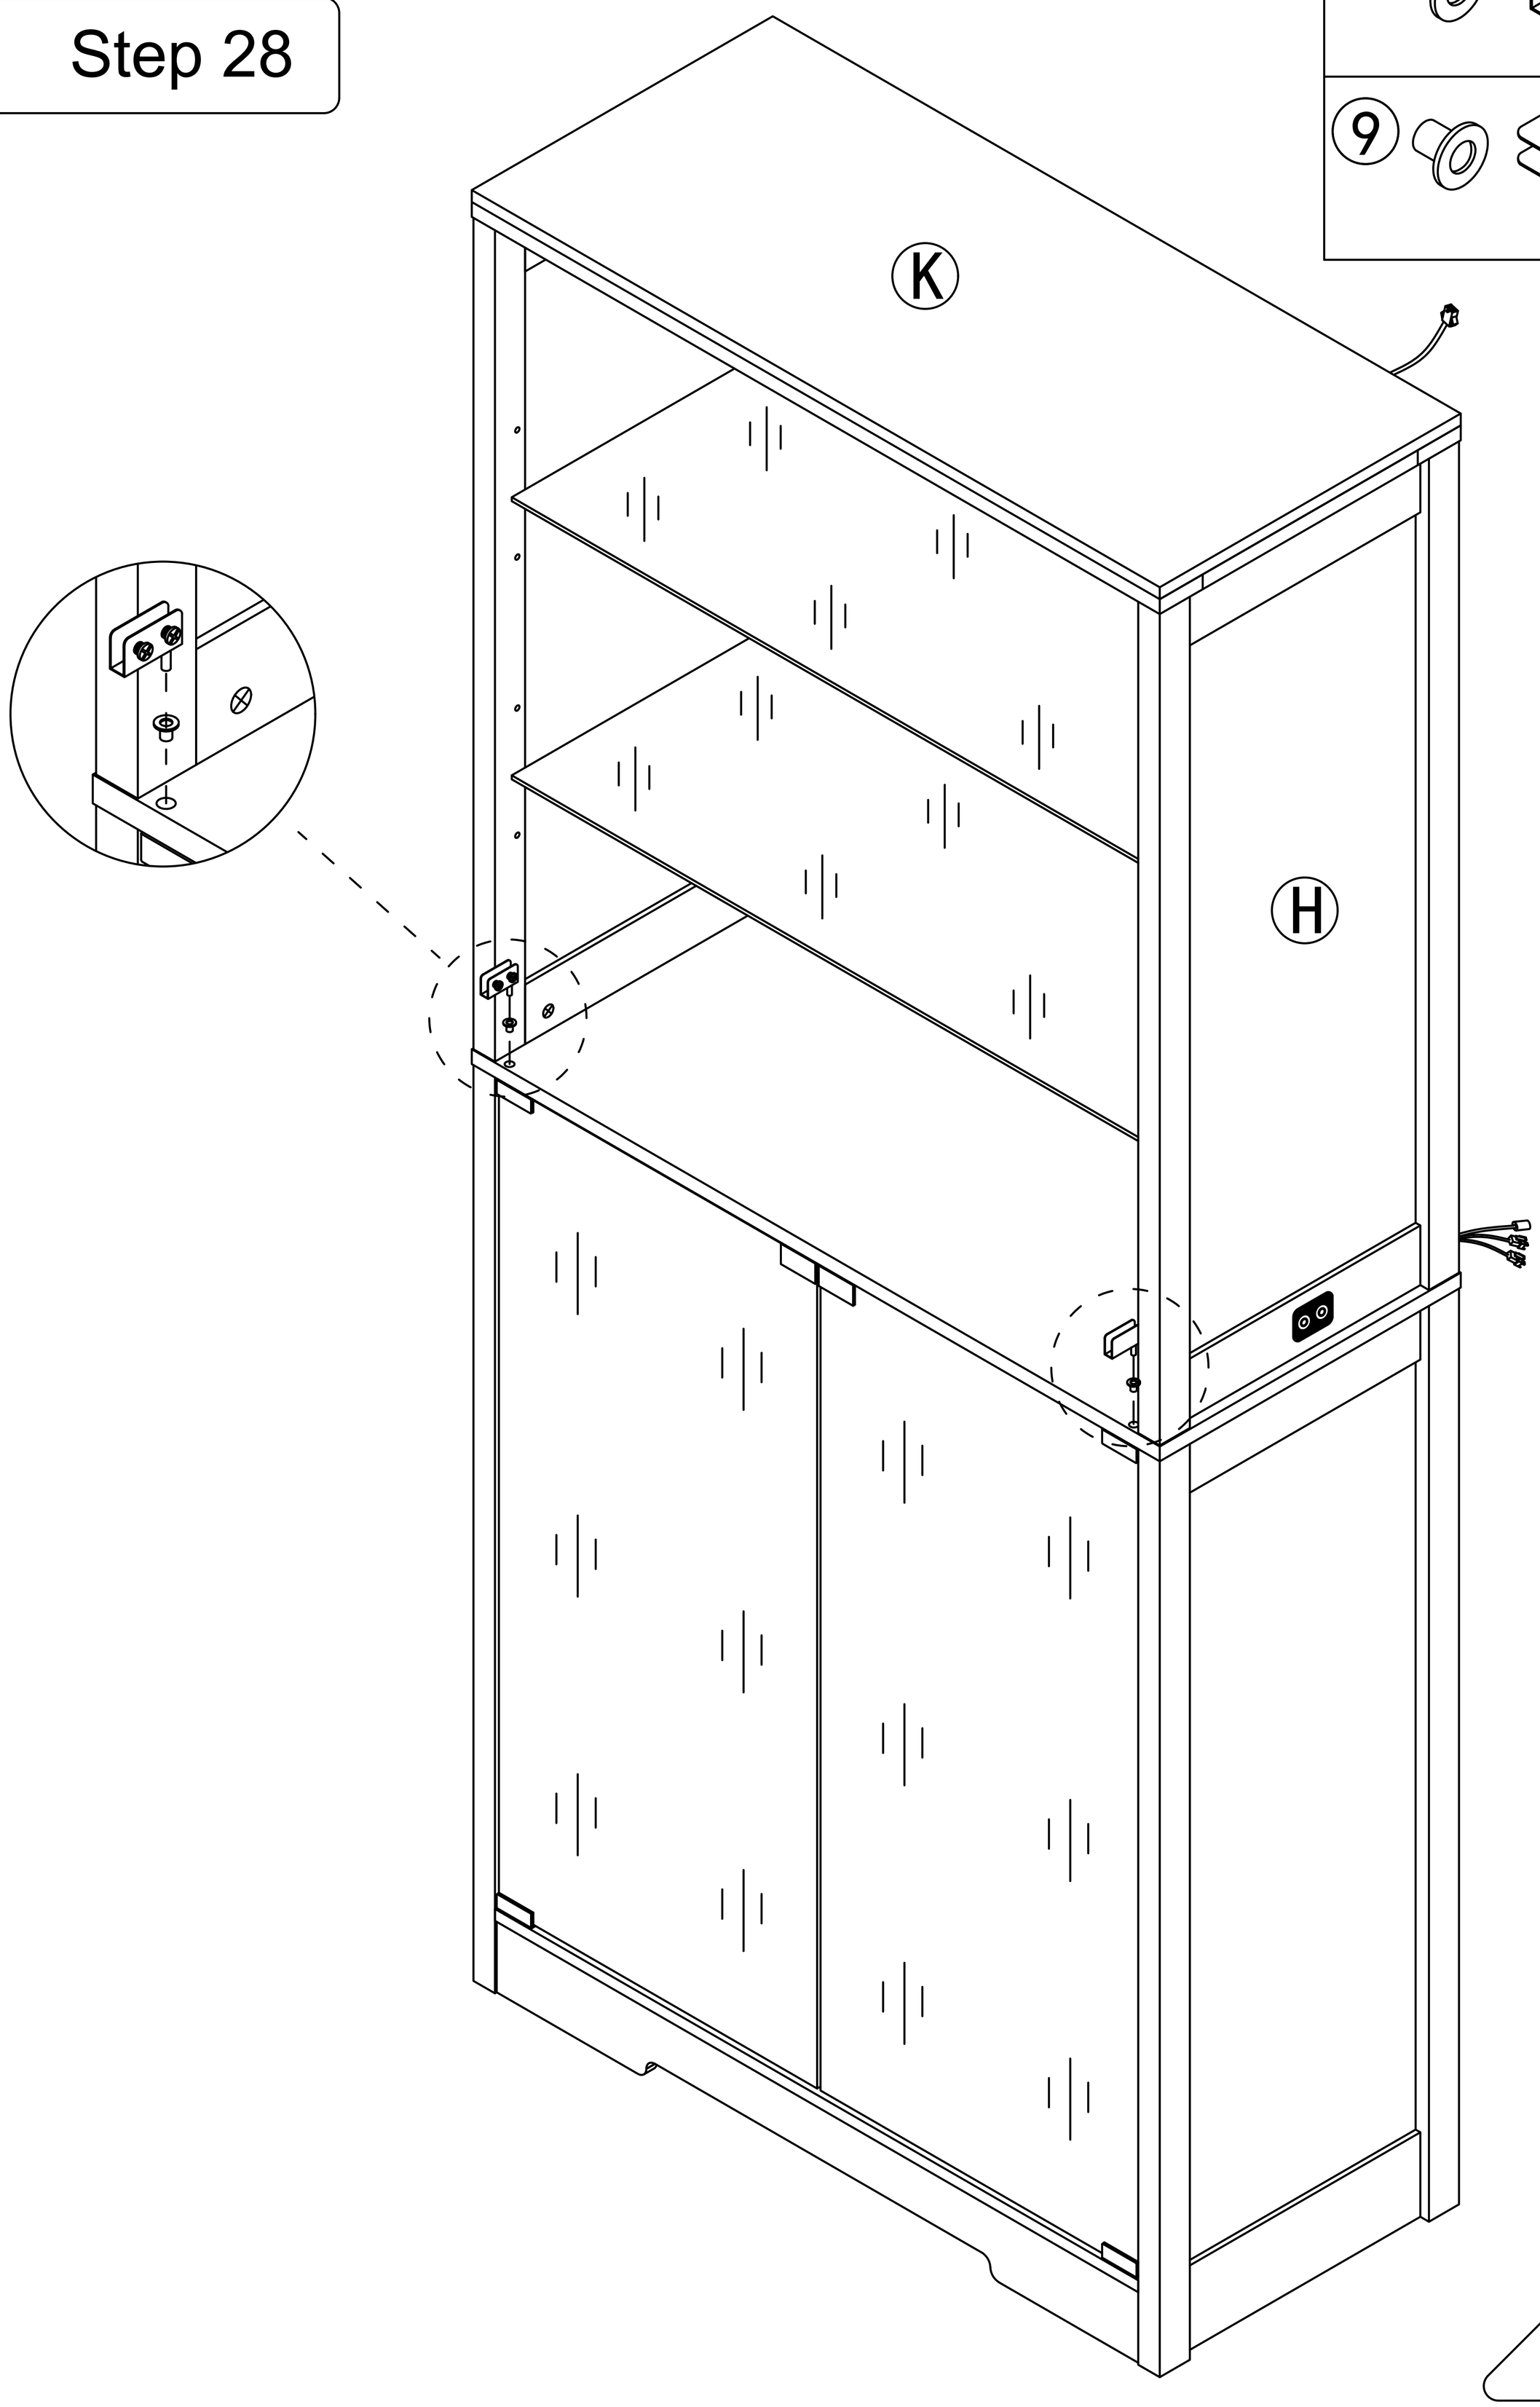


Step 29


Pay attention to the direction of the door hinge during installation



When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.

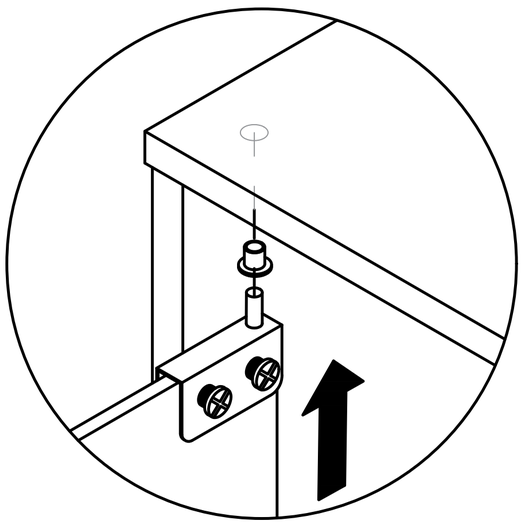


first

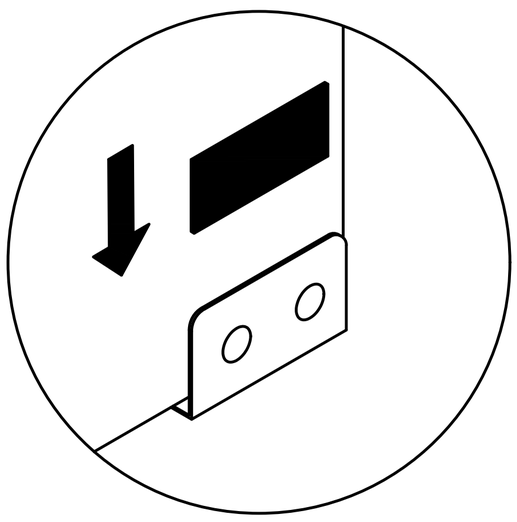


second

After installing the glass door, place the black gasket on the side where the screws are installed

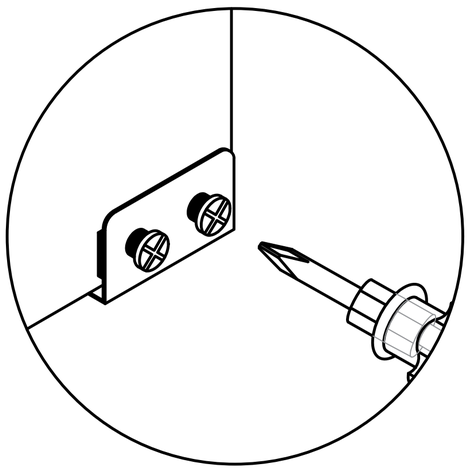


third

Locking screw

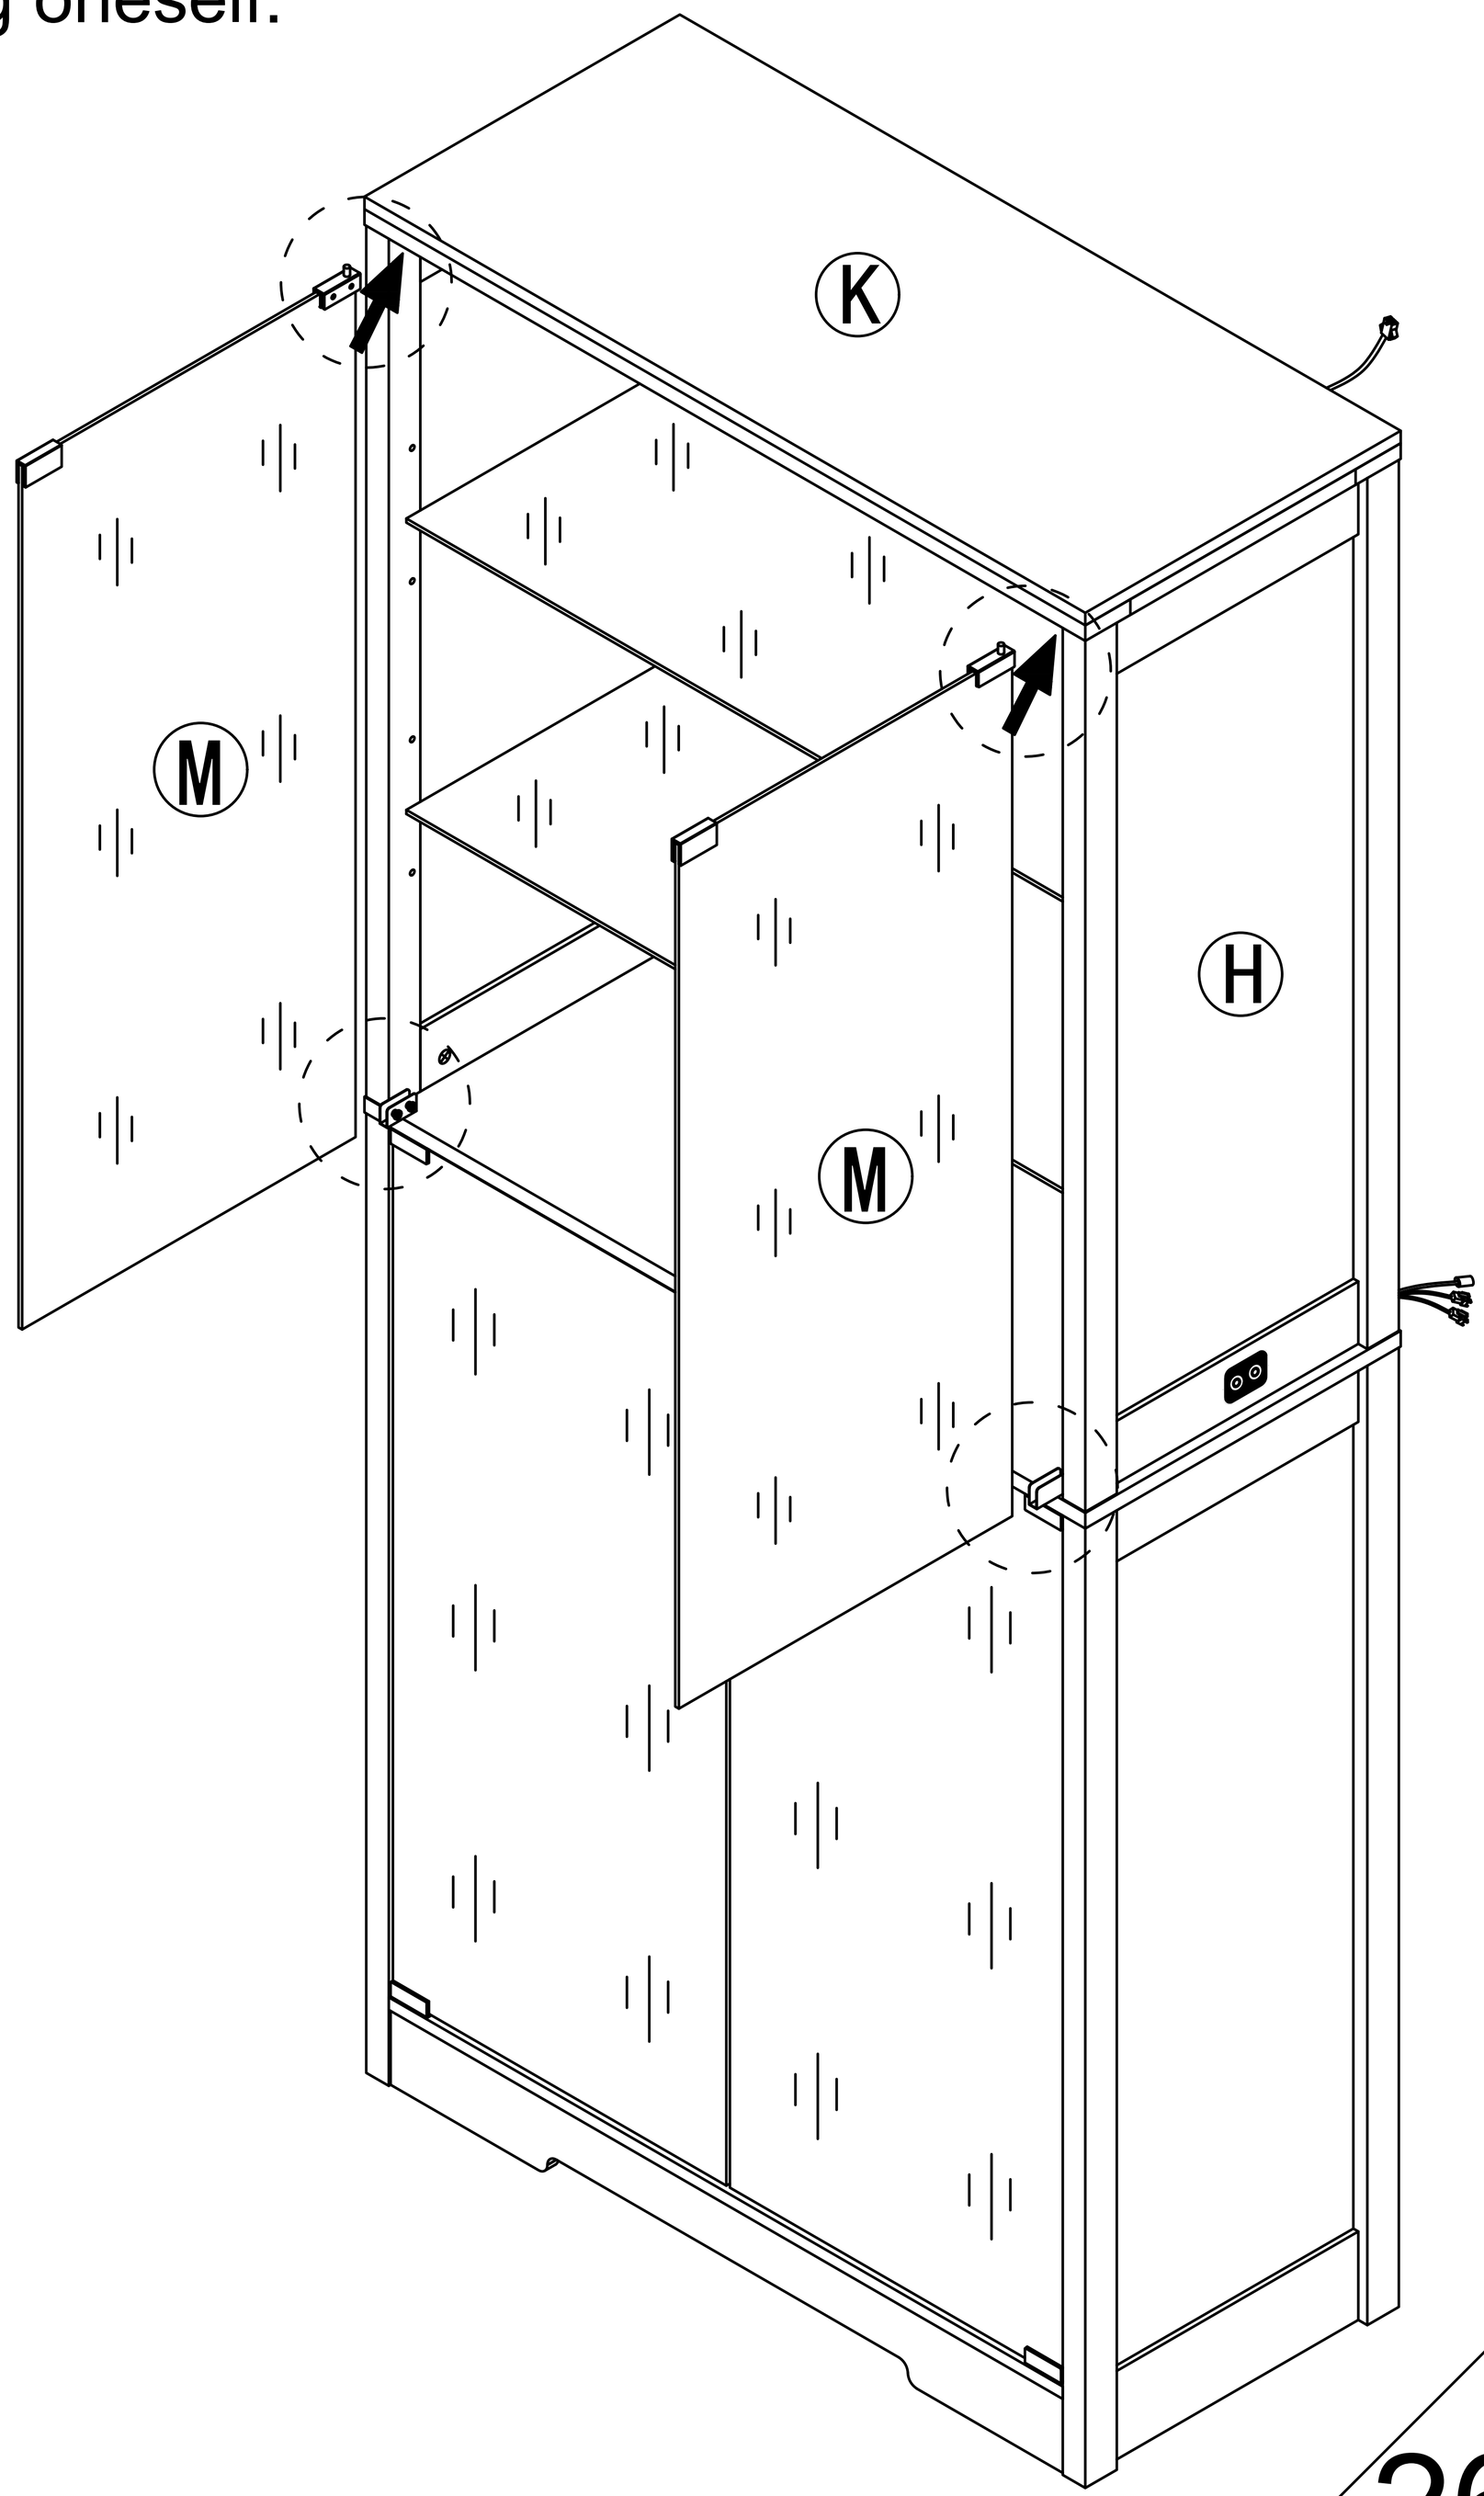


Step 30


The rebound device automatically opens and closes by pressing

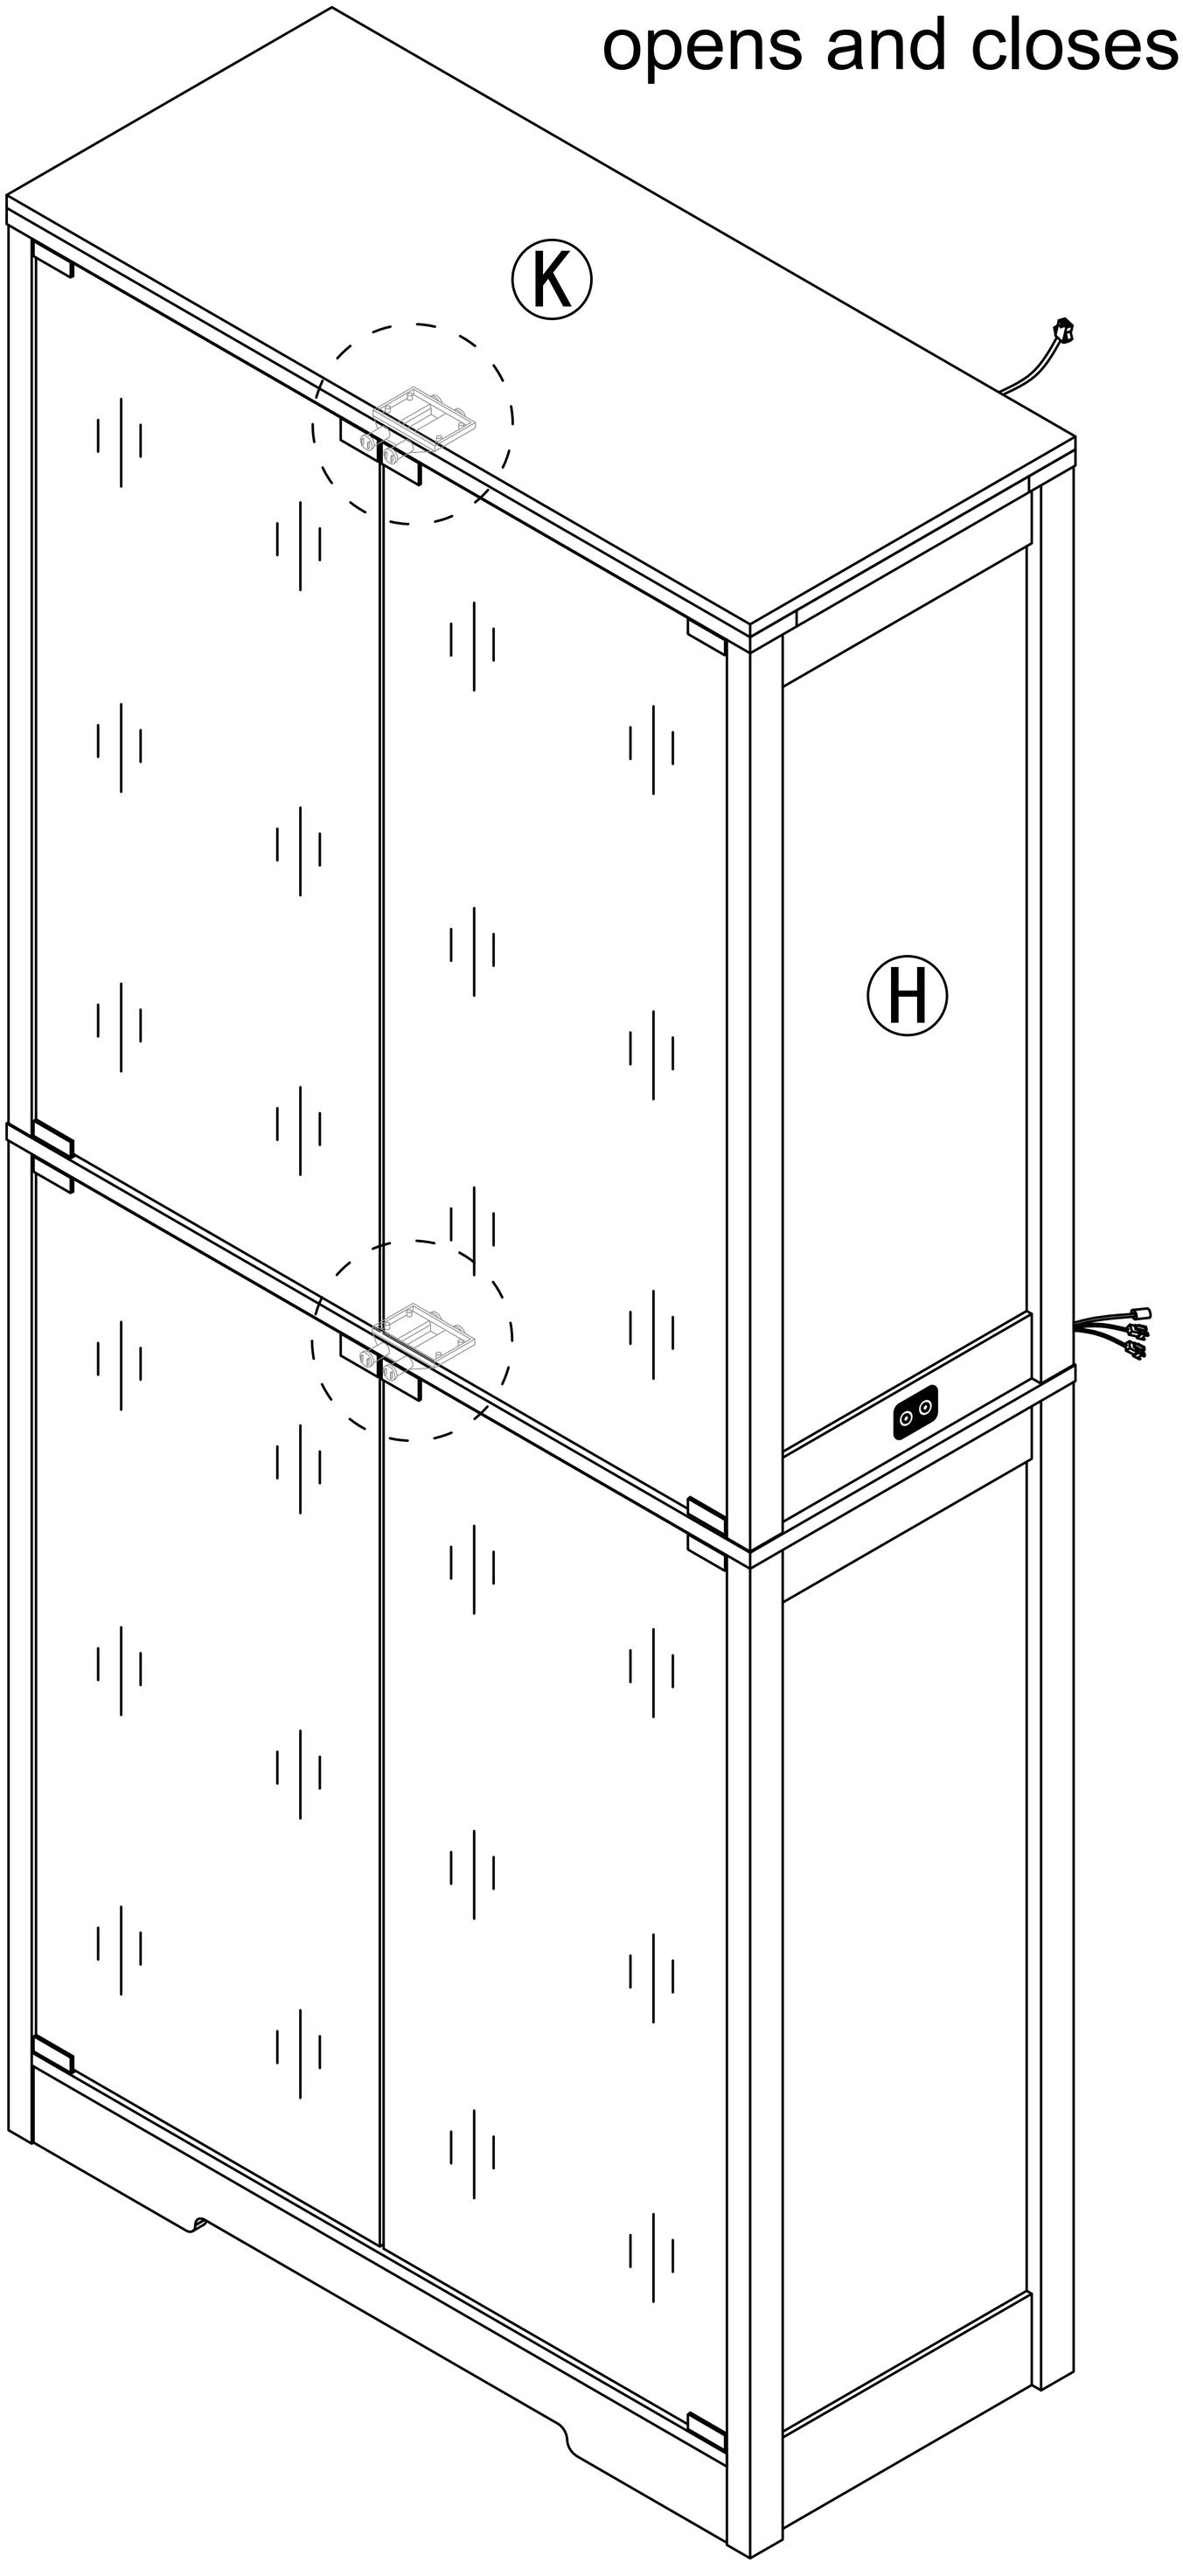

Open the glass door

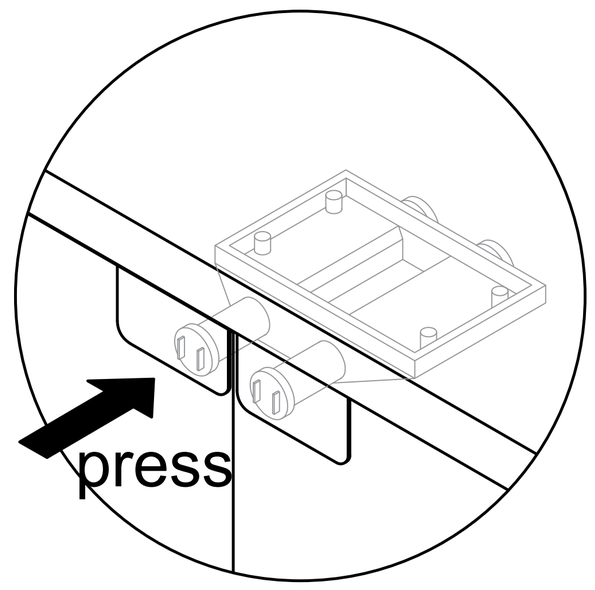


Close the glass door

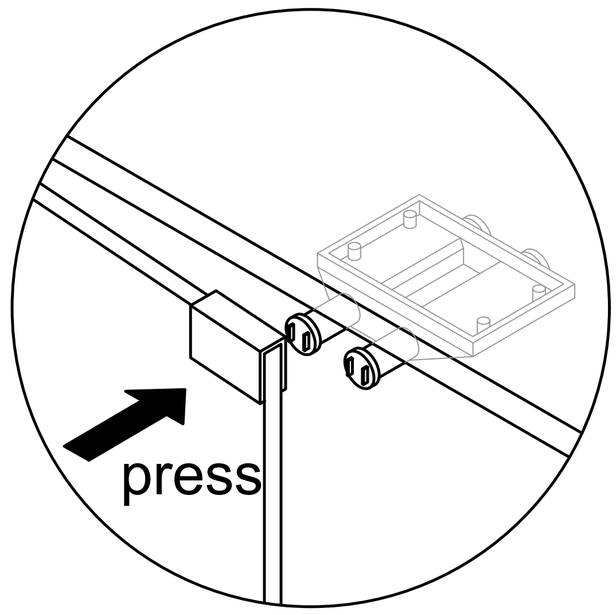


Step 31

6 x24

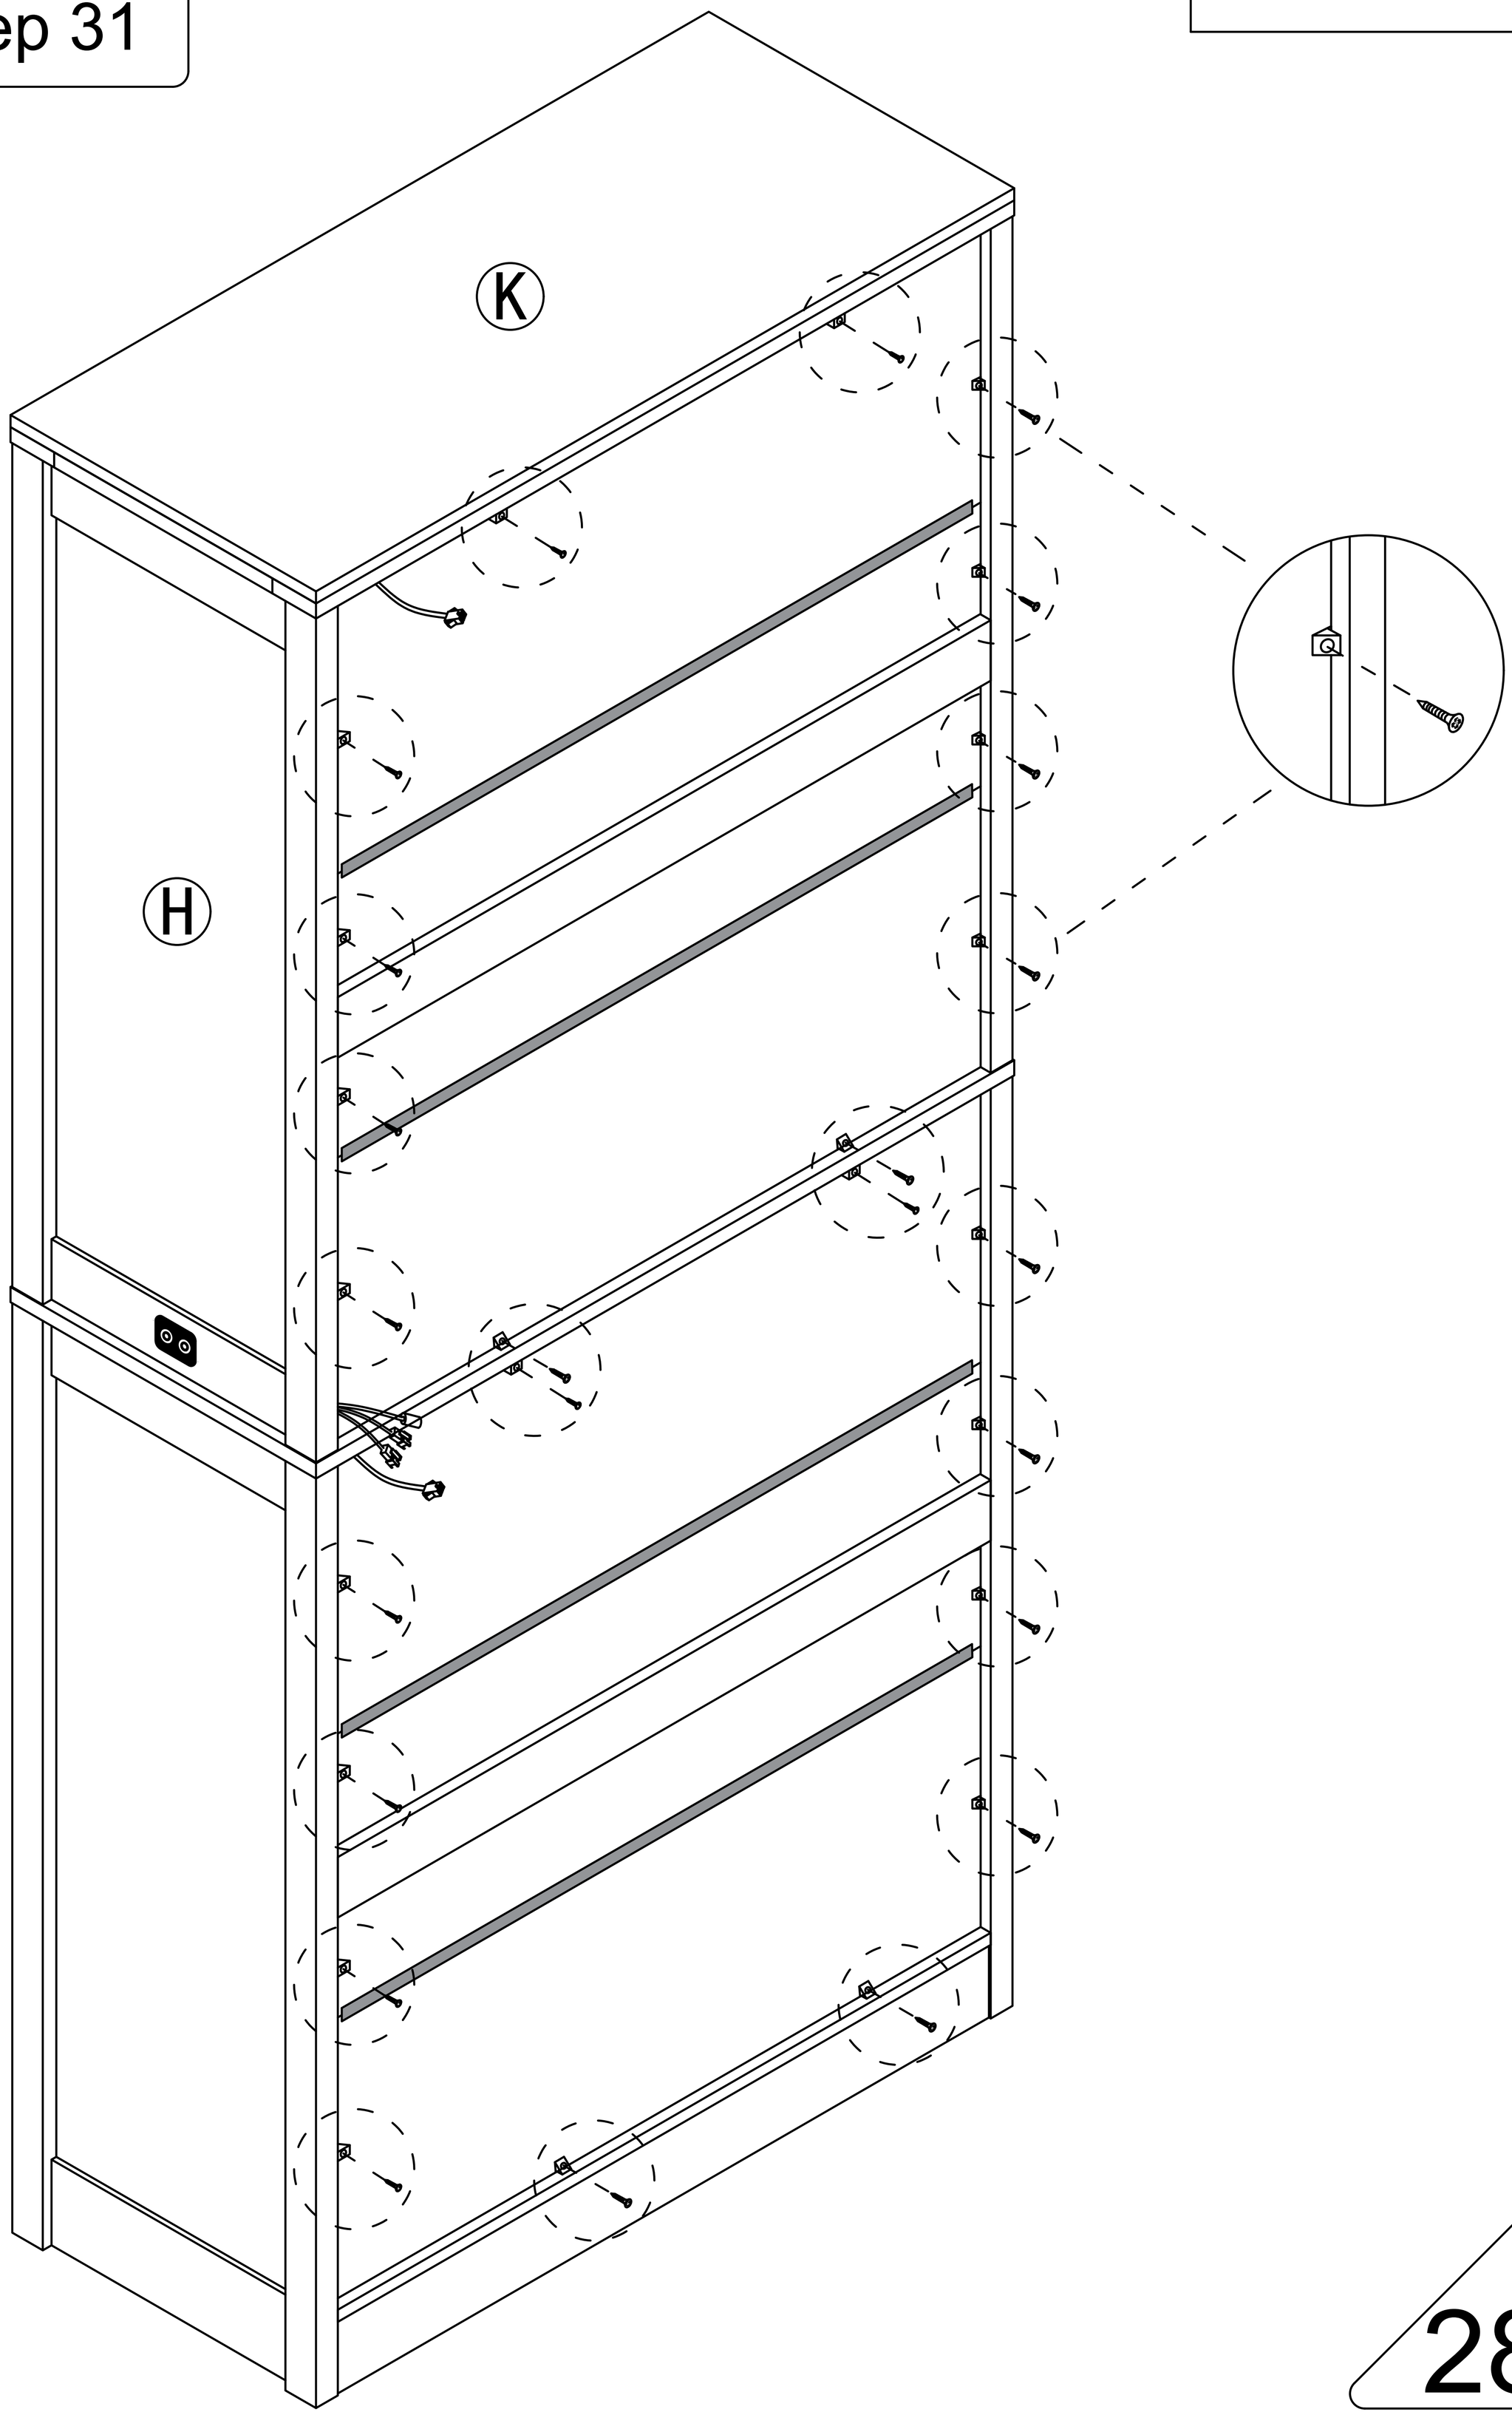


Step 32

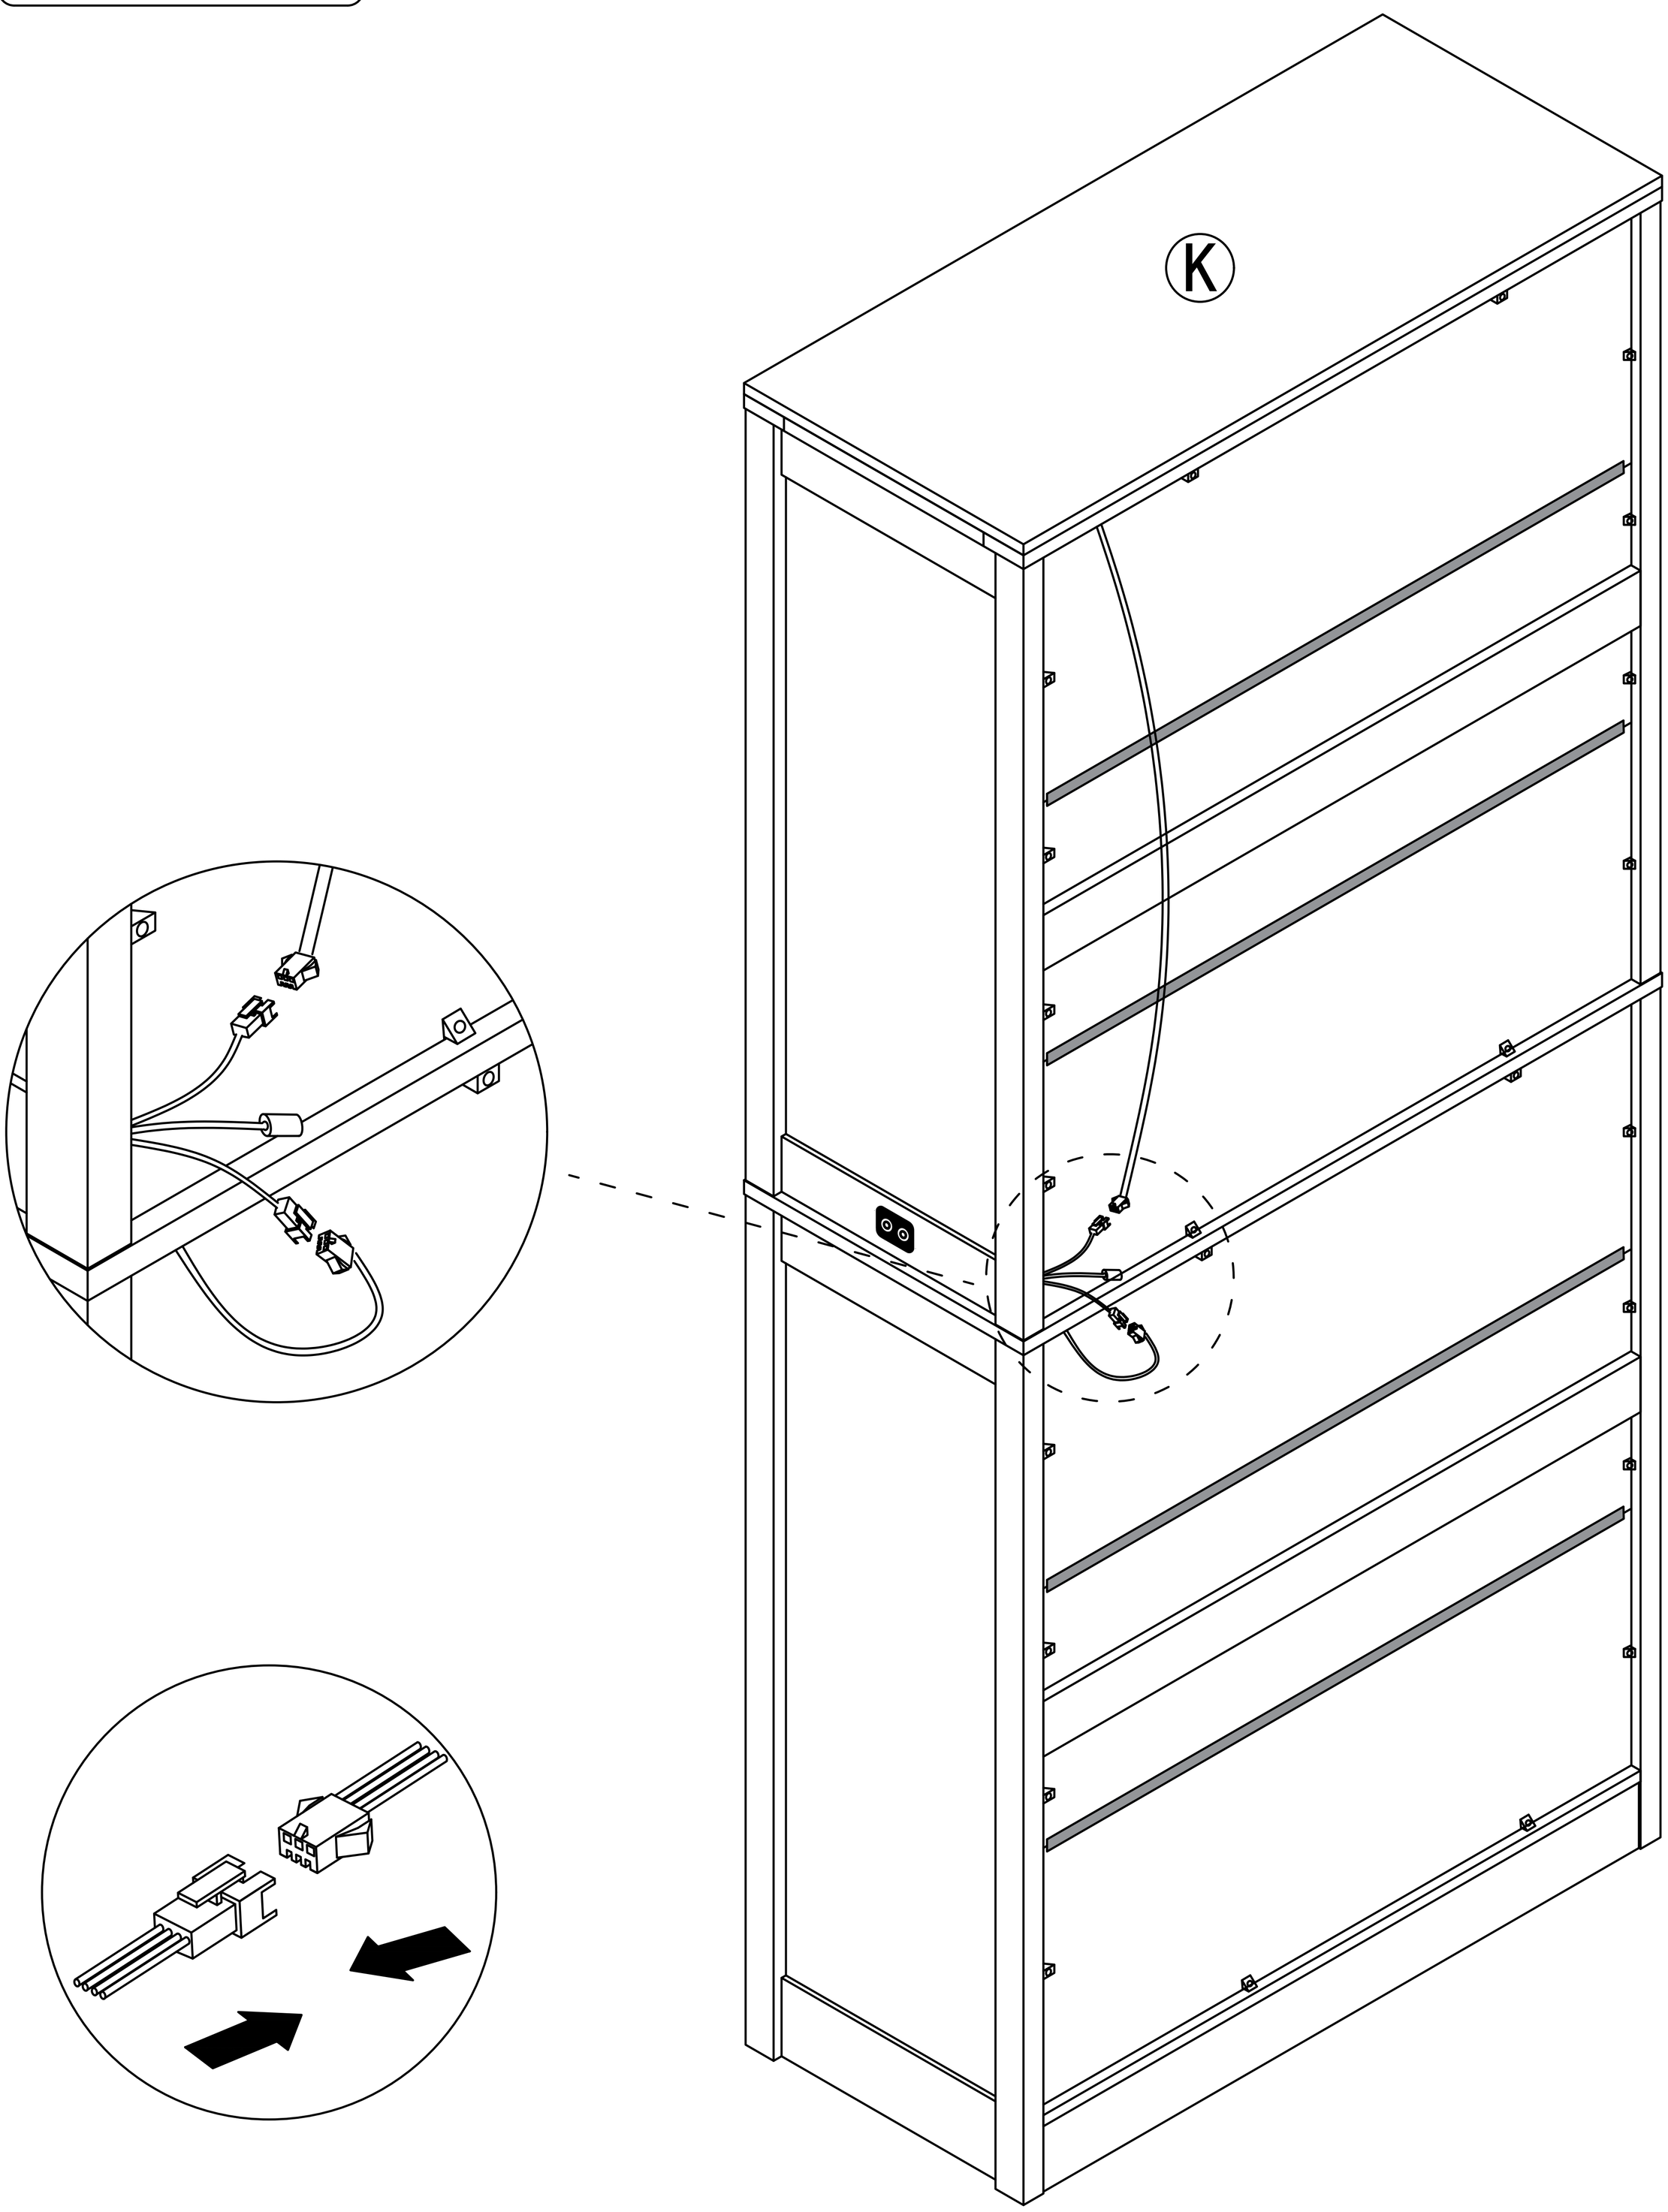

Step 33


7




x2

K

Step 34

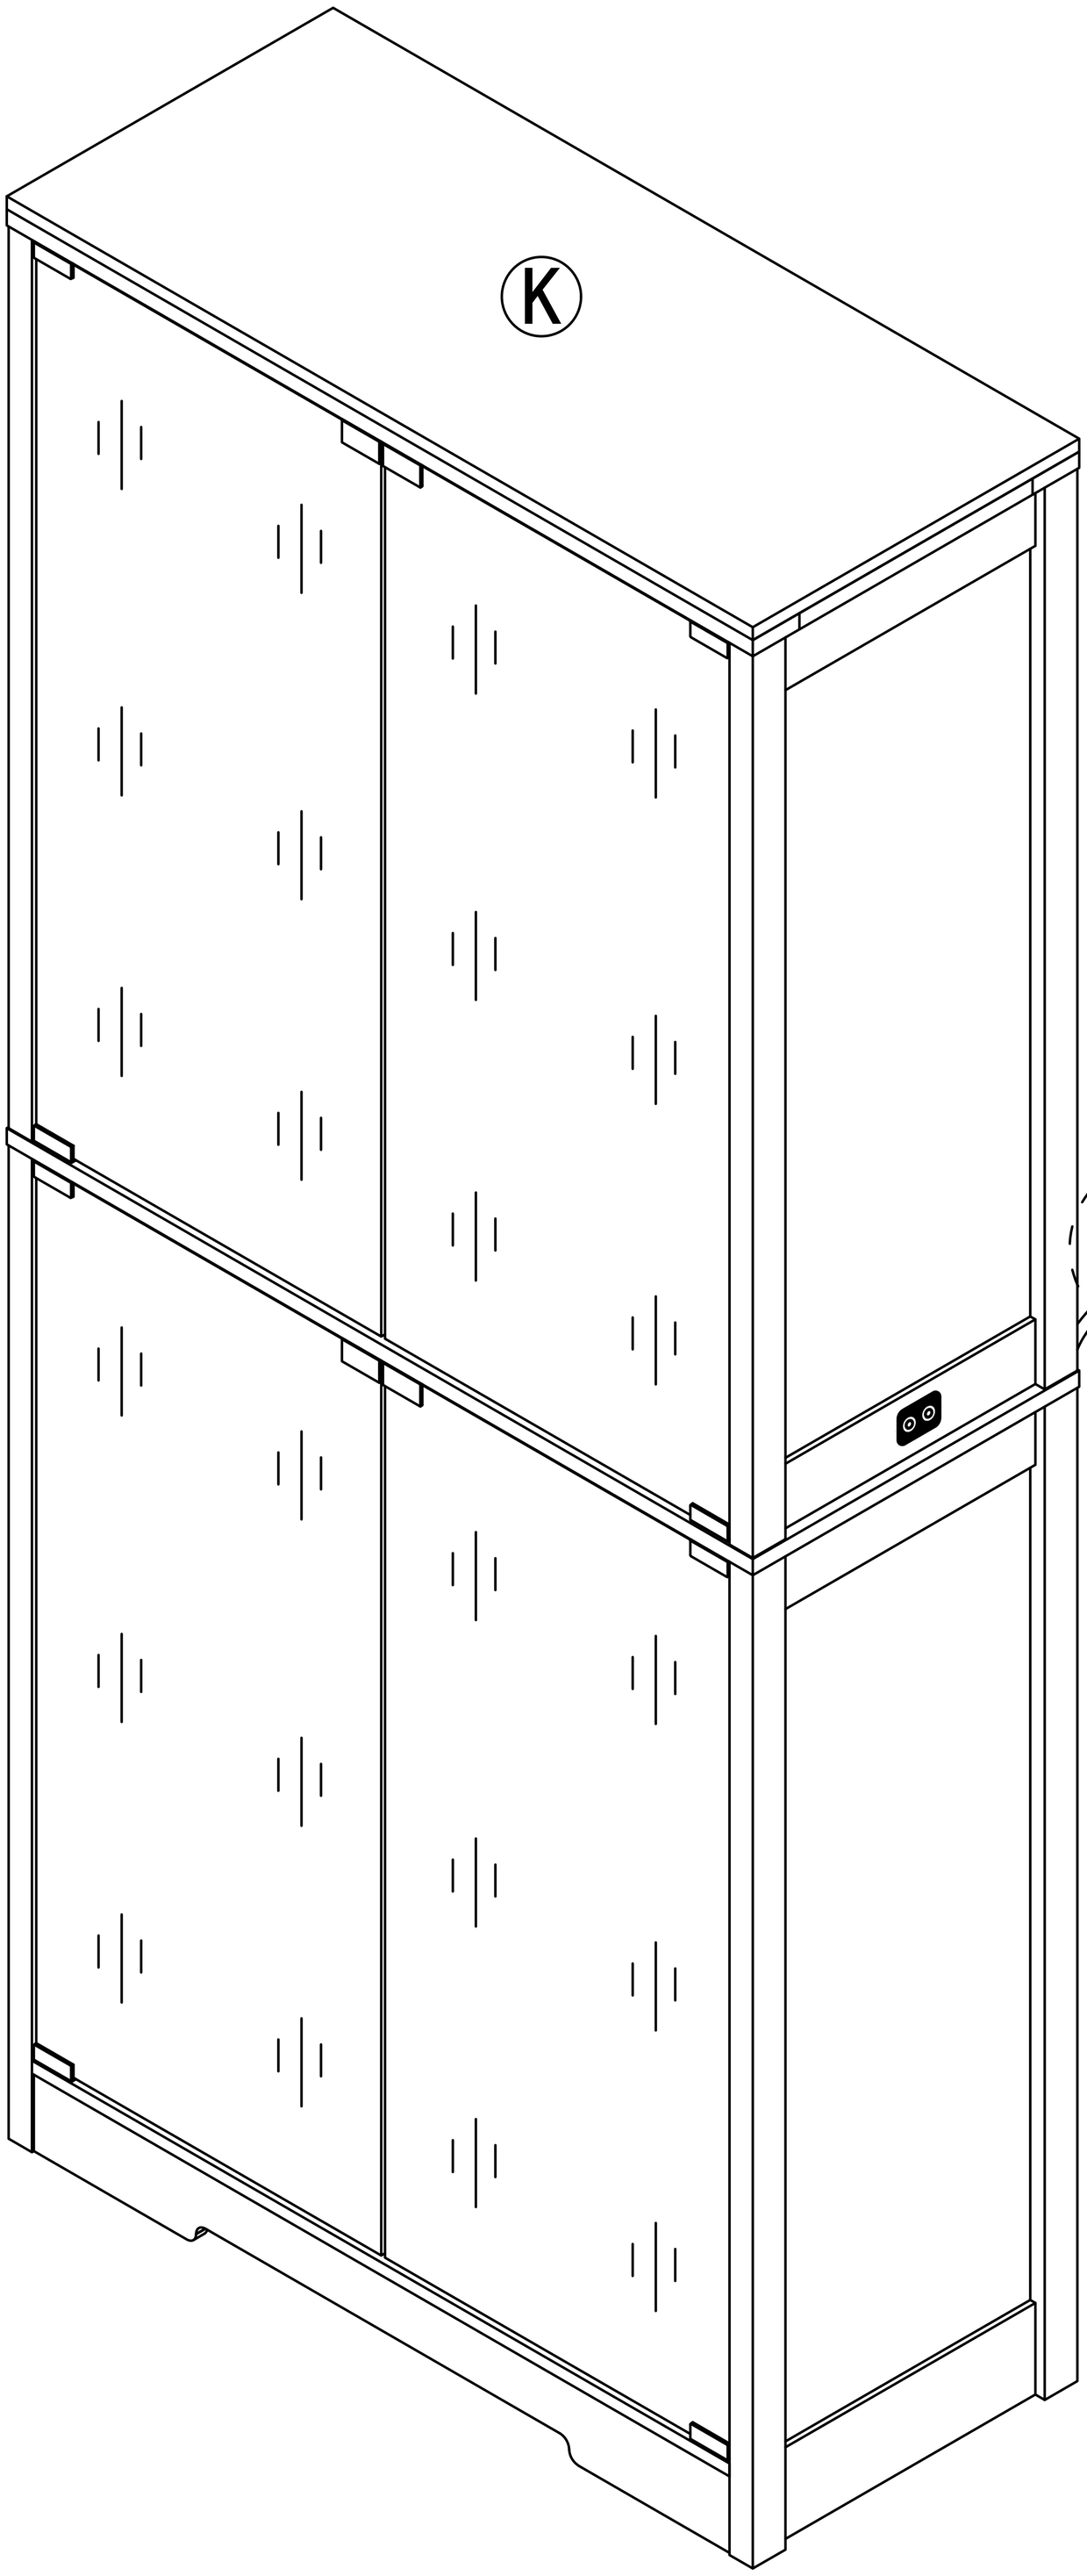


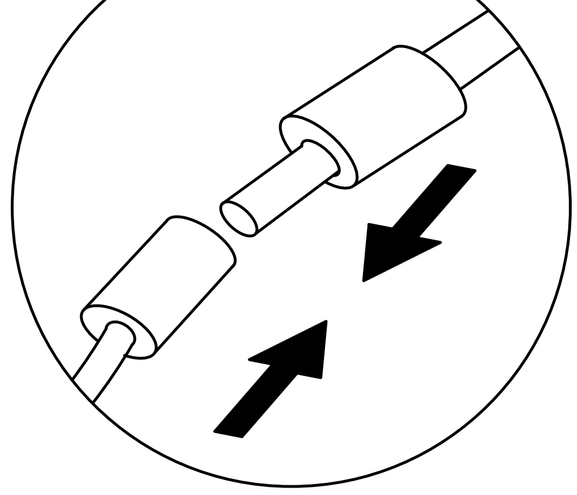




Step 35


Install as required

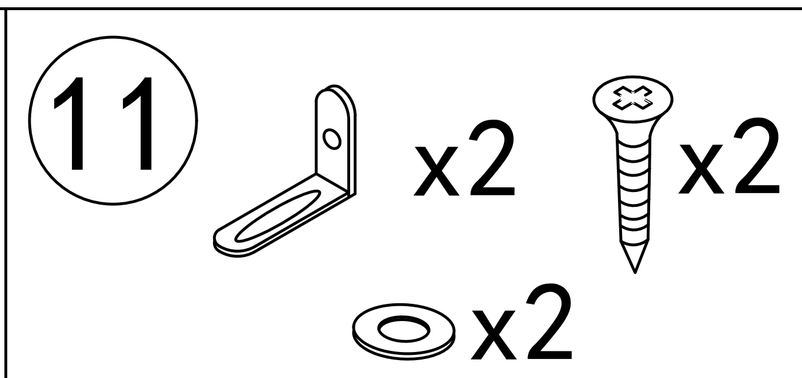



3.5x14mm



Install the anti fall hardware on the cabinet as shown in the picture first

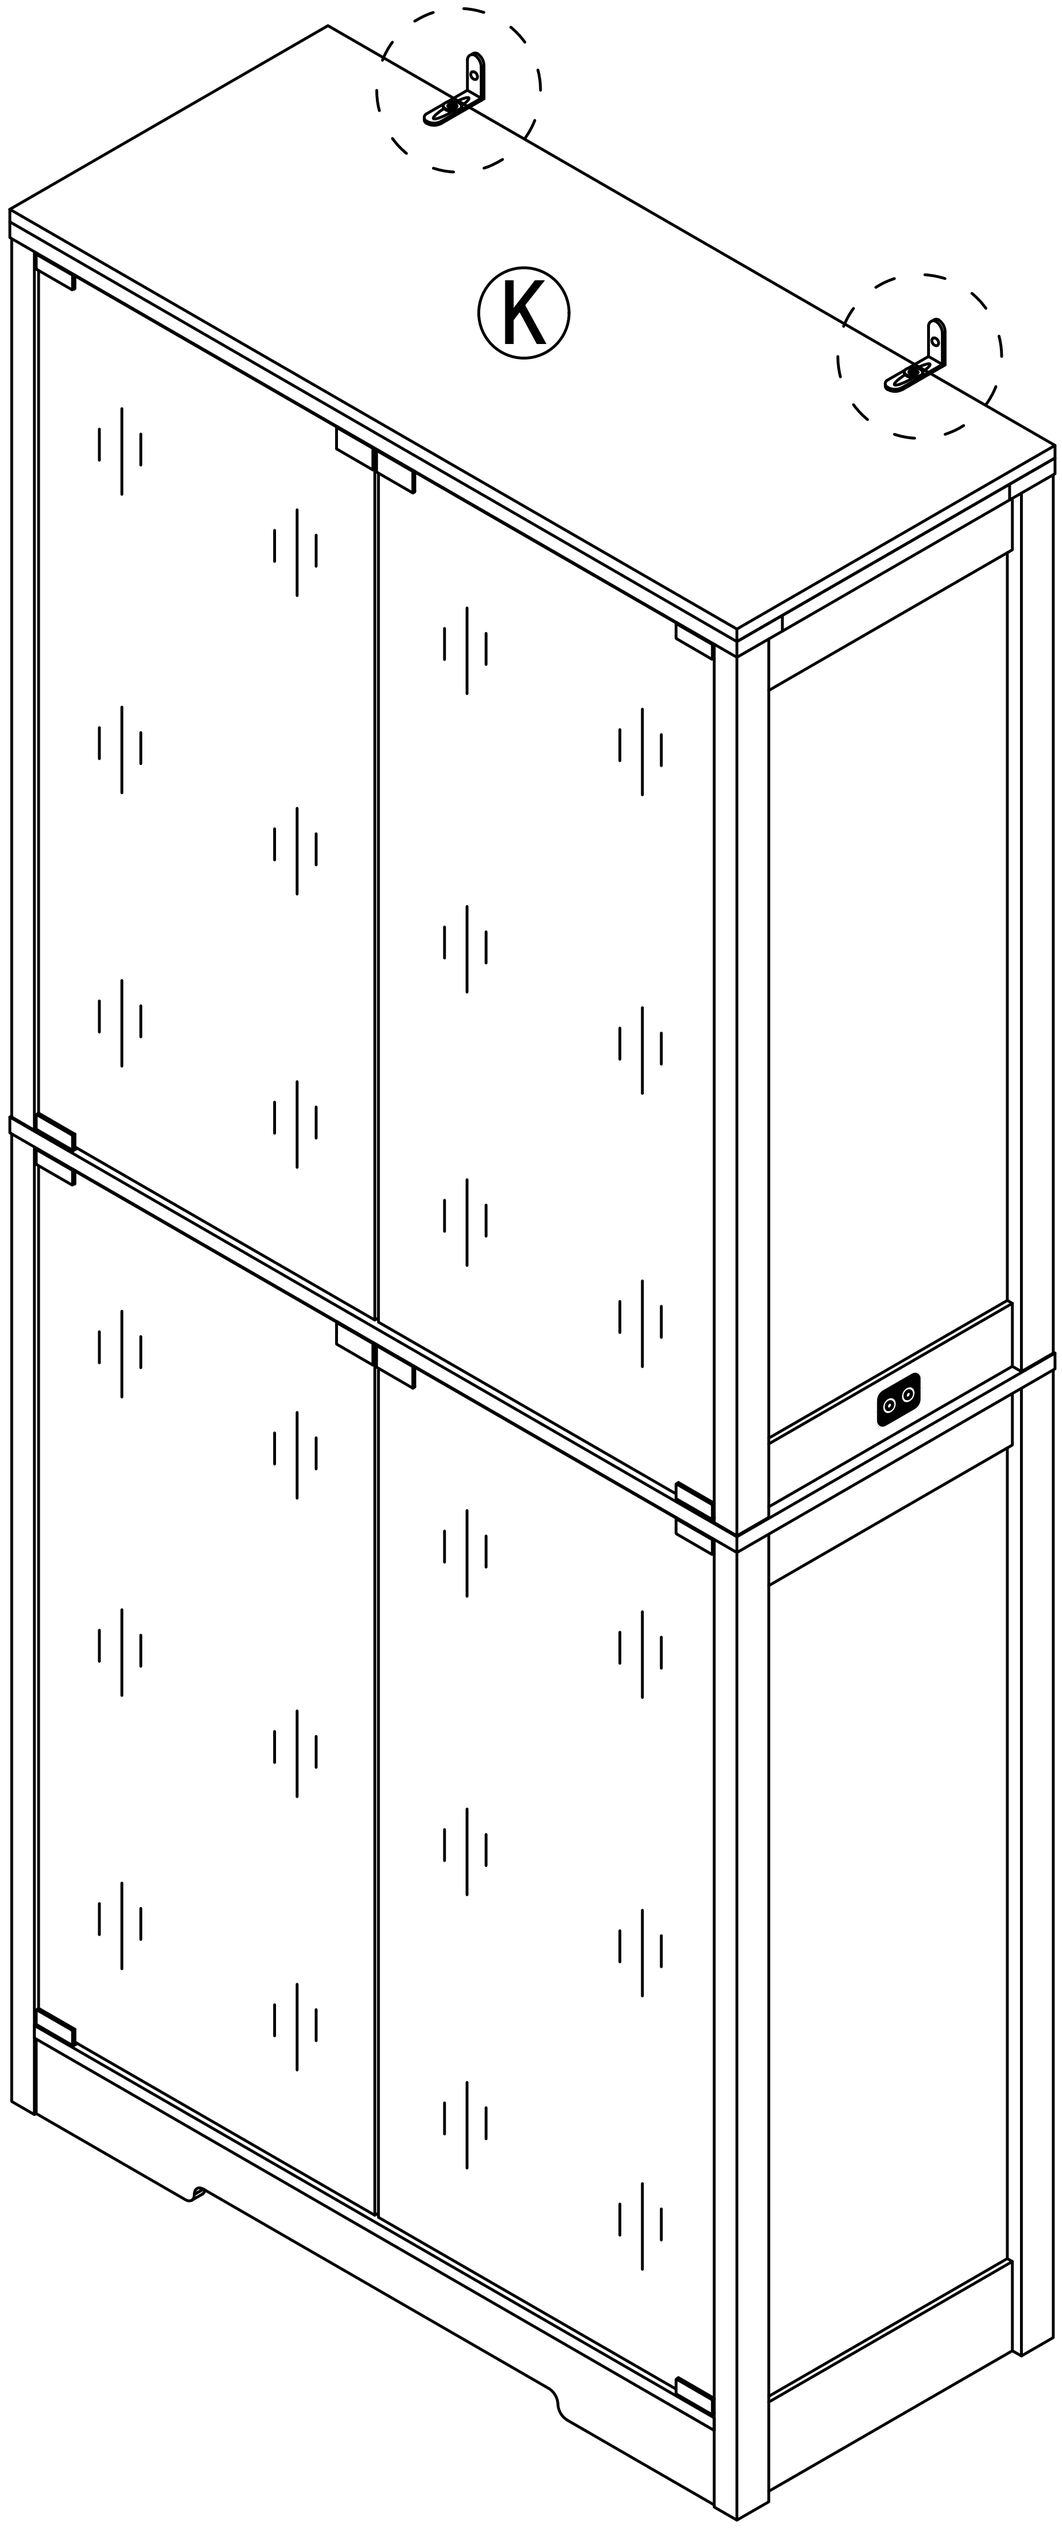


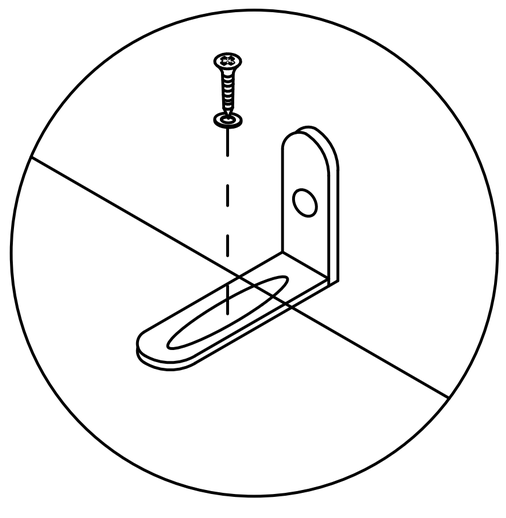

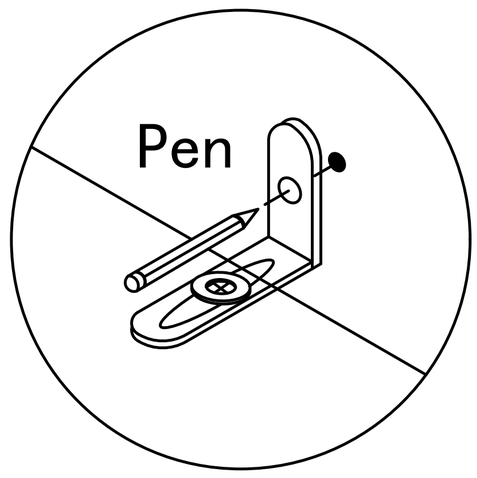

Then mark the wall with a pen through the holes in the anti-fall hardware


Step 36

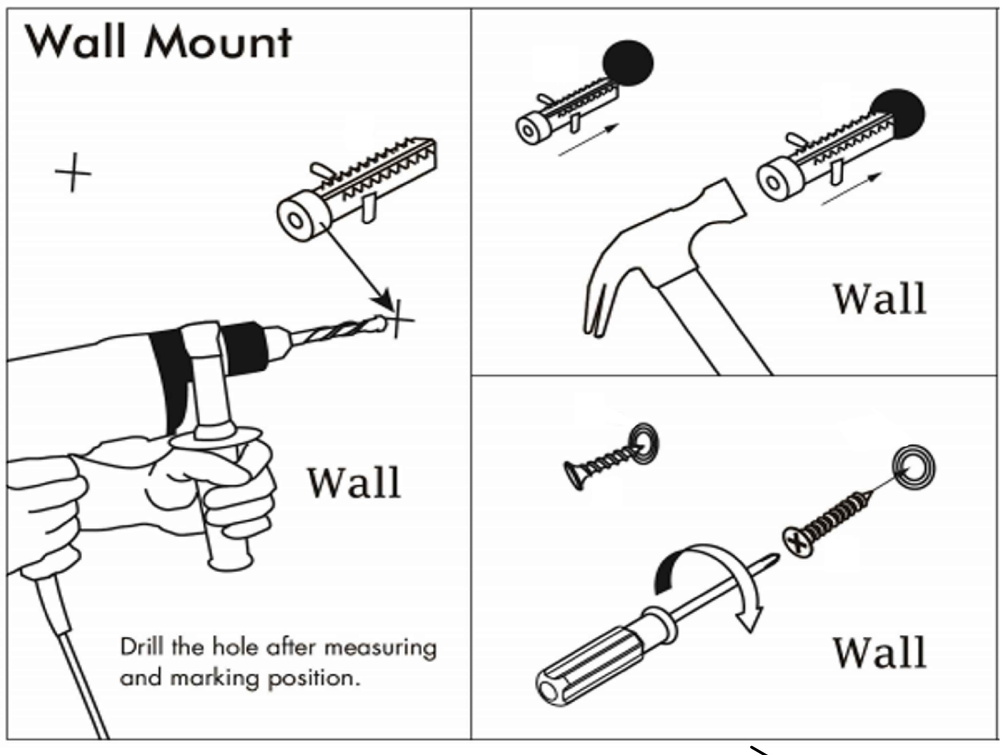



11 x2

x2 x2

Drill the hole with an electric drill and punch in the colloidal particles

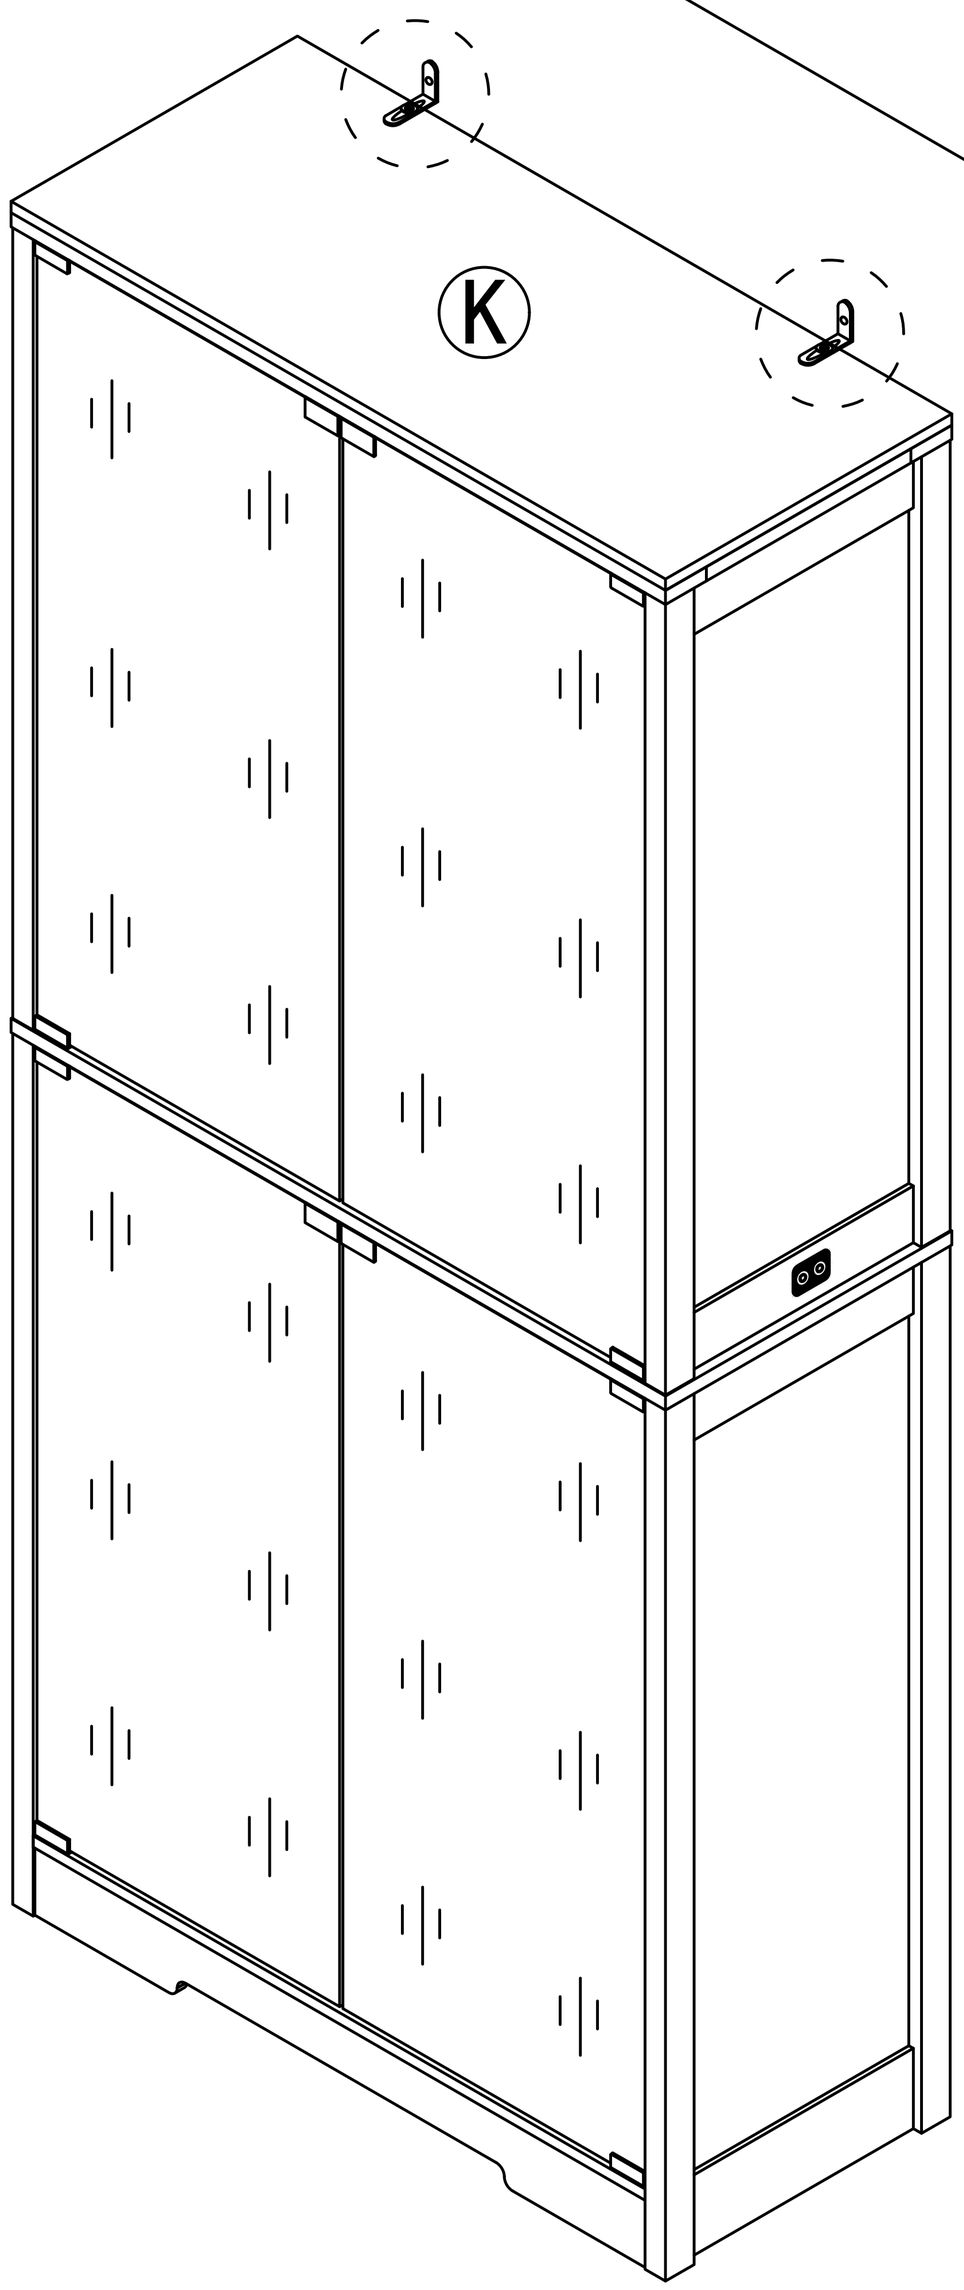

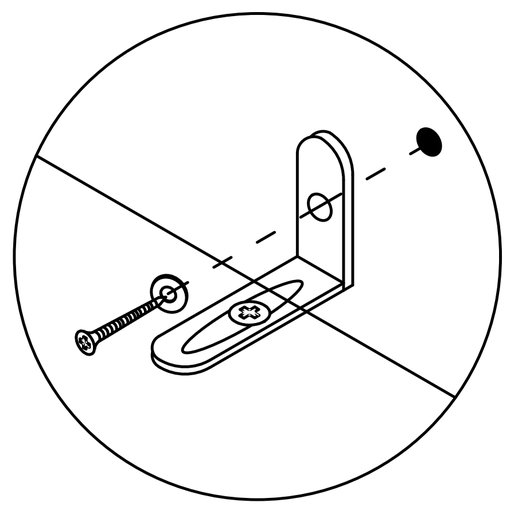

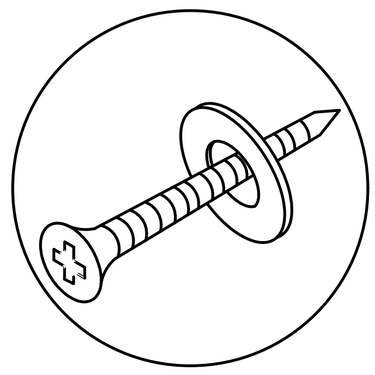

4x45mm

Fix the dressing table to the wall


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

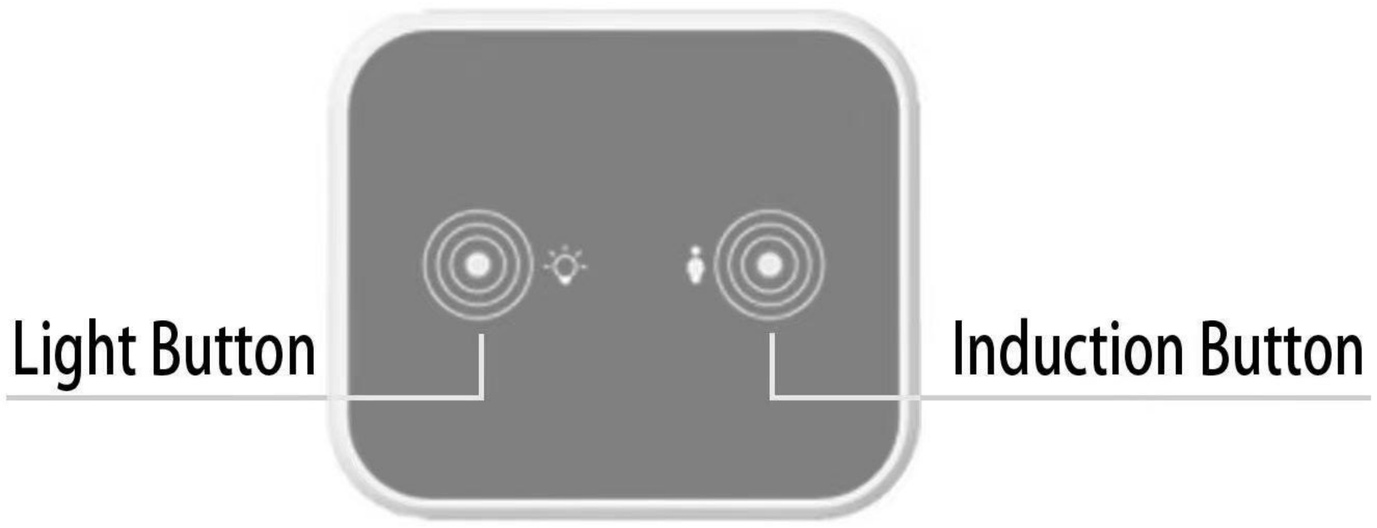

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. **B**. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.