


Assembly & Installation Instructions

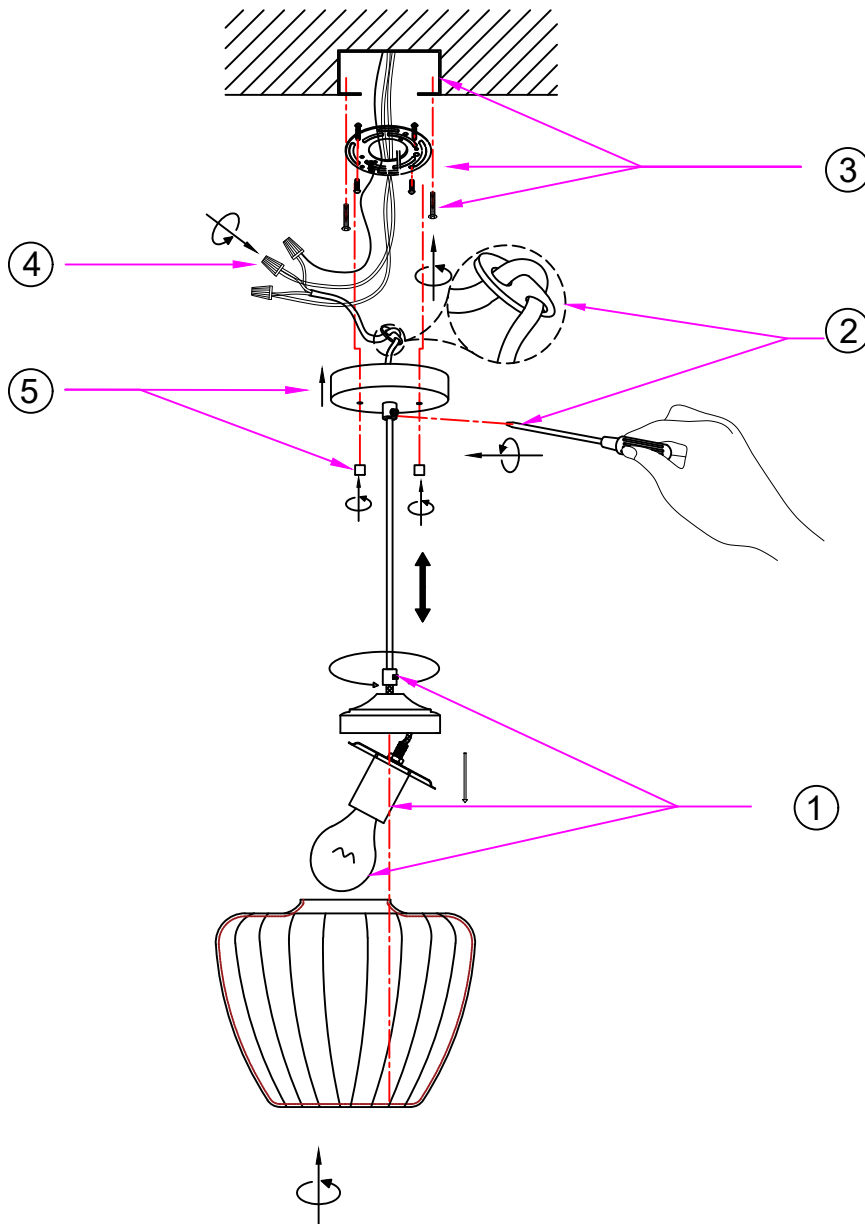

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Install E26 light bulb (not included) first, place the lamp cup sideways into the glass shade, cover the glass opening with an iron cover. Straighten the wires, and fix them with iron wire fastener.
2. Loosen the screw inside the wire fastener to adjust the height of the hanging wire, adjust the 8 shape fastener to the bottom, and then use the machine meter screw to fix the wire.
3. Secure the mounting plate to the junction box with the mounting screws.
4. Use the wire cap to tightly connect the black wire in the back plate to the black wire in the junction box. Similarly, connect the white wire in the back plate and the junction box. Make sure no bare wires are exposed to prevent electric leakage. Fix the ground wire of the lamp body and the external ground wire to the mounting plate with the green screw.
5. Secure the back plate to the mounting plate with the decorative nuts.
6. Installation complete.