

Assembly Instructions




ASSEMBLY RATING

The Assembly Rating is a 5-point system that shows the degree of effort needed in assembling a specific product (with 1 being easy and 5 being difficult). For some products, two persons are recommended.

EASY  DIFFICULT

Tools Required For Assembly:

Allen Wrench



(Included)

Wrench



(Included)

Phillips Screwdriver



(Not Included)




2 PERSONS RECOMMENDED


ASSEMBLY & CARE ADVICE

FOR YOUR FURNITURE TO LAST, CORRECT ASSEMBLY AND PROPER MAINTENANCE ARE NECESSARY. PLEASE FOLLOW THE INFORMATION PROVIDED BELOW TO FULLY ENJOY YOUR FURNITURE.


BASIC ASSEMBLY TECHNIQUES

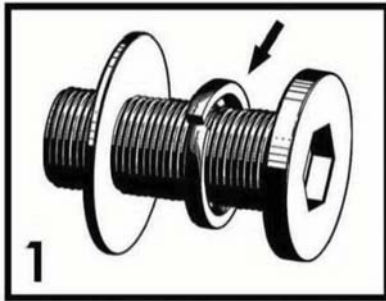


When lock or spring washer is used in an assembly, please make sure the lock or spring washer is placed between the larger flat washer and the head of the screw or bolt.

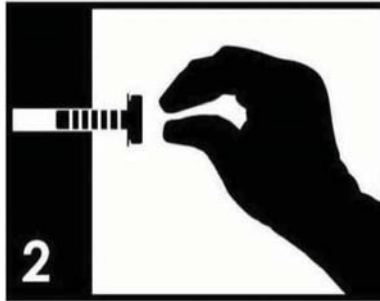


Position each part correctly and insert screws or bolts into their respective holes by hand tighten or using the proper hand tool. Only tighten when step is completed or when instructed to do so.

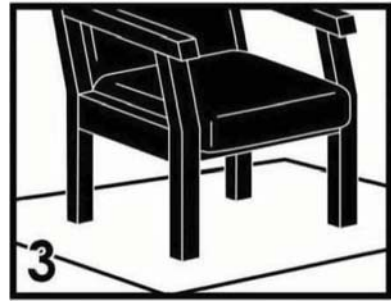


Use cardboard or carpet area when assembling furniture to prevent scratches. Make sure the furniture rests on a flat and level surface with each leg evenly touching the floor.

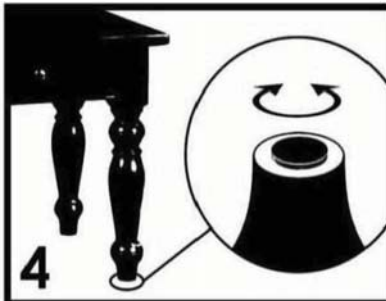

Some furniture comes with height adjustment knobs underneath each leg. To lower or to raise each leg, you need to turn clockwise or counterclockwise, respectively.

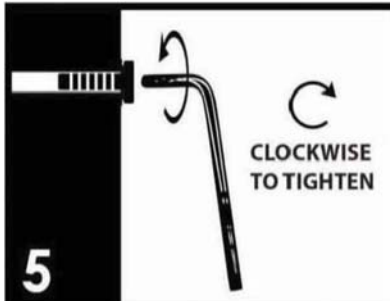


Make sure all parts are properly aligned, then use the appropriate hand tool to completely tighten the bolts or screws. Do not use power tools and do not overtighten.

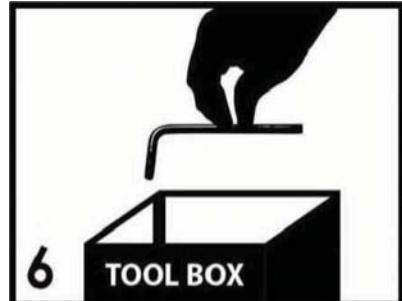

Save the instructions and store the Allen wrench or any supplied tool for later maintenance. After two weeks, check and tighten any loose hardware and repeat again every six months thereafter.

IT IS THE USER'S RESPONSIBILITY TO MAINTAIN THE FURNITURE. THE HARDWARE MAY LOOSEN OVER TIME AND MAY CAUSE THE FURNITURE TO BE WOBBLY AND UNABLE TO SUPPORT ITS INTENDED WEIGHT CAPACITY. THIS MAY LEAD TO COLLAPSE AND MAY CAUSE SERIOUS INJURY.




FAILURE TO FOLLOW THE GUIDELINES ABOVE MAY RESULT IN INJURY AND/OR PROPERTY DAMAGE.




Before you begin, please read Page 2 of "Assembly and Care Advice".

And remember, do not tighten until each step is completed or instructed.


Parts List




#1 x 1pc
Headboard




#2 x 2pcs
Headboard Leg - L/R




#3 x 1pc
Headboard Support




#4 x 1pc
Footboard



#5 x 2pcs
Side Rail



#6 x 1set
Slat Kit (12pcs)



#7 x 1pc
Center Rail




#8 x 3pcs
Support Leg




Before you begin, please read Page 2 of "Assembly and Care Advice".

And remember, do not tighten until each step is completed or instructed.

Hardware List




#A x 6pcs
Bolt 5/16"X 2"



#B x 4pcs
Bolt 5/16"X 1-1/2"




#C x 10pcs
Lock Washer




#D x 10pcs
Flat Washer




#E x 8pcs
Threaded bolt



#F x 8pcs
U-square washer




#G x 8pcs
Hex nut



#H x 12pcs
Screw



#I x 1pc
Allen Wrench



#J x 1pc
Wrench




#1

#A x 6pcs
#B x 4pcs
#C x 10pcs
#D x 10pcs

1. Place the headboard (#1) face down onto a protected surface. Then prepare 6 bolt assemblies by first inserting a lock washer (#C) onto the bolt (#A) then a flat washer (#D) onto that same bolt (#A).

2. Align the headboard legs (#2) to each side and insert 3 bolt assemblies into each leg and secure using the Allen wrench (#I).


3. Prepare 4 bolt assemblies by first inserting a lock washer (#C) onto the bolt (#B) then a flat washer (#D) onto that same bolt (#B). Align each end of the headboard support (#3) to the legs and insert 2 bolt assemblies into each end. Secure using the Allen wrench.

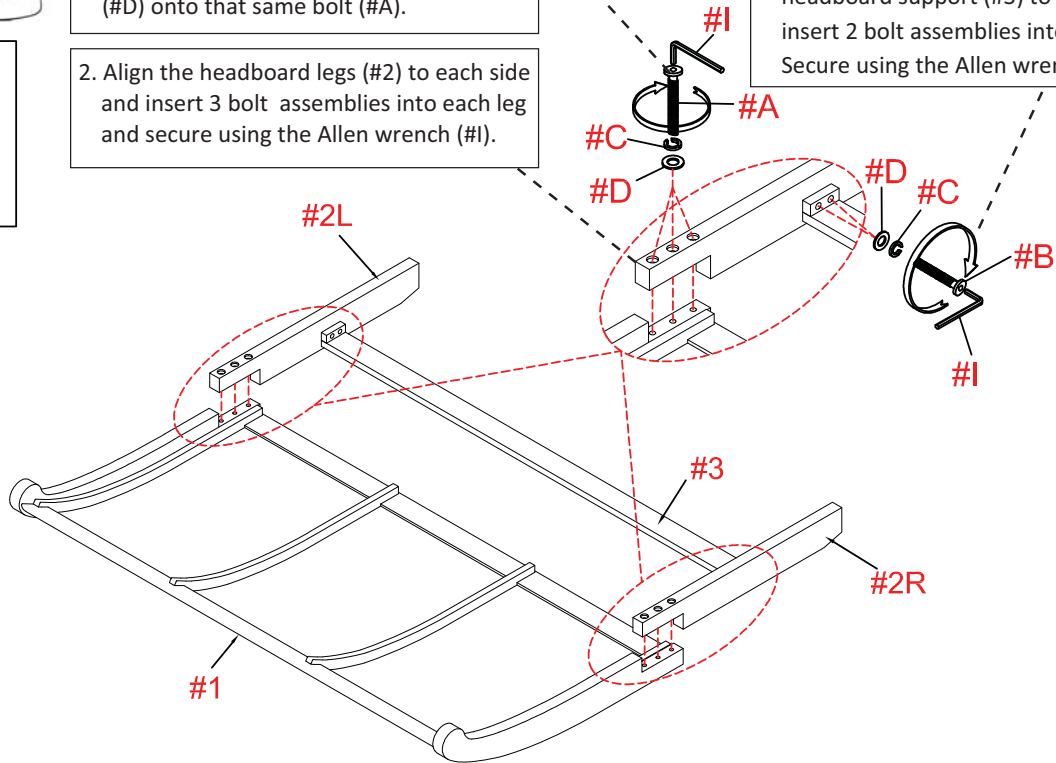

#2

#E x 8pcs
#F x 8pcs
#G x 8pcs

1. Insert 2 threaded bolts (#E) into the holes along the sides of the headboard (#1) and footboard (#4). Turn right to tighten. Then place the side rails (#5) onto those threaded bolts (#E).

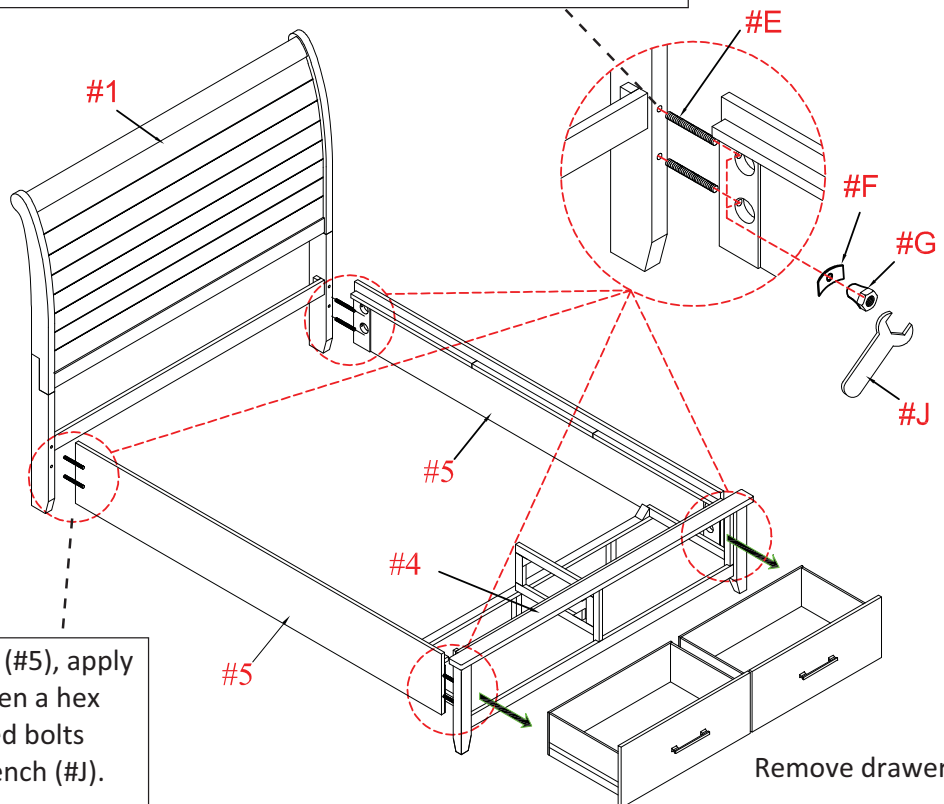


2. From within the side rails (#5), apply a u-square washer (#F) then a hex nut (#G) onto the threaded bolts (#E). Secure using the wrench (#J).

Remove drawers




Lay the slat kit (#6) face down onto a protected surface, then place the center rail (#7). Insert the threaded ends of the support legs (#8) into the holes along the center rail (#7) and turn right to tighten. Adjust the leveler by according to the ground level.

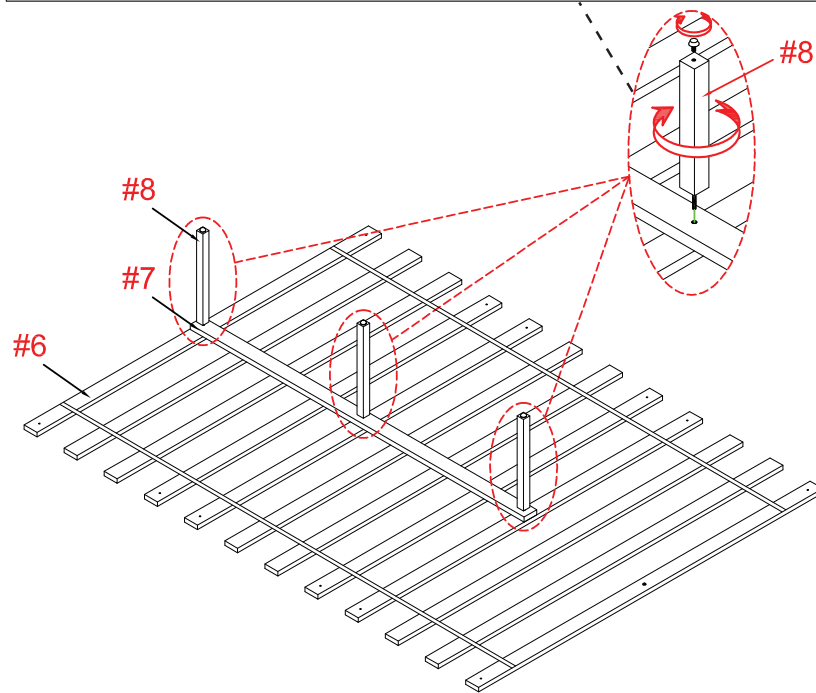

#H x 12pcs

Place the slat kit (#6) onto the side rails (#5), then insert a screw (#H) into each end. Secure using a Phillips screwdriver.

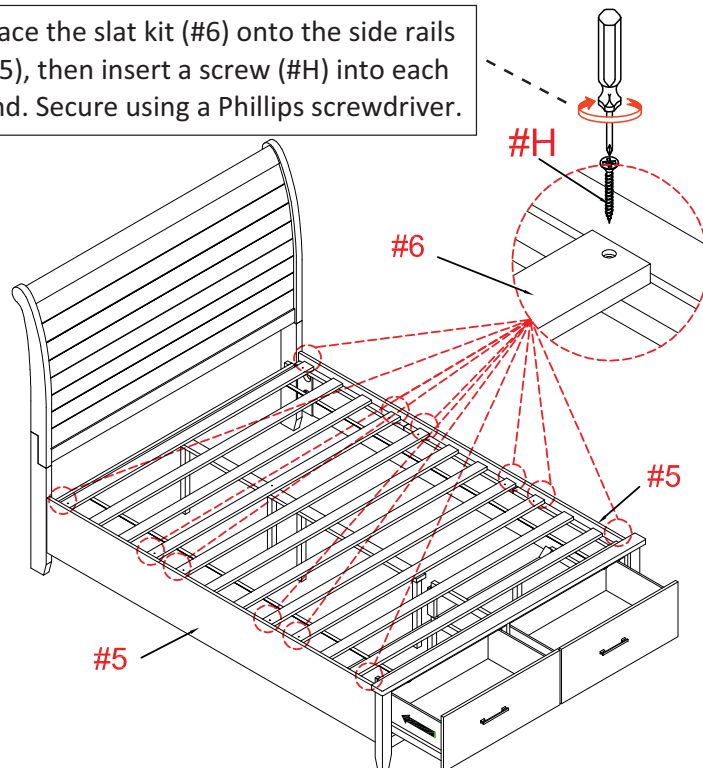

ASSEMBLY IS COMPLETED