Installation manual for:

Dimensions: D30" H40" L24

 $Bulb\ Type\hbox{:}E12\ bulb\ not\ included\\$

Lamp Frame Weight (1bs):24.8 Total Weight (1bs):84



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, our professional customer service team is committed to assisting you,





SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.


CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit: 110 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions, please call our Customer Service department. Our customer service team will provide comprehensive and worry free service to our valued customers.

Frame Parts List

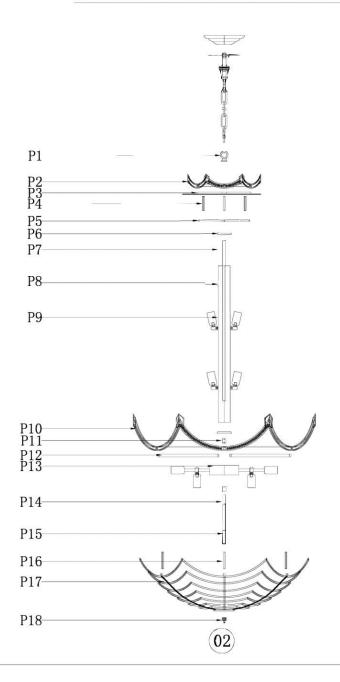

Step 1

Please use the parts list to ensure you are not missing any parts

PARTS LIST

part	picture	Description	Qty	Check list
ZA		4"Mounting bracket	1	
ZB		5.3"Canopy cover	1	
ZC		Canopy ring	1	
ZD		L59"Chain05T Twist Design	1	
ZE	~	Power Cord 12' SPT-2-18# Clear/Gold	1	
P1	9	Loop	1	
P2		12" Lamp body	1	
Р3		9.8"Metal Frame	1	
P4	1	4"Iron bracket	1	
P5		8.3"Metal ring	1	
P6		Check ring	4	
	I.	02		

			_	
part	picture	Description	Qty	Check list
P7		25.7" Threaded pipe	1	
P8		25.8″ Metal tube	1	
P9		E12 Socket	24	
P10	w	30" Lamp body	1	
P11	0	Coupling	2	
P12		11.2" Iron bracket	6	
P13		4.7" Metal wire box	1	
P14		6″ Metal tube	1	
P15		6.5" Threaded pipe	1	
P16		3" Iron bracket	6	
P17		Metal Frame	1	
P18	#	Finial	1	


D30″	H40"	L24

part	picture	Description	Qty	Check list
A		Screw in 701-30#	6	
В	**	1052-8#*12 attached on frame	432	
С		2020-22#+611-64#	126	
D	800	1050-14#*32	48	
Е		Screw in 701-40#	6	
F		701-40#	217	

part	picture	Description	Qty	Check list

Step 2

Canopy Installation Instruction

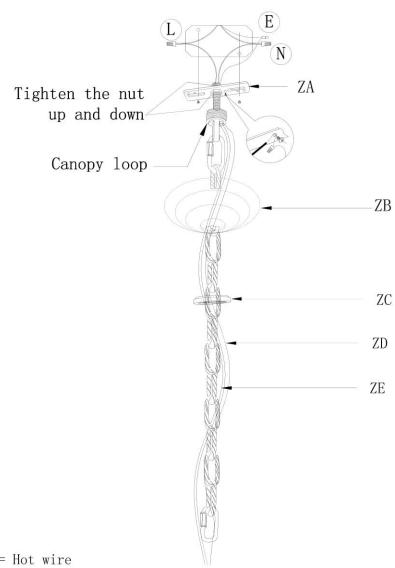

IMPORTANT: Test sockets with bulb before dressing the fixture.


- 1 . Attach the crossbar to the electrical box.
- 2 .Pass the lamp wire and ground wire through the loop, canopy ring and center hole of canopy cover.
- 3 . Screw2. 5" threaded pipe into the crossbar and fasten with hex-nut.
- 4. Pull wires up through the nipple.
- 5 . Screw loop only onto threaded pipe.
- 6. Hang the fixture on chain.
- 7 . Make the electrical connections as detailed in the drawing above.
- 8 . Secure the canopy cover with threaded canopy ring

"N" = Neutral wire

"E" = Ground wire

D30" H40" L24 Step 3

Frame Assembly Diagram

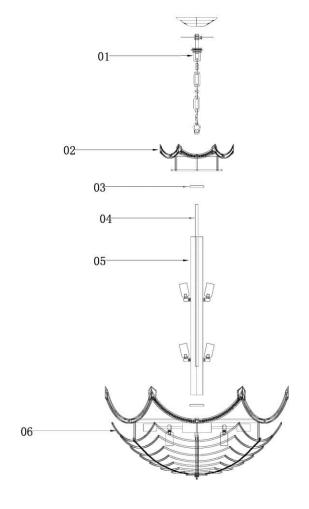

Frame Assembly Instructions

Installation:

Please read all instructions carefully.

Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete.

Please note that each part has been assigned a number.

Please proceed in a numerical order.

- 1. Put the lamp body (06) main wire through the threaded pipe (04).
- 2. Screw the threaded pipe (04) on the lamp body (06), install the pipe cover (03) into the pant tier pipe (05) both sides, then cover it on the threaded pipe (04).
- 3. Put the top tier (02) through threaded pipe (04), screw it with chain (01) bottom ring.
- 4. Hang the all lamp on the ceiling.
- 5. Connect the lamp main wire with the positive and negative of 4"Junction box are correct.
- 6. As the crystal pressing instruction, hang the crystal parts.


The end!

Step 4 Crystal Dressing Instructions

1. Hang crystal "A"、"B"、"C"、"D"、"E"、"F".

Crystal Dressing Diagram

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

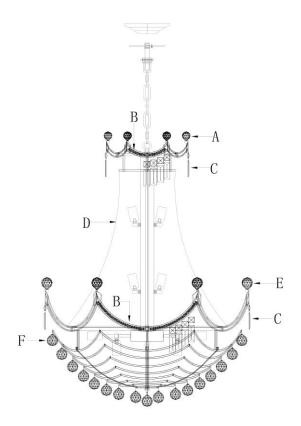

Congratulations!

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

Cleaning and Maintenance of Chandelier Frame
The finish on our chandelier frames and fixture frames is
protected by a durable coating of lacquer. To clean, use
a clean, soft, dry cloth. Do not use any metal polishes,
cleaners, abrasives or any substance which could remove
the protective finish. Failure to follow these
instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts
Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us at the address shown on the reverse side. For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle and faxing it to our customer service department. You will be contacted with prices prior to shipment. All orders must be pre-paid.