


Huntington Motion chair  
HUN-WIC-SOFASET-6PCS

## **Assembly Instructions**

### **Care and Cleaning**

- *For best results clean once a year with mild soap and water, then rinse. For maximum protection, we recommend using outdoor furniture covers or store when not in use.*
- *DO NOT use solvents, janitorial cleaners, alcohol based cleaners, protectants, scouring agents, bleach, gasoline or ammonia based cleaners.*

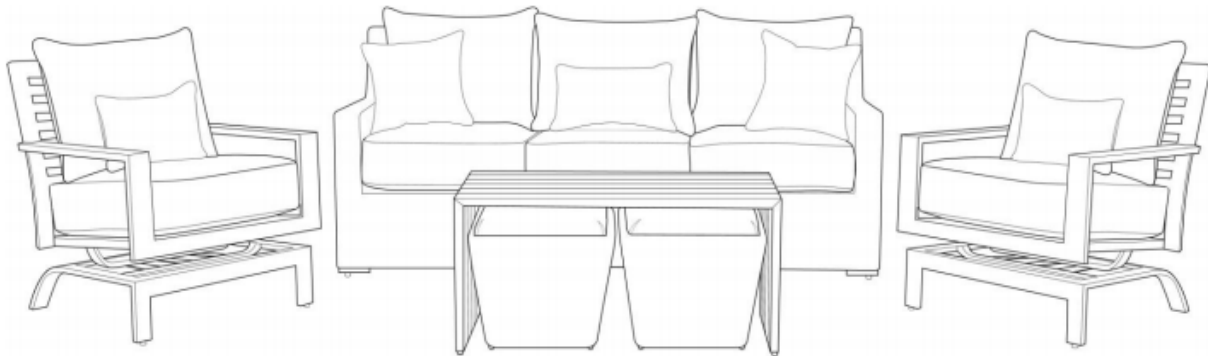



**THIS ASSEMBLY MANUAL CONTAINS IMPORTANT SAFETY INFORMATION.  
PLEASE READ AND KEEP FOR FUTURE REFERENCE.**

---








1

## **Motion Chair Assembly**


### **Components**

Part	Description	Image	Qty
A	Chair seat		1
B	Chair base		1

### **Hardware**

Part	Description	Image	Qty
C	Bolt		6
D	Lock washer		6
E	Flat washer		12
F	Metal plate		6
G	Nut		6
H	Bolt cover		12
I	Nut cover		12

### **Tools Needed for Assembly**

Part	Description	Image	Qty
J	wrench		1


K	wrench		1
---	--------	---	---

## 2

### Step 1


Place the chair seat (A) upside down on a non-abrasive, flat surface. Align the holes on chair seat (A) with the holes on chair base (B). Make sure that the arrow label on the bottom of chair seat (A) and chair base (B) are facing the same direction. Insert bolts (C) through flat washer (E), metal plate (F), chair seat (A), chair base (B), metal plate (F), Lock washer (D), and flat washer (E) as shown in the diagram below. Secure bolt (C) with nut (G). Do not tighten nut (G) completely. Repeat step 1 five more times for each hole in the chair base (B).

Once all nuts (G) and bolts (C) are in place, securely tighten each bolt (C) and nut (G) by placing wrench (J) on bolt (C) and wrench (K) on nut (G). Hold wrench (K) in place. Turn wrench (J) to tighten bolt (G). Make sure to complete this process for each bolt (C) and nut (G).

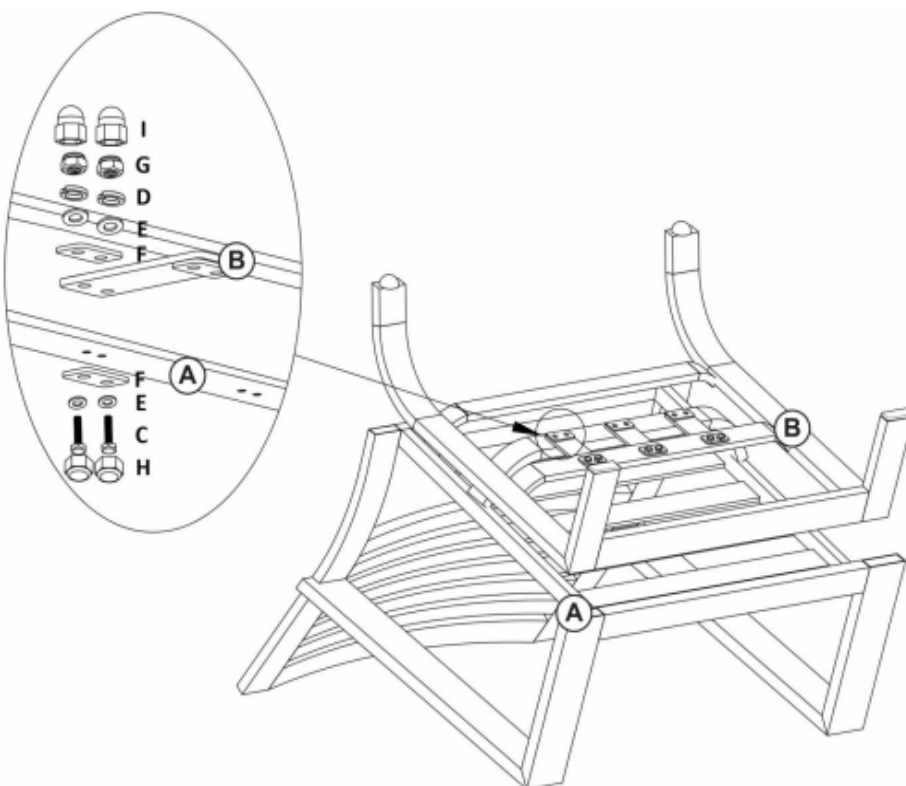

---

## Step 2

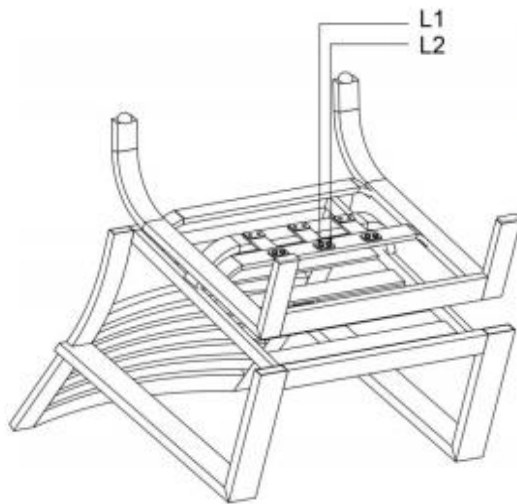

Use wrench (J) and wrench (K) to secure the nut and bolt in location (L1) and location (L2). See below diagram.


Warning: Improper assembly may result in serious personal injury.



MUST TIGHTEN ALL BOLTS

---

## Step 3

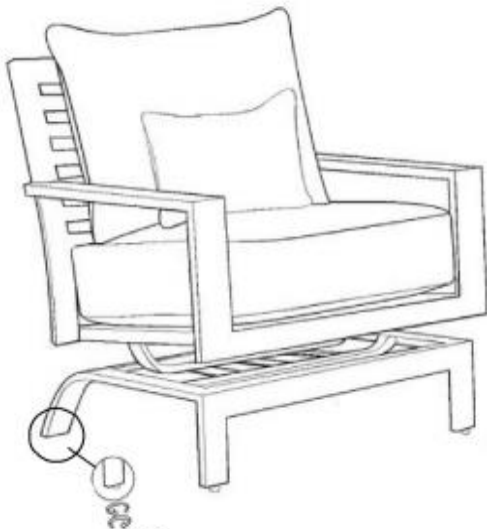

Fully tighten all the bolts with wrench (J) and wrench (K). Turn the chair right side up. Put the seat cushion, back cushion, and pillow on the chair. Make sure all the connections are secure before use. If necessary, you can adjust the feet to level the chair.

