

# POST BASE

## Assembly Instructions



### CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

### TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver




Flat blade screwdriver



Pliers




Wire strippers

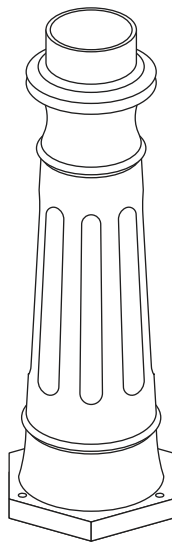

Base




Pole



Mounting Unit



Anchor Bolts



Wire Nuts


**\*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**

# POST BASE

## Assembly Instructions

### STEP 1

Route the electrical wire from the power supply underground and out through the middle of the installation area. Screw the **anchor bolts** into the **mounting unit**. Fill the hole with concrete (not included) and insert the assembled **mounting unit** before the concrete dries. The **mounting unit** should be at ground level.

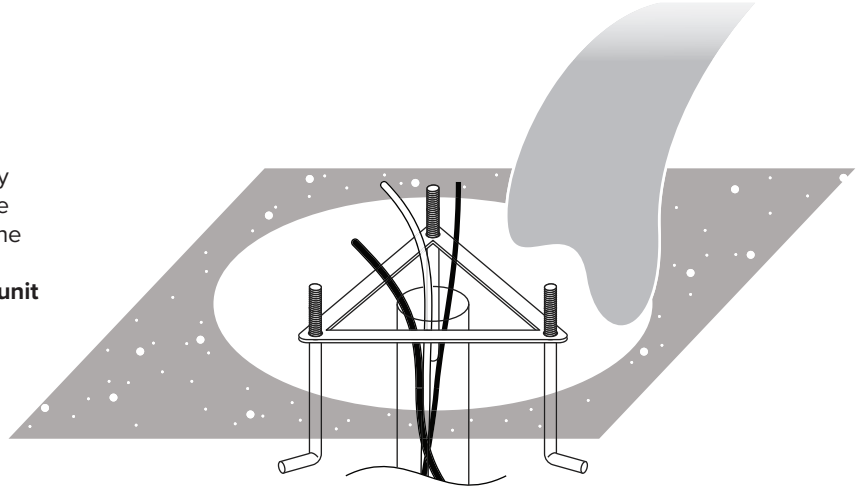

### STEP 2



Connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black \*Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

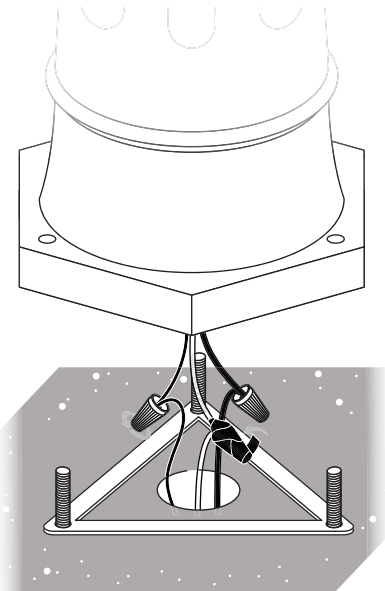

### STEP 3

Secure the **base** to the **mounting unit** and attach the **pole** to the top of the **base**.

