
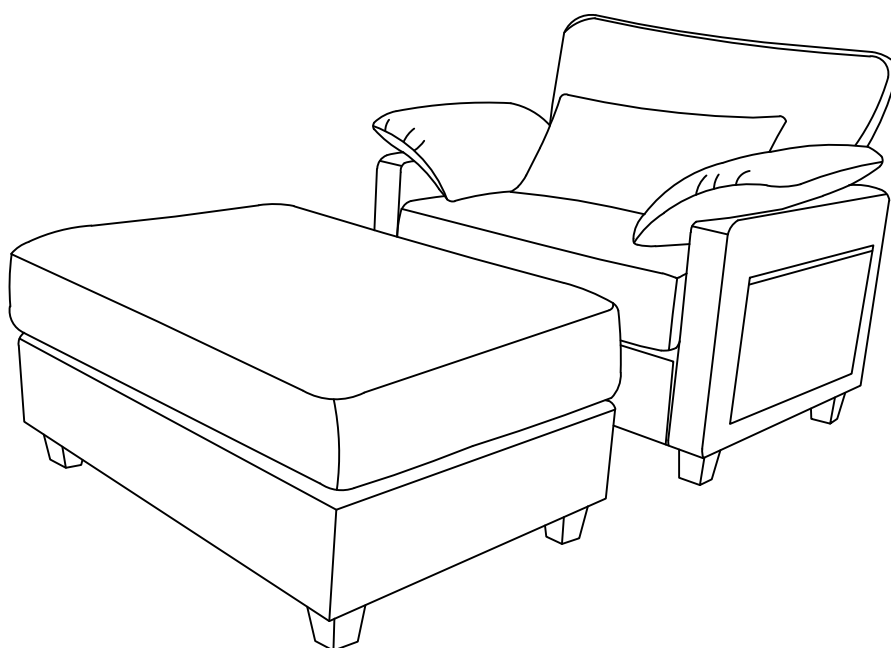
















Assemble Instructions




PART LIST

Ex1 	Fx1 	Gx1 	Hx1 
Left Armrest	Right Armrest	Front plate	Back plate
Ix1 	Jx1 	Kx1 	Lx2 
Backrest	Lumbar Pillow	Back cushion	Armrest Pillow
Mx1 	Nx1 	Ox1 	Px1 
Footstool frame	Frame	Footstool Cushion	Chair Cushion
Qx8 	Rx2 	Sx8 	Tx2 
Plastic Gaskets	Short Rod	Foots	Armrest inserts
Ux2 	Vx2 	Ax12 	Bx1 
Right Iron Pieces	Left Iron Pieces	Gasket	Allen Key M6(1PC)
Cx12 	Dx12 		
Screw M6*16	Screw M6*35		

Note: The screws are in 1:1 ratio and can be placed here for comparison.


DISASSEMBLY DIAGRAM

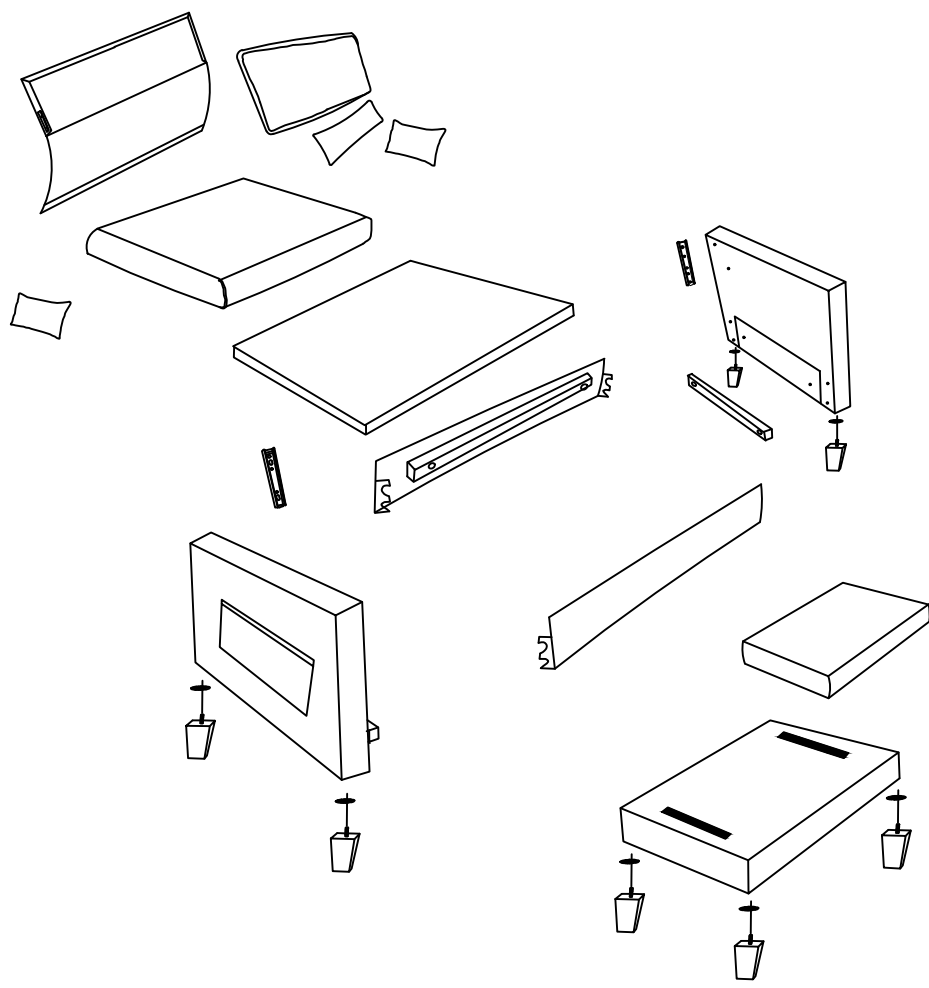


STEP1

E		1
F		1
S		4
Q		4


Screw the sofa feet with plastic washers into the Left/ Right sofa armrests, tighten them up to 100%.

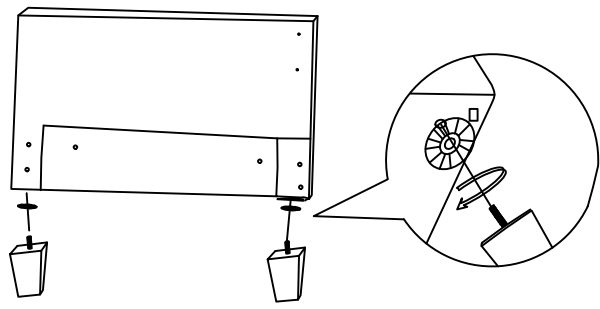

STEP2

		1
		1
R		2
D		4
A		4
B		1


First align the short rod (R) with the holes in the armrests the screw the screws (D)and Washer (#A)into the armrests of the sofa using a allen key (B).

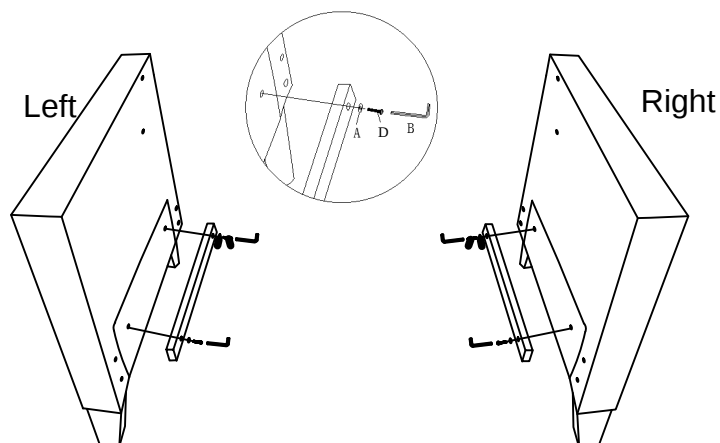

STEP3

		1
		1
T		2
C		4
B		1


As shown in the figure, assemble the metal insert (T) on both sides behind the armrest with screw (C) and allen key (B), Pay attention to assembling the insert with the big end facing up and the small end facing down.

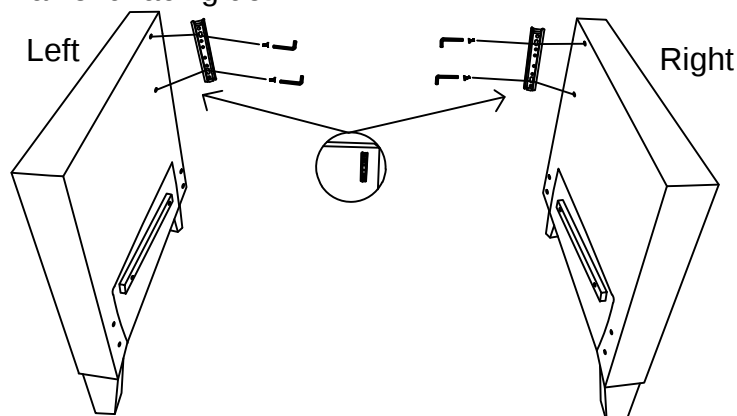


STEP4

		1
		1
D		8
B		1


Screw the screws (C) into the armrests of the sofa with allen B, tighten them up to **30%-40%**.

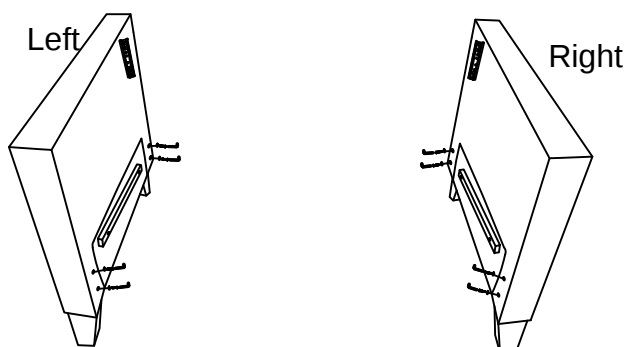

STEP5

U		2
V		2
		1
		1
C		8
B		1


As shown in the figure, first align the connecting iron piece (U& V) with the holes front/back plate. Tighten the screw (C) with Allen Key.

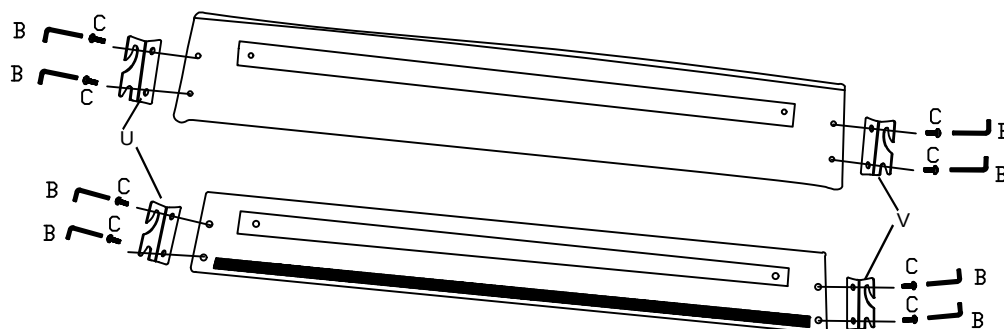

STEP6




Insert the assembled front and back plates into the screw in **30%-40%** of the armrests screws. After align, tighten all the screws up to **100%**.

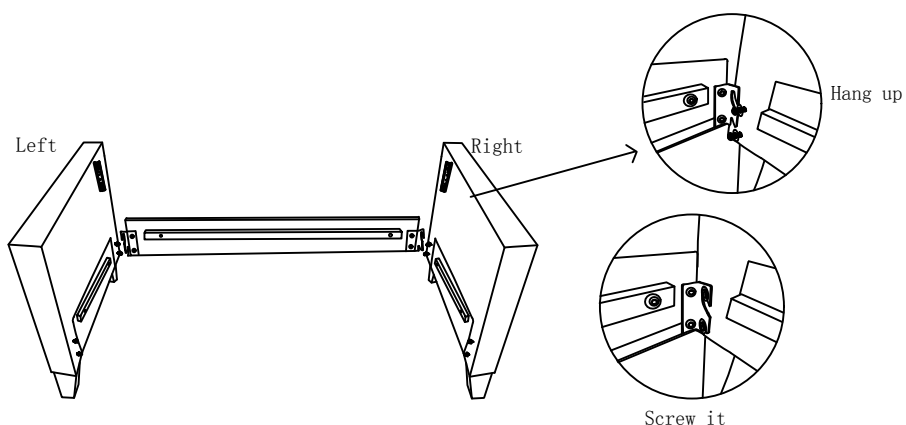


STEP7




Snap the completed assembled B-1 from step 5 onto the handrail locking into one third of the screws as shown, and lock it in place.

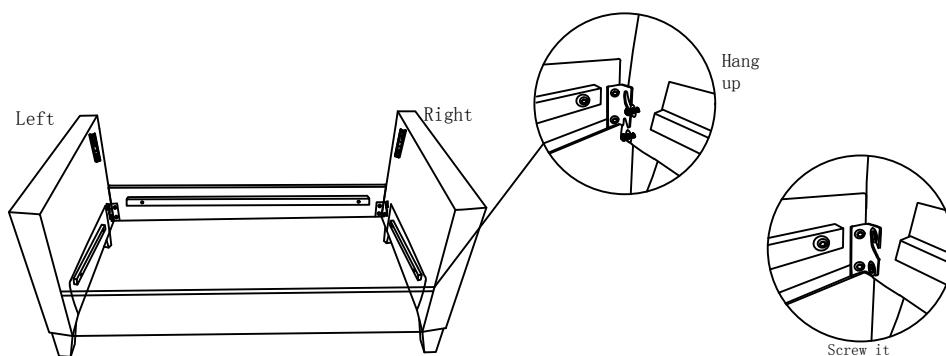

STEP8





As shown in the figure, connect the backrest frame (I) and the assembled seat frame bracket with the metal insert. Note that when connecting the insert, both sides should be inserted horizontally downward.

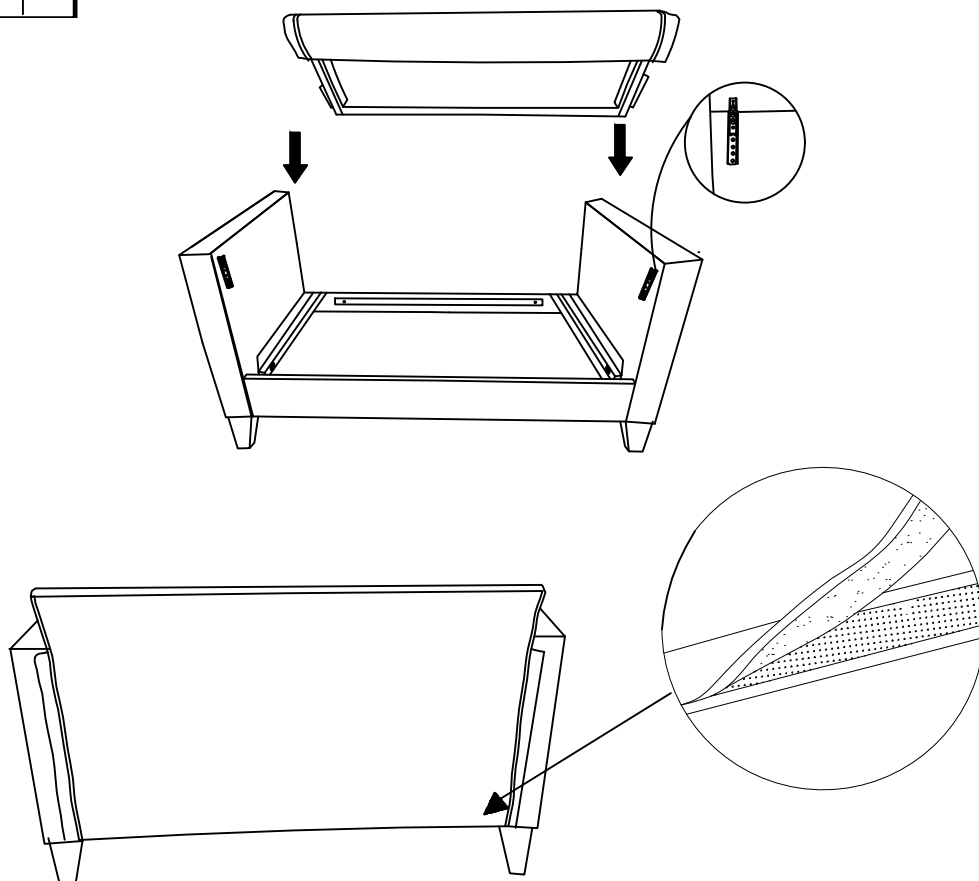


STEP9


Put on the seat frame(N).

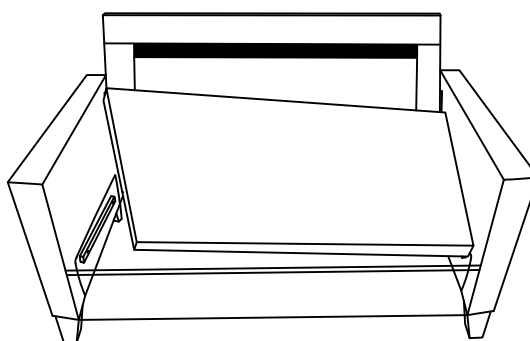


STEP10

M		1
S		4
W		4


Use plastic gasket (W) to tighten the legs(S) to the bottom of the footstool frame(M).

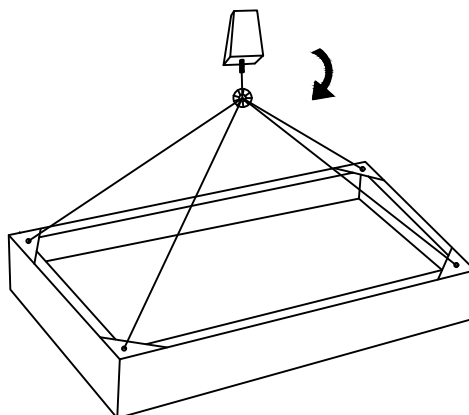


STEP11

J		1
L		2
K		1
O		1
P		1


Open all vacuum-packed cushions, pillows and others things. Adjust them to their original state by hand.

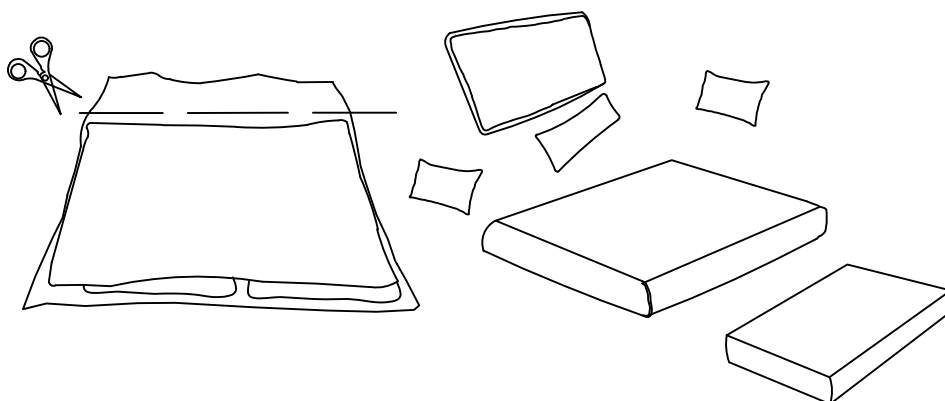


STEP12

J		1
L		2
K		1
P		1
O		1

According to the diagram, place the seat cushion and pillows, armrest cushion on the sofa and firmly fix them to the sofa body with the Velcro fasteners on the seat. If the fabric has wrinkles, please wait for 72 hours for the cushion to fully rebound.

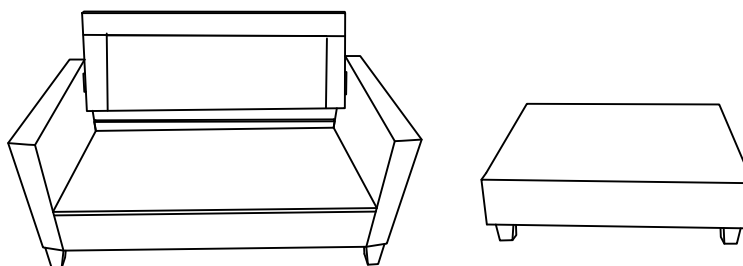

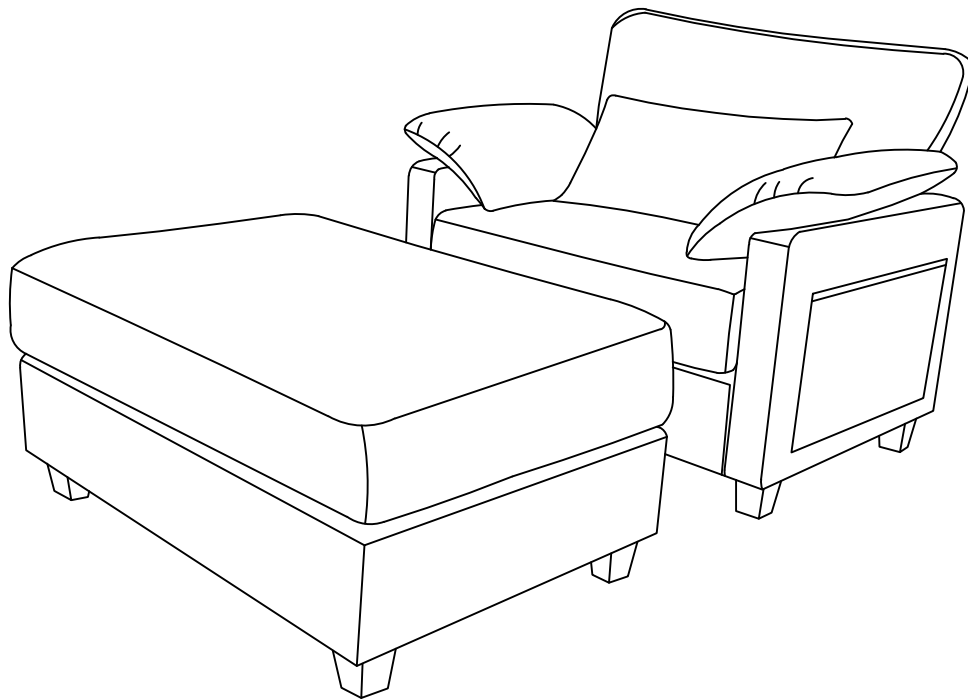

FAQ

Q1:Missing parts or some parts damaged when received.

A1:If you find some parts are missing or damaged from the box,please kindly send us messages to let us know the name of missing part regarding of the parts list of the instuction,we will send you the replacement and offer you the best solution asap.

Q2: Assemble Diffcultly

A2:If there are any problems during the installation process, you can take photos and send them to us, and we will reply promptly.

There are also installation videos on our Amazon page that you can view online.

Q3:Return Policy.

A3:Before returning the item, please contact us about return issue,please make sure that the box packaging is complete,the product is not damaged, stained and not affecting secondary sales. Return product that do not use the original packaging maybe rejected, and the pictures may be requested to offer.