

Owner Manual

WARNING

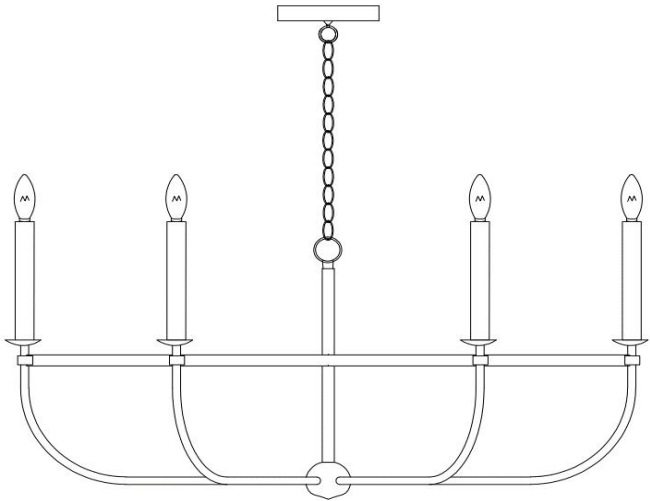
- ※ Please make sure that you have all parts indicated and they are in good condition before you begin assembly of this item. Refer to part list and hardware list below for guidance
- ※ This item should be assembled on the ceiling to prevent scratching the finish during assembly
- ※ To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- ※ If you are having difficulty, our friendly Customer Care team is always here to help.

PREPARATION

- ※ Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- ※ If any part is missing or damaged, do not attempt to assemble the product.
- ※ Estimated Assembly Time: 15 minutes.

CARE AND MAINTENANCE

Unplug lamps before using any cleaning solutions. Dust shades with a feather duster or with an appropriate vacuum brush attachment. Wipe with a soft, dry cloth and clean lamp bases with the methods appropriate to the material. Avoid the use of chemicals and household cleaners as they may damage the finish.



Part List and Hardware List

PEICE	DESCRIPTION	PICTURE	QUANTITY	PEICE	DESCRIPTION	PICTURE	QUANTITY
A	Lamp base		1X	H	Terminal Cap		2X
B	Hoop		1X	HW3	Screw,M4*25		2X
HW1	Screw,M4*10		6X	HW4	Nut		2X
D	Pipe		4X	K	socket tube		6X
E	Canopy		1X	L	Socket		6X
F	Mounting Plate		1X	M	Light bulb		6X
HW2	Screw,M4*25		2X				







PREPARATION

※ Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.

※ If any part is missing or damaged, do not attempt to assemble the product.

※ Estimated Assembly Time: 30 minutes.

※ If you are having difficulty, our friendly Customer Care team is always here to help.

		
Step 1: Unpack all parts from cartons carefully. Thread tubes(B) into canopy (C) and connect tubes(B) with light body(A)	STEP2: put the socket tube(K) on socket(L) and put the light bulb(M) on socket(L).PLEASE USE TYPE"C35"BULB MAX 60W OR CFL BULB MAX 13-WATT OR LED BULB MAX 9WATT THERE ARE 6 PCS LED BULB IN THE BOX	Step 3: Connect,Neutral,White Outlet Supply Wire to: Black White,*Parallel Cord(square&ridged).Clear,Brown,Gold or Black without Tracer(colored stripes).Insulated Wire(not green)with copper metal conductor
		
STEP4:Install the mounthing plate(F) to the junction box with 2 Mounting screws(HW2)	STEP5: Attach the Canopy(E) to the junction box and fix it by turning the Canopy Nut(J) clockwise	STEP6: Consult a qualified electrician to ensure correct branch circuit conductor. ENJOY YOUR LAMP