



INSTALLATION INSTRUCTIONS




Parts overview

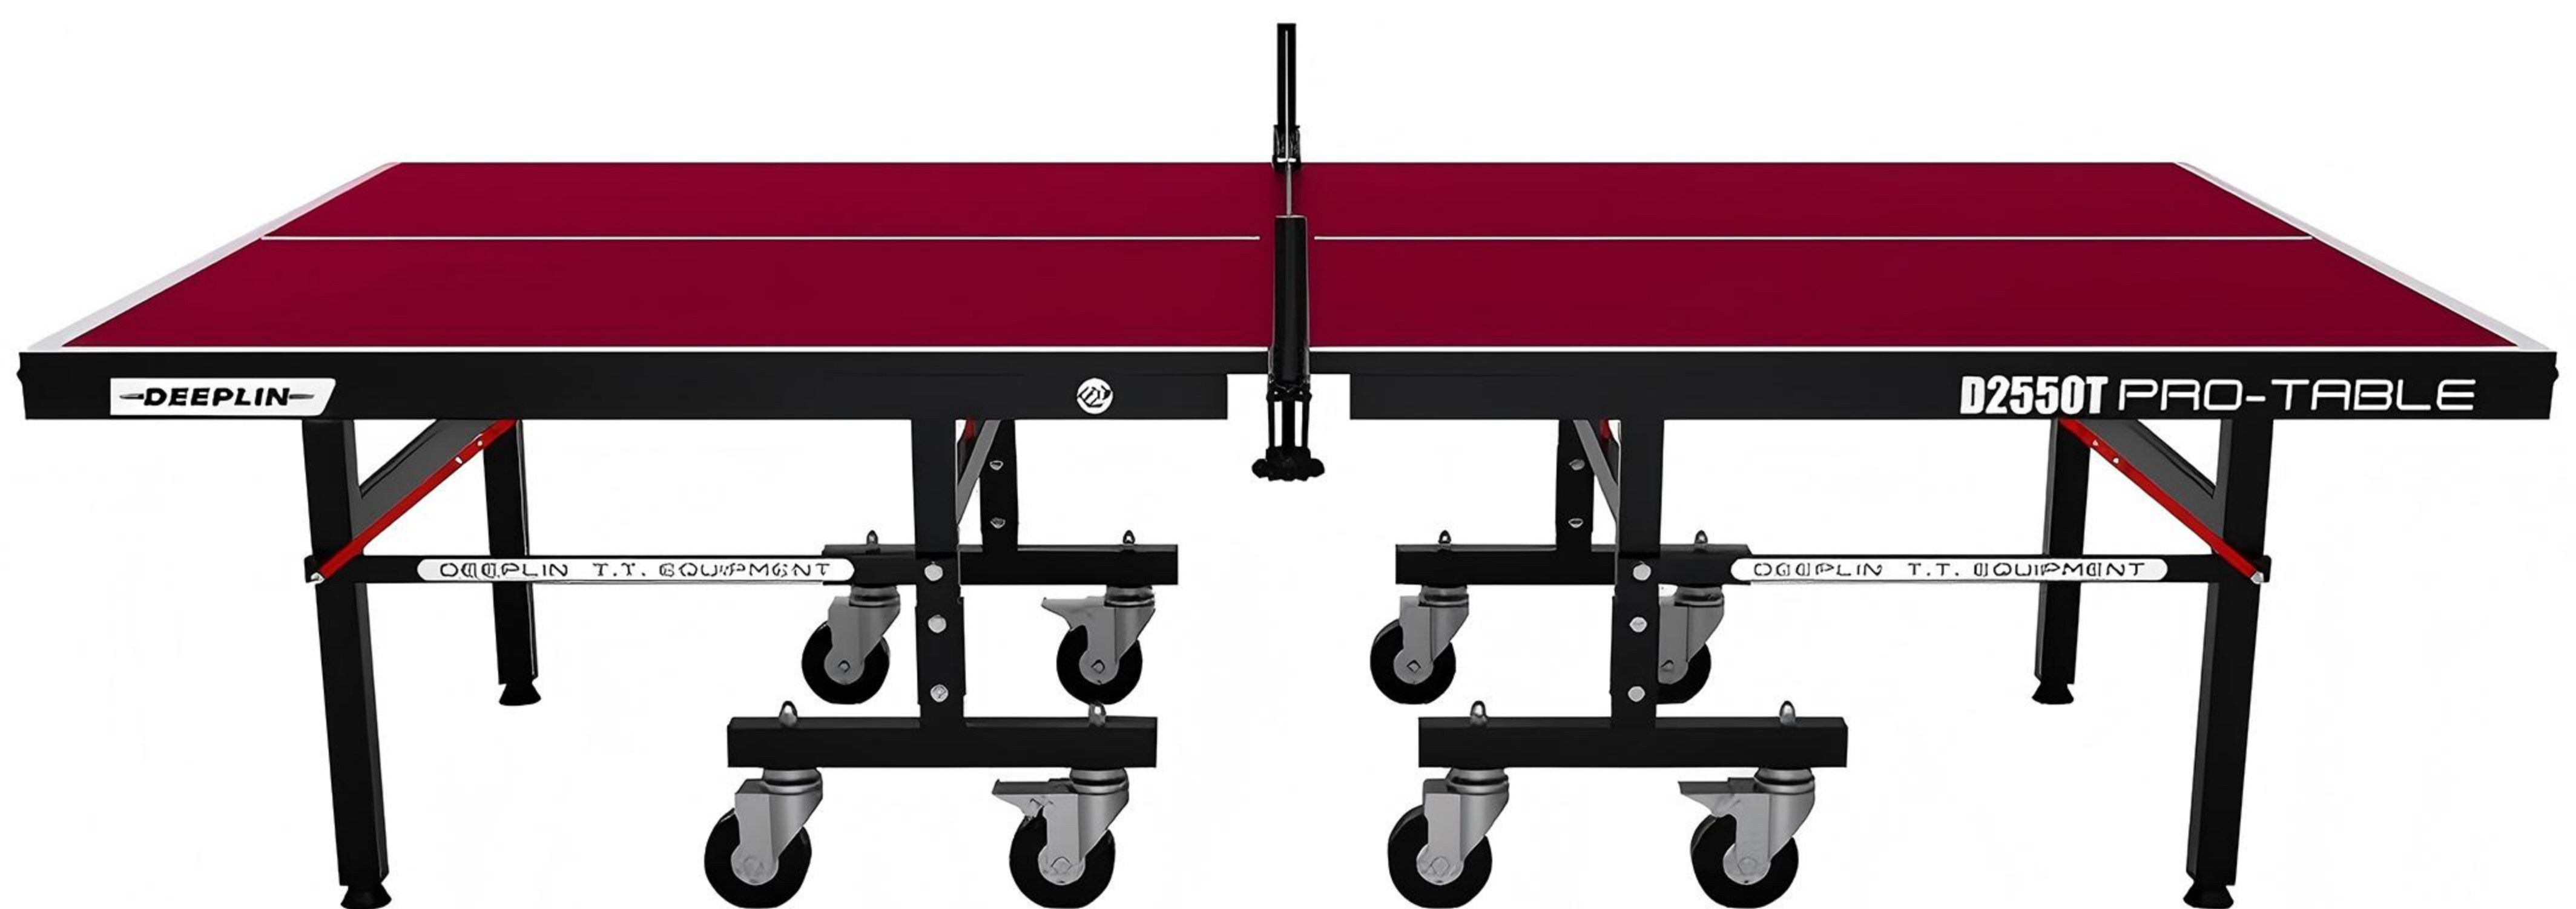

First, open the safety lock button and prop up the stand.

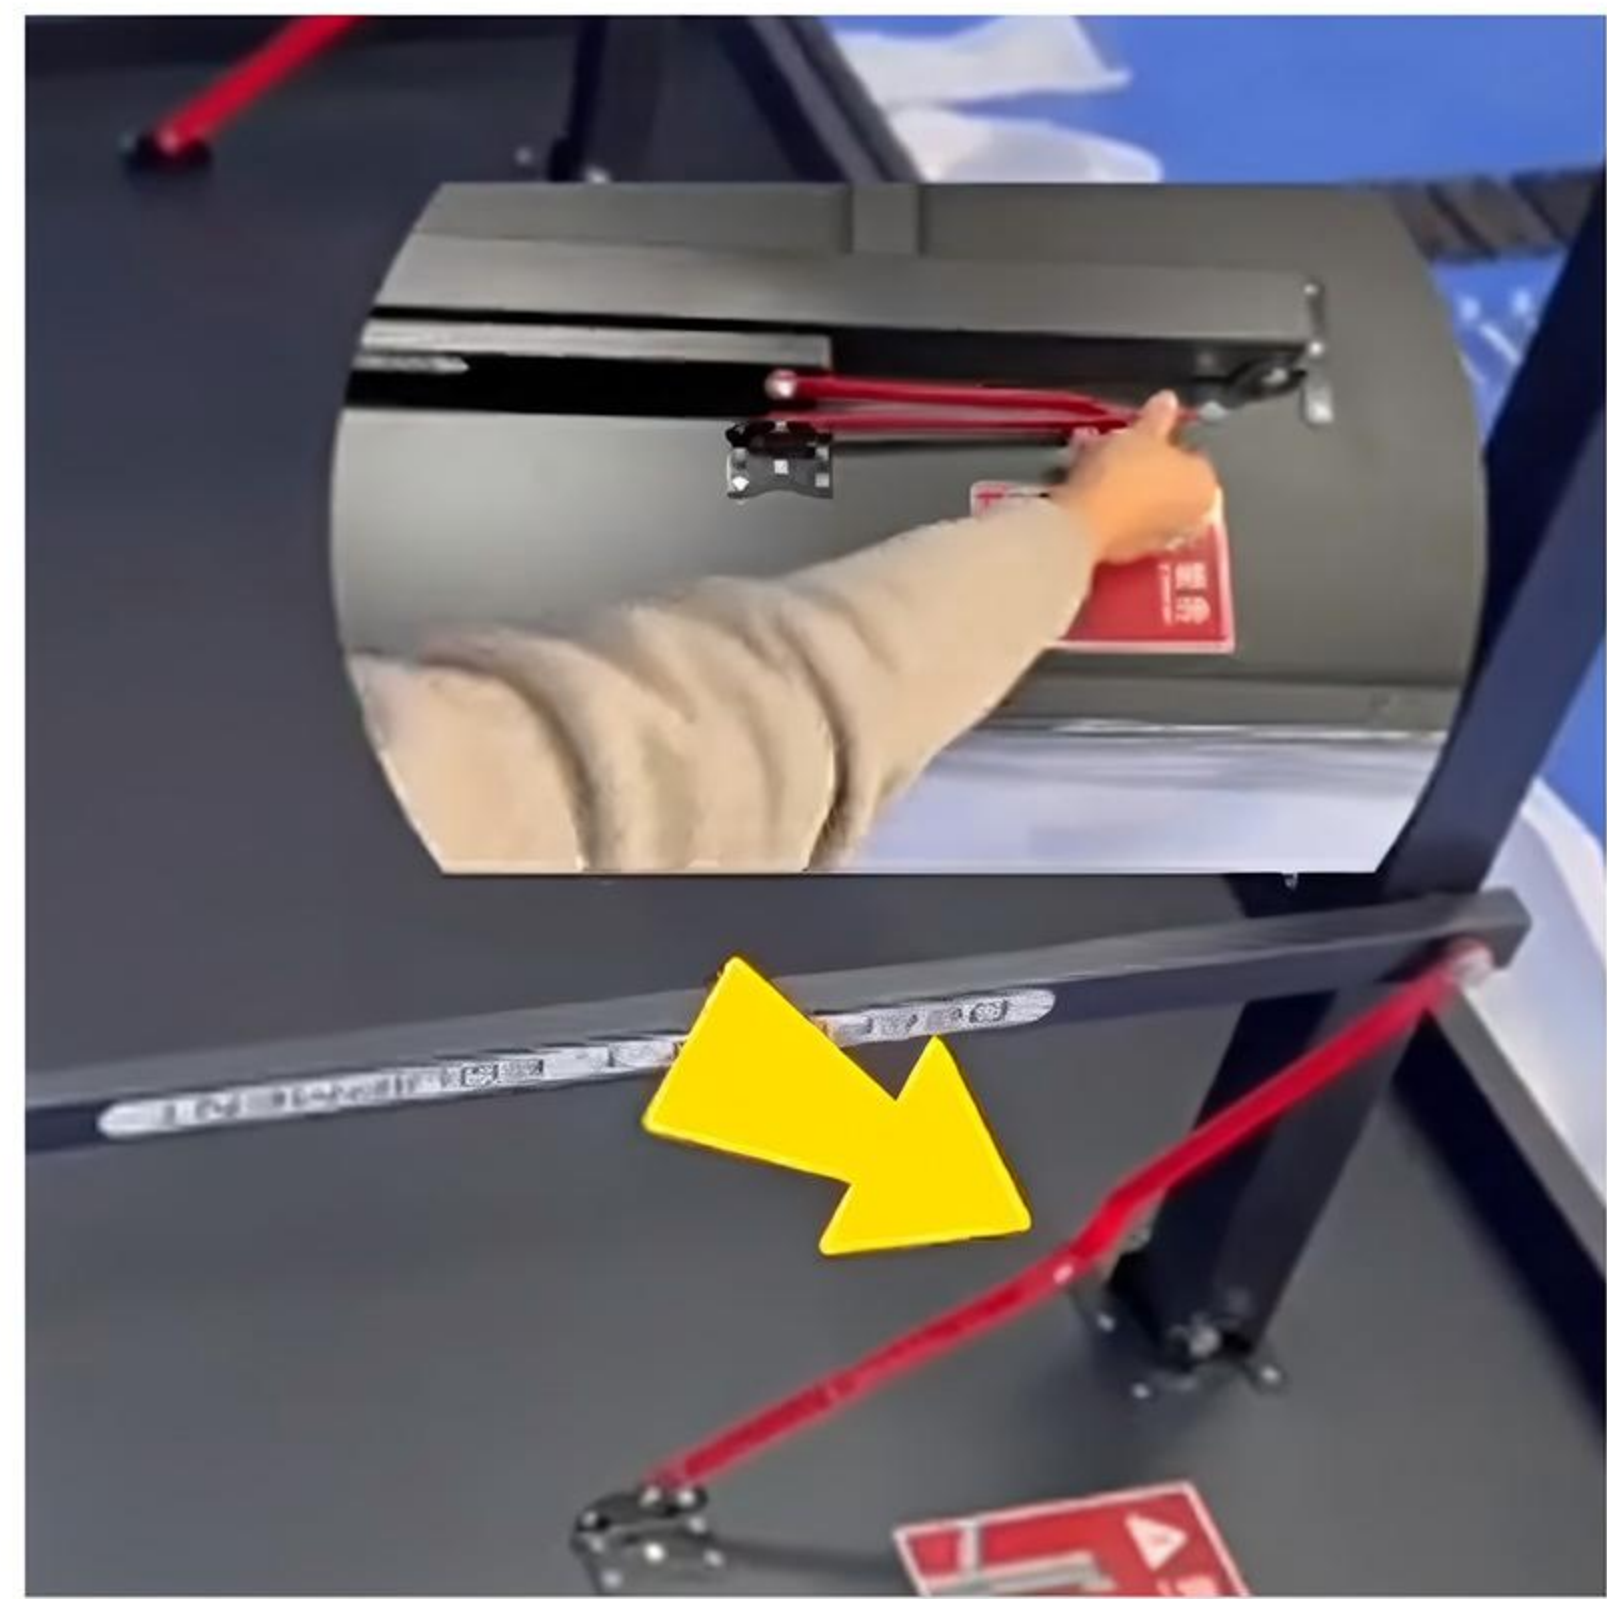

Note: The diagonal support bar should be opened outward.

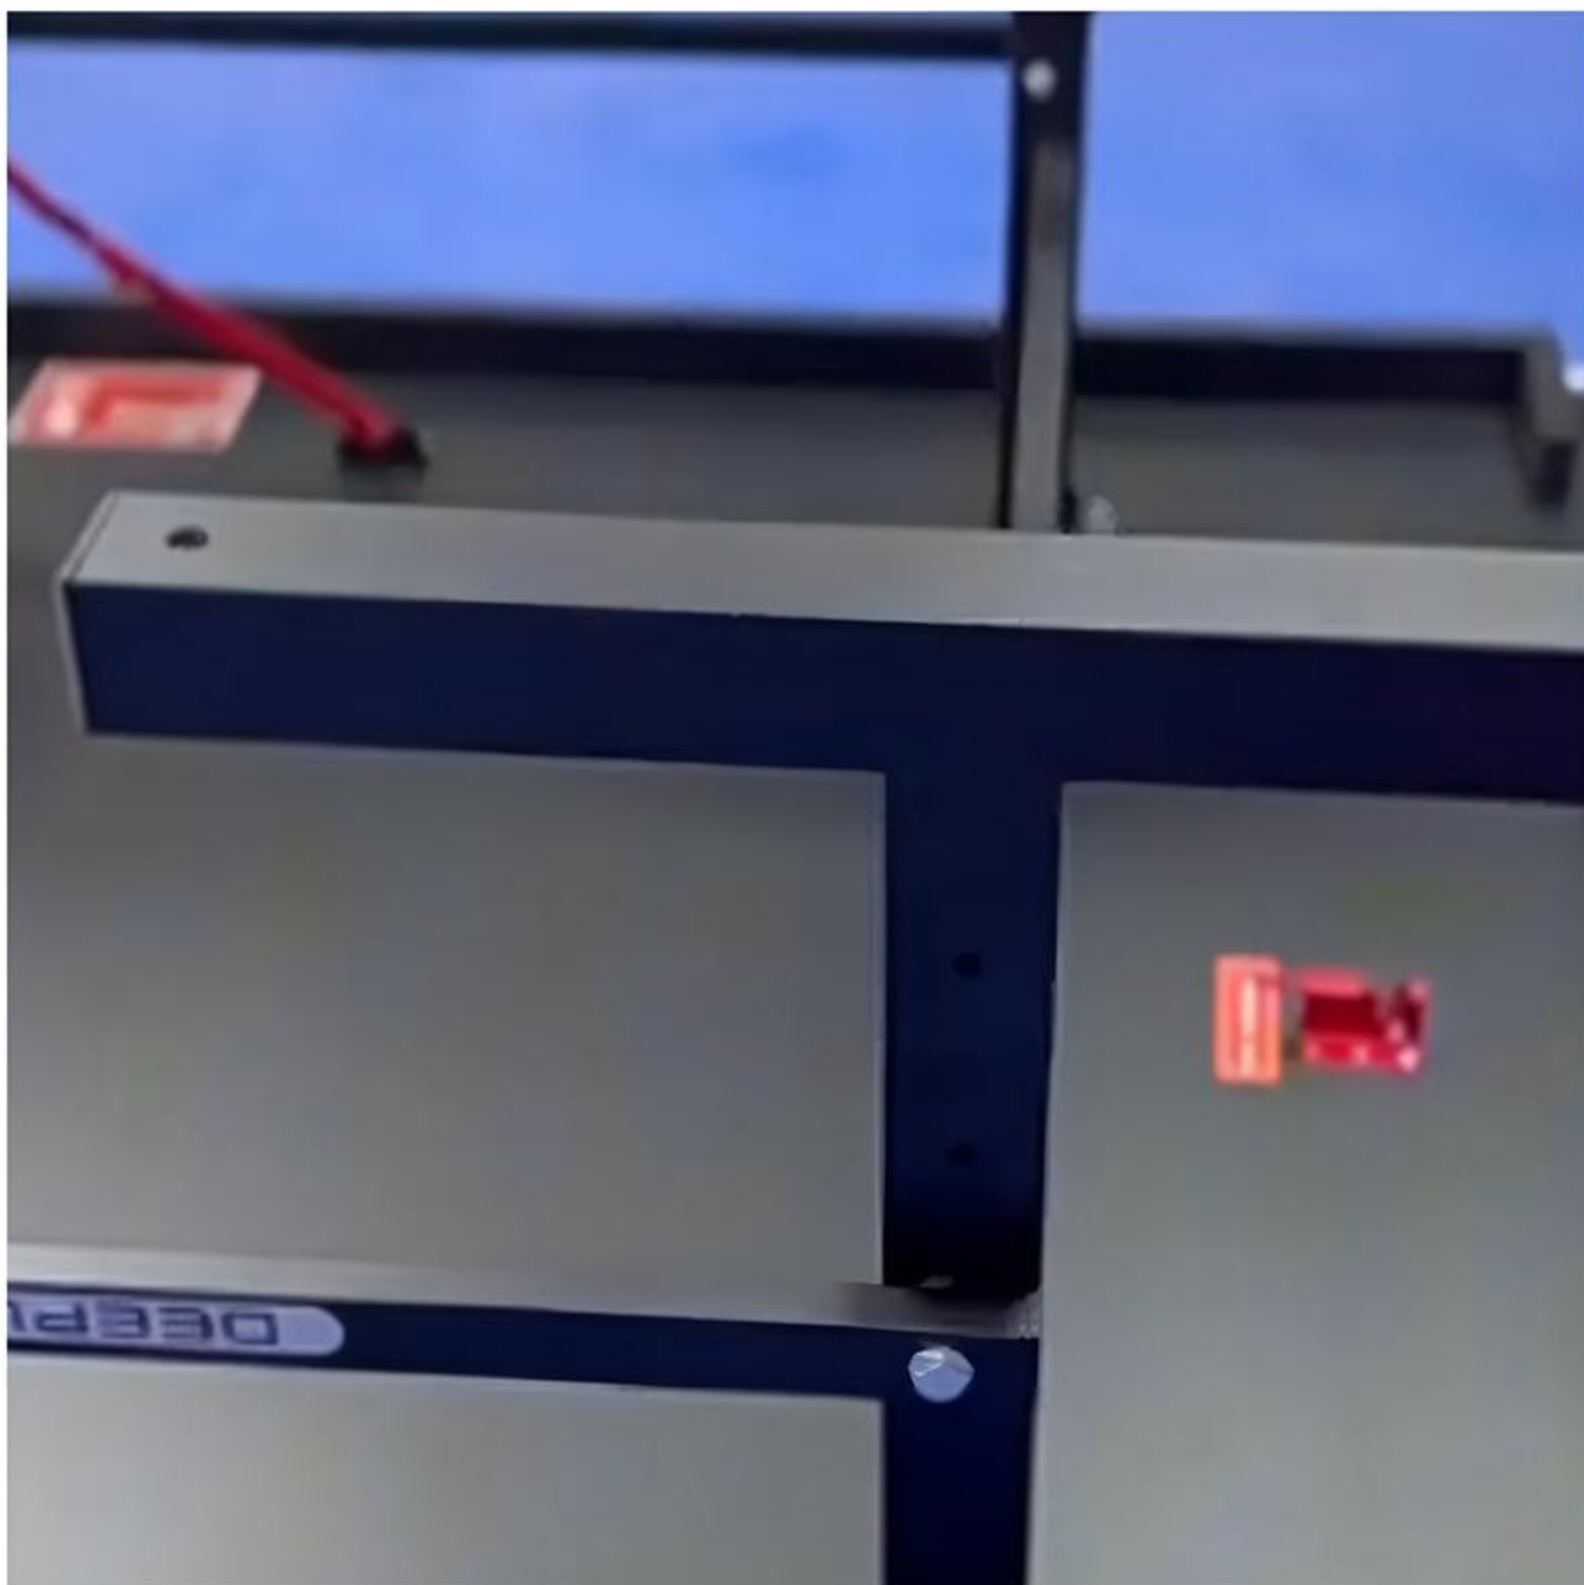

Install the T-shaped bracket.



Install 2 clamping plates, and insert 2 screws through them.



Tighten the screws with a wrench.



Install the casters.

