


D		Backrest	1
E		Seat Cushion	1
Hardware			
Label	Picture	Description	QTY
1	٩,	Bolt (M6*35MM)	10
2	0	Washer	10
3		Allen Key	1
Assembly Preparation			
Before Beginning Assembly:			
 Read instructions, cover to cover- Have 2 adults on hand for assembly- Do not assemble on flooring or carpet- Assemble on a clean non-marring surface (packing foam)- Save all packaging until finished- 			

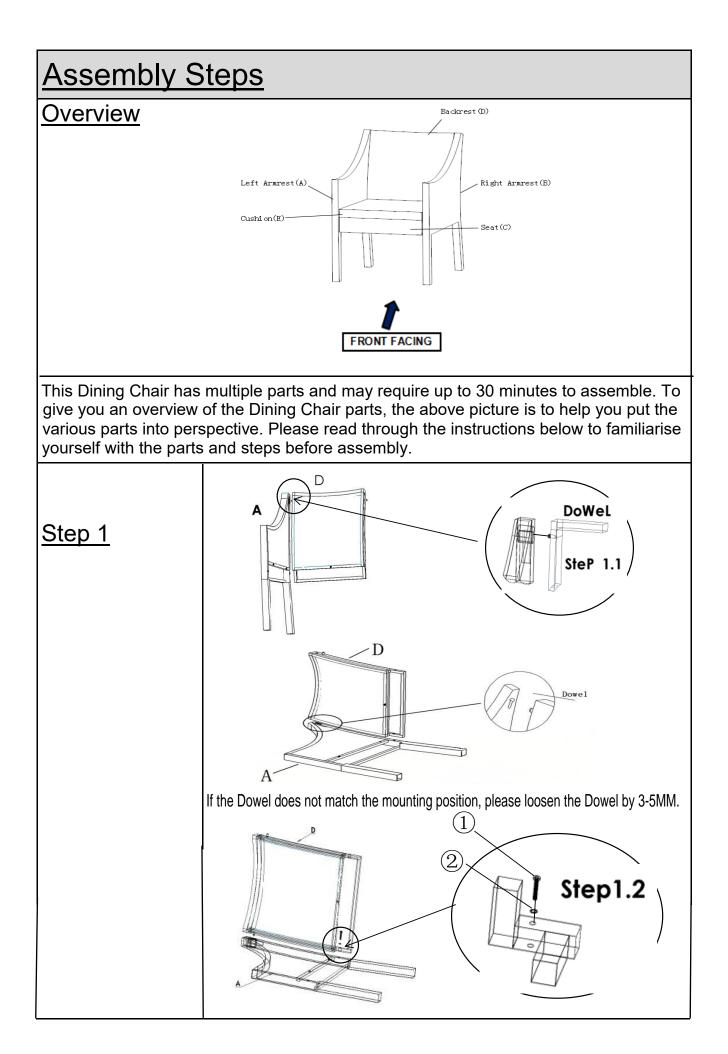


Open the carton and place all the parts onto a clean, non-marring surface. 1.1 Insert the Dowel on the Backrest(D) into the mounting position of the Left Armrest(A).

1.2 Attach Backrest(D) to Left Armrest(A) using Bolts(1) and Washers(2) with Allen Key(3) as shown in the picture.

Do not fully tighten the Bolts.

Occasionally some of the PE Wicker shifts and covers the mounting positions preventing easy assembly. The PE Wicker should never be cut, but moved away from the mounting positions.

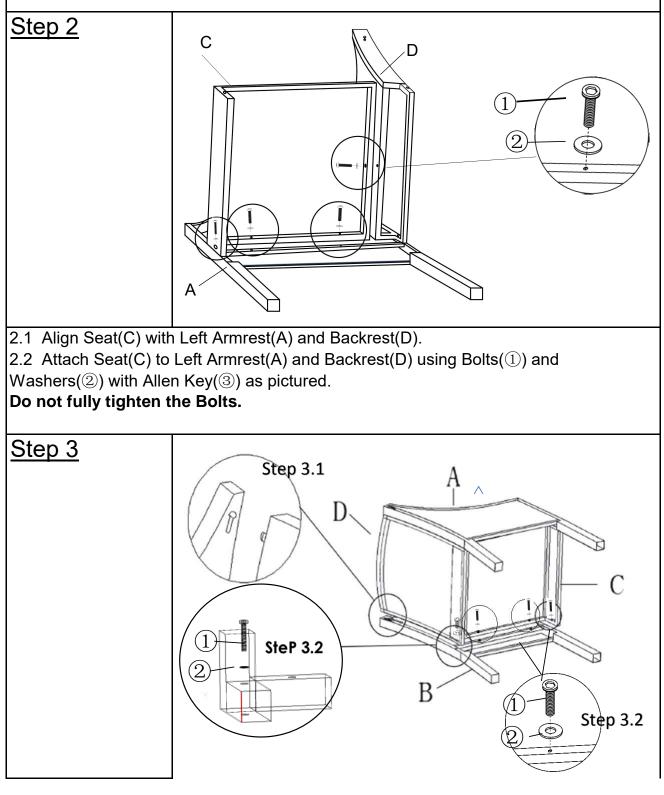

Align Right Armrest(B) to Backrest(D) and Seat(C).

3.1 Insert the Dowel on the Backrest(D) into the mounting position of the Right Armrest(B).

3.2 Attach Right Armrest(B) to Backrest(D) and Seat(C) using Bolts(1) and Washers(2) with Allen Key(3) as shown in the picture.

Stand the Chair up.

Exert pressure floorwards, onto the Chair with both your hands.

This pressure will help the Chair reach full alignments status.

Check for wobbles on a LEVEL surface.

If no wobbles are found proceed to tighten the Bolts and Screws in a sequential manner, until evenly secured.

When tightening the Bolts and Screws sequentially.

DO NOT tighten any Bolt or Screw fully and then move on towards the next one. If there are still wobbles, loosen the Bolts and Screws and excute the same above process.

If the Chair is not stable it could lead to damage to the product.

