



To deodorize the leather leave the chair in a shady outside for 1-2 days.



For longer use

Re-tighten bolts every 6 months by using the enclosed allen-key.  
\*Using an electric drill can damage the chair. Please re-tighten bolts manually.



## Safety Information



Sit in the center of the chair, with your back to the backrest



Do not sit at the front edge of the chair



Do not stand on the chair



Do not use the chair with more than one person



Do not push the chair around when a person is sitting in it




Do not push down on the backrest when a person is reclined



Do not place all your weight on only the backrest

# INSTRUCTION MANUAL

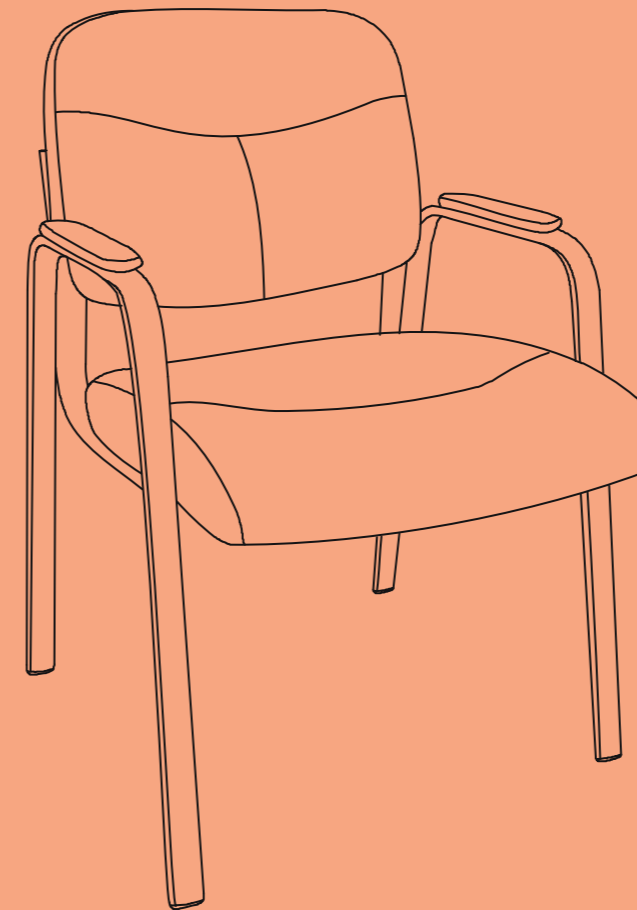


# INSTRUCTION MANUAL

## C-6109


## Package List



(A)\*1 (L) Armrest




(B)\*1 (R) Armrest



(C)\*1 Backrest



(D)\*1 Seat Cushion



M6x35mm

(E)\*8 Bolts




(F)\*8 Washer



(G)\*1 Wrench

# Assembly Instruction

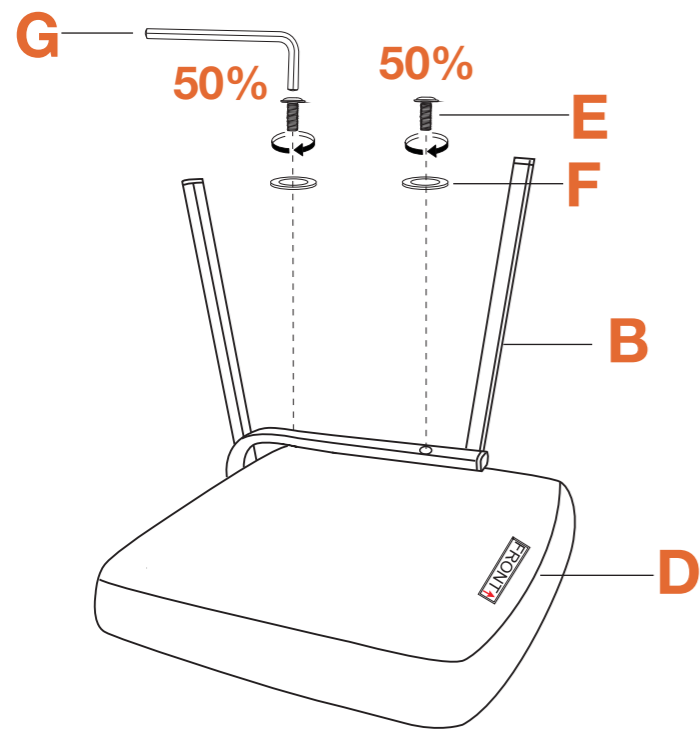

## Step 1:


Put Bolts (E)\*2 into the Washer (F)\*2. Install Armrest (B)\*1(R) to the right side of the Seat Cushion (D) with Bolts (E)\*2.

**Note: Bolts are only tightened 50%**

## Step 2:

Install Armrest (A)\*1(L) to the left side of the Seat Cushion (D) as in previous step.



**Note: Bolts are only tightened 50%.**

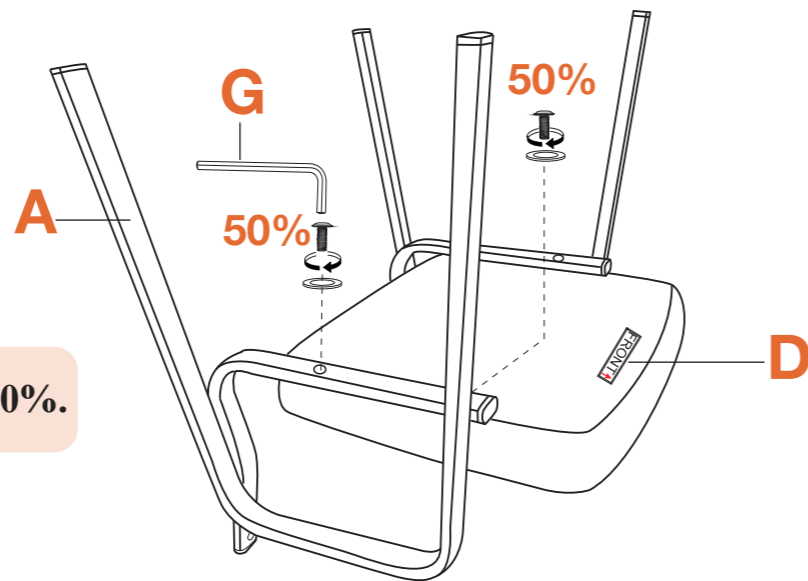

## Step 3:

Put Bolts (E)\*4 into the Washer (F)\*4. Attach Backrest (C) to the Armrests (A&B) with Bolts (E)\*4.

**Note: 100% tighten the Bolts.**

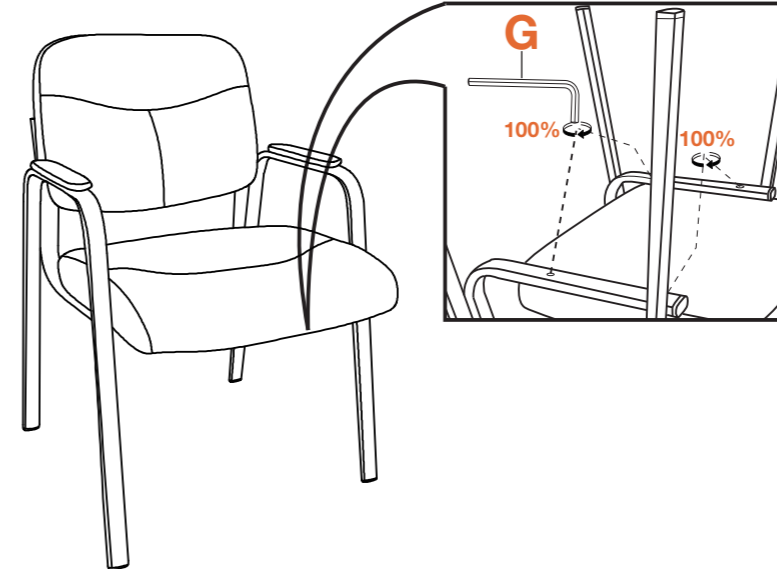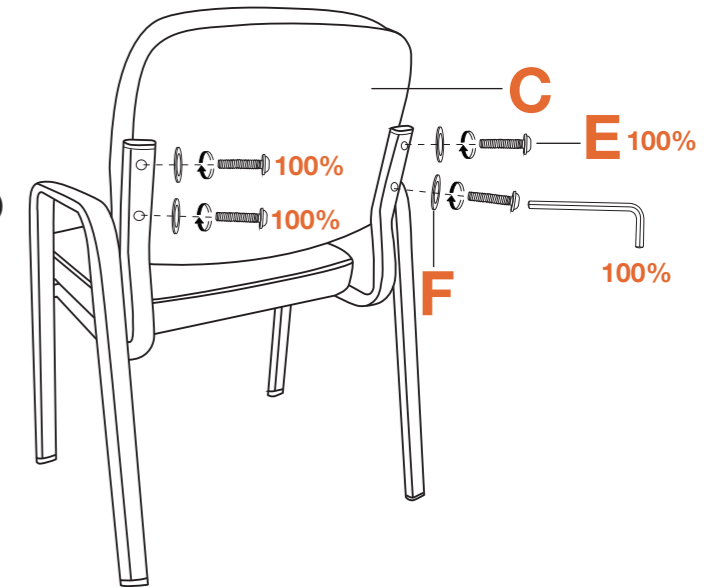

## Step 4:

**100%** tighten the Bolts (E)\*4 on both sides of the Seat Cushion (D).

## CAUTION:

- \* Before using the chair, check to ensure that all bolts are fully tightened.
- \* Lubricate all parts and tighten all bolts every 6 months or whenever needed.