



Shift®+ | K-21335-G

Round two-function handshower, 1.75 gpm

Features

- Multifunction handshower offers full coverage and targeted massage spray settings
- Ergonomic design is comfortable and easy to grip
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.75 gpm (6.6 lpm) flow rate.
- Contains flow-regulating check valve for backflow prevention
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-06-2026 18:08 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

OBC compliant when installed to the specific requirements of these regulations.



OBC

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
OBC

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Flow Rate

Handshower Rated Maximum 1.75 gpm (6.6 l/min)

Flow:


Recommended Products/Accessories

K-23723 Faucet cleaner

Required Products/Accessories

- K-8593 72" metal shower hose
 - K-9069 25" sidebar
- or
- K-9514 60" metal shower hose
 - K-9069 25" sidebar
- or
- K-8593 72" metal shower hose
 - K-14791 Wall-mount handshower holder with supply elbow
- or
- K-9514 60" metal shower hose
 - K-14791 Wall-mount handshower holder with supply elbow



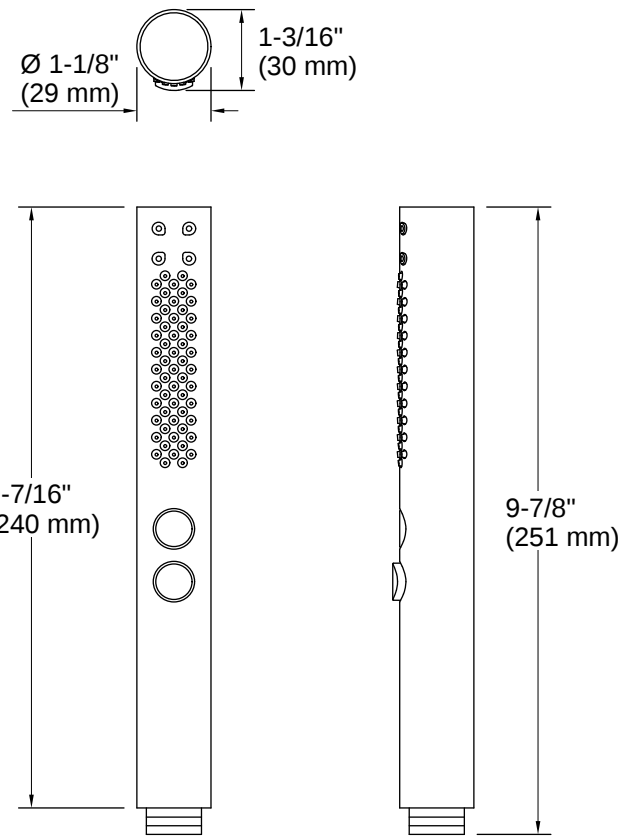

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

Plumbing codes may require that a vacuum breaker be installed in-line to handshowers. Please consult local plumbing codes.

OBC compliant when installed to the specific requirements of these regulations.

