

Three Bar Pot Rack PR38



If you need assistance, please call 1-877-ENCLUME
Enclume Design Products
 24 Colwell Street, Port Hadlock, WA 98339


Enclosed you will find everything needed for the assembly and use of your ceiling rack. Two people make assembly and installation easier. The parts and hardware included are:

Hardware included:

- 4 – 5/16" x 3/8" Button Head Screws
- 2 – 5/16" x 7/8" Button Head Screws
- 2 – 5/16" Nuts
- 1 – Two-point Toggler Mounting Set
- 1 – 3/16" Allen Wrench

Components included:

- 1 – Upper Bar (six holes)
- 1 – Utensil Bar (two holes each)
- 2 – Side Bars (two threaded holes each)
- 4 – Arms
- 2 – 6" ceiling Hooks
- 2 – 15" Round utensil Hooks
- 2 – Ceiling Screw Hooks
- 12 – Straight Pot Hooks (EPHS)
- 6 – Small Straight Hooks (DRPHS)

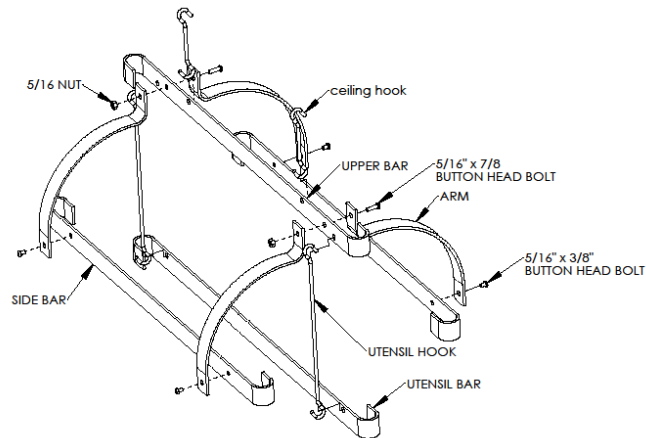

INSTRUCTIONS

- 1) Place the rack parts on a flat surface. Begin by attaching the four arms to the two lower rack bars (two threaded holes in each). Using the Allen wrench insert the 5/16" x 3/8" button head screws (the shorter ones) through the holes in the arms and into the threaded holes in the side bars. Repeat this process four times to connect all the arms to the side bars. Do not tighten screws fully yet.
- 2) Next attach the upper bar to the four arms. Place the upper bar between the tops of one set of arms, line-up the holes at the top of the set of arms with one of the outside holes in the upper bar. Insert one of the two 5/16" x 7/8" button head screws (the longer ones) into an arm hole, through the upper bar and through the other arm in the pair. Thread a 5/16" nut on the protruding button head screw and lightly tighten. Repeat this process to secure the other two arms to the upper bar.
- 3) Now place the rack on a flat surface to level and set to straight, then tighten all screws and nuts to final positions.
- 4) To mount the rack on a ceiling with wood joists above-- insert the two ceiling screw hooks into wood joists. These screw hooks must be driven into the solid wood of the joists.
- 5) Mounting the rack onto a ceiling of dry wall or sheetrock -- Use the enclosed Toggler mounting set. Per the instructions, insert the two togglers into the ceiling and secure. Then insert the machined screw hooks into the inserted togglers.
- 6) Finally hang the 6" Ceiling Hooks from the screw hooks and hang your rack from the inside holes in the upper bar. Hang the 15" Utensil Hooks on the Lower outside holes on the upper and attaché the lower bar. Lastly hang the dozen pot hooks around the two side bars, and the six utensil hooks on the lower utensil bar.
- 7) Your rack is now ready to use, and the Toggler system will safely hold the rack and several hundred pounds of cookware. Our hammered steel racks are finished with an industrial wax designed to give years of protection. Cleaning is easily done with a damp cloth. Dry thoroughly after cleaning. If a touch-up is ever needed we recommend a commercial wax product.

WARNING: It is important that your ceiling rack is assembled correctly. If the unit is assembled or used incorrectly, it could become unstable and collapse, possibly causing injury.

LIMITED WARRANTY: This product is warranted to be free of material defects, other than that from normal use, for a period of five years from the date of purchase. Customer's exclusive remedy shall be the repair or replacement of the defective product and shall be subject to the following conditions: (1) notice of any defect is received by Enclume within the warranty period and (2) customer returns the defective product to Enclume Design Products, 24 Colwell St., Port Hadlock, WA 98339, postage prepaid within 20 days following a return authorization number (which may be obtained by telephoning the number at the top of this instructions) being provided to the customer by Enclume. There are no other warranties, expressed or implied. THERE ARE NO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ENCLUME SPECIFICALLY DISCLAIMS ANY AND ALL INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE PURCHASE OR USE OF ENCLUME'S PRODUCTS.