01)Reach out to us, it's easy!

★ Email: brandservice.us@outlook.com
- Missing Parts Replacement Service
- Shipping Damage Replacement Service
- Custom Extra Rod Service
- Bulb Purchase Service

Only our experts give all the support you need

- Faster response.
- Professional product guidance.
- Satisfying after-sales support.

Our offers fully comply with Platform's Terms of Service and Privacy Notice.

02)Before you begin

- Turn off power before installation.
- For indoor dry locations only.
- If you are not familiar with electrical wiring, please consult a licensed electrician.

03)How to Choose G9 Bulb ?

- QTY: 16×G9 Bulb(Not Included)
- Watts: 4~9W Per Bulb
- Compatible G9 Bulb Size(ΦxH): Within 0.7 x 2.1 inch.
- Select Temperature Color: 3-color Temperature or 2700K ~ 6000K or Dimmable G9 Bulb and Dimmer Switch (Not Included).

04)Quick Start Guide | Chandelier Model: C007

Please examine the package contents to ensure everything is included as expected.

Please scan the code and subscribe to search for the model **C007** to view the installation video.

05)Package Contents

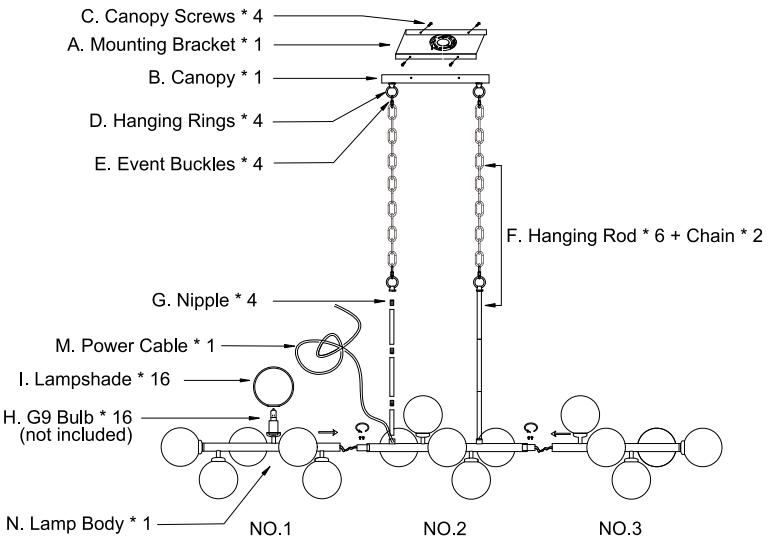

A	Mounting Bracket * 1
B	Canopy * 1
C	Canopy Screws * 4
D	Hanging Rings * 4
E	Event Buckles * 4
F	Hanging Rod * 6 + Chain * 2
G	Nipple * 4
H	G9 Bulb * 16 (not included)
I	Lampshade * 16
J	Gloves * 1
K	Ground Wire * 1
L	Wire Nut * 3
M	Power Cable * 1
N	Lamp Body (No. 1, No. 2, No. 3.)
O	Outlet Box Screw * 2



06)Choose Rod or Chain (Adjustable) by Ceiling Height

Ceiling Height	Recommended Rod or Chain	Approx. Hanging Height
8 ft (240 cm)	1 x 11.8 in Rod (30cm)	≈ 24 in (60cm)
9 ft (270 cm)	2 x 11.8 in Rod (60cm)	≈ 36 in (90cm)
10 ft (300 cm)	3 x 11.8 in Rod (90cm)	≈ 48 in (120cm)
11 ft (370 cm)	3 x 11.8 in Rod + 35.4 in (90cm) Chain	≈ 48-83 in(120-210cm)(Adjustable)

Fixture bottom should hang 30–36 inches above floor or table surface.

07)Fixture Aassembly (Detailed Start Guide):

1. Step 1) Wearing Gloves (J), pick up the Lamp Body (No. 1, No. 2, No. 3.) (N), and splice the 3 sections of the lamp body; firstly, stuff the wires of the interface into the tube, then lock the screws, and finally form 1 lamp body.

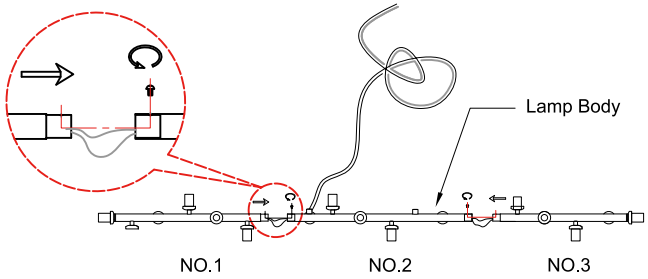

Step 2) Secure the Hanging Rod (F) with the Nipples (G) and splice to the proper length.
Step 3) Route the Power Cable (M) through the Hanging Rod (F), then lock the Hanging Rings (D), and finally through the Canopy (B). Next, lock on the Event Buckles (E).

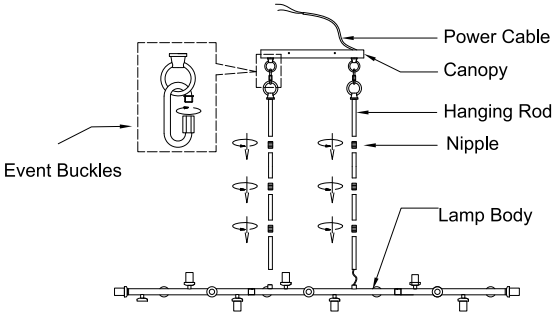

08)Installing The Bracket:

2.Step 1) Loosen side Canopy Screws (C) on Canopy (B) and remove Mounting Bracket (A).
Step 2) Remove the screws on the outlet box and secure the mounting bracket to the outlet box with the removed screws or Outlet Box Screws (O).

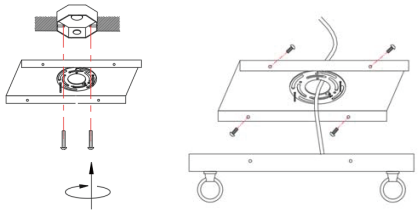

09)Mounting And Wiring:

3. Step 1) Connect the Ground Wire (bare copper) (K) to the ground wire.
Then, connect the fixture Power Cable (M) to the indoor power cable:
the neutral wire (white) to the neutral wire with the Wire Nut (L), and the hot wire (black) to the hot wire with the Wire Nut (L). Wrap the connections with electrical tape.
Step 2) Secure Canopy (B) to Mounting Bracket (A) with side Canopy Screws (C).

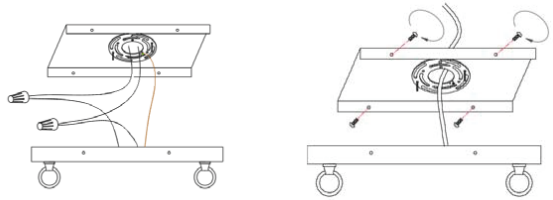

10)Install Bulbs And Lamp Shade:

4.Step 1) Install 16 G9 LED bulbs (not included) (H) up to 9W, then install the lamp shades on the sockets.



Note: Fully dimmable when used with dimmable bulbs and compatible dimming switches (not included).
Step 2) After checking the correctness, power on the test light.

11)Final Check & Care:

★ Email: brandservice.us@outlook.com

√ Fixture is level and stable. √ Glass shade is secure.
√ All screws are tightened. √ Wiring connections are safe.

Caution:

⚠ 1. Turn off power before cleaning. Wipe with a soft, dry cloth. Do not use abrasive cleaners.
⚠ 2. Avoid using water or cleaning solutions on light fixture.

12)Ordering Parts:

Keep this sheet for future reference in case you need to order replacement parts. All parts for this fixture can be ordered from the place of purchase. Be sure to use exact wording from illustration when ordering parts.

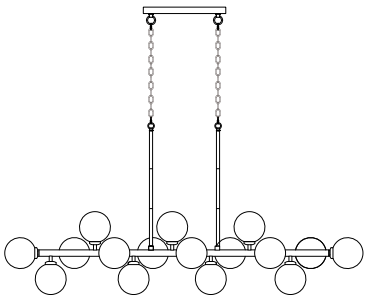

IMAGE FOR FINISHED PRODUCT
Chandelier Model: C007