

Item Number: PL-EG-08-299
PL-EG-08-300
PL-EG-08-301

Pendant Light

1-light Globe Pendant Light

Assembly Instructions



ARTS TYPE & QTY INCLUDING:


ARTS TYPE & QTY INCLUDING:		
item NO	Description	Quantity
C	Mounting plate	X1
D	Green grounding screw	X1
E	Canopy	X1
F	Barrel Nut	X3
G	threaded tupe (6")	X2
H	threaded tupe (12")	X3
I	Iron frame A	X1
J	Screw	X3
K	expanding nail	X4
L	iron pipe B(4")	X3
M	Iron frame B	X1
N	Glass plate	X58
O	Nut	X29
P	Quick link	X1
Q	Insurance buckle	X1
R	iron pipe A(1")	X29
S	Lamp body	X1
ARTS TYPE & QTY INCLUDING:		
A	Mounting Screw	X2
B	Wire Connector	X3

WARNING & INSTALLATION INSTRUCTIONS(To reduce the risk of fire, electric shock, or injury to persons):

- 1.We suggest installation by a licensed electrician.
2. Please read the instruction carefully and save it as you may need it at later time.
- 3.Before you start, NEVER attempt any work without shutting off the electricity until the work is done.
A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position.
B). Place the wall switch in the "OFF" position.
- 4.Mounting surface should be clean, dry, flat, strong enough and 1/4" larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
- 5.Make sure that the ceiling or wall can stand the weight of the lamp before fixture.
- 6.Make sure the voltage you are using is 120V. The maximum wattage is TYPE B, Max 40W per bulb.
- 7.Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
- 8.When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
- 9.The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.
- 10.Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.

INSTALLATION STEPS:

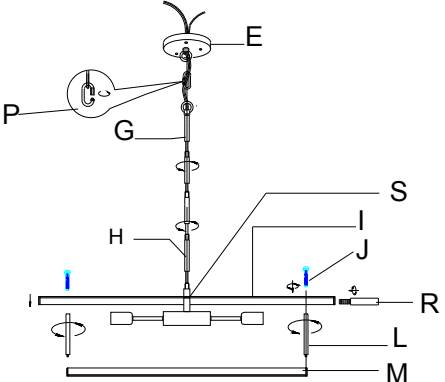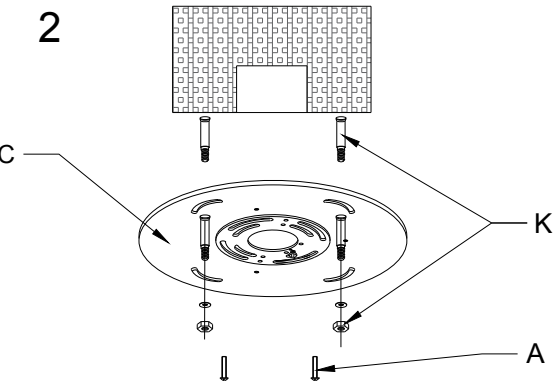
	
Step 1: (1) Assemble the iron rod B (L) onto the iron frame B (M), Then install the lamp body (S) onto the iron rod B (L) and secure it with screw (J). (2) Pass the wire throught the threaded pipe (H) and the threaded pipe (G) one by one and tighten the wires, Then twist the threaded pipe onto the lamp body . Next, connect the threaded pipe to the canopy(E) with the quick link (P) and pass the wires throught the canopy (E).. (3). Screw the iron pipe A (R) into the holes of metal frame A (I) and metal frame B (M) on the lamp body.	
	
Step 2: (1) Use a measuring tape to measure the distance between the four holeson the mounting plate. Drill holes in the wall at the same distances as the holes on the mounting plate, And then tap the expansion nail (K) into the holes. (2) Remove the nuts and washers from the expansion nail (K), then attach the mounting plate (C) to the expansion bolts. Use the nuts and washers of the expansion nail (K) to secure the mounting plate (C) to the wall. Then, Use the mounting screws (A) to secure the mounting plate (C) to the outlet box.	

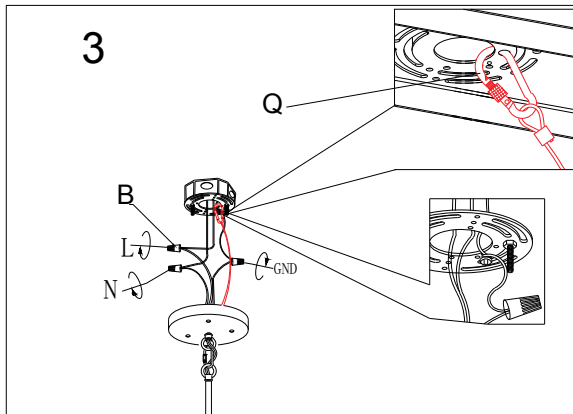

Step 3:

- (1). Open the insurance buckle(Q), And then attach it to the mounting plate(C) as shown in the diagram.
- (2).Take Wire Connector (B) and connect the main power supply cable (L wire) to the positive (+) wire of power supply cable. Similarly, Connect the main power supply cable (N wire) to the negative (-) wire, And the ground wire to the ground wire. Ensure no copper strands are exposed to prevent electric shock.


4

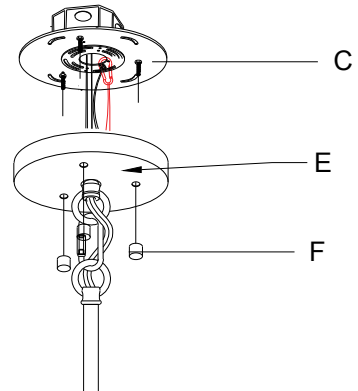

Step 4:


Install the Canopy (E) to the mounting plate (C) and secure it with the Barrel nut (F).

5

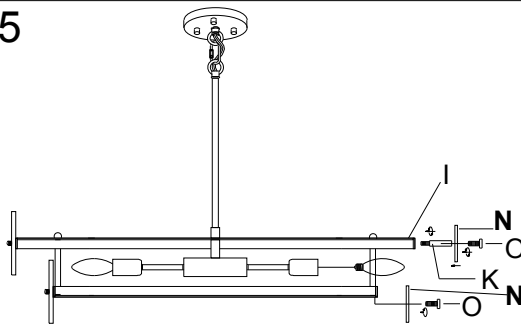


Step 5:

- 1). Install the glass plate (N) onto the lamp body using the nut (O)
- 2). Install the light bulb(bulb not included), Ensuring the wattage does not exceed the warning label.

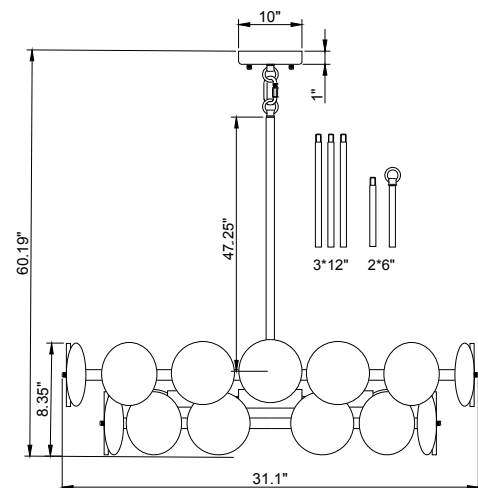

Connect ground wires according to the below

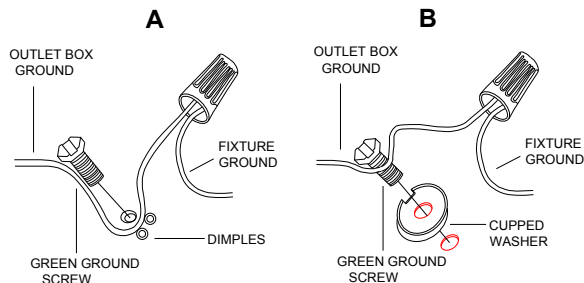

Connect wires according to the below chart

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear,Brown,Gold or Black without tracer	Clear,Brown,Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth(see illus.)

Twist wires together with plastic wire connectors until tightly joined, and wrap each connector with approved electrical tape. Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box.

Check everything is installed properly then you could turn on the light. Enjoy!

CLEANING

To clean, wipe the fixture with a soft cloth. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

After-Sales Service:

If you have any questions during installation or use, feel free to contact us anytime via our service email. Service Email: info@taloya.com