

KOHLER®

Roughing-In

K-3827
BANCROFT®
COMFORT HEIGHT® TOILET

Product Information

| | |
|--|--------------------------------|
| Applicable product: | |
| Comfort Height toilet – left-hand trip lever | K-3827 |
| Fixture: | |
| Configuration | two-piece, elongated |
| Water per flush | 1.28 gpf (4.8 lpf) |
| Passageway | 2-1/8" (54 mm) |
| Water area | 11-1/4" (286 mm) x 9" (229 mm) |
| Water depth from rim | 5-3/8" (137 mm) |
| Seat post hole centers | 5-1/2" (140 mm) |
| Included components: | |
| Bowl | K-4067 |
| Tank | K-4383 |
| Tank cover | 1033723 |
| Trip lever | 1160365 |
| Bolt cap accessory pack | 1013092 |

Installation Notes


Install this product according to the installation guide.

For back-to-back toilet installations: Use only a 45° double wye fitting.

Will comply with the Americans with Disabilities Act (**ADA**) when installed per the requirements of the 2010 ADA Standards of Accessible Design, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.

The model is acceptable for left-hand Accessible compartment installations only.

Fixture conforms to ASME Standard A112.19.2/CSA B45.1. All dimensions are nominal.

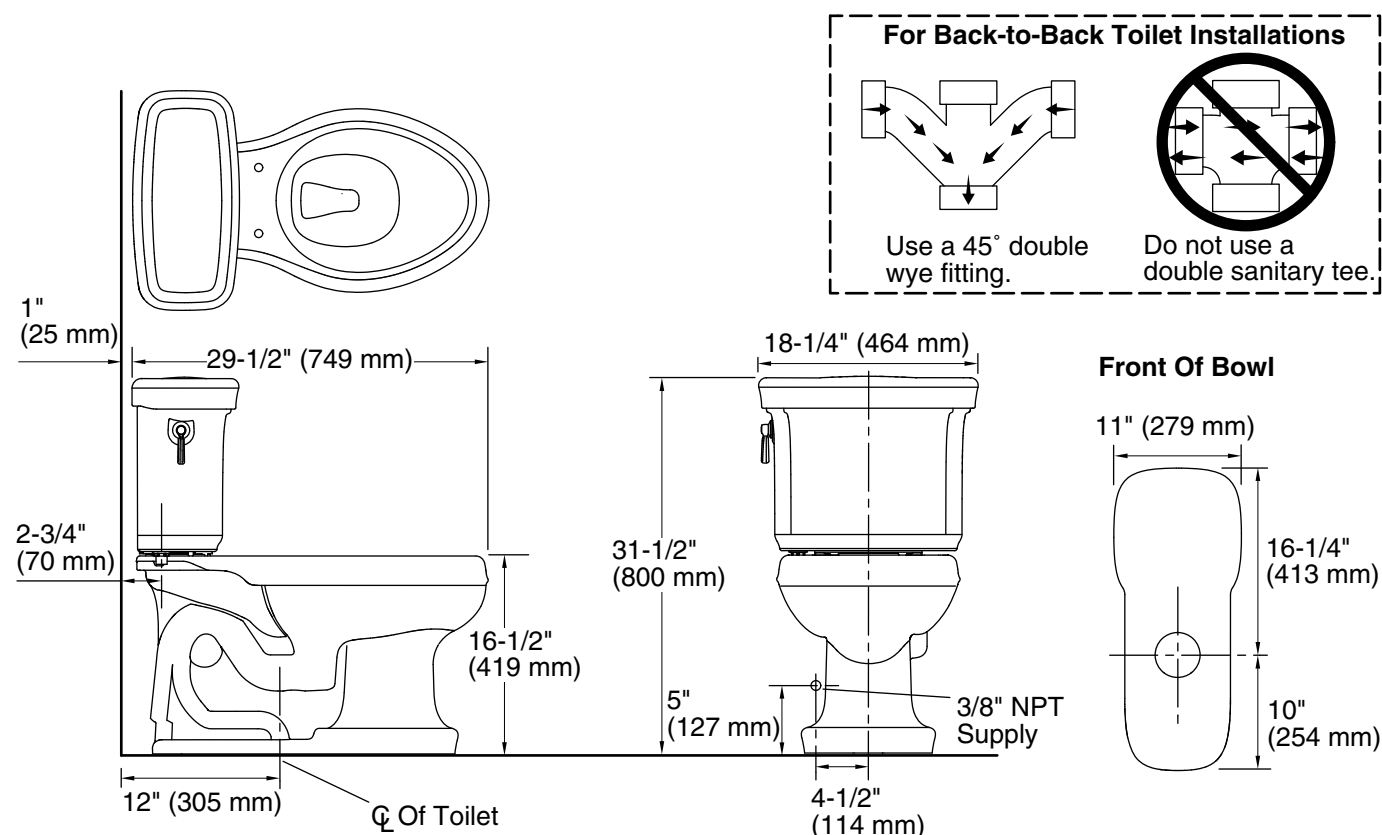

BANCROFT® COMFORT HEIGHT® TOILET
1155370-1-C

KOHLER®