


User's Manual



DIMENSIONS

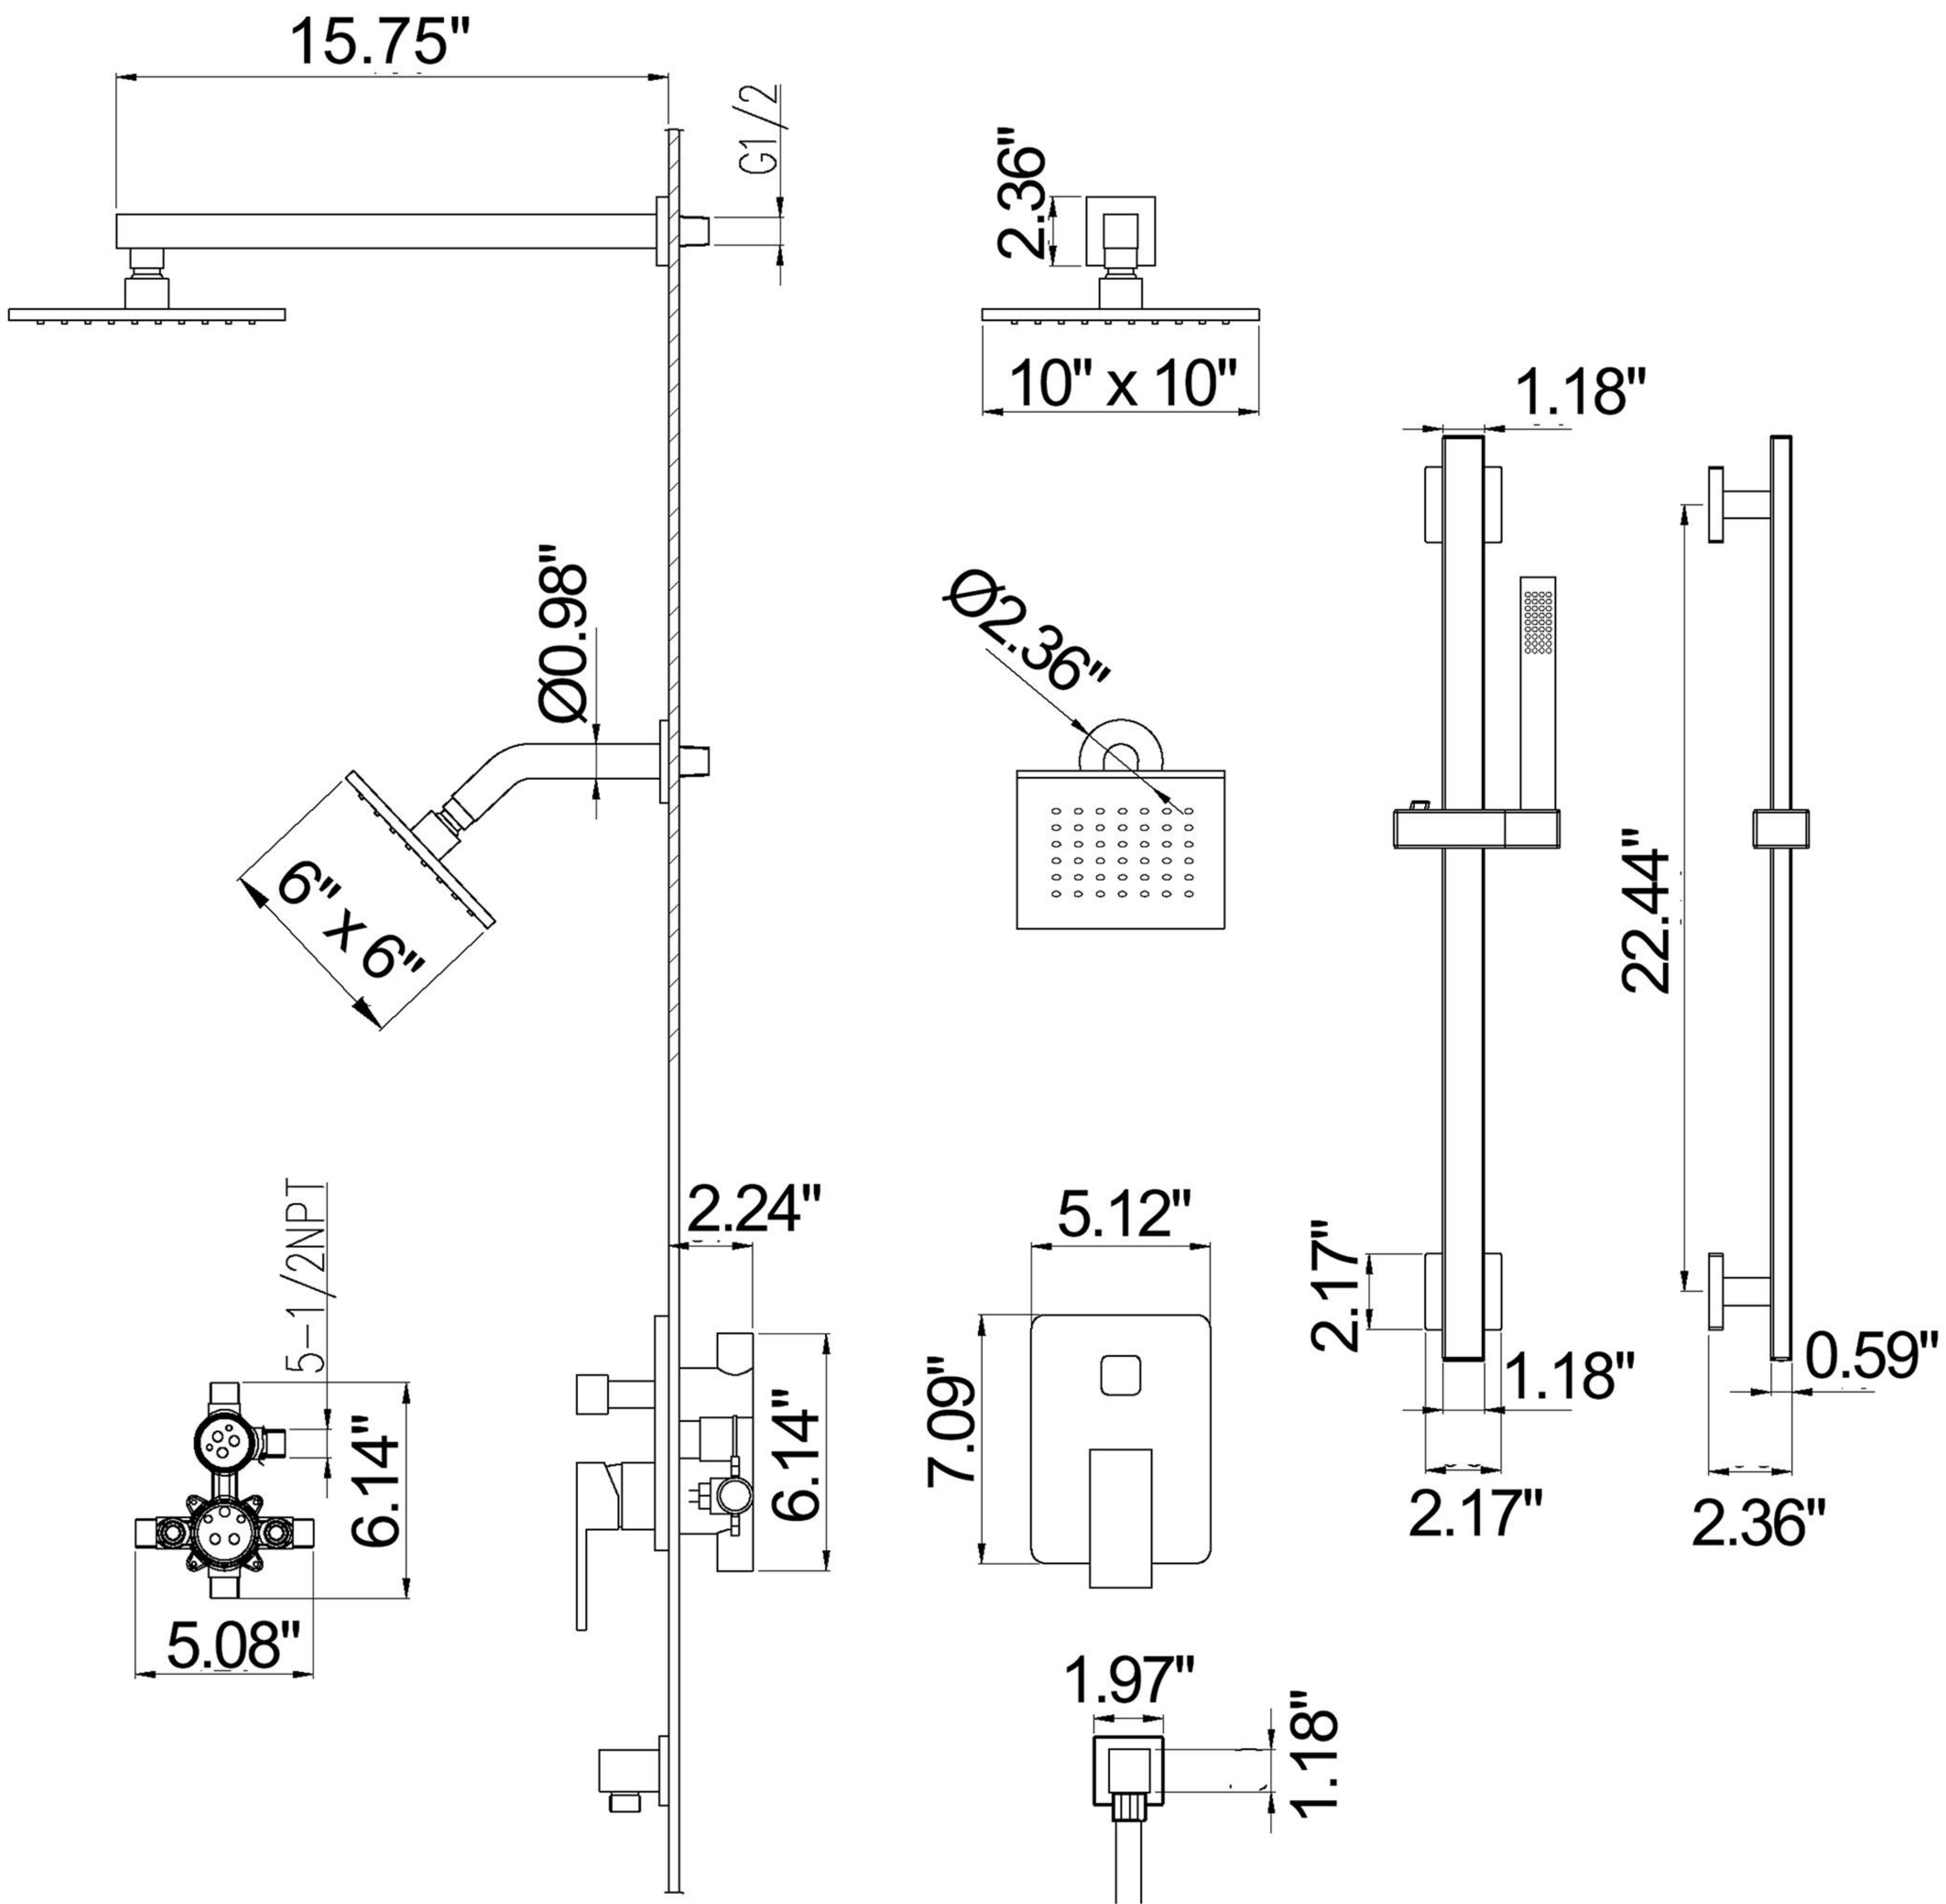

IAPMO RESEARCH AND TESTING, INC.
5001 East Philadelphia Street, Ontario, California 91761-2816 • USA • 909-472-4100 • 909-472-4244 • www.iapmort.org

ANSI **IAPMO R&T** **ISO 9001**

CERTIFICATE OF LISTING

This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at pld.iapmo.org

Effective Date: December 2019 -Rev. 2/24/2020- Void After: December 2024

Product: Flexible Water Connectors File No. 5311

Issued To: Fanaki Group Inc. Mechanical & Electrical Industrial Zone, Yuhuan County, Yuhuan 317600, ZHEJIANG China

Identification: Products shall be marked with manufacturer's name or trademark, a statement "For use with water in accessible locations only." The products shall also bear the cUPC® certification mark. Markings shall be by means of either a permanent mark on the product, a label on the product or a tag attached to the product.

Characteristics: Flexible water connectors manufactured in various sizes, lengths and metal end fittings for hot or cold water applications that consist of an inner tube, which may or may not have an outer braided cover. Connectors are to be installed for use in accessible locations only. To be installed in accordance with the manufacturer's instruction, and the latest edition of the Uniform Plumbing Code and National Plumbing Code of Canada.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the

Tim Collings Chairman, Product Certification Committee *Ran Cherry* CEO, The IAPMO Group

This listing period is based upon the last date of the month indicated on the Effective Date and Void After Date shown above. Any change in material, manufacturing process, marking or design without having first obtained the approval of the Product Certification Committee, or any evidence of non-compliance with applicable codes and standards or of inferior workmanship, may be deemed sufficient cause for revocation of this listing. Production of or reference to this form for advertising purposes may be made only by specific written permission of IAPMO Research and Testing, Inc. Any alteration of this certificate could be grounds for revocation of the listing. This document shall be reproduced in its entirety.

IAPMO RESEARCH AND TESTING, INC.
5001 East Philadelphia Street, Ontario, California 91761-2816 • USA • 909-472-4100 • 909-472-4244 • www.iapmort.org

ANSI **IAPMO R&T** **ISO 9001**

CERTIFICATE OF LISTING

This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at pld.iapmo.org

Effective Date: November 2019 Void After: November 2024

Product: Plumbing Fixture Fittings File No. 10633

Issued To: Aqua Gallery Co., Ltd 13th-15th A10 Block International Ceramics Sanitary City, 528000 Foshan, China

Identification: Plumbing supply fittings complying with this Standard shall be marked with the manufacturer's recognized name, trademark, or other mark or, in the case of private labeling, the name, trademark or other mark of the customer for whom the fitting was manufactured. The marking shall be accomplished by use of a permanent mark or by placing a permanent label on the product. Markings on plumbing supply fittings shall be visible after installation.

Single-handle, single-control, and automatic compensating mixing bath and shower valves shall have identifiable temperature control settings in which the settings are indicated by words ("cold", "warm", "hot", etc.), by numbers, or graphically.

Packages shall be marked with the manufacturer's name, trademark, or other mark as well as the model number or, in the case of private

Tim Collings Chairman, Product Certification Committee *Ran Cherry* CEO, The IAPMO Group

This listing period is based upon the last date of the month indicated on the Effective Date and Void After Date shown above. Any change in material, manufacturing process, marking or design without having first obtained the approval of the Product Certification Committee, or any evidence of non-compliance with applicable codes and standards or of inferior workmanship, may be deemed sufficient cause for revocation of this listing. Production of or reference to this form for advertising purposes may be made only by specific written permission of IAPMO Research and Testing, Inc. Any alteration of this certificate could be grounds for revocation of the listing. This document shall be reproduced in its entirety.

IAPMO RESEARCH AND TESTING, INC.
5001 East Philadelphia Street, Ontario, California 91761-2816 • USA • 909-472-4100 • 909-472-4244 • www.iapmort.org

ANSI **IAPMO R&T** **ISO 9001**

CERTIFICATE OF LISTING

This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at pld.iapmo.org

Effective Date: March 2019 Void After: March 2024

Product: Plumbing Fixture Fittings - Components File No. MC-9703

Issued To: Ningbo Wanhai Cartridge Technology Co., Ltd. Xiachen Zone, Chunhu Fenghua, NINGBO 315538 China

Identification: Each fitting component shall bear permanent legible markings to identify the manufacturer. This marking shall be the trade name, trademark, or other mark known to identify the manufacturer. The product shall also bear all other markings required by the standard. The marking shall be applied so as to be visible after installation. The product or packaging shall also bear the cUPC® certification mark along with the term "COMPONENT" above.

Characteristics: Plumbing fixture fitting components to be installed in accordance with the manufacturer's instructions and the requirements of the latest edition of the Uniform Plumbing Code.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the laboratory's compliance to the applicable requirements of ISO/IEC 17025.


Products are in compliance with the following code(s): Uniform Plumbing Code (UPC®)

Tim Collings Chairman, Product Certification Committee *Ran Cherry* CEO, The IAPMO Group


This listing period is based upon the last date of the month indicated on the Effective Date and Void After Date shown above. Any change in material, manufacturing process, marking or design without having first obtained the approval of the Product Certification Committee, or any evidence of non-compliance with applicable codes and standards or of inferior workmanship, may be deemed sufficient cause for revocation of this listing. Production of or reference to this form for advertising purposes may be made only by specific written permission of IAPMO Research and Testing, Inc. Any alteration of this certificate could be grounds for revocation of the listing. This document shall be reproduced in its entirety.

INSTALLATION INSTRUCTIONS


INSTALLATION MANUAL Tools You Will Need :

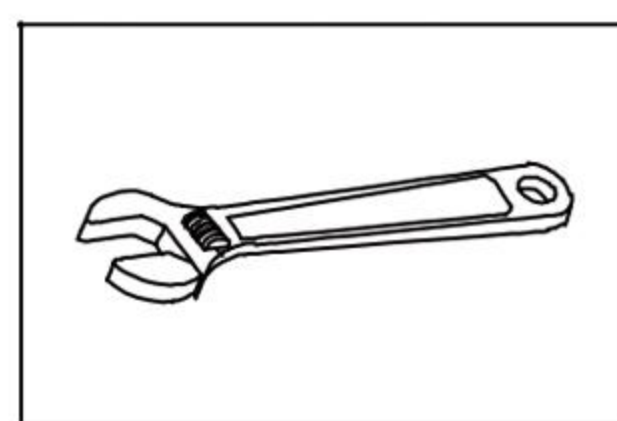


Adjustable wrench

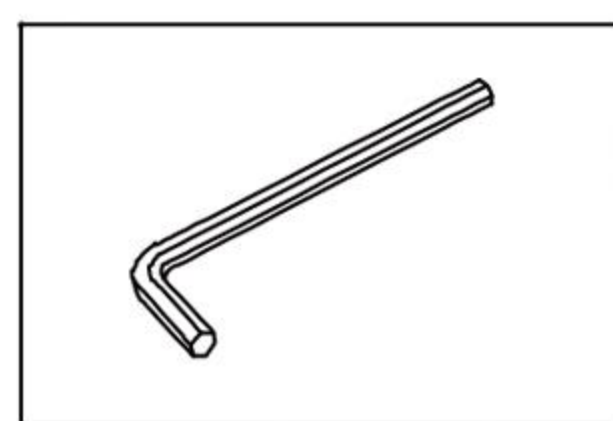

Hexagon wrench

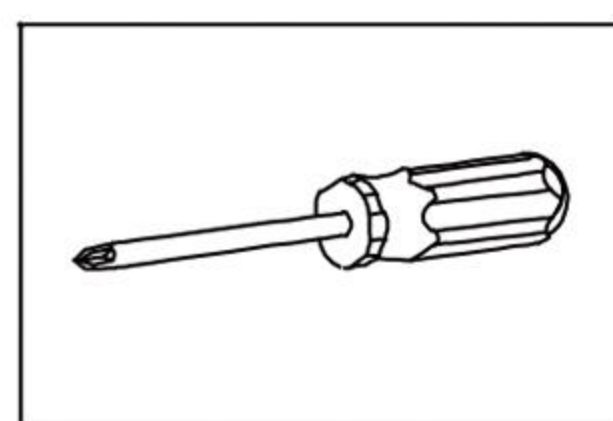




Philips Screwdriver

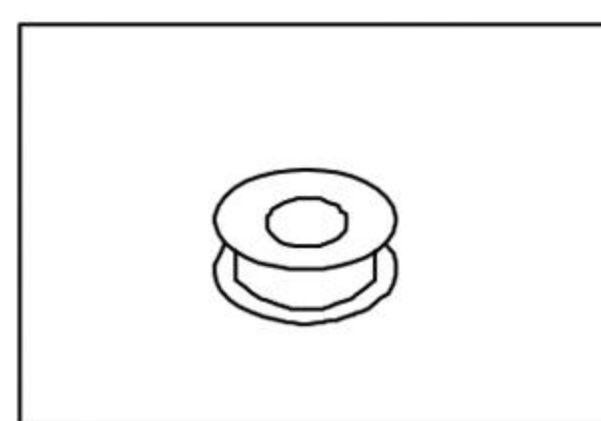


Pipe Tape

Installation Note:


1. Please inspect the package contents upon receipt. If any parts are missing or damaged, contact us immediately.
2. The embedded water outlet pipe joint conforms to the same size standard as our products.
3. Do not disassemble the main body. It has been precisely installed, commissioned, and calibrated at the factory.
4. Ensure correct connection of the hot and cold inlet pipes. When facing the faucet, connect the hot water pipe to the LEFT and the cold water pipe to the RIGHT.
5. Before installation, thoroughly flush the water pipes to remove any debris, sludge, or sediment. This prevents blockages within the product.
6. After installation, carefully check all connections for leaks and ensure every joint is securely sealed.
7. Water Pressure Requirements:
Minimum Inlet Water Pressure: ≥ 0.1 MPa
Maximum Inlet Water Pressure: ≤ 1.0 MPa
8. Maximum Operating Water Temperature: 90°C (194°F). Do not exceed.
9. Maximum Tightening Torque at Nut Joints: 10 N·m (Newton meters). Do not exceed.
10. Avoid excessive bending of the shower hose. Maintain its natural shape and prevent permanent deformation.

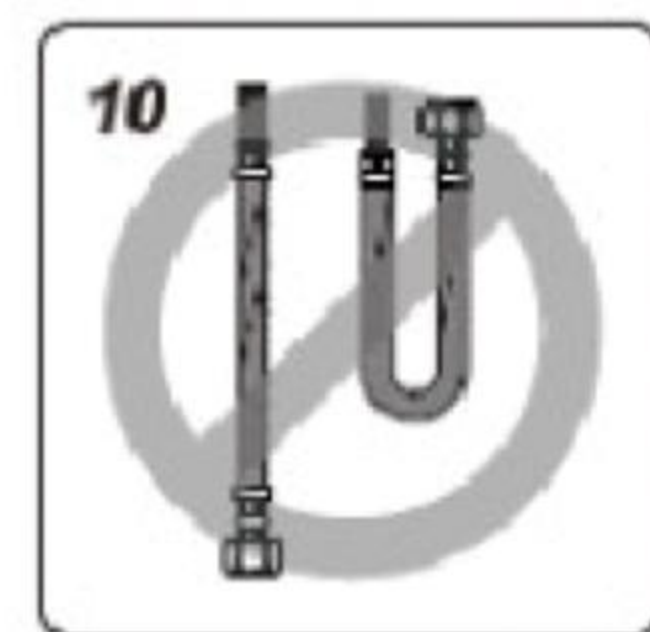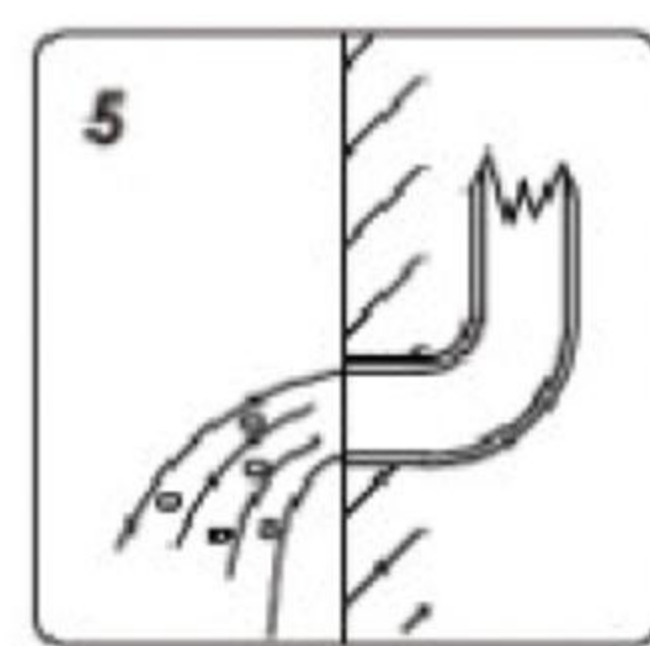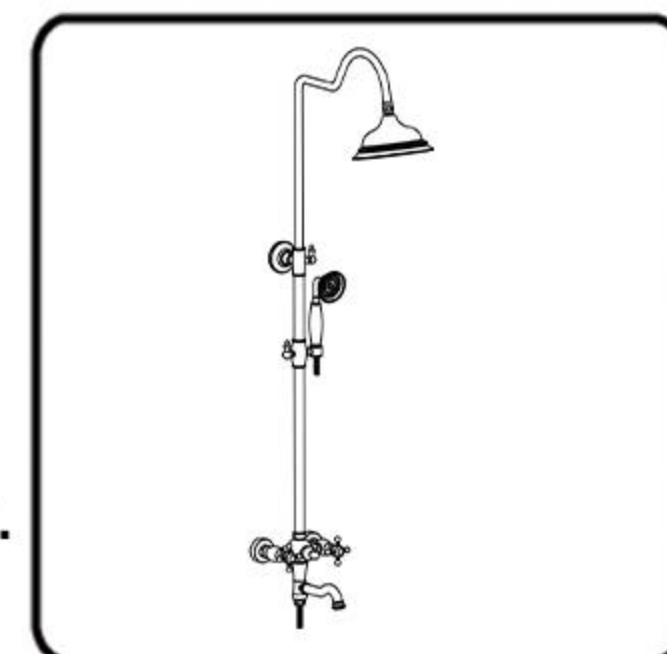

INSTALLATION STEPS

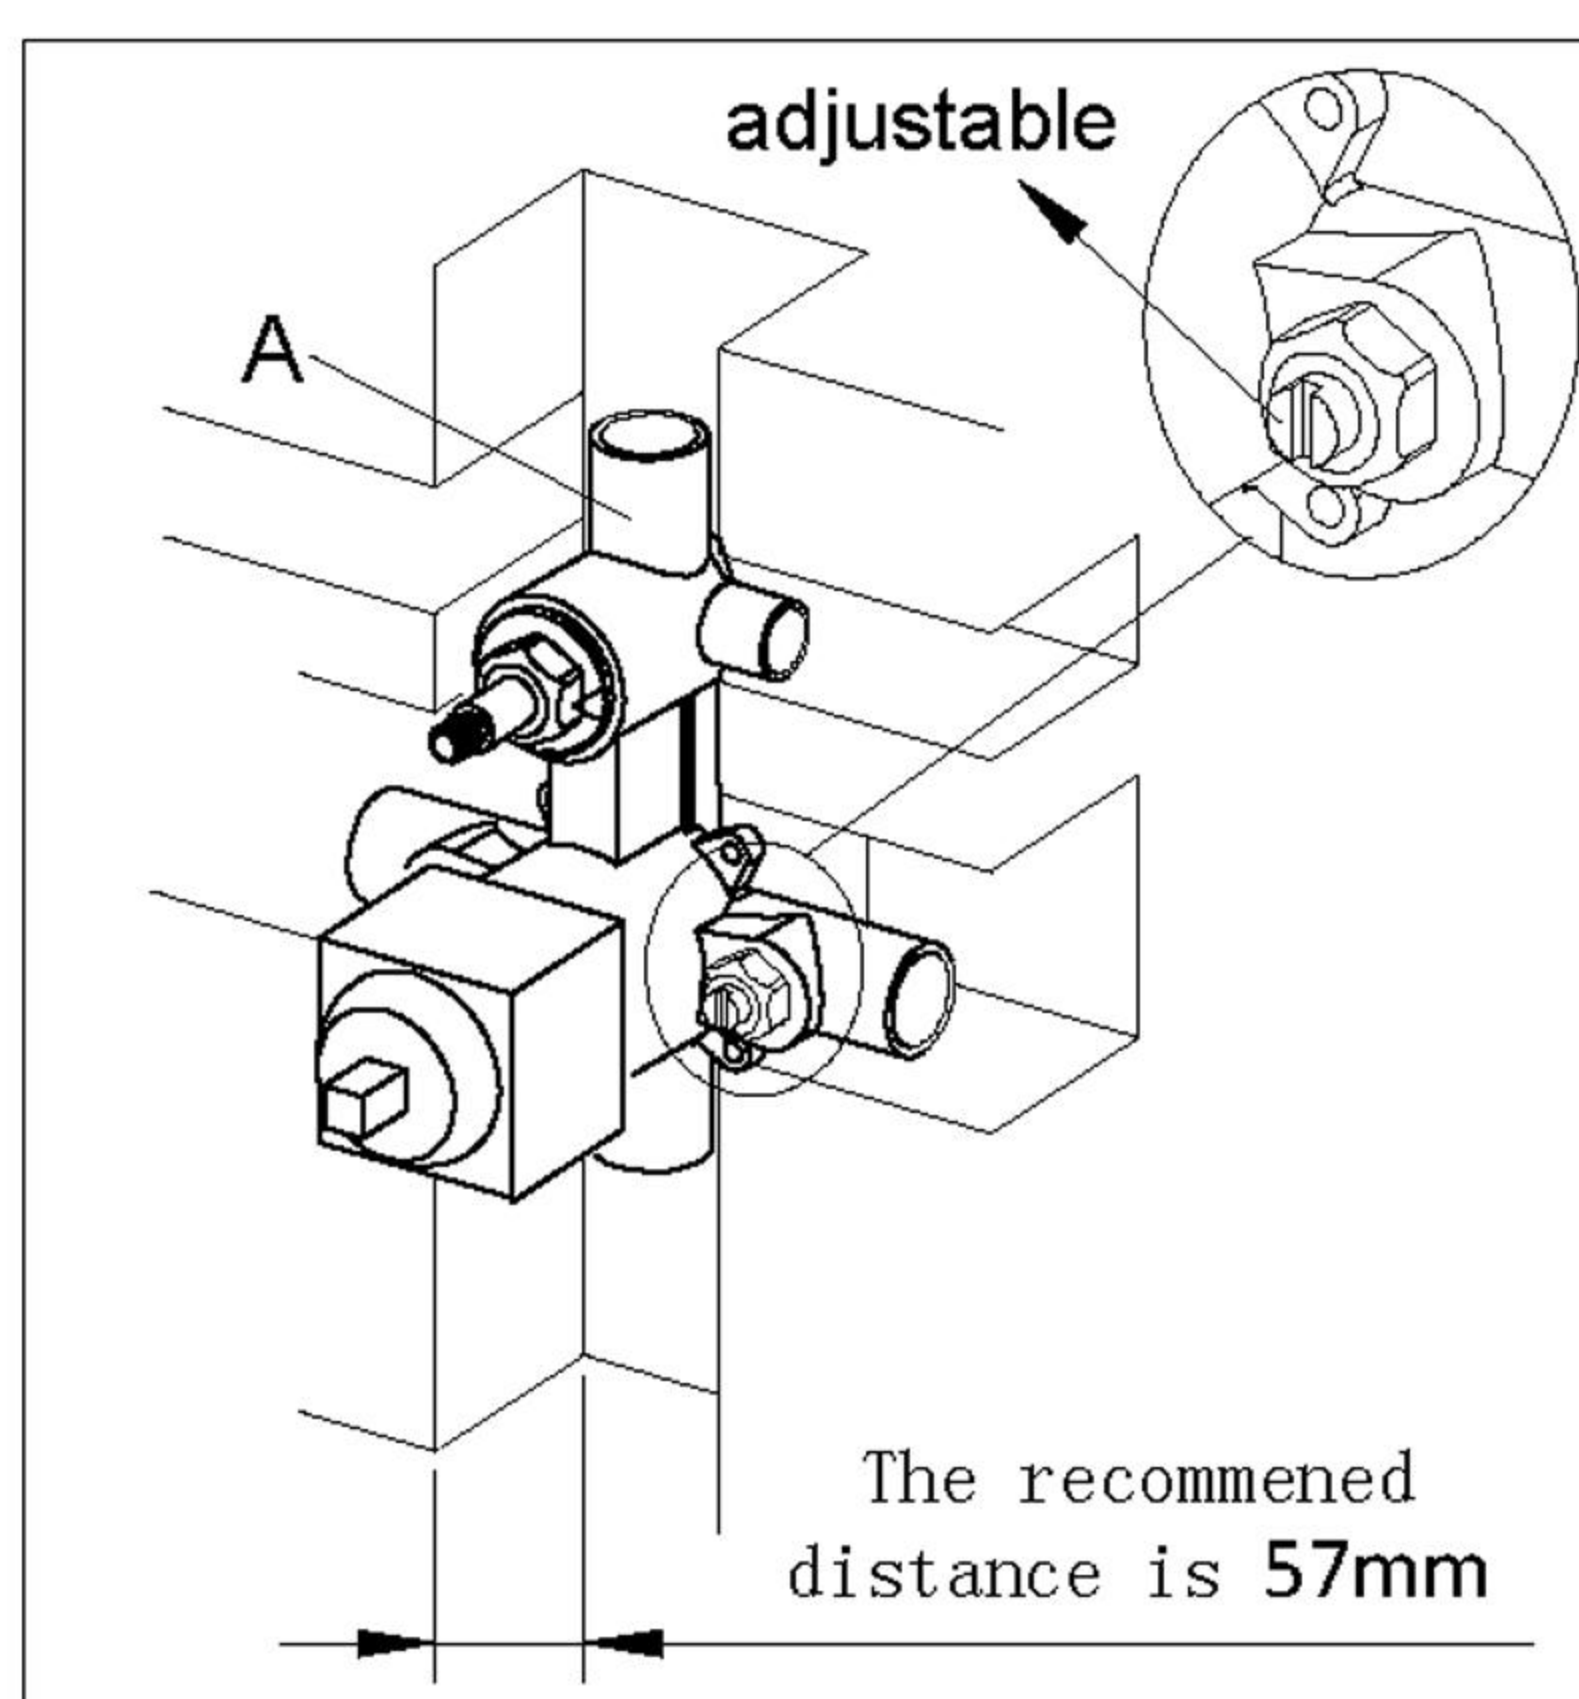


1. Fix the shower valve(A) into the wall, Use a level to ensure that the valve is straight and level. The distance between the bottom of the body and the surface of the tile is 57mm.

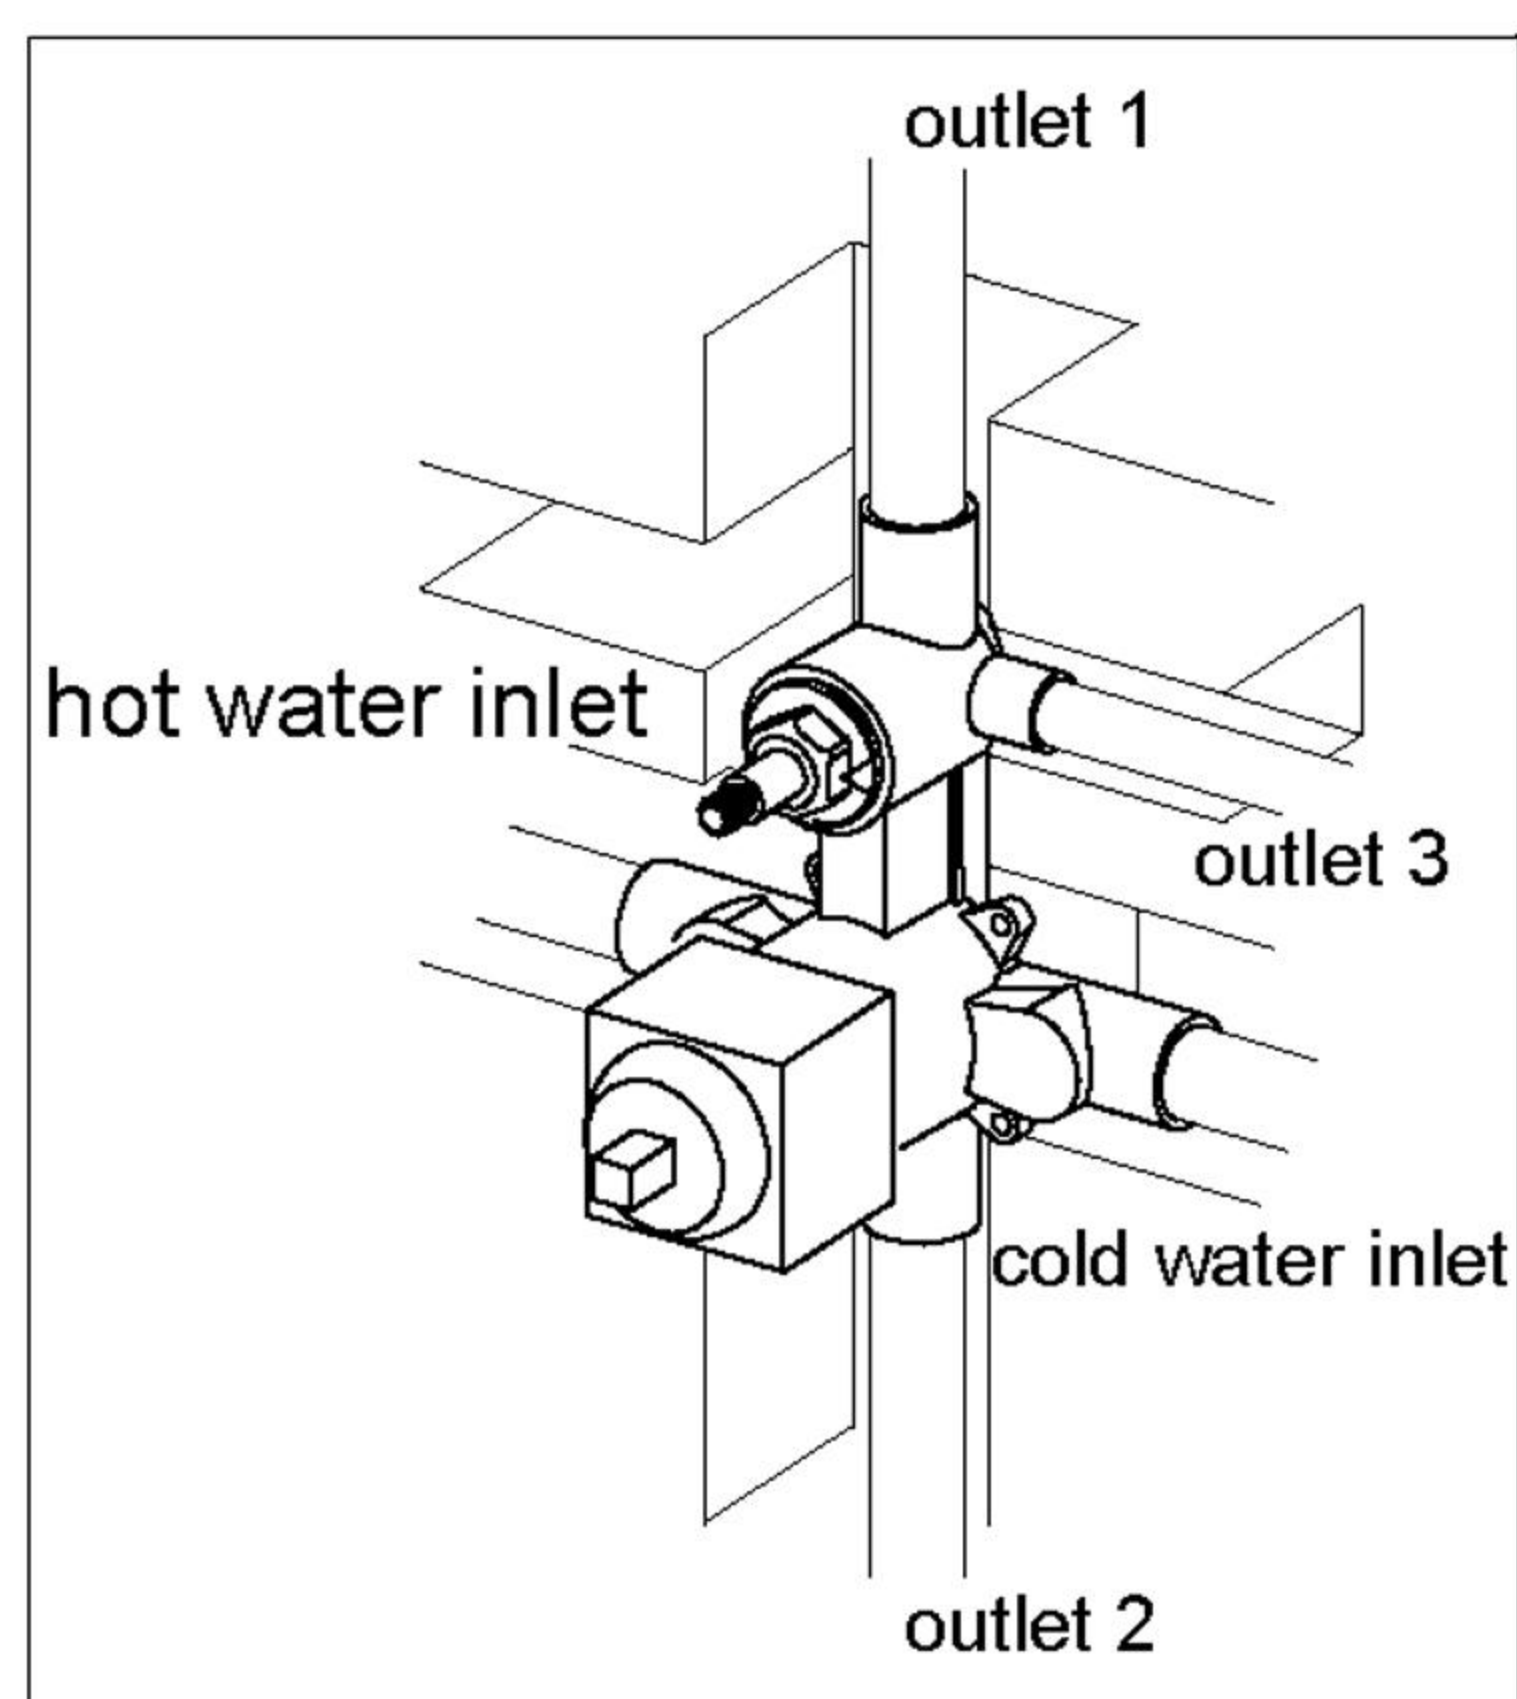


2. Wrap Teflon tape around the pipe threads and connect hot and cold water supply lines and in-wall pipes(not included) as desired to the valve. Turn on the water supply and open the cartridge to check for leakage. Then, put on the protective cover.


INSTALLATION STEPS

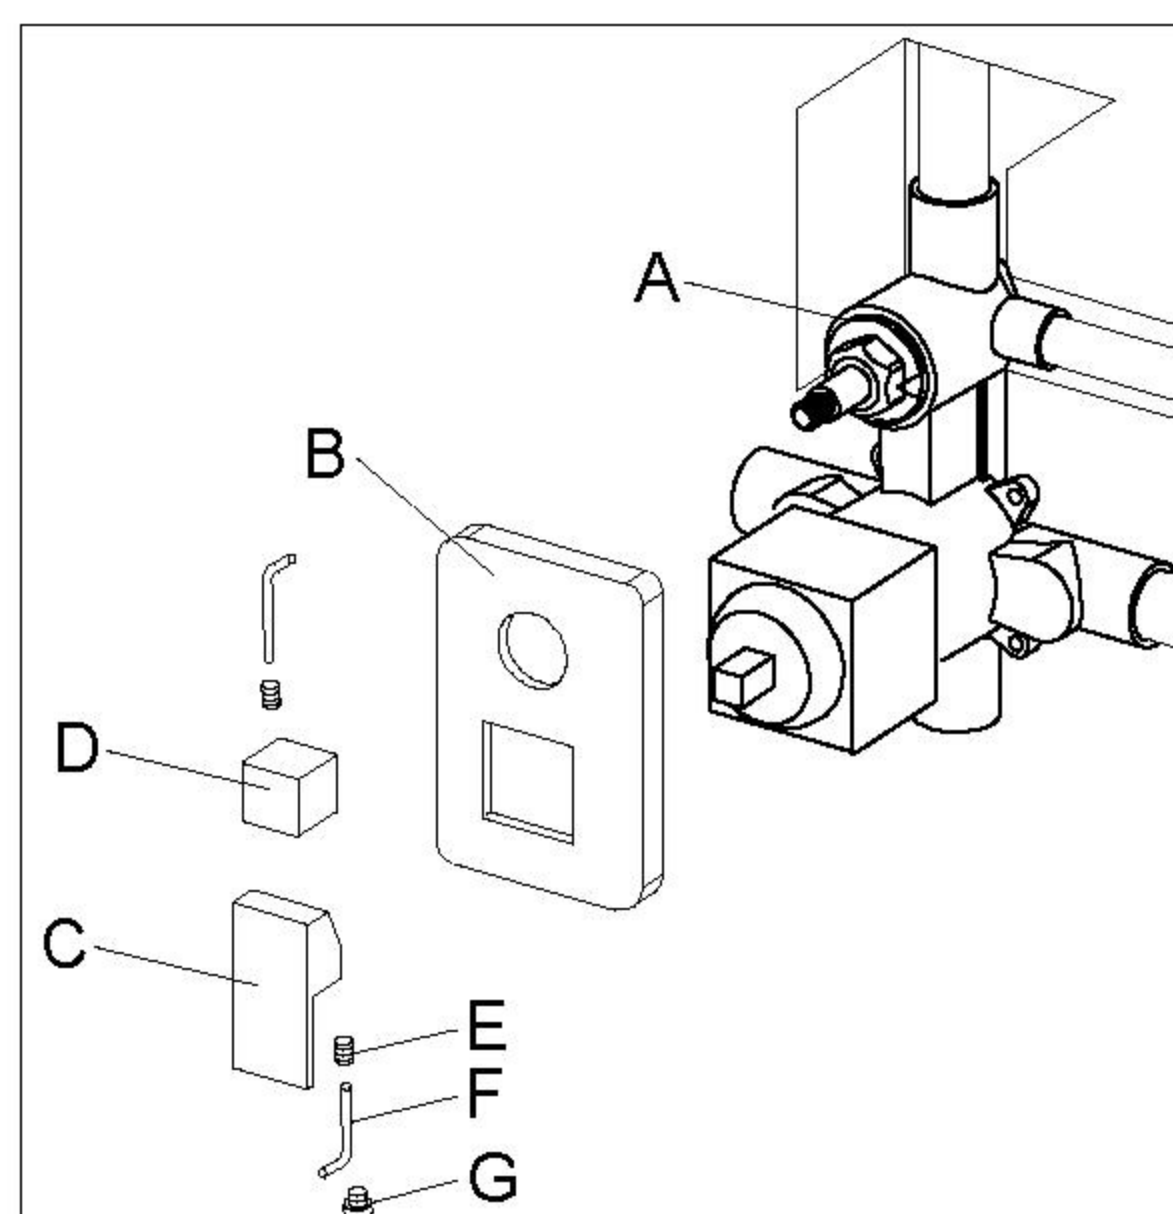


3.Remove the protective cover when the finished wall is completed and install the escutcheon (B) to the valve (A) and press it against the finished wall.Then, install the handle (C) and diverter knob (D),tighten set screws (E) with Allen key (F),and put on the indication buttons (G).

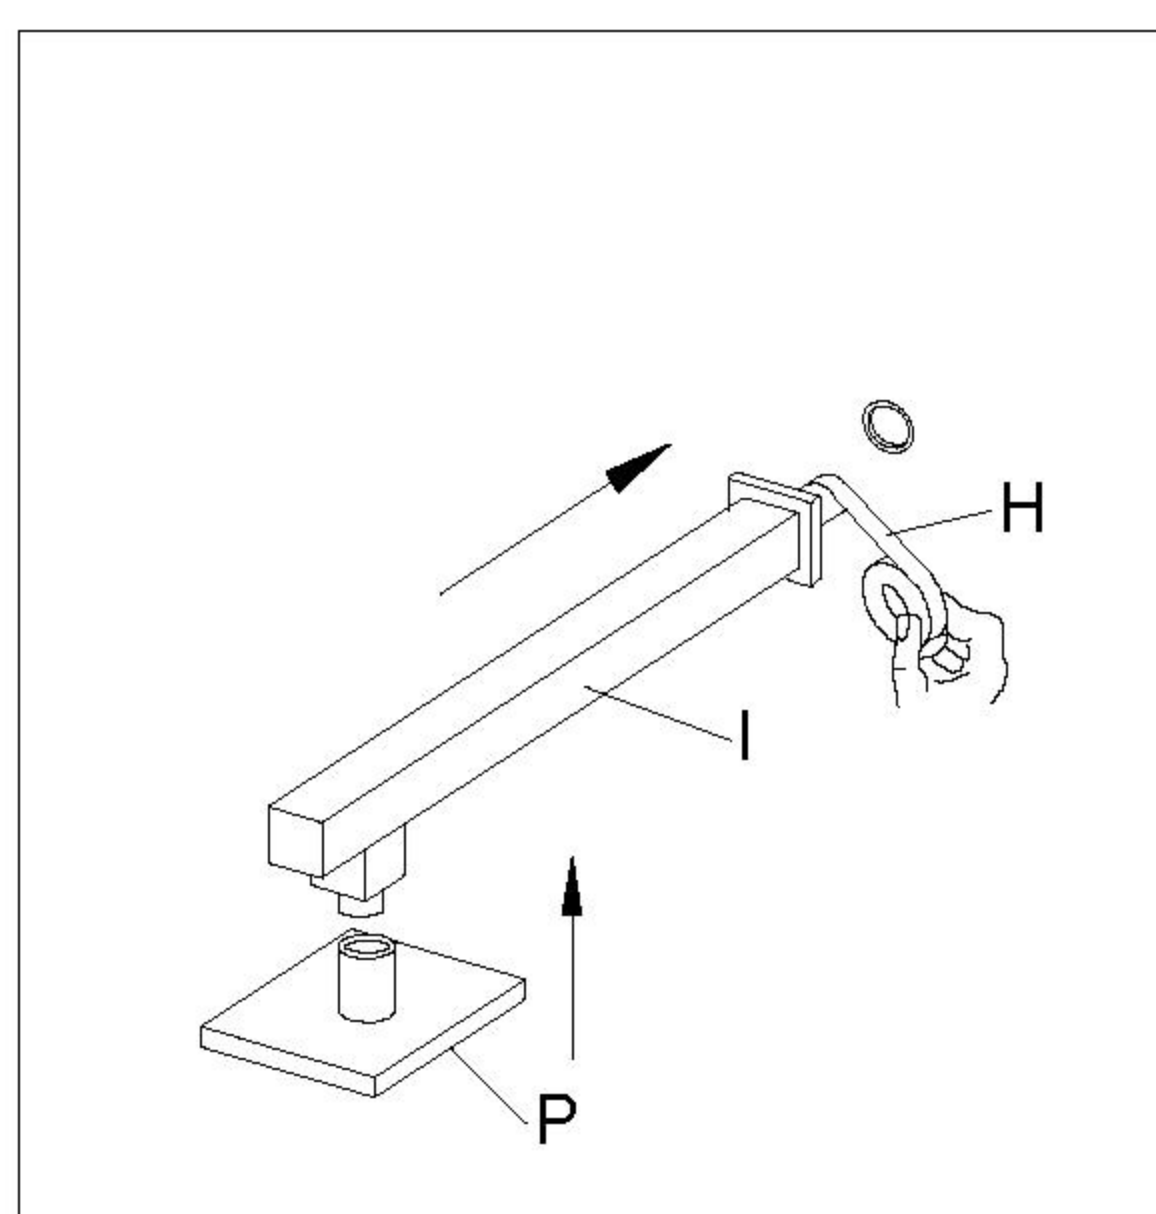


4.Turn the water on for 1 minute to flush any debris. Apply Teflon tape (H) to the threaded tail pipe and install the shower hose (I) into the outlet on the wall,Then connect the top shower (P) to the spout.

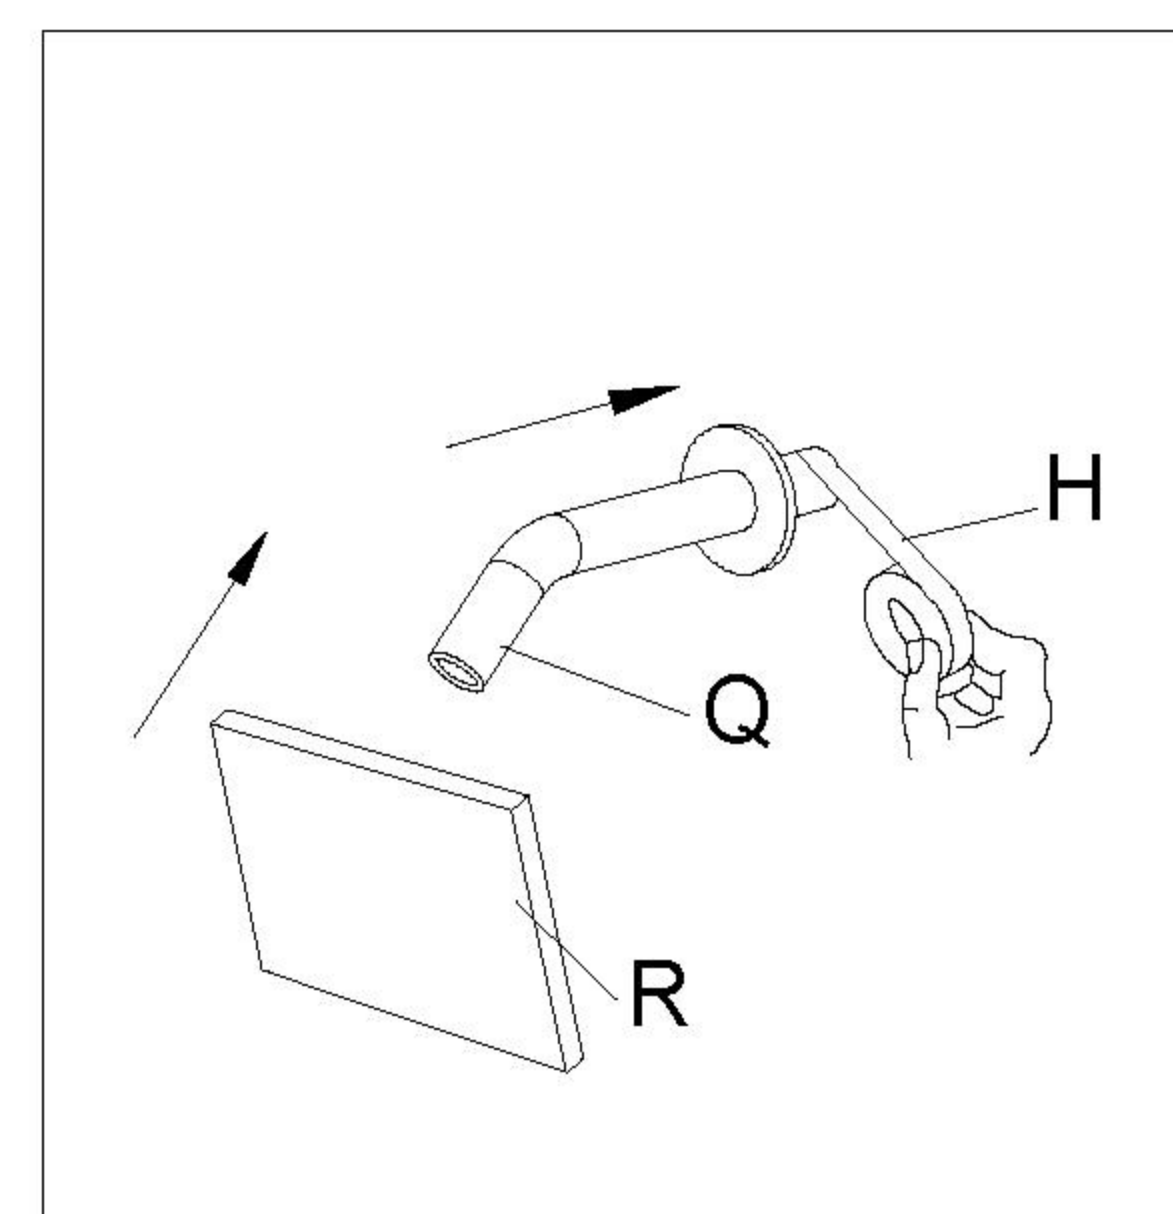


5.Turn the water on for 1 minute to flush any debris. Apply Teflon tape (H) to the threaded tail pipe and install the shower hose (Q) into the outlet on the wall,Then connect the top shower (R) to the spout.

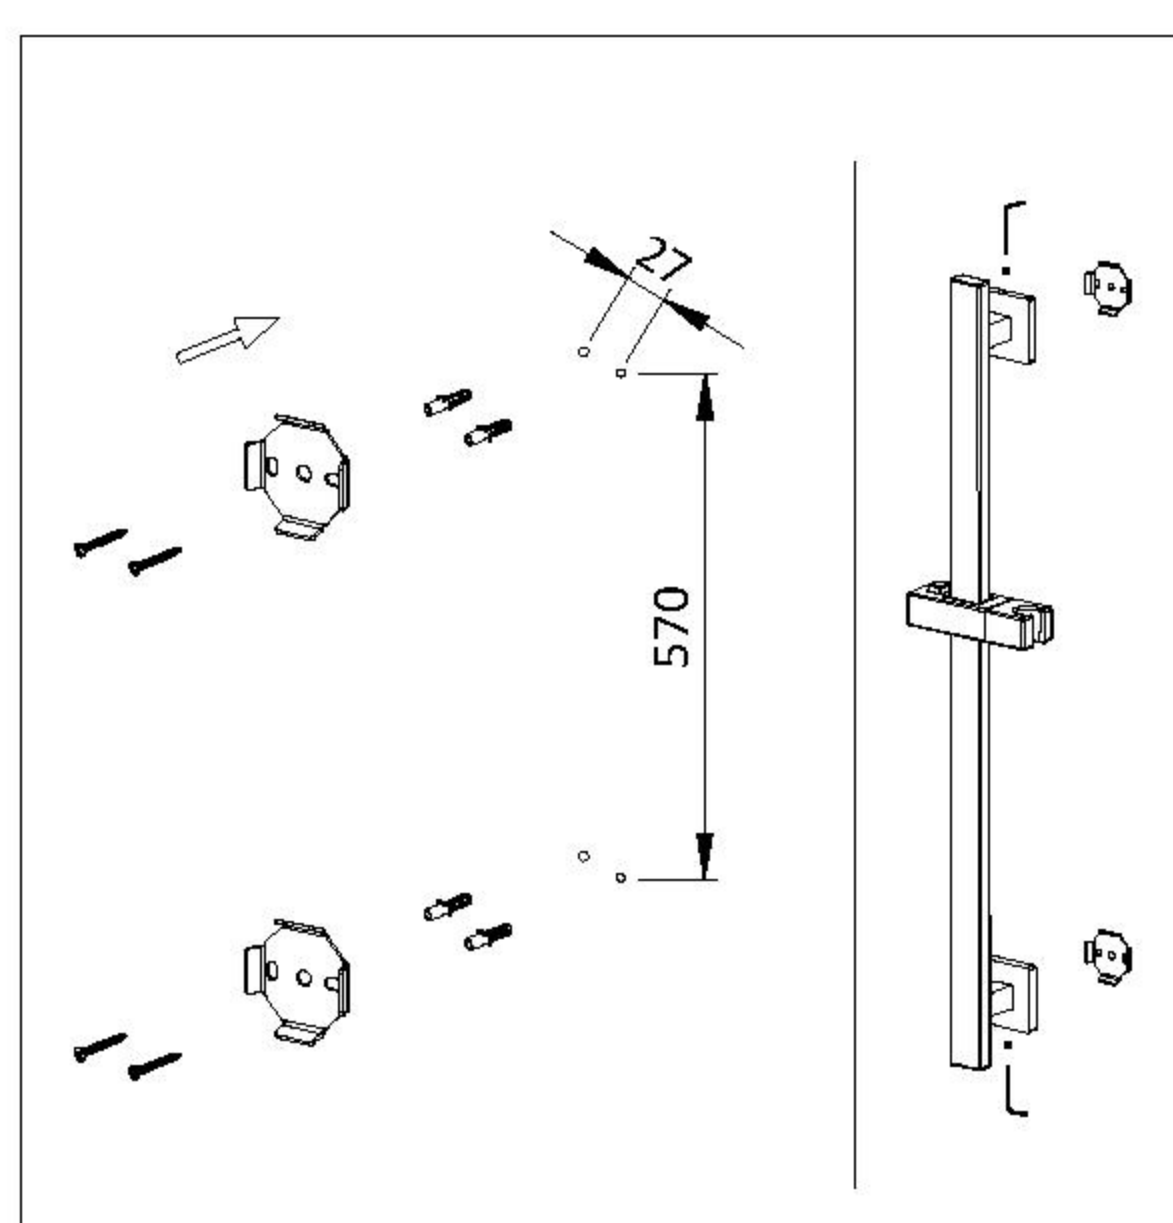

6.Use the hexagonal key (E) to install the seat with the lift bar removed, according to the appropriate height with the cross-screw installation seat fixed on the wall, and then the lift rod into the wall installation seat, tighten the screw fixed.

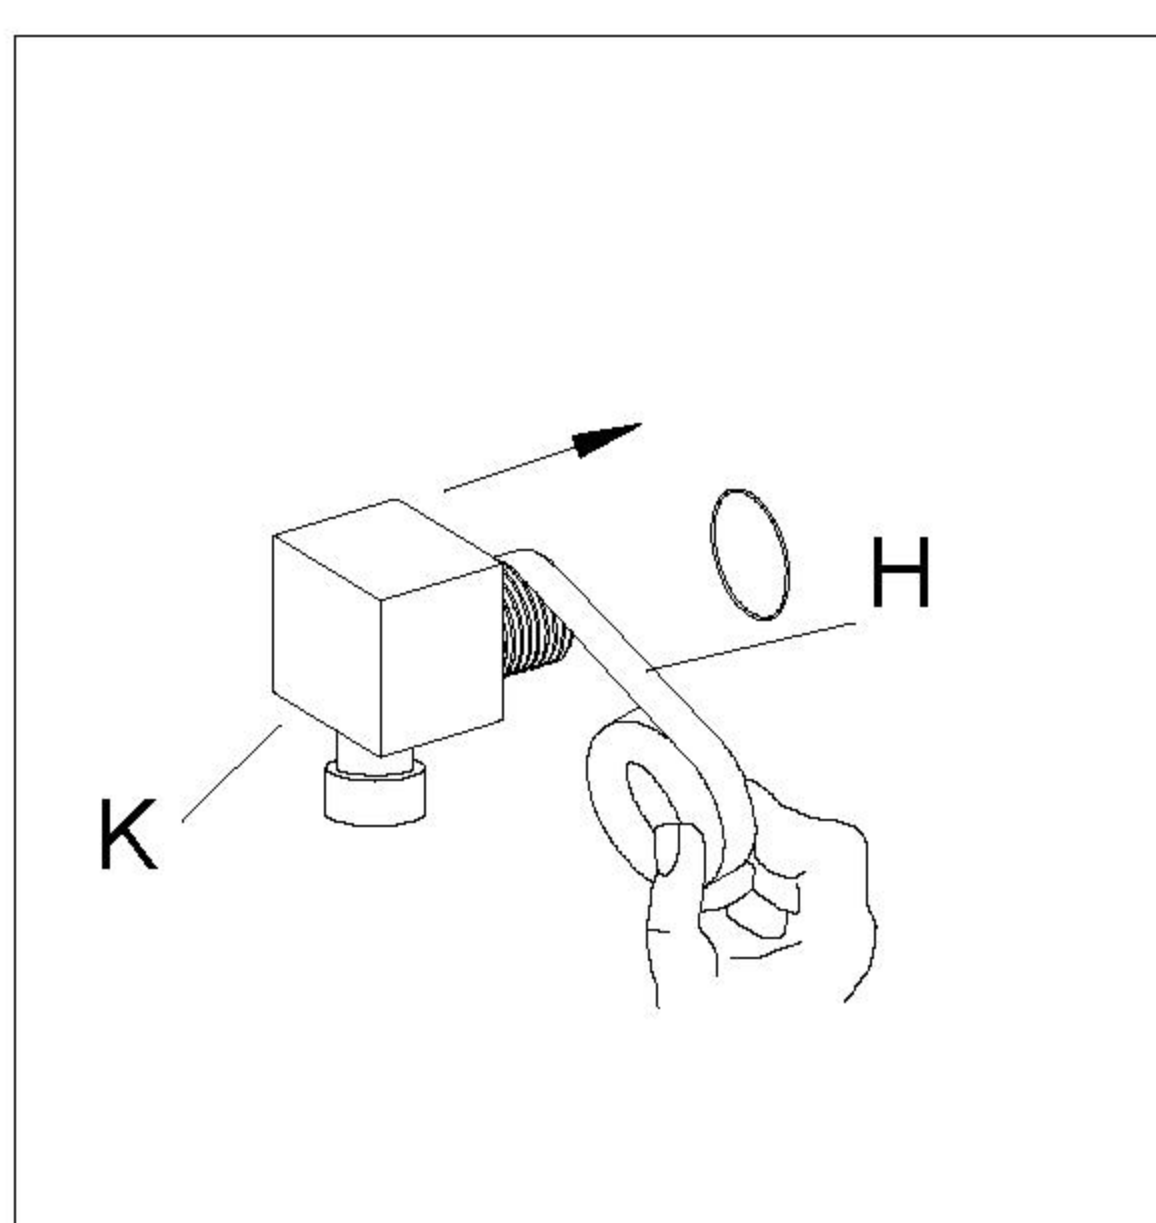

7. Wrap nylon tape around the screw thread at the end of shower seat, screw the shower seat (K) into the water outlet hole reserved on the wall and tighten.

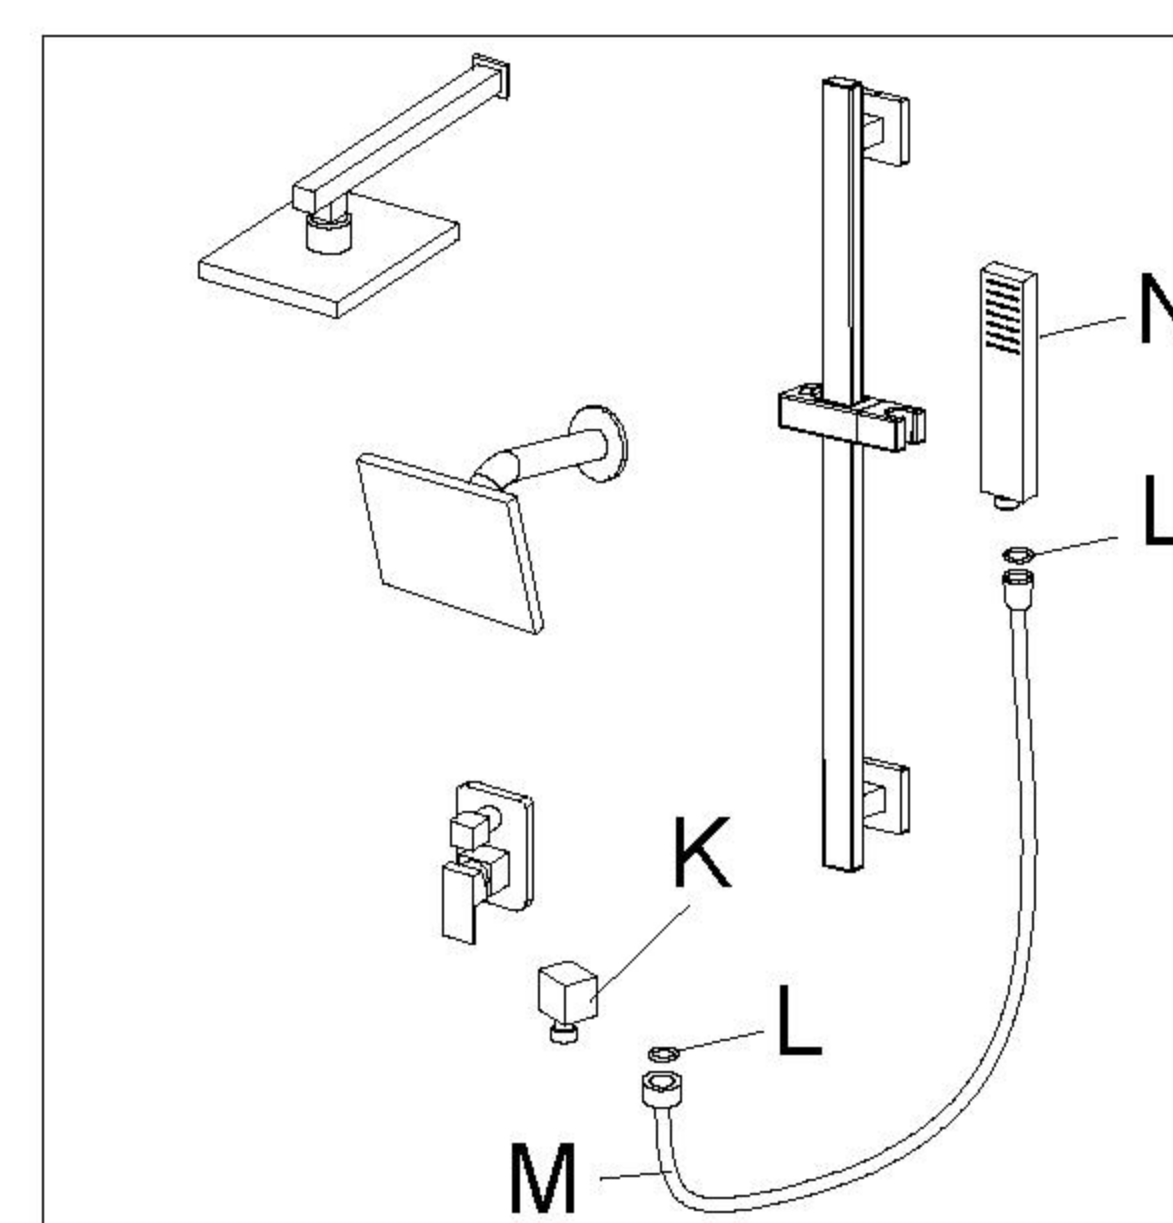


8.Add rubber washers (L) at both ends of the shower hose (M).Connect shower hose (M) to the wall supply holder (K) and hand shower (N).Then, place the hand shower (N) to the wall supply holder (K).

MAINTENANCE

To maintain a clean, bright appearance and optimal performance of your shower head,please follow these care instructions:

1. Rinse with water only and dry with a soft cotton cloth..
2. For surface dirt or limescale buildup, use a mild liquid detergent or a colorless, non-abrasive glass cleaner. A non-abrasive polish may also be used.
3. Do NOT use: abrasive detergents or polishes, emery cloth, paper towels, scrapers, etc.
4. Do NOT use: acidic cleaners, or cleaners and soaps containing insoluble granules.
5. Mineral deposits may accumulate in the shower head over time, reducing water flow. If this occurs, unscrew the shower head, rinse it thoroughly with water, and screw it back into place.

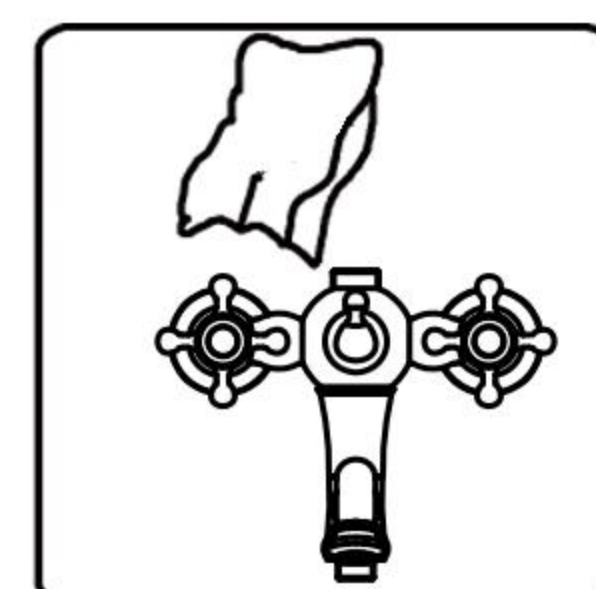

Please feel free to contact us if you have any questions. We will help to solve the issue together with you.