

ASSEMBLY INSTRUCTIONS

PLEASE KEEP THIS FOR FUTURE REFERENCE

Prior to assembly, please read these instructions carefully. We recommend you carry out assembly on a soft surface to avoid scratching any surfaces.



WARNING

Please do not destroy, damage or dispose of any packaging until you have completely satisfied yourself that this product meets with your satisfaction and is in perfect condition. Doing so will result in problems returning the item to your supplier.

Parts List















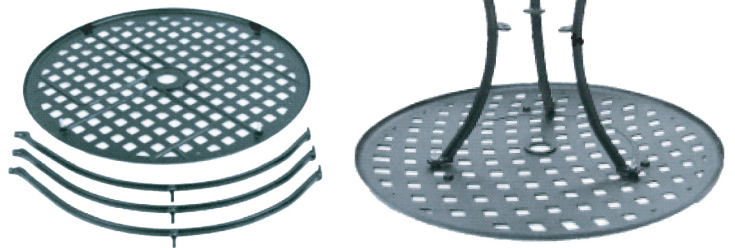
| Part | Description | Image | Qty |
|-----------|---------------------------------|---|-----|
| A | Table top |  | 1 |
| B | Leg |  | 3 |
| C | Round leg support |  | 1 |
| D | Backrest |  | 2 |
| E | Seat |  | 2 |
| F1 | Chair front leg |  | 4 |
| F2 | Chair back leg |  | 4 |
| M | Armrest |  | 4 |
| G1 | Bolt(6*25MM) |  | 8 |
| G2 | Bolt(6*30MM) |  | 6 |
| H | Washer, Spring washer, Nut(8MM) |  | 23 |
| I | Washer, Spring washer, Nut(6MM) |  | 14 |
| J | Screw (8*34MM) |  | 3 |
| K | Wrench |  | 1 |

Table Assembly



STEP 1

1. Lay the table top(A) upside down on an even soft clean surface. Fix the screw(J) into the table top, then fit the three table legs(B) over the fixed studs(J) and bolt in position using washers, Spring washer, and nuts(H). DO NOT OVER TIGHTEN.



H x3  J x3 

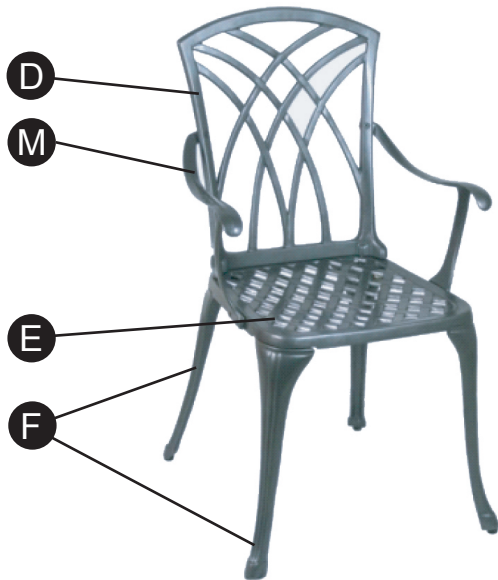
STEP 2

2. Attach the round leg support(C) to the three legs using Bolts(G), washers, Spring washer, and nuts (I). Tighten all nuts.

I x6  G2 x6 

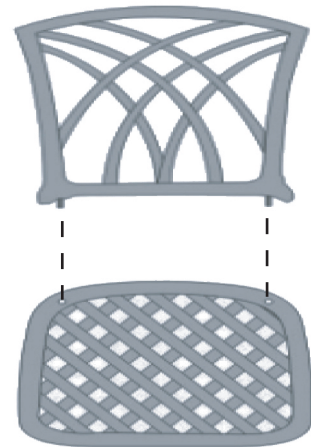


Chair Assembly



STEP 1

1. Fit the Backrest(D) to the Seat(E) by inserting the prefixed studs into the two holes on the seat. Bolt together using Washers, Spring washer, Nut(H). Tighten the nut using the Wrench(K).



STEP 2

2. Turn the unit upside down. Fix the Chair front legs(F1) and back legs(F2) to the Seat(E) by fitting the prefixed studs and into the holes in the top of the legs. Bolt together using Washers, Spring washers and Nuts(H). Fix the armrest(M) with Back and Seat using Washers, Spring washers and Nuts(I). Tighten the nut using the Wrench(K).

