

SECURITY MAJOR SAVE WORRY

modern stylish Bright lights at home



PRODUCT MANUAL

Copyright · No reprinting

Falt/Sloped Ceiling Available

Cable length (Adjustable)
118in/300cm

11.8in

31.5in

23.6in

19.7in

15.7in

11.8in

7.9in



Bulb Wattage: 104W
Voltage: 110v

press this button can adjust
the height of chandelier or
DIY the shape you want



Installation of
sloping ceiling

31.49in

23.62in

11.81in

23.62in


15.74in

15.74in

23.62in

11.81in

Total length 157.48in

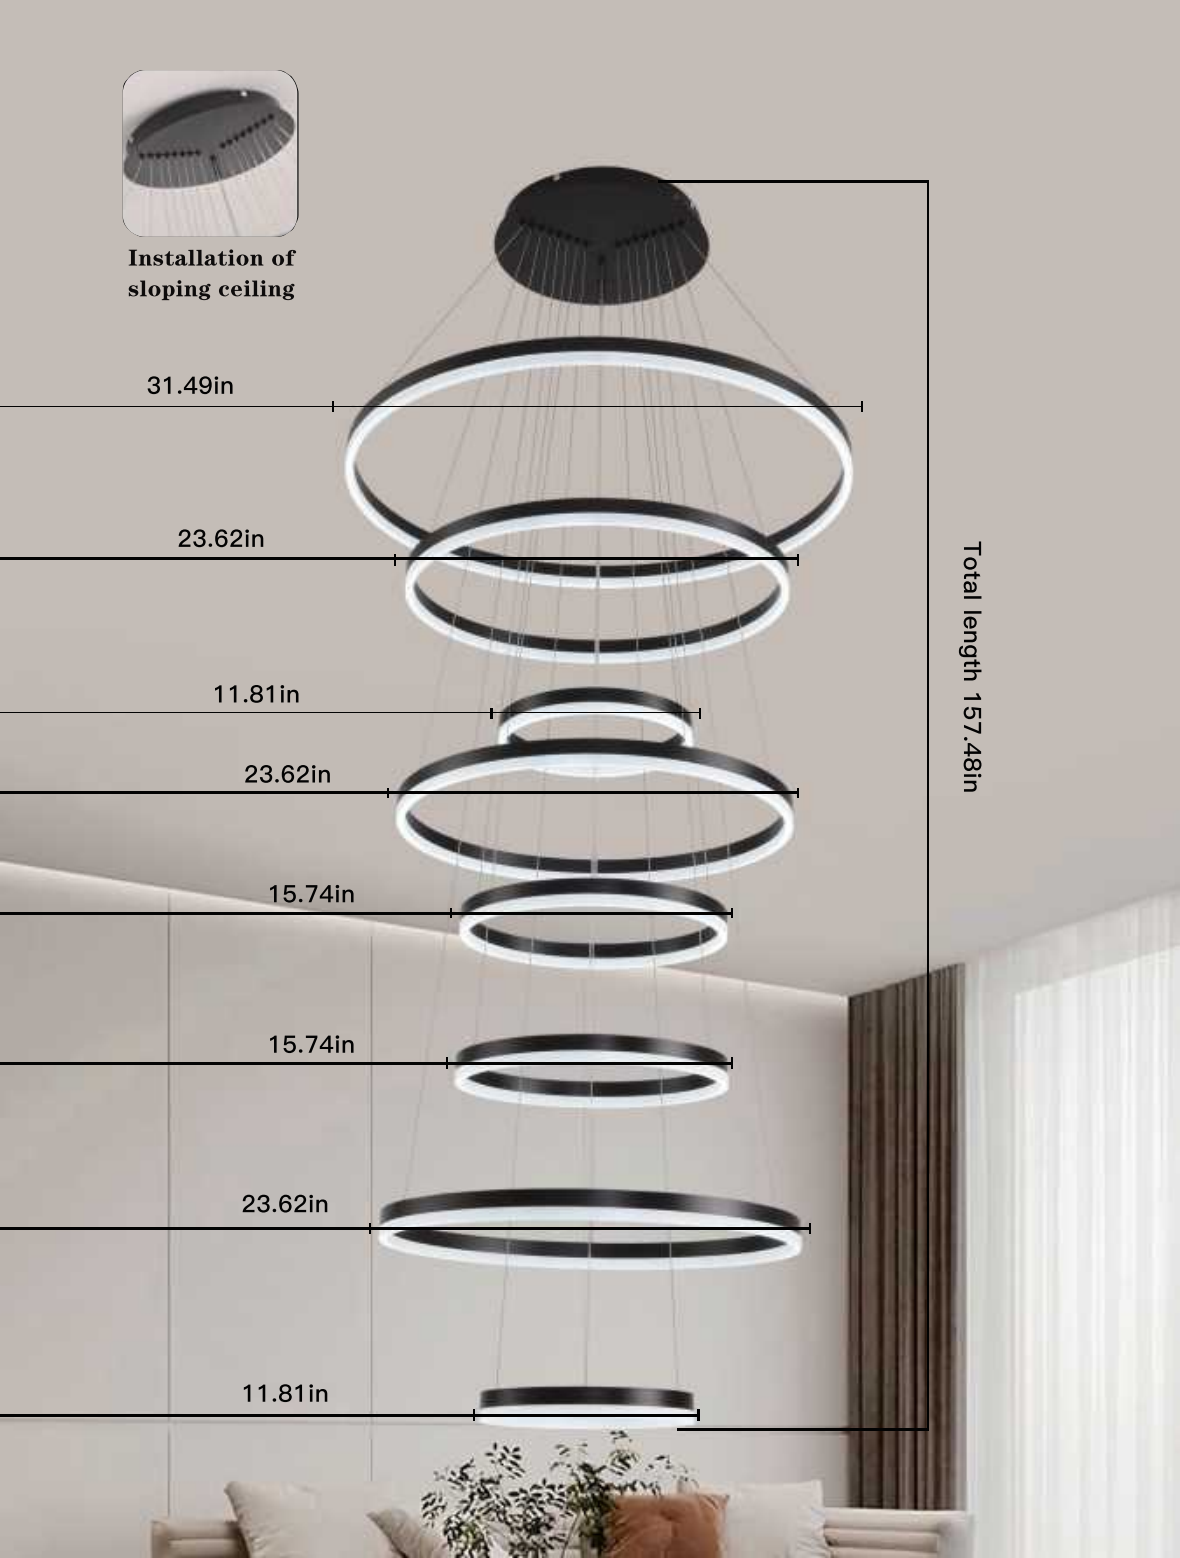



Cold Light(6000K)



Natural Light(4000K)



Warm Light (3000K)

Color Temperature
Adjustable 3000K-6000K

3000K

4000K

6000K

Brightness Dimming
Range from 10% to 100%

10%

50%

100%



1

SIMPLE INSTALLATION OF LIGHTING FIXTURES ONLY REQUIRES THE FOLLOWING STEPS



1



Open the packaging of the lighting fixture.

2



Tear open the packaging film and remove the cross iron frame and remote control.

3



We have arranged all the suspension cables properly. You do not need to rearrange the suspension cables.

4



Press and hold the locking pin to adjust the length of the suspension wire.

5




open the packaging and install the cross iron frame separately on the ceiling.

6



All the wires of the chandelier have been connected, just connect the three wires of the chandelier to your ceiling wires (grounding wire, red live wire, blue zero wire)

7

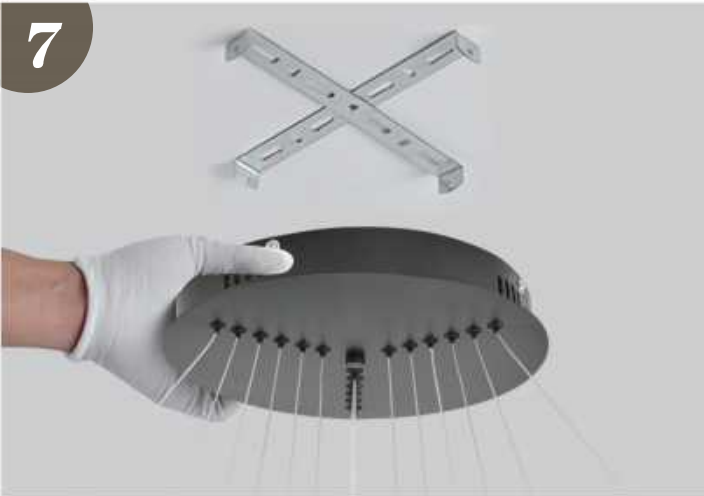

Fix the ceiling of the pendant lamp on the cross iron frame to complete the installation of the lamp.

- Please wear gloves when installing. If there are stains and sweat stains on the hardware, they should be removed in time; With grounding symbol (⏚) Of the lighting, The reliable and permanent grounding of grounding wire must be ensured during installation.
- Fixed lamps must be fixed firmly when installing to ensure that the medium installed can bear the weight of the lamp body. After installation, pull the lamp with 5 times the weight of the lamp body for 3 times to ensure that the lamp will not fall.

2

REMOTE CONTROL INSTRUCTIONS

