

ASSEMBLY INSTRUCTIONS

*** THIS IS AN DIRECT WIRED FIXTURE. WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

*** TO REDUCE THE RISK OF ELECTRIC SHOCK, SHUT OFF THE MAIN ELECTRICAL SUPPLY AT FUSE BOX/CIRCUIT BREAKER.

*** THIS FIXTURE SHOULD ONLY BE CLEANED WITH A SOFT LINT FREE CLOTH DAMPLED WITH WATER. DO NOT USE ANY CHEMICAL OR ABUSIVE CLEANER AS THEY MAY DAMAGE THE SURFACE OF THE PRODUCTS.


CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE.

1. SCREW THE SHORT POLE ONTO THE LIGHTING BODY.
2. CONNECT THE GREEN GROUND WIRE "G" TO THE SUPPLY WIRE, CATHODE WIRE "N" IN WHITE TO THE SUPPLY WIRE, ANODE WIRE "L" IN BLACK TO THE SUPPLY WIRE IN THE JUNCTION BOX AS ILLUSTRATED WITH WIRE NUTS (2).
3. ATTACH THE MOUNTING PLATE (3) TO JUNCTION BOX AND TIGHTEN BY SCREWS (4).
4. LOOP THE CABLE INSIDE THE CANOPY USING THE PLASTIC STRAIN RELIEF TO HAVE YOUR DESIRED LENGTH, TUCK ADDITIONAL WIRE INSIDE THE CANOPY (5).
5. ALIGN THE CANOPY TO THE MOUNTING PLATE AND TIGHTEN BY SIDE SCREWS (6).

TURN ON POWER AND ENJOY YOUR LIGHT!!!

USE 18W LED BULB
USE 30W LED BULB
(bulb included)

This LED light provides low maintenance service with no bulbs to change.

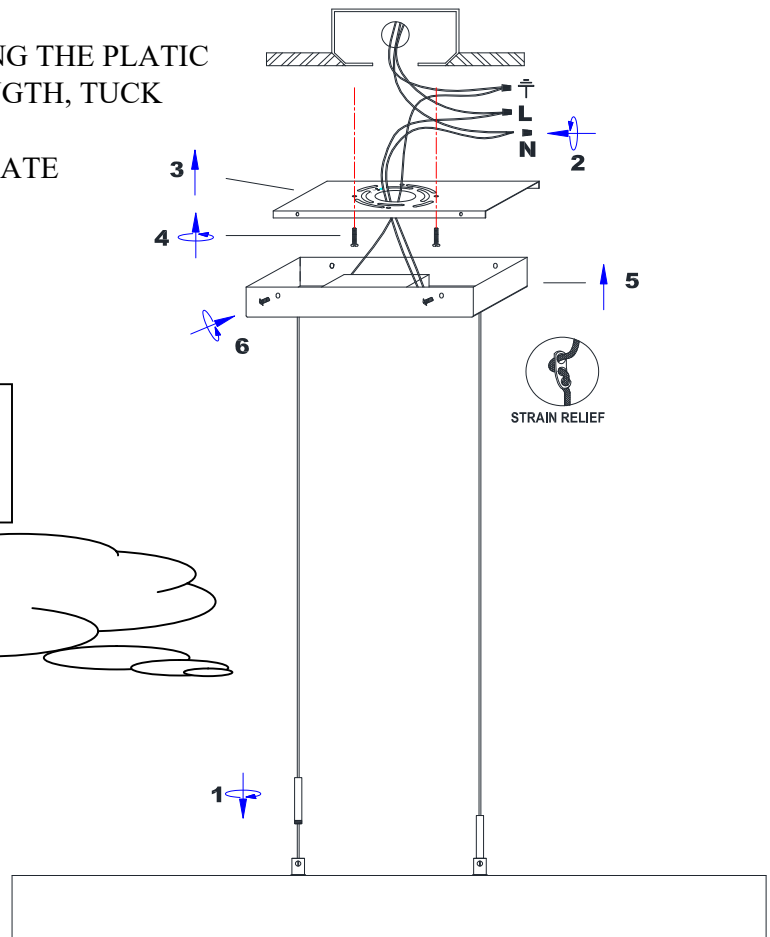

Suggested Dimmers

This fixture is DIMMABLE and is designed to operate with most standard dimmer. Noted below is a listed of dimmers that have been tested with this fixture. This list of dimmers does not imply any guarantee or warranty of compatibility with a particular application. Dimmers that are not listed do not imply non-compatibility.

Dimmer that works with these pendant is:

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.