

LED BATHROOM MIRROR

INSTALLATION MANUAL

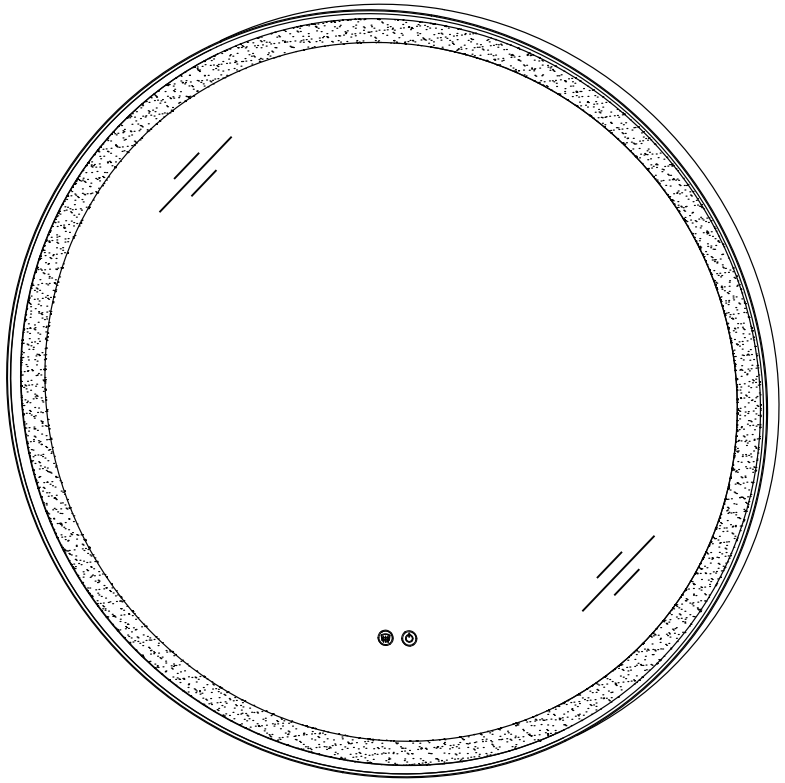

* This installation manual applies to oval, round,
or racetrack oval shape within the same mirror collection.




INSTALLATION MANUAL


CONTACT US


Thank you for shopping with us! We hope that our products have added a touch of brightness to your life. If you need any assistance, please don't hesitate to reach out. Our dedicated team is available 24/7 to ensure your satisfaction.


BM@ZRSupport.com 1-888-204-3326 ZRSupport


ACCESSORIES LIST


Round Hangers



Wall Anchor-A



Wall Anchor-B



Short Screw



Long Screw

TOOLS REQUIRED



Level Ruler


Marker



Hammer




Tape Measure



Electric Drill


Phillips Screwdriver


Safety Goggles

BEFORE INSTALLATION

To ensure the best experience, **please read carefully and follow the instructions provided below before assembling and installing the product.**

1. Important Safety Instructions:

- Assemble the product by two or more adults to ensure proper installation.
- To connect the wires to electrical junction box, consultation with a qualified technician or electrician is highly recommended.
- Disconnect power before installing, adding, or changing any components.
- Make sure that the fixing location can support the weight of the entire fixture.
- To prevent injury, the mirror must be installed according to the instructions provided.

2. Pre-assembly:

- Inspect the product immediately upon receipt for any transit damage or missing parts.
- The voltage for your product should be between 100V and 120V. If the voltage exceeds 120V, please use a transformer.
- Please do not remove the plastic corner guards and transparent film on the mirror until the installation is finished.

3. Before Installation:

- Please check and make sure that the mirror is functioning properly.

• Power Check

After powering on, the backlight of two buttons will activate automatically.

• Anti-fog

The anti-fog function helps resist the troubling fog and keep a clear reflection image. To save energy, it will automatically turn off after one hour. A long press in standby mode will turn off the indicator light.

• Touch Switch

The button controls the light brightness and color temperature. Keep holding it and the brightness will change. You can adjust the color temperature as well: the first tap is white light, the second one is warm light, and the third one is natural light. If no button is pressed within 15 seconds, the next tap will turn off the light immediately. A long press in standby mode will turn off the indicator light.


• Memory Function

Your current settings will be saved, and it will resume in the same settings when you turn it on again.

INSTRUCTIONS

* This installation manual applies to oval, round, or racetrack oval shape within the same mirror collection.


1. Decide whether to hang the mirror vertically or horizontally (①). Once decided, measure the width of the mirror, referred to as Distance A. Use the table on the right to find the recommended Distance B between the two round hangers based on Distance A (②).

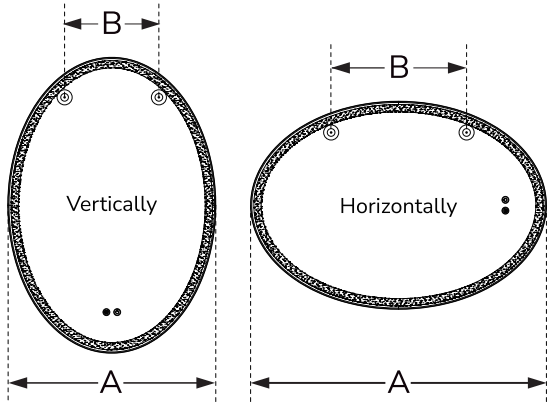

Distance A	Distance B
A<20in	7in
20in≤A<24in	8in
24in≤A<26in	10in
26in≤A<30in	12in
30in≤A<36in	14in
36in≤A<40in	16in
40in≤A<48in	18in
48in≤A<55in	20in
55in≤A<60in	26in
60in≤A<72in	28in


2. Place the mirror against the wall at the desired location, ensuring that the mirror is positioned high enough above the faucet (①). Draw two horizontal lines on the wall at the top and bottom of the mirror to mark its position (②).

①

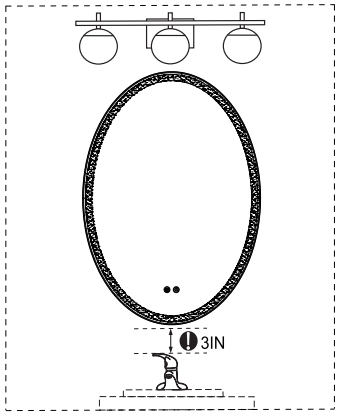


Note: Please hang the mirror at least 3 inches above the faucet.

②

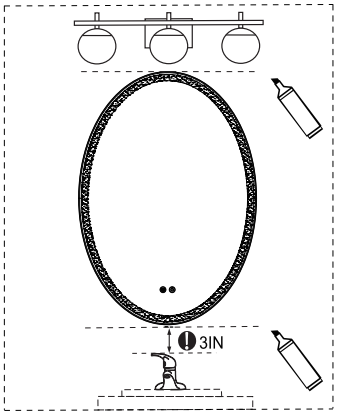


Note: Please hang the mirror at least 3 inches above the faucet.

3. Remove the mirror and locate the points along the inner rim of the mirror's back frame where the distance between them equals Distance B. Measure the distance (referred to as H) from the top of the mirror to the level where Distance B is equal.

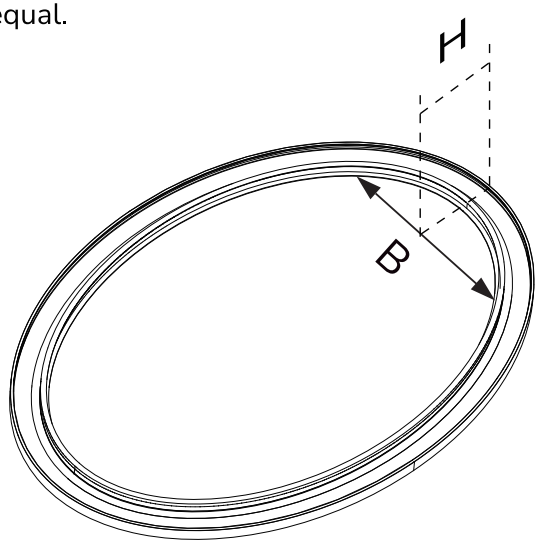


4. Draw a horizontal line on the wall below the line that indicates the top of the mirror, leaving a space equal to H (①). Then, draw a line equal to Distance B on this new line, centering it with the sink, and mark the two endpoints of Distance B (②).


①

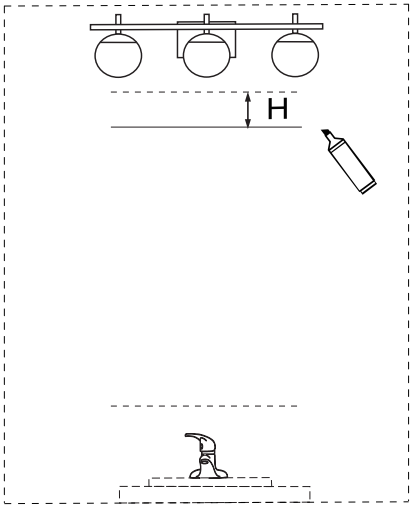


②

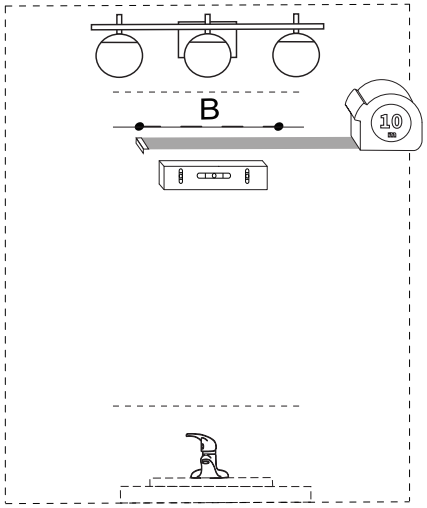


5. Use an electric drill to punch holes at the marked spots, and then apply wall anchors with a hammer.

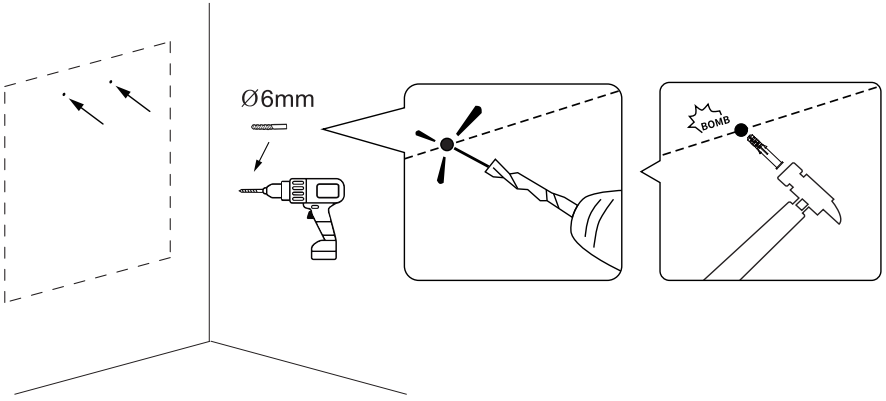

Choose appropriate drill bits that match the thickness and material of the wall to ensure secure mounting.

Thickness of Wall :	Recommended Drill Bit :
＞5/8" (16mm)	1/4" (6mm) drill bit, drilling depth in 1 31/32" (50mm) 
5/16" (8)-5/8" (16mm)	25/64" (10mm) drill bit 
＜5/16" (8mm)	Unapplicable


6. Screw the two round hangers to the wall.

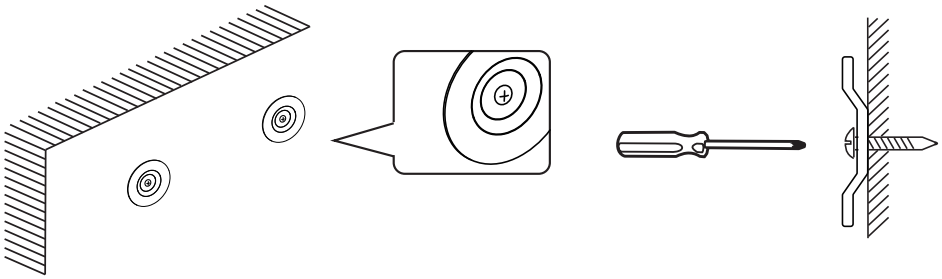

7. Connect the power by plugging into an outlet or hardwiring to a standard circuit panel.

• Option 1: Plug-in

After hanging the mirror securely, plug the power cable to a standard socket.

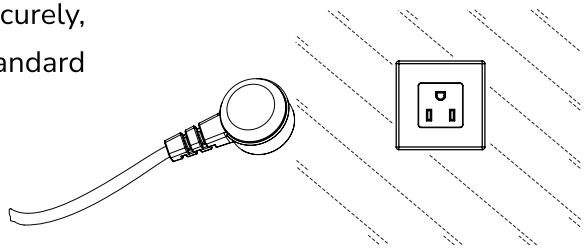


• Option 2: Hardwired

Cut the head off the plug and hardwire it into an outlet.

Black wire --- power supply L (LIVE)

White wire --- power supply N (NEUTRAL)


Green wire --- power supply E (EARTH)

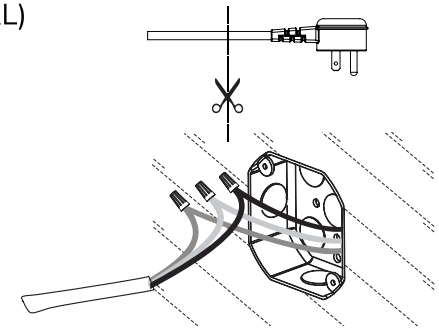

⚠ REMINDER: Please make sure the power is cut off before installation.

⚠ WARNING: This mirror must be earthed.

8. Place the mirror against the wall, align the hook with the mounted hanger, slowly lower the mirror down, and make sure that it slots into the right position and hangs securely.

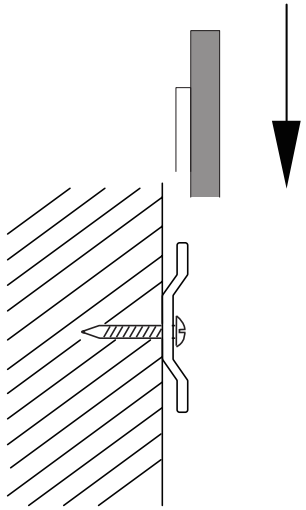

Installation Completed