


Basketball Hoop Instructions

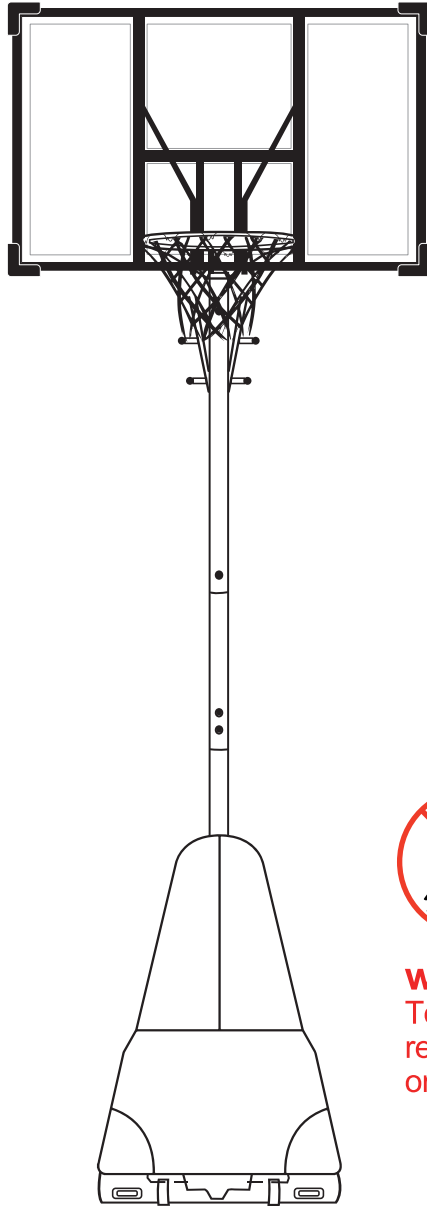

warning:

To ensure your safety, please refrain from forcefully dunking or hanging on the hoop.

Dear Customer,


Thank you for choosing our product. Please read this manual carefully before assembling or using this product. If there are parts missing, please kindly send us messages to let us know the name of missing part regarding to the Parts List of instructions. We will send replacement to you asap.

Two Design Options


We sell two kinds of backboards, which differ in size: 44 inches and 52 inches. Both sizes are the same in function.

If you purchased the 44-inch version, all parts will be included in one box.

If you purchased the 52-inch version, the parts will come in two boxes.

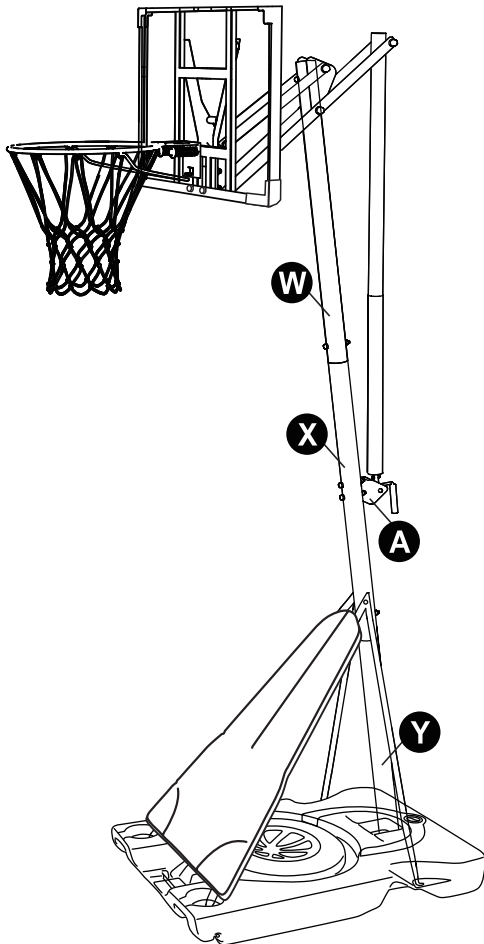

3 Poles Design
(Poles W-X-Y)
Height Range: 7.44-10ft.

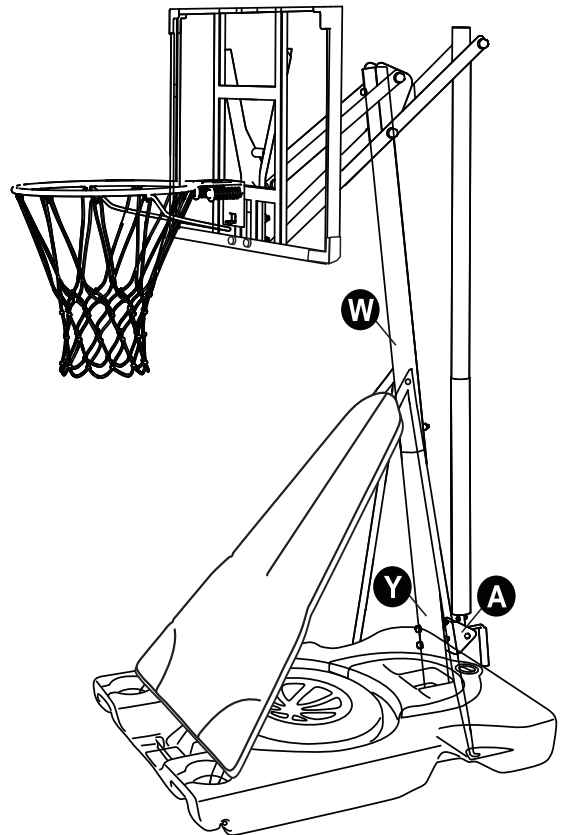

2 Poles Design
(Poles W-Y)
Height Range: 4.36-6.89ft.

Content

Important Safety Notes 2

Parts List 3-5

Assembly Instructions

For 3 poles design

Step 1-10 6-14

For 2 poles design

Step 1 15

Step 3-7 8-11

Step 8 16-17

Step 9-10 13-14

Height Adujustment 17

Priduct Return Policy 18

Important Safety Notes

1. It is recommended to have 2 or more adults install the basketball hoop. Children should not be involved in the installation process or climb on it.
2. Prior to playing, ensure that the counterweight screws of the base are tightly secured to prevent damage to the product and injury to users.
3. Check for any leaks in the base before using. Even a small amount of water leakage can cause the product to collapse.
4. The basketball hoop is designed for recreational and fitness purposes only. It is not intended for intense competition. Climbing or hanging on the hoop, backboard bracket, or net is strictly prohibited.

Warning

1. If any parts of the basketball hoop need repairs or replacements, please promptly contact the after-sales personnel for assistance.
2. Exercise caution when moving the basketball hoop on uneven ground to prevent scratches or tipping over.
3. In freezing temperatures, ensure the water in the base either drained or replaced with sand to prevent damage.
4. When the basketball hoop is used outdoors for an extended period, protect the top of the main pole and lifting pole with plastic covers to prevent rainwater from affecting the lifespan of the product.
5. To avoid losing jewelry during exercise, it is advisable not to wear watches, necklaces, earrings, or other accessories when playing.
6. Exercise caution and keep fingers away from moving parts when adjusting the height of the basketball hoop.
7. Children are prohibited from moving the basketball hoop or adjusting its height.
8. After installation, fill the base with water or sand for stability. Place the base on a level surface to prevent damage from sharp objects during use.
9. All screws must be tightened before use to prevent instability.

Parts List

- Please check the parts counts before assembly. If any part is missing, please reach the customer service team for help.
- You can list the parts counts you received in the blank column for reference.

Part Number	Name	Qty.	Note	
a1,a2	Screw,M8 X 35mm	2		
a3,a4,a5	Screw,M8 X 40mm	5		
b1,b2,b3	Screw,M8 X 45mm	3		
b4,b5,b6,b7	Screw,M8 X 120mm	3		
c1,c2	Screw,M8 X 16mm	3		
d1,d2,d3	Screw,M8 X25mm	5		
f1,f2,f3	Screw,M8 X80mm	6		
g1,g2,g3,g4	Screw,M10 X100mm	2		
h1,h2,h3	Screw,M8 X65mm	2		
i1,i2,i3,i4	Screw,M12 X140mm	2		
j1,j2,j3,j4	Screw,M12 X140mm	3		
m1,m2,m3	Screw,M12 X140mm	3		
A	Triangular block	1		
B	Connection block	1		
C	Crank	1		
G	Base wheel	2		
J	Basketball rim	1		
K	Backboard bracket	1		
L	Nets	2		
M	Backboard	1		
N	Guard board	1		
P	Short support bar	2		
Q	Long support bar	2		
S	Base	1		
T	Hexagon socket wrench	1		
U1,U2,U3,U4	Support rod	1	U1, U2 are packaged inside X	
O	Wheel pin	1		
W	Top pole	1		
X	Middle pole	1		
Y	Bottom pole	1		
Z	Lifting rod	1	Z is packaged inside W	
AA	M13-14	2		
BB	M17-19	2		

Basketball Hoop Part List



NOTE!

This icon means how tight the screws should be tightened. Please follow this icon to ensure the installation is complete.

Tools Required



POWERDRILL



2 PERSON
ASSEMBLY



UP TO 60 MIN
ASSEMBLY

Hardwares

a1,a2


Screw,M8 X 35mm



2 PCS

a3,a4,a5


Screw,M8 X 40mm



5 PCS

b1,b2,b3


Screw,M8 X 45mm



3 PCS

b4,b5,b6,b7

Screw,M8 X 120mm



3 PCS

c1,c2


Screw,M8 X 16mm



3 PCS

d1,d2,d3

Screw,M8 X25mm



5 PCS

f1,f2,f3


Screw,M8 X80mm



6 PCS

g1,g2,g3,g4


Screw,M10 X100mm



2 PCS

h1,h2,h3


Screw,M8 X65mm



2 PCS

i1,i2,i3,i4


Screw,M12 X140mm



2 PCS

j1,j2,j3,j4


Screw,M12 X140mm



3 PCS













m1,m2,m3

Screw,M12 X140mm



3 PCS

Parts

A Triangular block  1 PC	B Connection block  1 PC	C Crank  1 PC	G Base wheel  2 PCS
J Basketball rim  1 PC	K Backboard bracket  1 PC	L Nets  2 PCS	M Backboard  1 PC
N Guard board  1 PC	P Short support bar  2 PCS	Q Long support bar  2 PCS	S Base  1 PC
T Hexagon socket wrench  1 PC	AA M13-14 Spanner  2 PCS	BB M17-19 Spanner  2 PCS	
U1 Support rod (Front Left)  1 PC	U3 Support rod (Back Left)  1 PC		
U2 Support rod (Front Right)  1 PC	U4 Support rod (Back Right)  1 PC		
O Wheel pin  1 PC	W Top pole  1 PC		
X Middle pole  1 PC	Y Bottom pole  1 PC		
Z Lifting rod  1 PC			


Note:

Z is packaged inside W.


U1, U2 are packaged inside X.

Assembly Instructions — For 3 poles design


Step 1 Install the wheels and poles to base

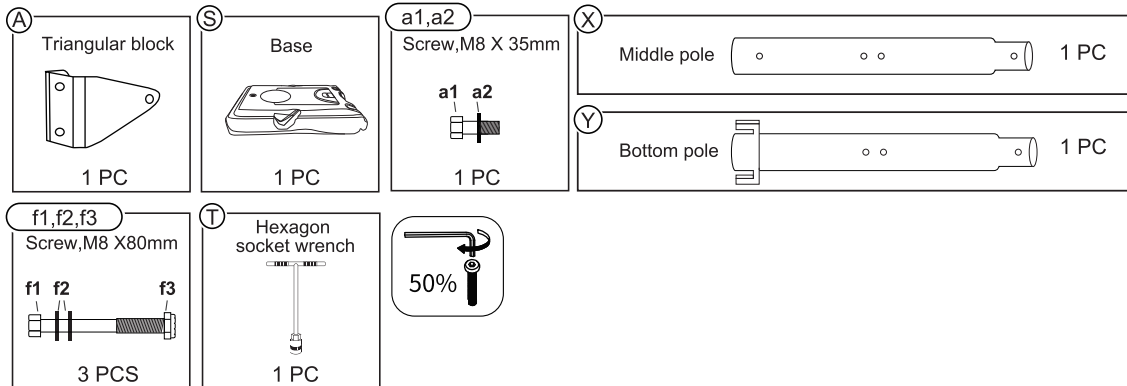

- 1 Secure the bottom pole Y to the base S with screw set a1 and a2 using the included socket wrench.
- 2 Install the triangular block A onto the middle pole X using screw set f1, f2, and f3.
- 3 Connect the middle pole X and bottom pole Y using screw set f1, f2, and f3.

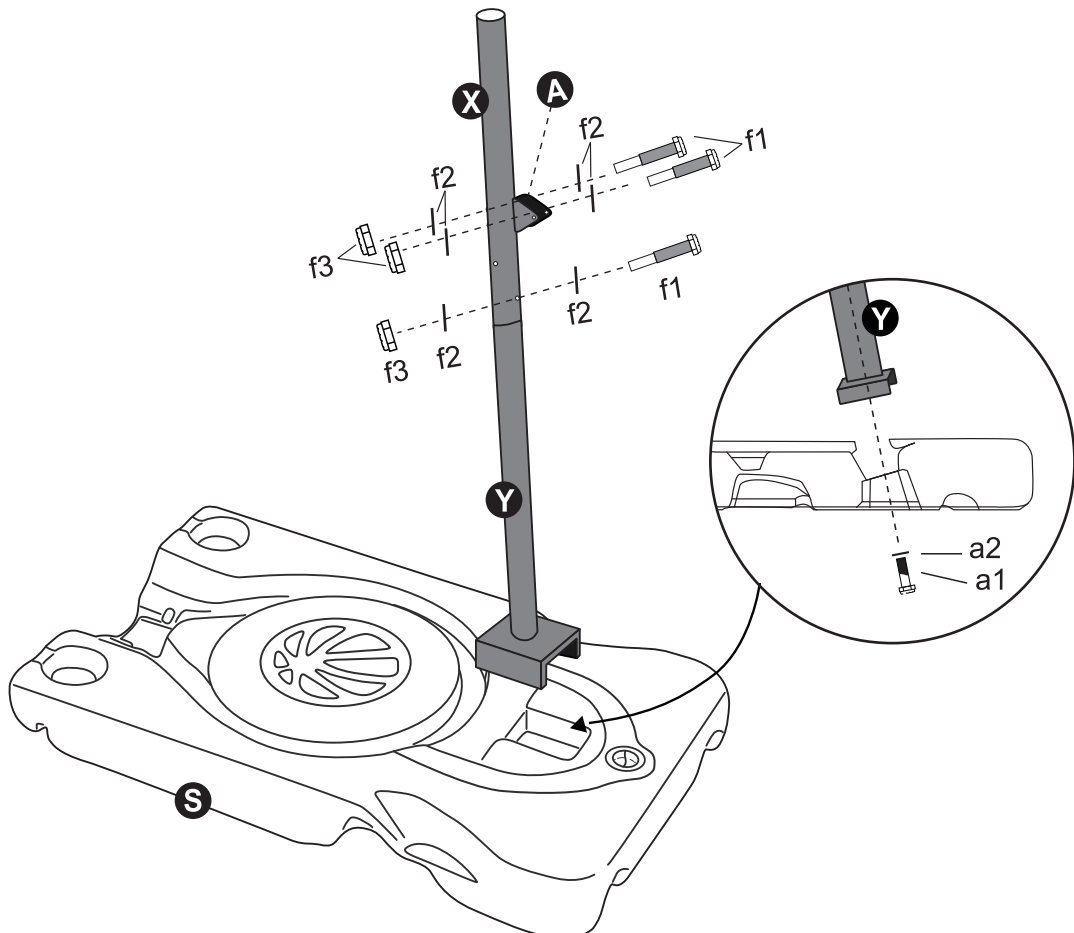


Step 2 Install 4 support rods

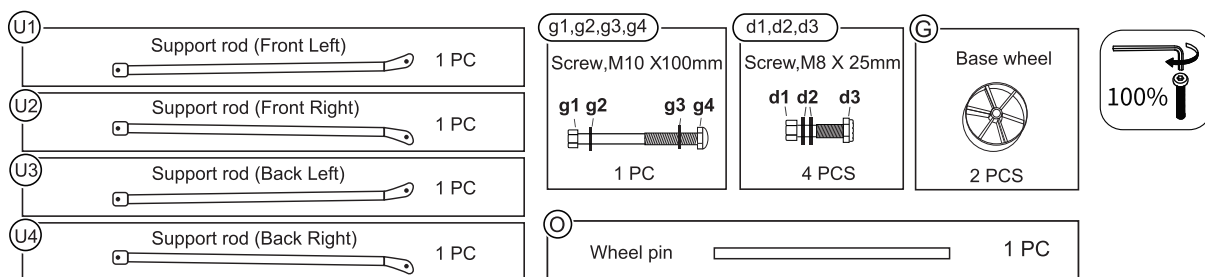


- 1 Use screw set g1, g2, g3, and g4 to secure the upper ends of the four support rods U1, U2, U3, and U4 onto the middle pole X.
- 2 Use screw set d1, d2, and d3 to respectively secure the bottom ends of the four support rods to the base.
- 3 Thread the wheel pin O through the wheels G.

Note:


1. The upper ends of U1 and U2 must be fixed on the inside of the upper ends of u3 and U4.
2. Please don't completely tighten the screws on the top of 4 U rods before attaching the bottom of 4 U rods to the base.

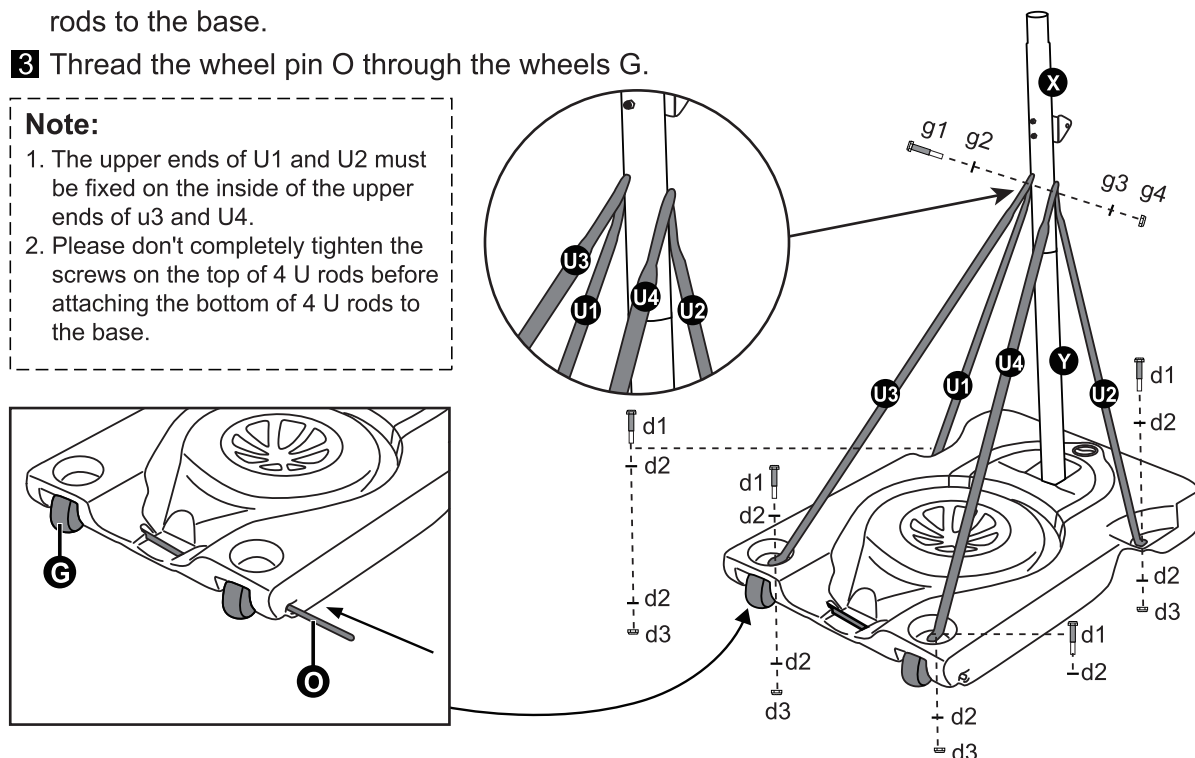


Step 3 Connect basketball rim, backboard and backboard bracket

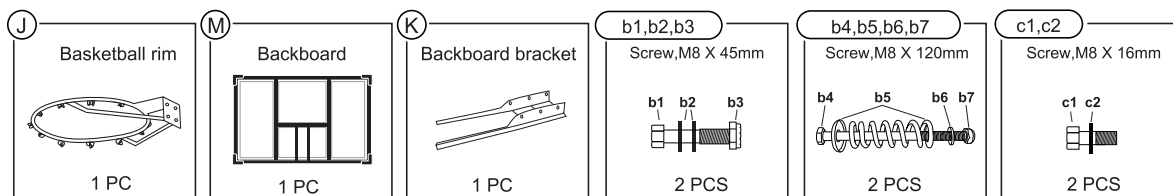


- 1 Remove the protective film of the backboard M.

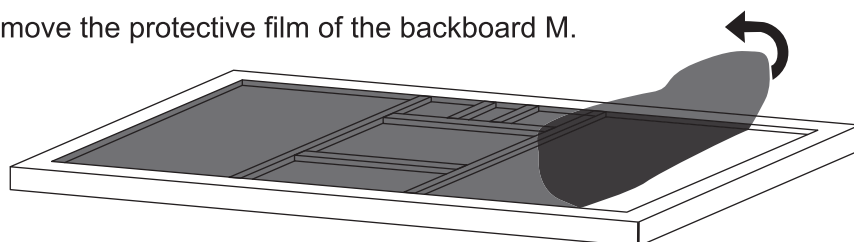


- 2** Connect the basketball rim J, backboard M, and backboard bracket K using screw sets b4, b5, b6, b7 in the upper two holes.

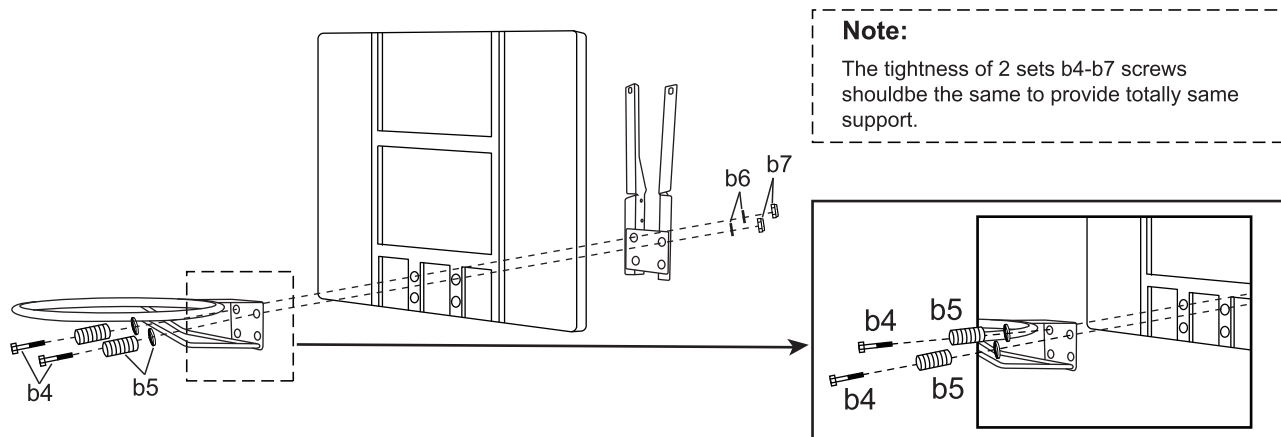


- 3** Connect the basketball rim J, backboard M, and backboard bracket K using screw sets b1, b2, b3 in the two holes below.

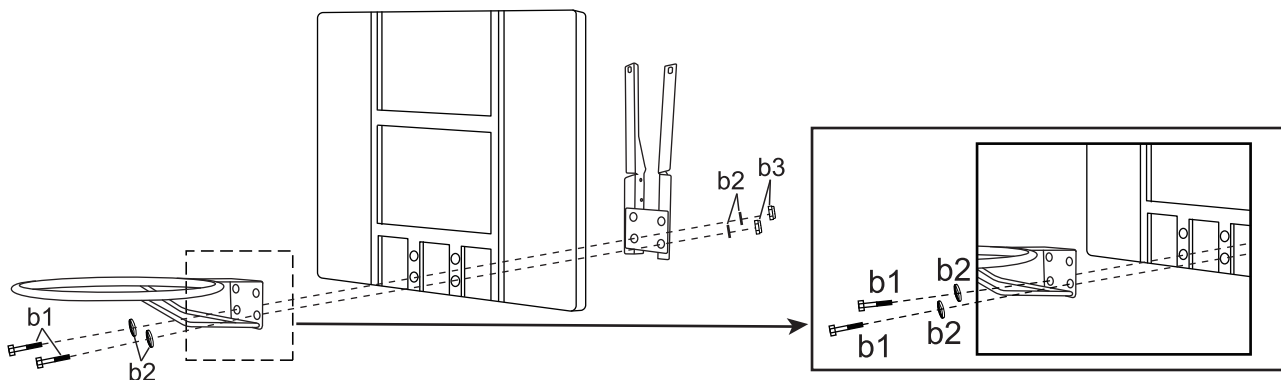

- 4** Gently bend the U-shaped bracket K to be Y-shaped first, and use the screw set c1, c2 to fix the upper end of the bracket K to the backboard M.

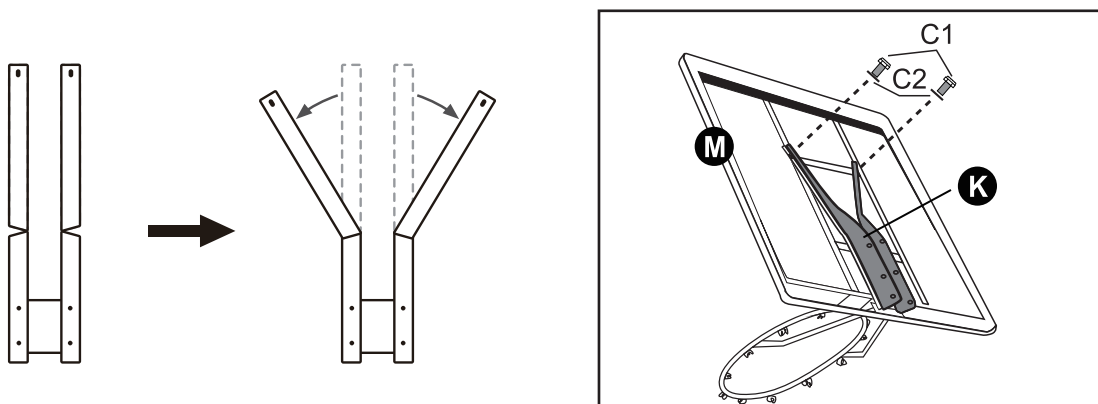



Step 4 Install the net






- Follow the directions to install the basketball net.

Note:




Please connect the white net rope to the rim.

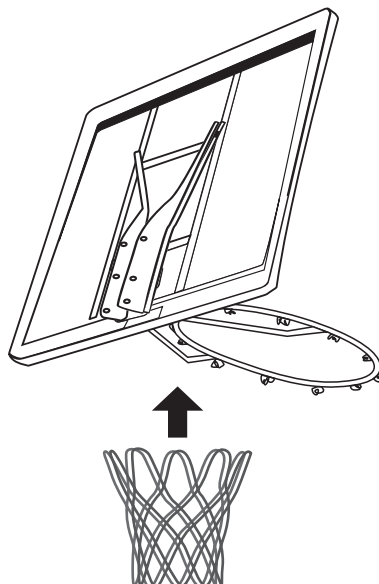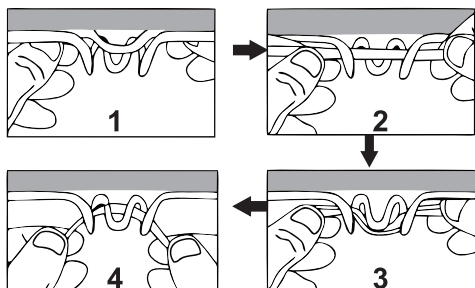



Step 5 Install 4 support bars to backboard bracket




- Use screw set j1, j2, j3, j4 to respectively attach two short support bars P and two long support bars Q to the backboard bracket K.

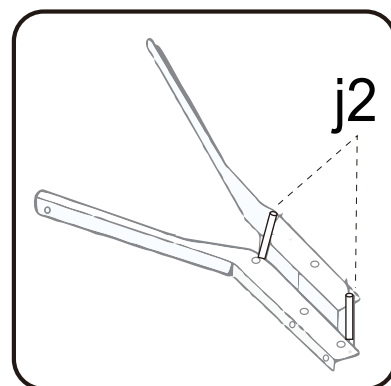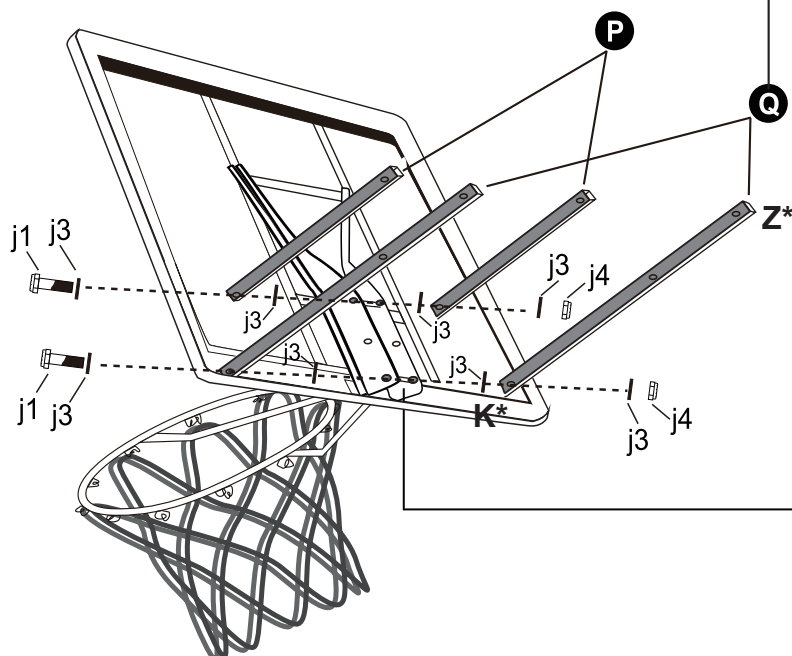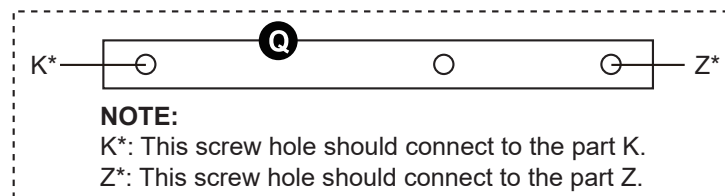


Step 6 Connect the 4 support bars to top pole

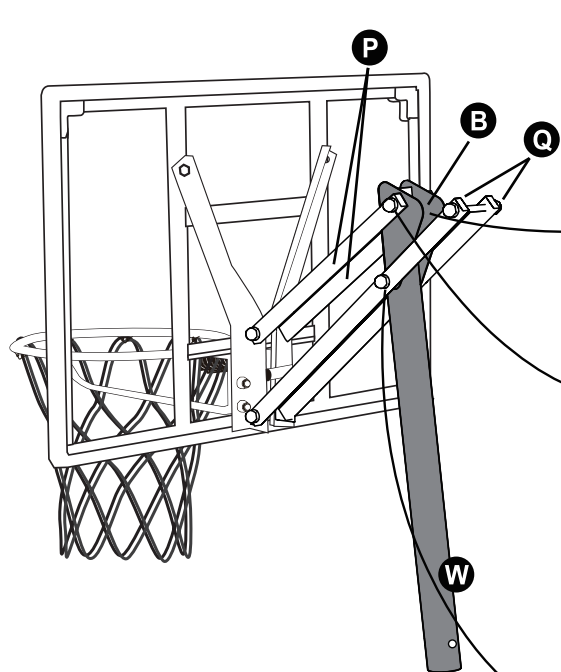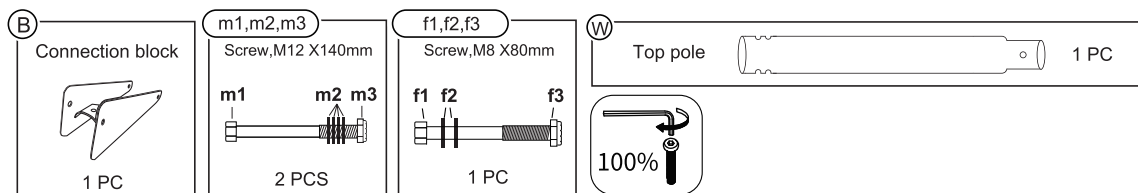


- 1** Install the connection block B to the top pole W using screw set f1, f2, f3.



- 2** Use screw set m1, m2, m3, to secure two short support bars P to the connection block B.


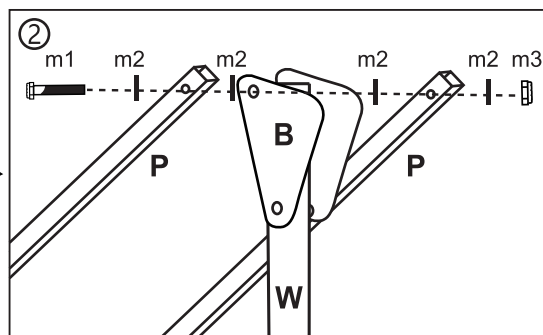


- 3** Use screws set m1, m2, m3 to secure two long support bars Q to the connection block B and the upper pole W.



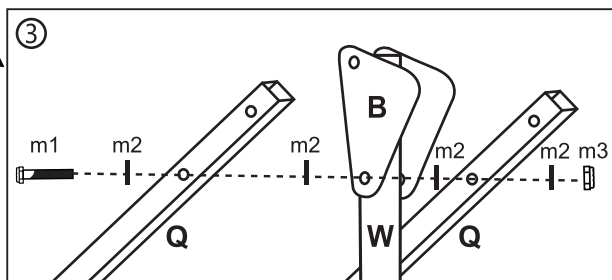


Note:


Please make sure you install the connection block B to the top pole W in the correct direction, otherwise you couldn't continue to the next step.

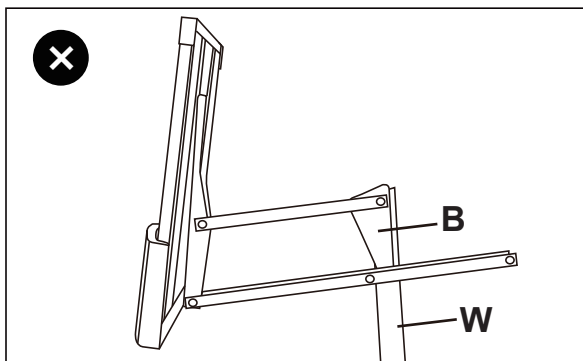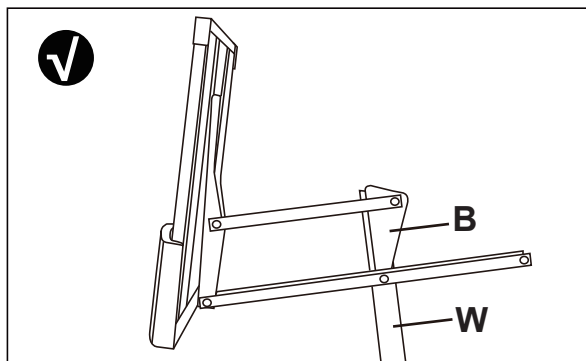

Step 7 Install lifting rod

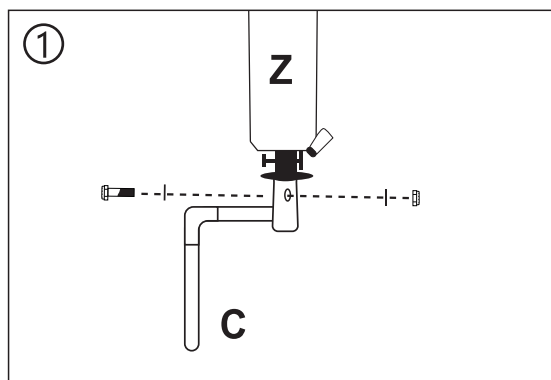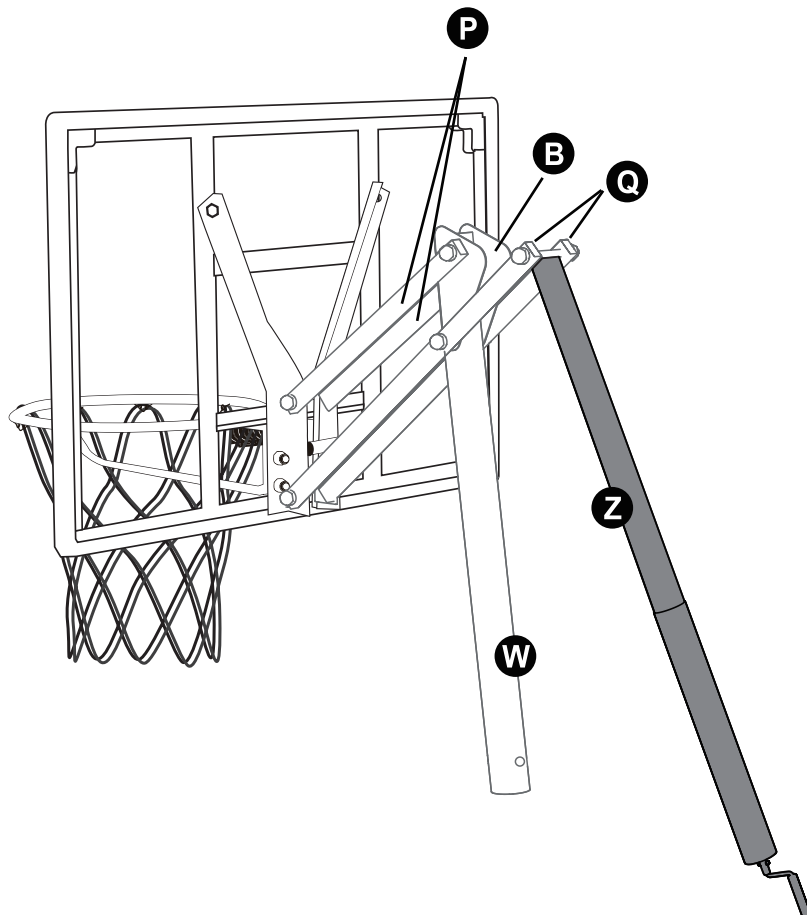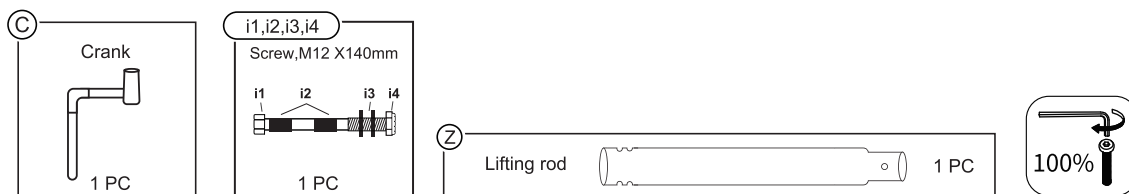


- 1** Install the crank C at the bottom of lifting rod Z.

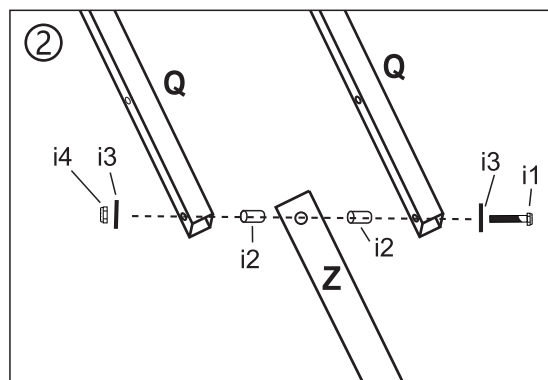

- 2** Use screw set i1, i2, i3, i4 to connect the lifting rod Z to the ends of the two long support bars Q


Step 8 Fix top pole and middle pole

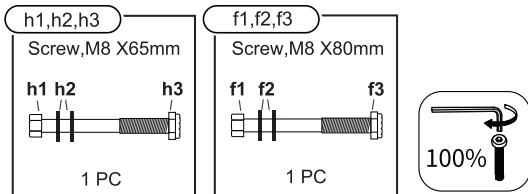

1 Use screw set f1, f2, and f3 to secure top pole W and middle pole X.

Note:

Slowly switch the pole X and let the holes appear. Make sure the holes can go through before you input the screw into it. If the screws get stuck, don't pull it out or push it in by force, otherwise the screws might get break.

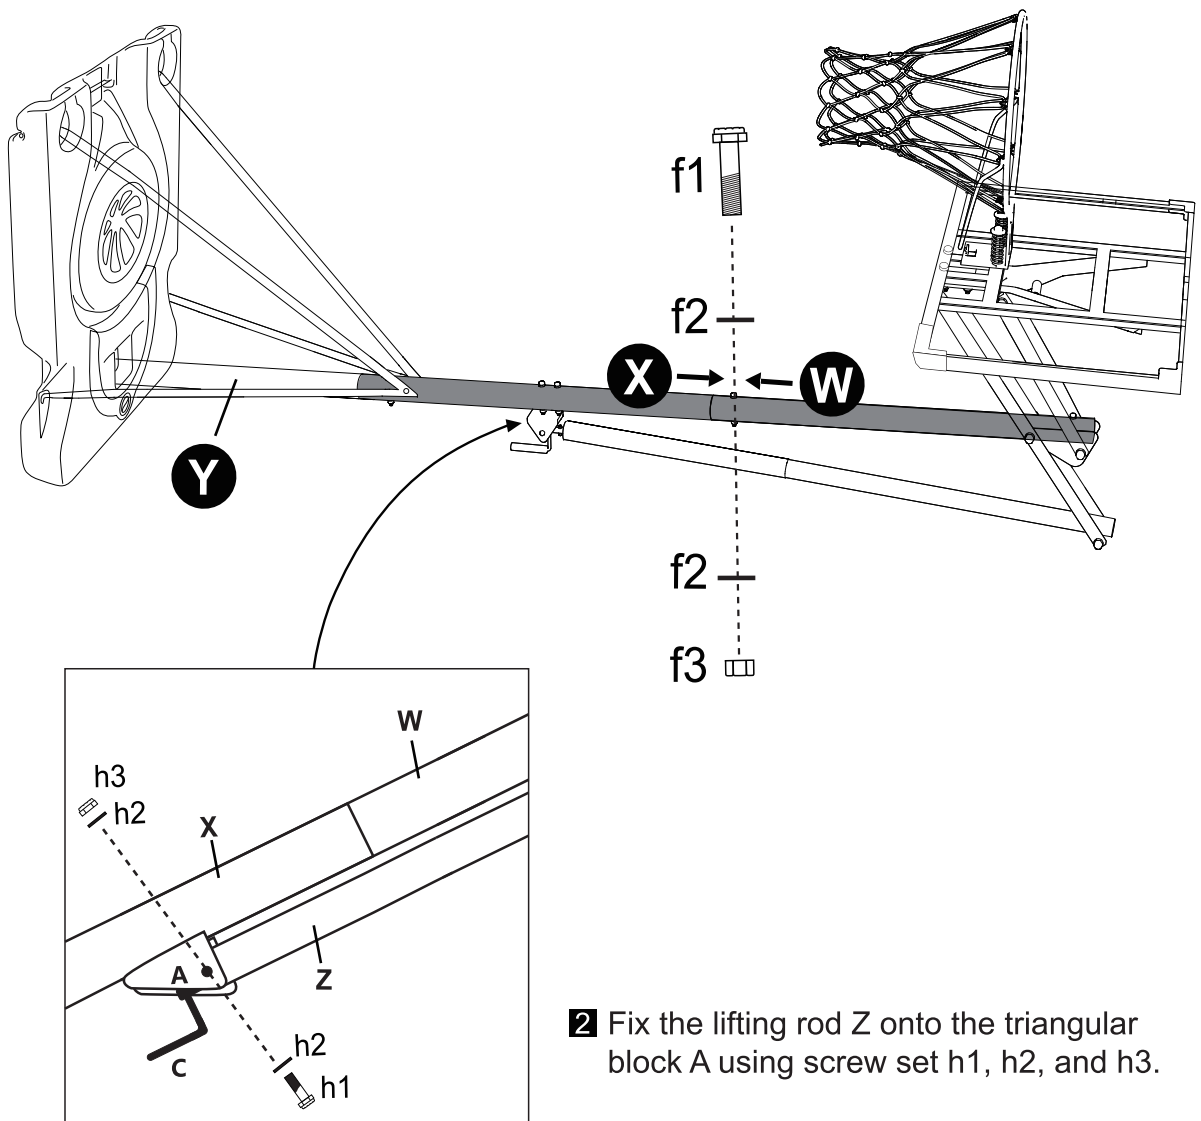

2 Fix the lifting rod Z onto the triangular block A using screw set h1, h2, and h3.

Step 9 Install guard board

a3,a4,a5

Screw,M8 X 40mm


a3 a4 a5



4 PCS

N

Guard board




1 PC



■ Use screw set a3, a4, and a5 to secure the guard board N onto support road U3 and U4.

Note: All screws must be tightened before use to prevent instability.

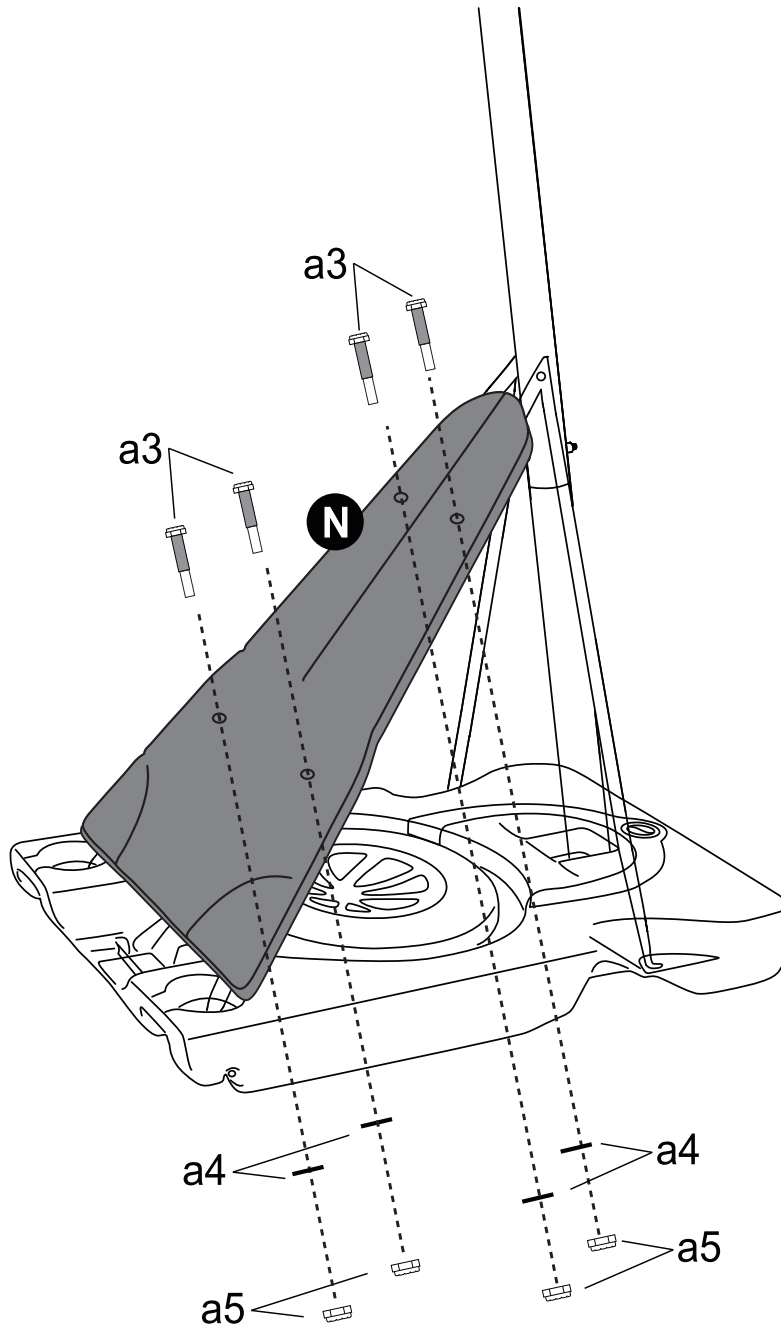


Step 10 Fill the base

Please fill the base with water or sand to ensure stability.

(Please note that once the sand is poured into the base, it cannot be easily removed.)


It is recommended to put extra weights on the base to increase stability

during special periods, such as on windy days.

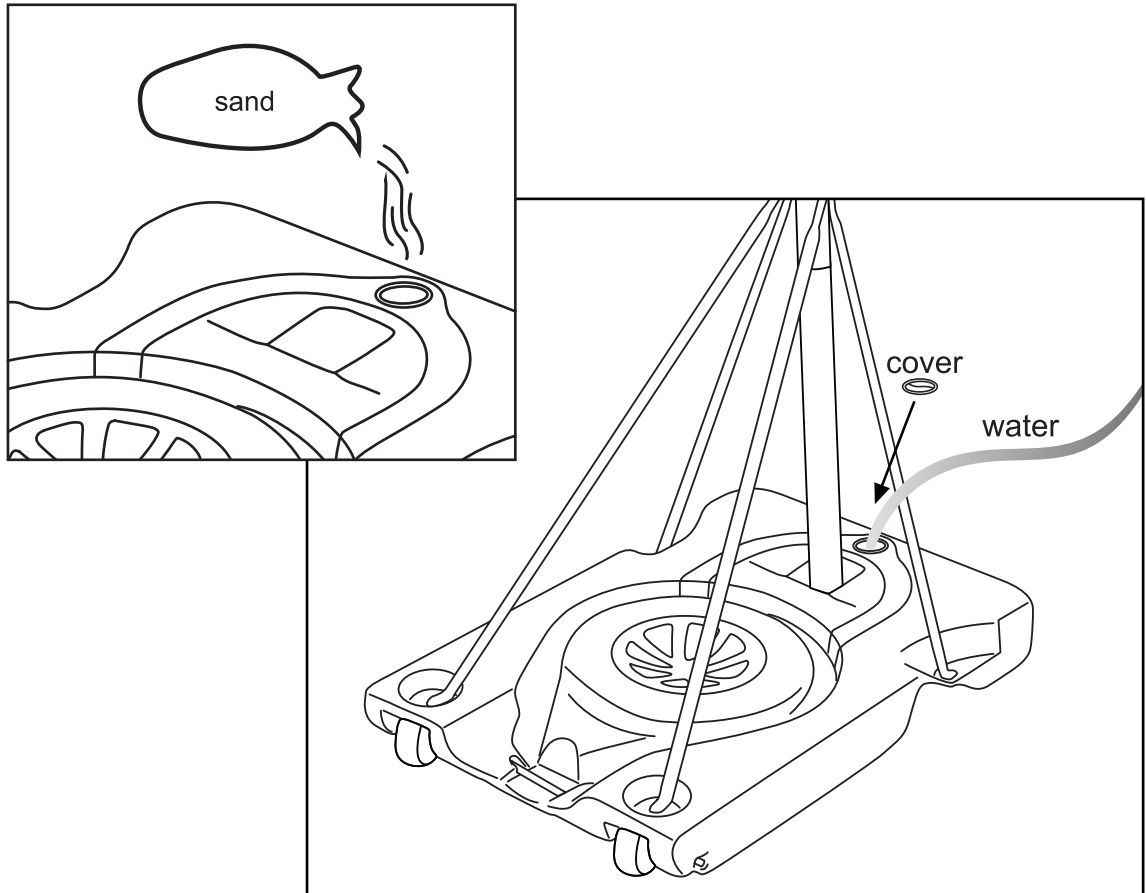


Assembly Instructions — For 2 poles design

Step 1 Install the wheels and bottom pole to base

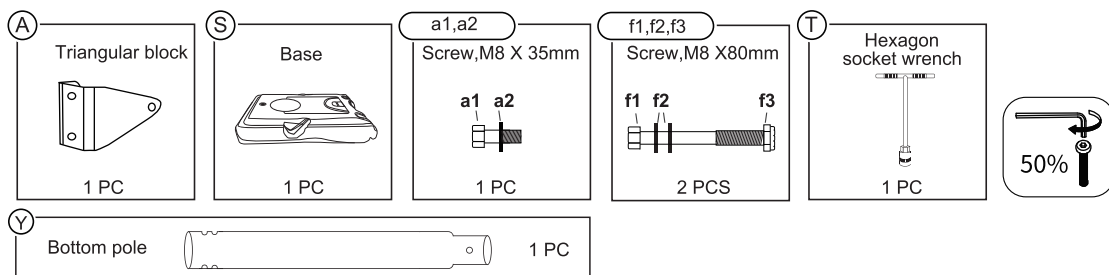


- 1 Install the triangular block A onto the bottom pole Y using screw set f1, f2, and f3.
- 2 Secure the bottom pole Y to the base S with screw set a1 and a2 using the included socket wrench.

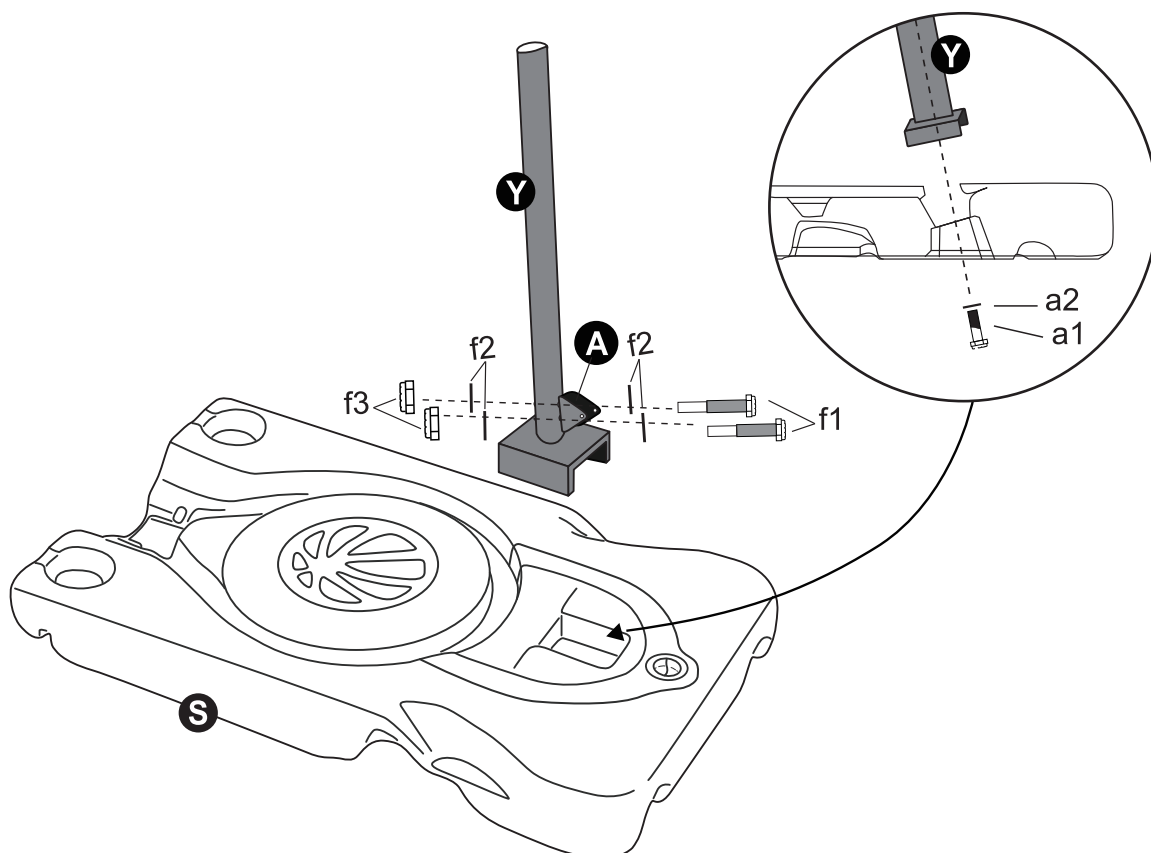

Note:

Please refer to page 7 to 11 (step 3 to step 7) for following assembly steps. Don't regard the step 2 as the next step, the assemble sequence is different.


Step 8 Fix top pole and bottom pole and install 4 support rods

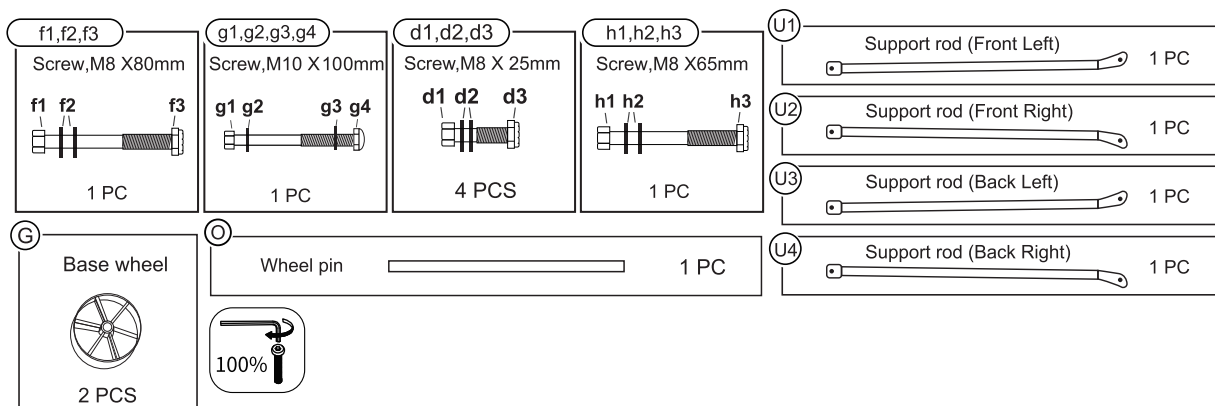

- 1 Use screw set f1, f2, and f3 to secure top pole W and bottom pole Y.
- 2 Use screw set g1, g2, g3, and g4 to secure the upper ends of the four support rods U1, U2, U3, and U4 onto the top pole W.
- 3 Use screw set d1, d2, and d3 to respectively secure the bottom ends of the four support rods to the base.
- 4 Thread the wheel pin O through the wheels G.

Note:


1. The upper ends of U1 and U2 must be fixed on the inside of the upper ends of U3 and U4.
2. Please don't completely tighten the screws on the top of 4 U rods before attaching the bottom of 4 U rods to the base.

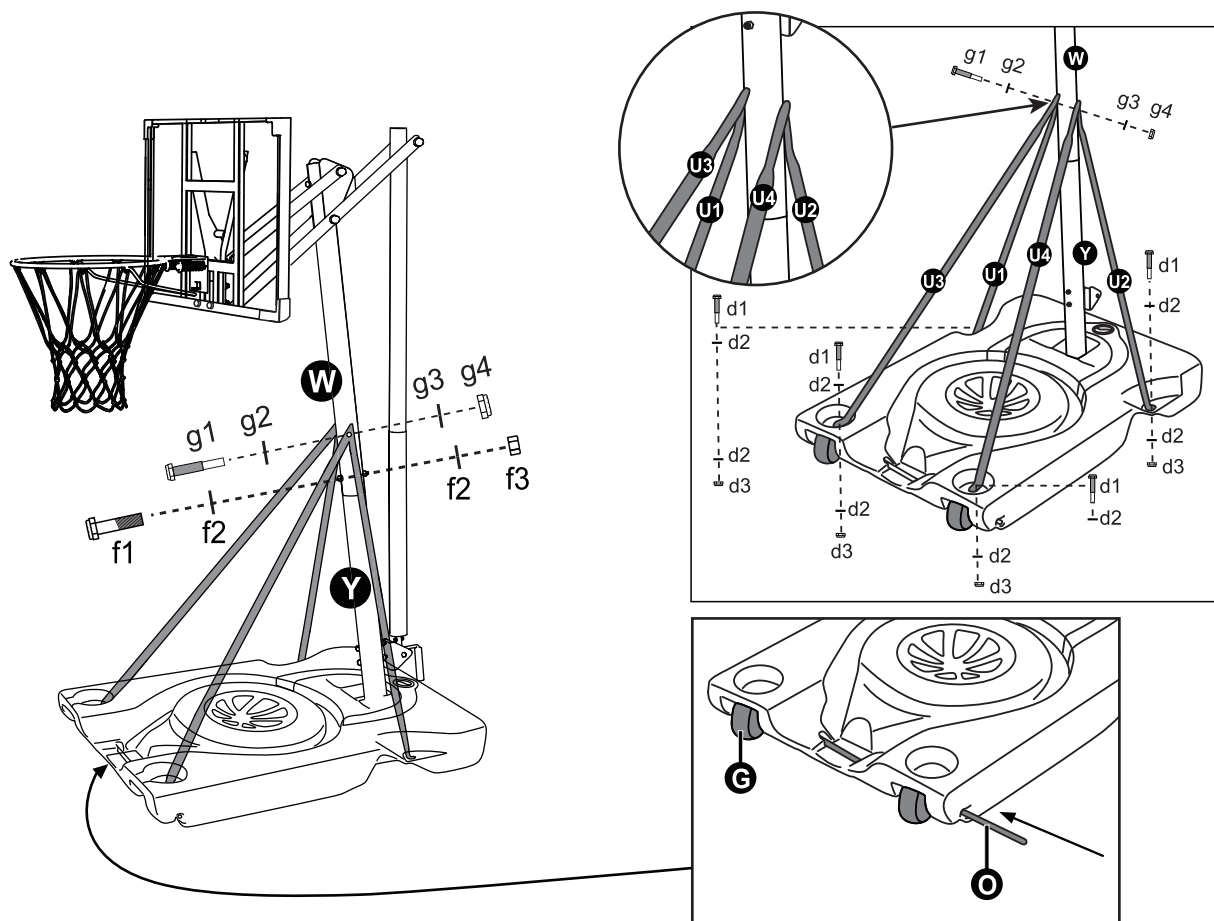

- 5 Fix the lifting rod Z onto the triangular block A using screw set h1. h2. and h3.


Note:

Steps 9-10 please refer to page 13 to 14.

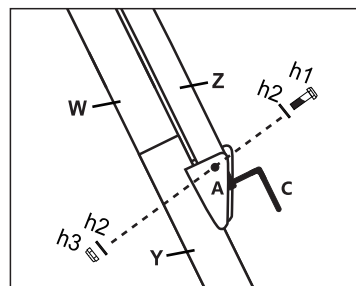


Height Adjustment

- To shift from three poles to two poles, please remove the middle pole X and move the triangular block A onto the bottom pole Y.
- When three poles are installed, height range: 7.44-10ft.
- When two poles are installed, height range: 4.36-6.89ft.

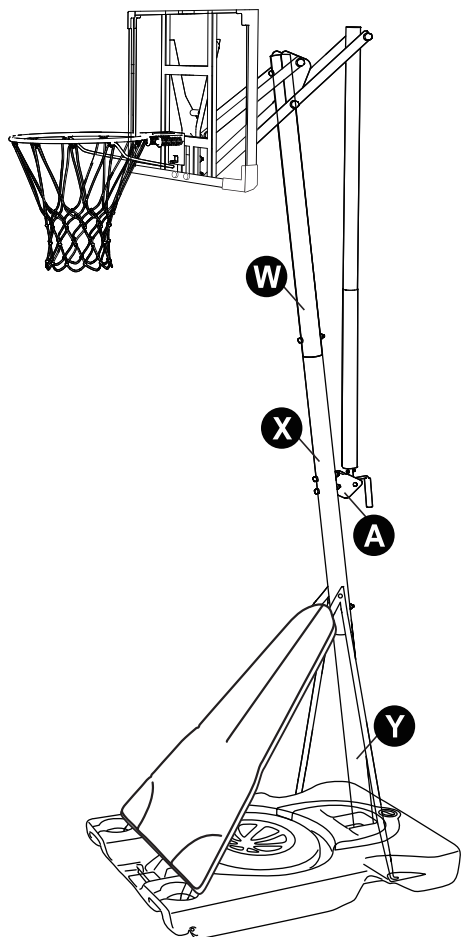

3 Poles Design

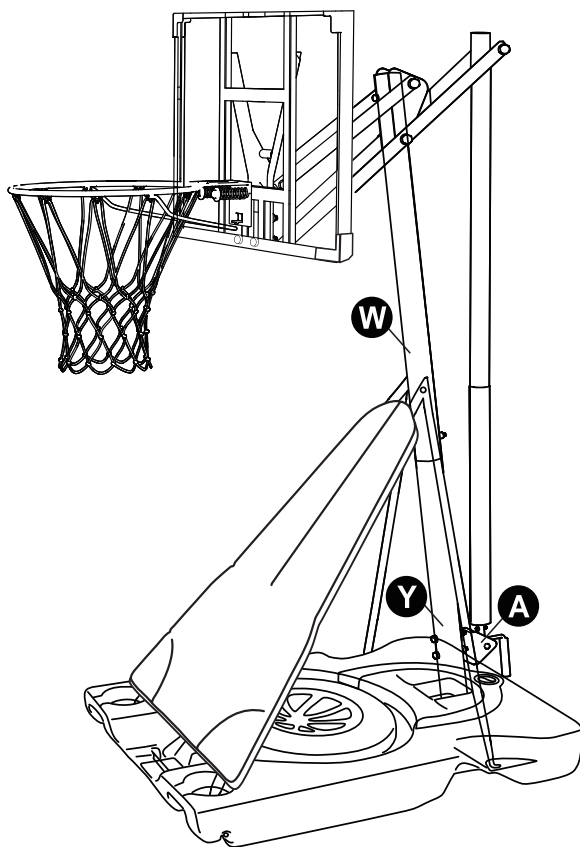

2 Poles Design

Product Return Policy

Returns are allowed within 30 days of the date you received the product. To submit a return request, please message us with your order ID and the reason for returning it so we can process the request and issue return authorization to you as soon as possible. Please be noted the return policy is subject to the conditions below:

1. Please don't assemble the product if you don't want to keep the product.
2. Important: Items must be in new condition to be eligible for returns. Original packaging must be retained and used in the event of a return. If an item is returned WITHOUT the original packaging, a repacking fee (\$50) will be deducted from the refund.
3. The customer should return all accessories from its original shipment. It is your responsibility to pack the item sufficiently to avoid damage in transit back to us. We encourage customers to photograph the items scheduled for return and the condition of the packaging before handing them over to the delivery company.
4. Once the item is back at our warehouse, it will be inspected by our team. If the quality of returned products is acceptable, we will issue you a refund minus the original shipping cost you paid on the order within 48 hours. All returned items will receive a full refund back to the original payment method.

Product Model:.....

Order ID:.....

Purchase Date:.....