


①	② lock nut & teeth lock washer ① light arm 4pcs	X 1PCS
②		X 1PCS
③	glass lampshade 4pcs	X 3PCS
④	splicing connector 2pcs ④	X 3PCS
⑤	⑤ canopy 1pcs	X 3PCS
⑥	⑥ cap nut 2pcs	X 3PCS

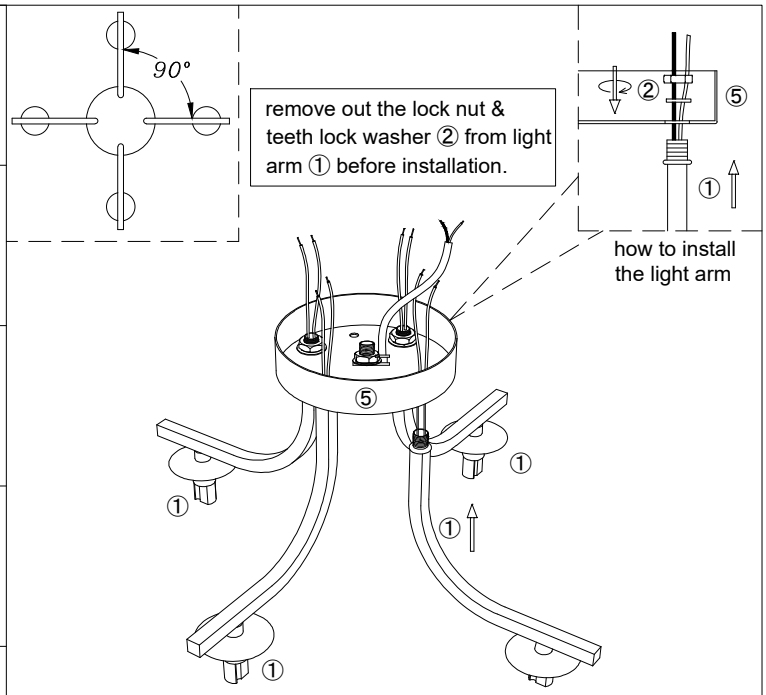


1.Install the light arm ① to the canopy ⑤ with lock nut & teeth lock washer ②, adjust the position of light arms ② like picture shown.



1.Pull the orange operating handle A to open the inlet hole, insert the wire B.
2.Press the operating handle A to finish wiring.
(Note: one inlet hole can put 2 or 3 wires inside)

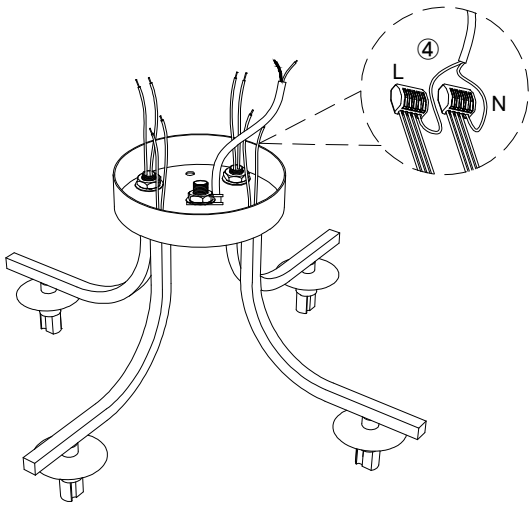

2.Connect all the wires by parallel with connectors ④ (all live line-L use one connector, and neutral Line-N use another connector).

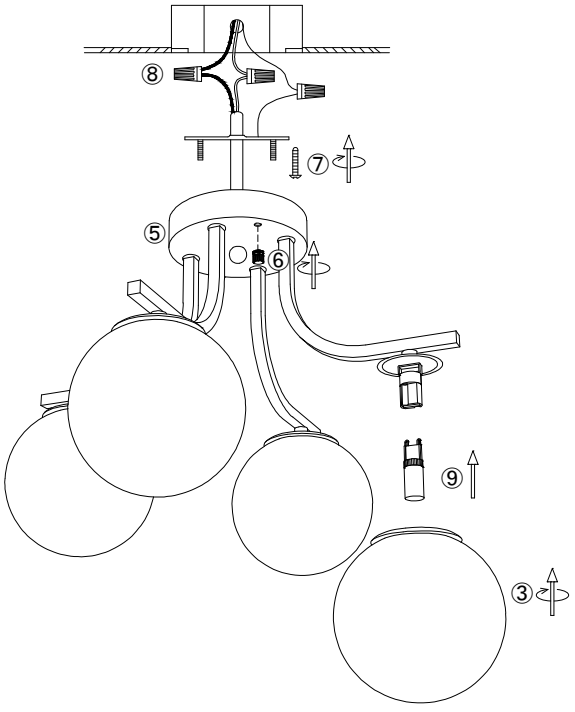

3.Install the bracket to the ceiling junction box with screw ⑦.
4.Connect the wire to your home line with cap connector ⑧.
5.Install the fixture to the bracket with cap nut ⑥.
6.Insert the G9 bulbs (bulbs are not included in the package), and rotate to install the lampshade ③ to the bulb holder.

X7072S-4

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !