


ENTRYWAY STORAGE BENCH



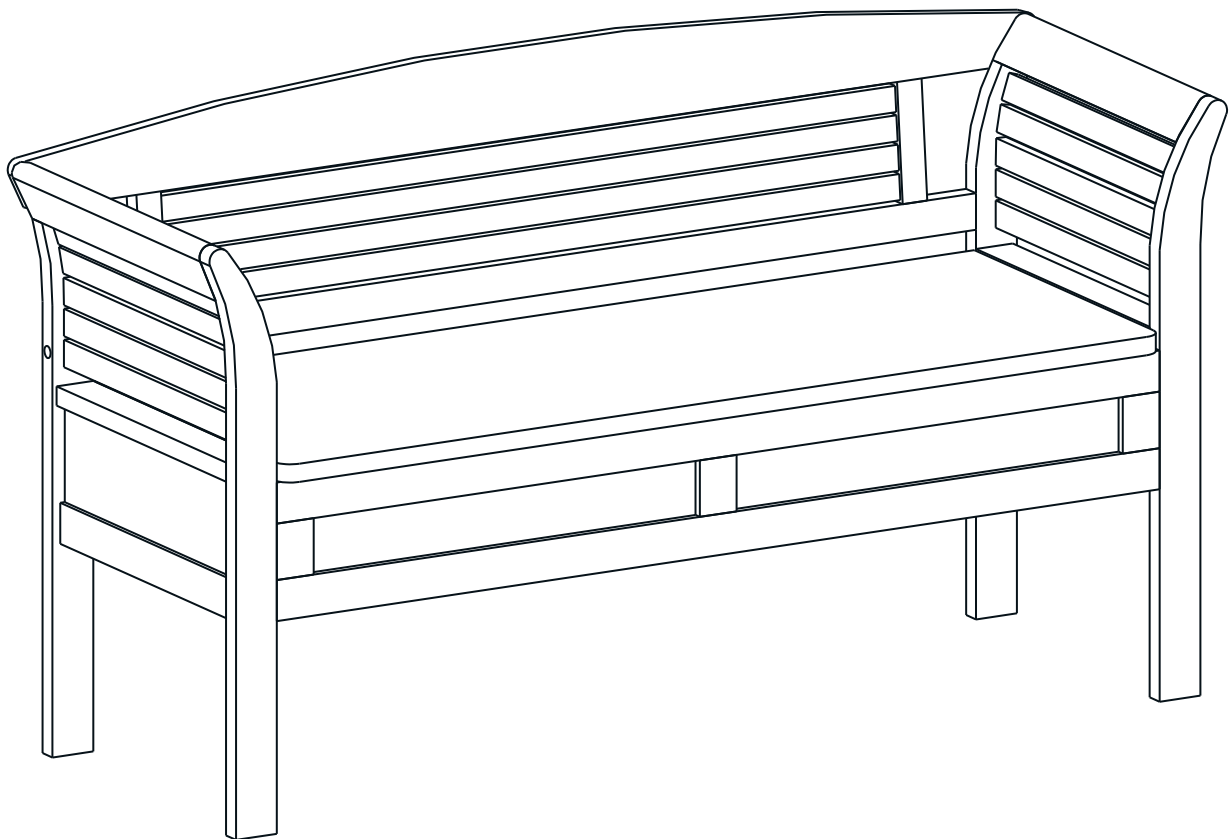

Questions, problems, assembly help, missing parts?

No need to return the product, we will gladly help and ship your replacement parts free of charge
Please call Customer Service

In order to assist you in a timely manner, please have the following information ready:

Model # _____ Part Number or Letter _____

Purchased at _____ Date of Purchase _____

If you wish to return the product, please contact the retailer where the product was purchased.

IMPORTANT : Please read this manual carefully before beginning assembly of this product. Keep this manual for future reference.

SAFETY INFORMATION

Identify all the parts and hardware. Do not discard of the packaging until you have checked that you have all of the parts and hardware required. Hardware package may have spare parts.

WARNING: This item contains small parts which can be swallowed by children and pets. Keep children and pets away during assembly. To avoid danger of suffocation, always keep plastic bags away from children and pets. We recommend that you assemble this unit on a carpeted floor to avoid scratches. If using power tools, set the tool to low torque to avoid damage.

May require 2 people for ease of assembly.

IMPORTANT : Please read this manual carefully before beginning assembly of this product. Keep this manual for future reference.

CARE and MAINTENANCE

Perhaps the greatest environmental damage to wood furniture comes from wide swings in relative humidity (RH) in our homes. Wood absorbs and desorbs water as relative humidity rises and falls, and in doing so it swells and shrinks. Making matters worse, it expands and contracts unequally along different grain directions. As humidity changes, the components of wooden objects are continually pushing and pulling against each other. This pressure often results in parts of furniture no longer fitting together closely or becoming distorted or breaking from their own internal stresses.

The response to relative humidity changes begins with determining the annual average RH for your particular space. Then try to keep the RH in the space where your furniture is as close to that average as possible, generally within about 10% up or down. De-humidify in the summer and humidify in the winter.

Be aware that raising the temperature lowers the humidity and vice versa. Thus, modern heating systems, which can drive down interior RH in the winter, almost invariably cause problems for furniture. To counteract their effect, you can either modify the RH by keeping furniture containing spaces cooler in the winter or most importantly, have a good working humidifier for your home. A humidistat automatically works to balance the humidity in your home so it is constant. Dry indoor air can suck enough moisture from its surroundings to do permanent damage to wood, causing it to crack or split.

Remember, that not all woods are created equal. Two factors that help determine how rapidly a wood will lose moisture are pore size and surface hardness. A piece made from a dense and hard wood will dry less rapidly than pieces made from softer woods.

Furniture that is sealed and lacquered will lose moisture more slowly than an unfinished piece while pieces with veneer finishes are not only stronger, but lose moisture more slowly than other finishes.


To help protect your wood furniture, take these steps:

- Use a humidifier, preferably one with an automatic control system that can sense the humidity level and adjust itself accordingly. Don't over-humidify; that can damage wood by causing it to expand and contract.
- Keep furniture out of direct sunlight, which can cause it to dry out, crack and warp.
- If you can avoid it, don't put furniture near heating vents. If you must, keep the piece 3 to 4 inches away from the wall, giving the heat and air space to circulate.
- Dust with soft dry cloth.
- Do not use liquid or aerosol products.
- To avoid marking, do not place rubber on surface (foot pads, etc.)
- For soil build-up, wipe with damp cloth & dry.
- Do not use abrasive cleaners.

PRE-ASSEMBLY INFORMATION


PARTS DESCRIPTION

A_L

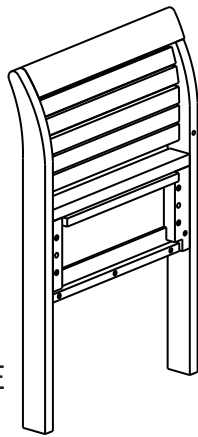


LEFT SIDE
QTY 1

A_R

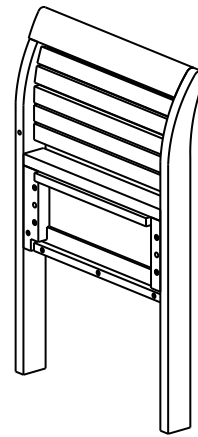


RIGHT SIDE
QTY 1

B

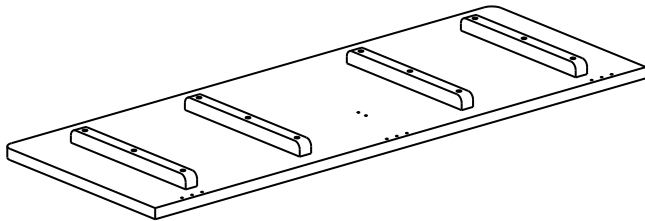


SEAT
QTY 1

C

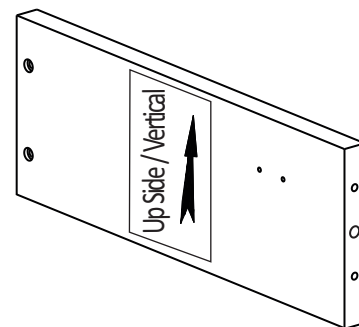


DIVIDER
QTY 1

D

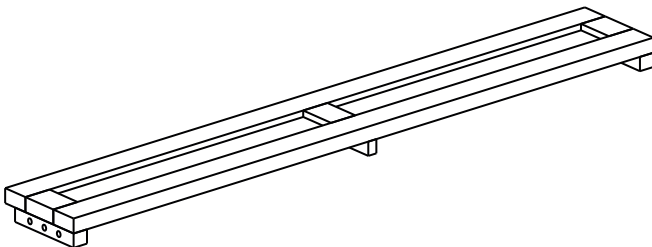


FRONT
QTY 1

E

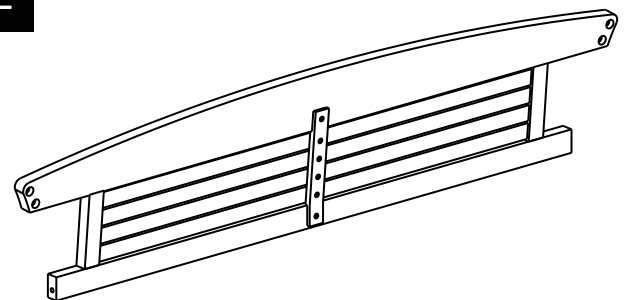


BACKREST
QTY 1

F

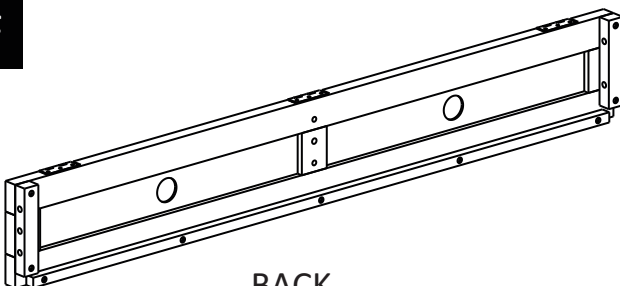

BACK
QTY 1

G

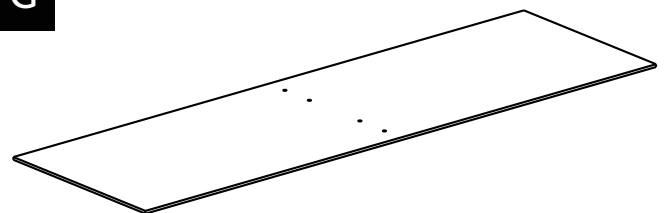


BOTTOM PANEL
QTY 1

NEED HELP? For help with assembly or if you are missing a part, please call customer service

PRE-ASSEMBLY INFORMATION


HARDWARE DESCRIPTION

1




ALLEN KEY BOLT
M6 X 40 mm
QTY 8

2




ALLEN KEY BOLT
M6 X 30 mm
QTY 4

3




ALLEN KEY SCREW
M6 x 30 mm
QTY 2

4




ALLEN KEY
QTY 1

5



LID SUPPORT
QTY 1

6




WOOD DOWEL
Ø8 X 30 mm
QTY 6

7




PHILLIPS SCREW
M3 X 12 mm
QTY 9

8



PHILLIPS SCREW
M4 X 25 mm
QTY 2

9




PHILLIPS SCREW
ROUND HEAD
M4 X 15 mm
QTY 4

10




ALLEN KEY BOLT
M6 X 80 mm
QTY 2 SETS

11




PHILLIPS SCREW
ROUND HEAD
M4 X 20 mm
QTY 4

12





WOOD BOLT CAPS
QTY 2



Required -
Flathead screwdriver
Phillips screwdriver
Rubber mallet
Not Included


NEED HELP? For help with assembly or if you are missing a part, please call customer service

COMPONENTS – KEY DIAGRAM

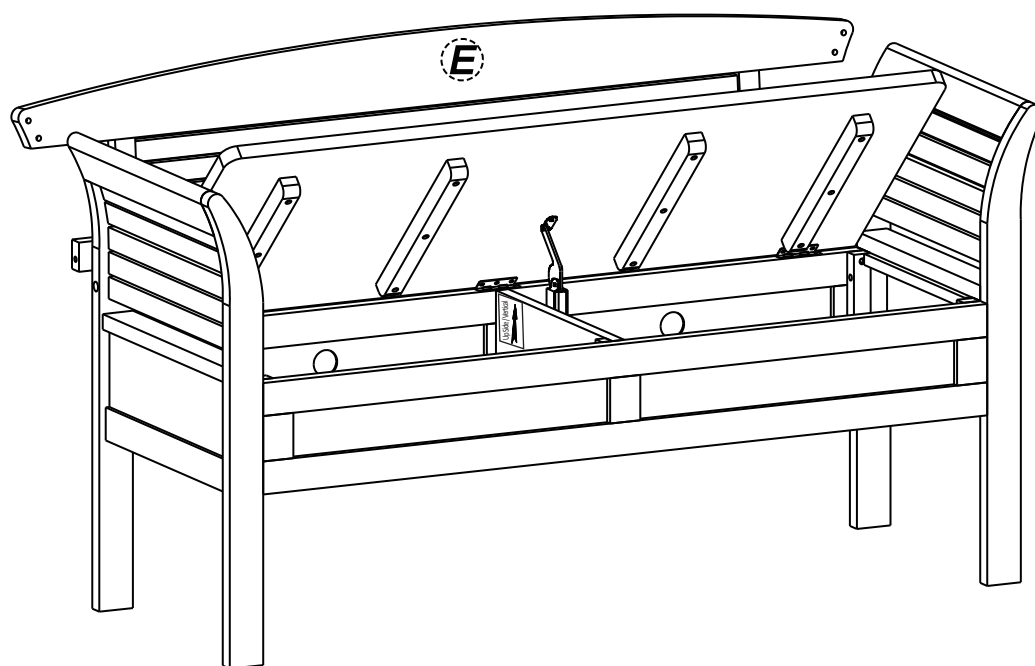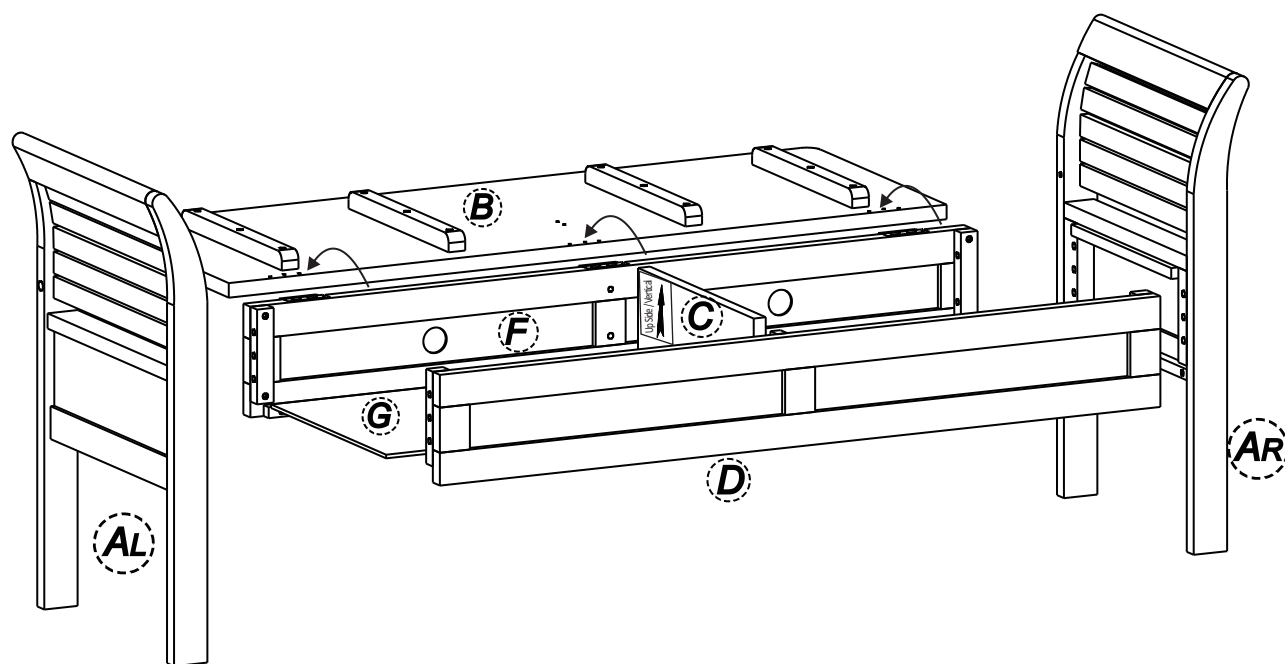

ASSEMBLY


STEP 1

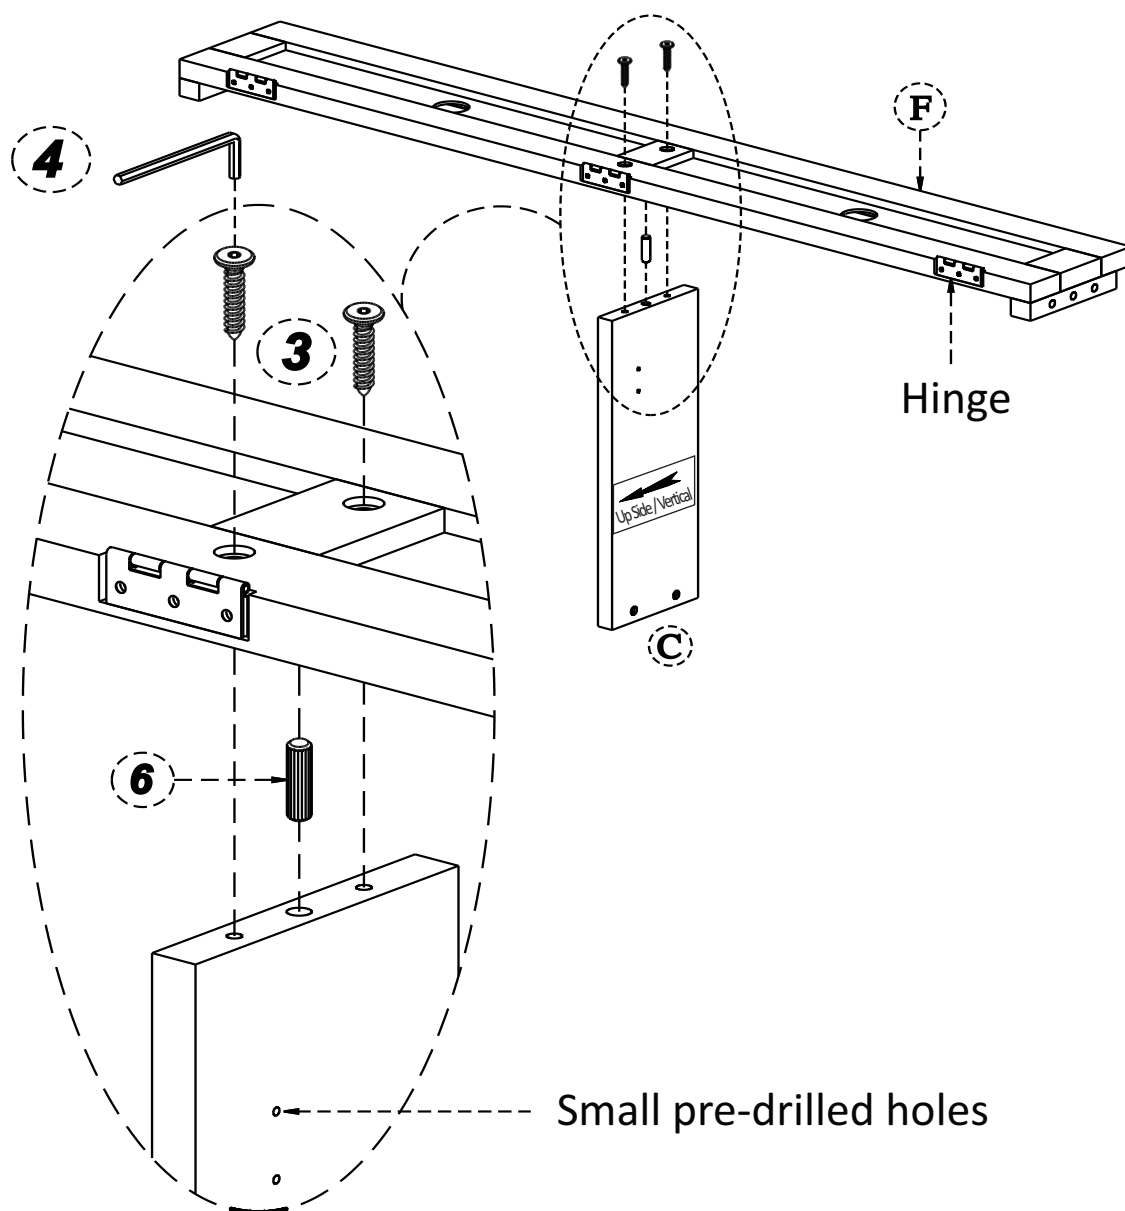

1. Insert Dowel ⑥ into Divider ①.
2. Use rubber mallet to tap Dowels ⑥ into bottom of holes securely. 1/2 length of Dowels should be exposed.
3. Align drilled holes on bottom of Back ② with Dowel ⑥ on Divider ①.
(Note: please pay close attention to the location of the 2 small guide holes which accommodate the lid support. They need to be on the same side as the hinges).
4. Using 2 Allen Key Screws ③ to attach Back ② to Divider ①.

ASSEMBLY


STEP 2

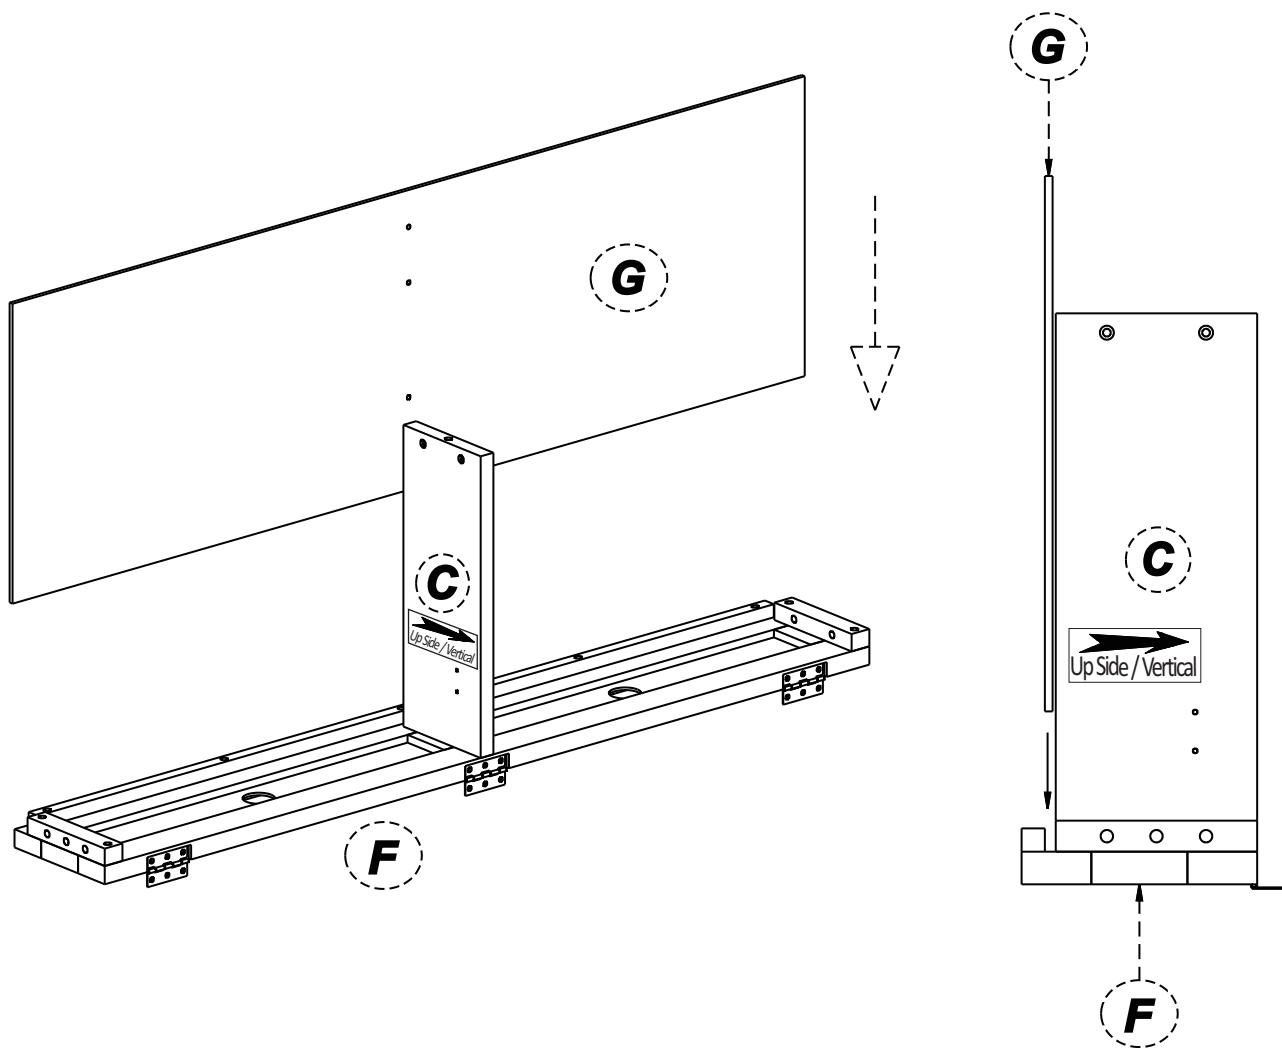


1. Attach Bottom Panel (G) to Divider (C) & Back (F) by sliding on the gap between Divider (C) & the long rail on Back (F).

ASSEMBLY

STEP 3




NOTE: The screwdriver is not included in the hardware pack.

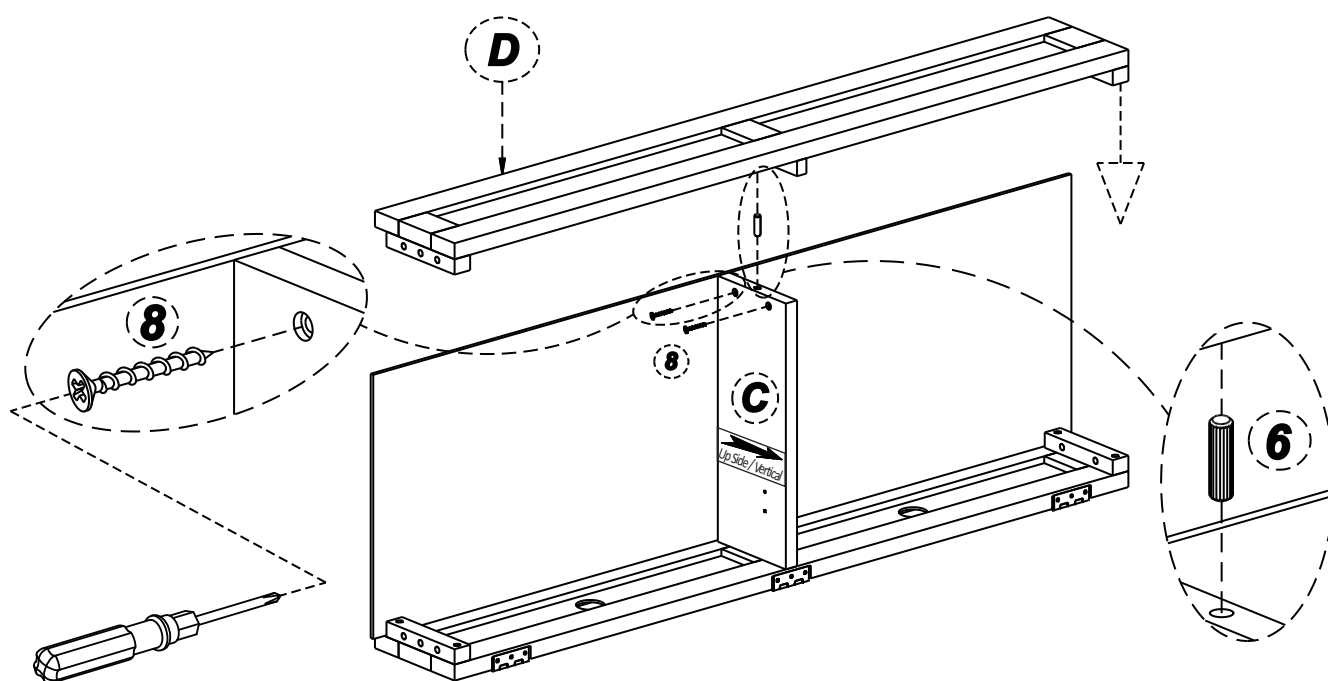

1. Insert Dowel (6) into Divider (C).
2. Use rubber mallet to tap Dowels (6) into bottom of holes securely. 1/2 length of Dowels should be exposed.
3. Align drilled holes on bottom of Front (D) with Dowel (6) on Divider (C).
4. Using 2 Phillips Screws (8) to attach Divider (C) to the middle bar on Front (D).

ASSEMBLY


STEP 4

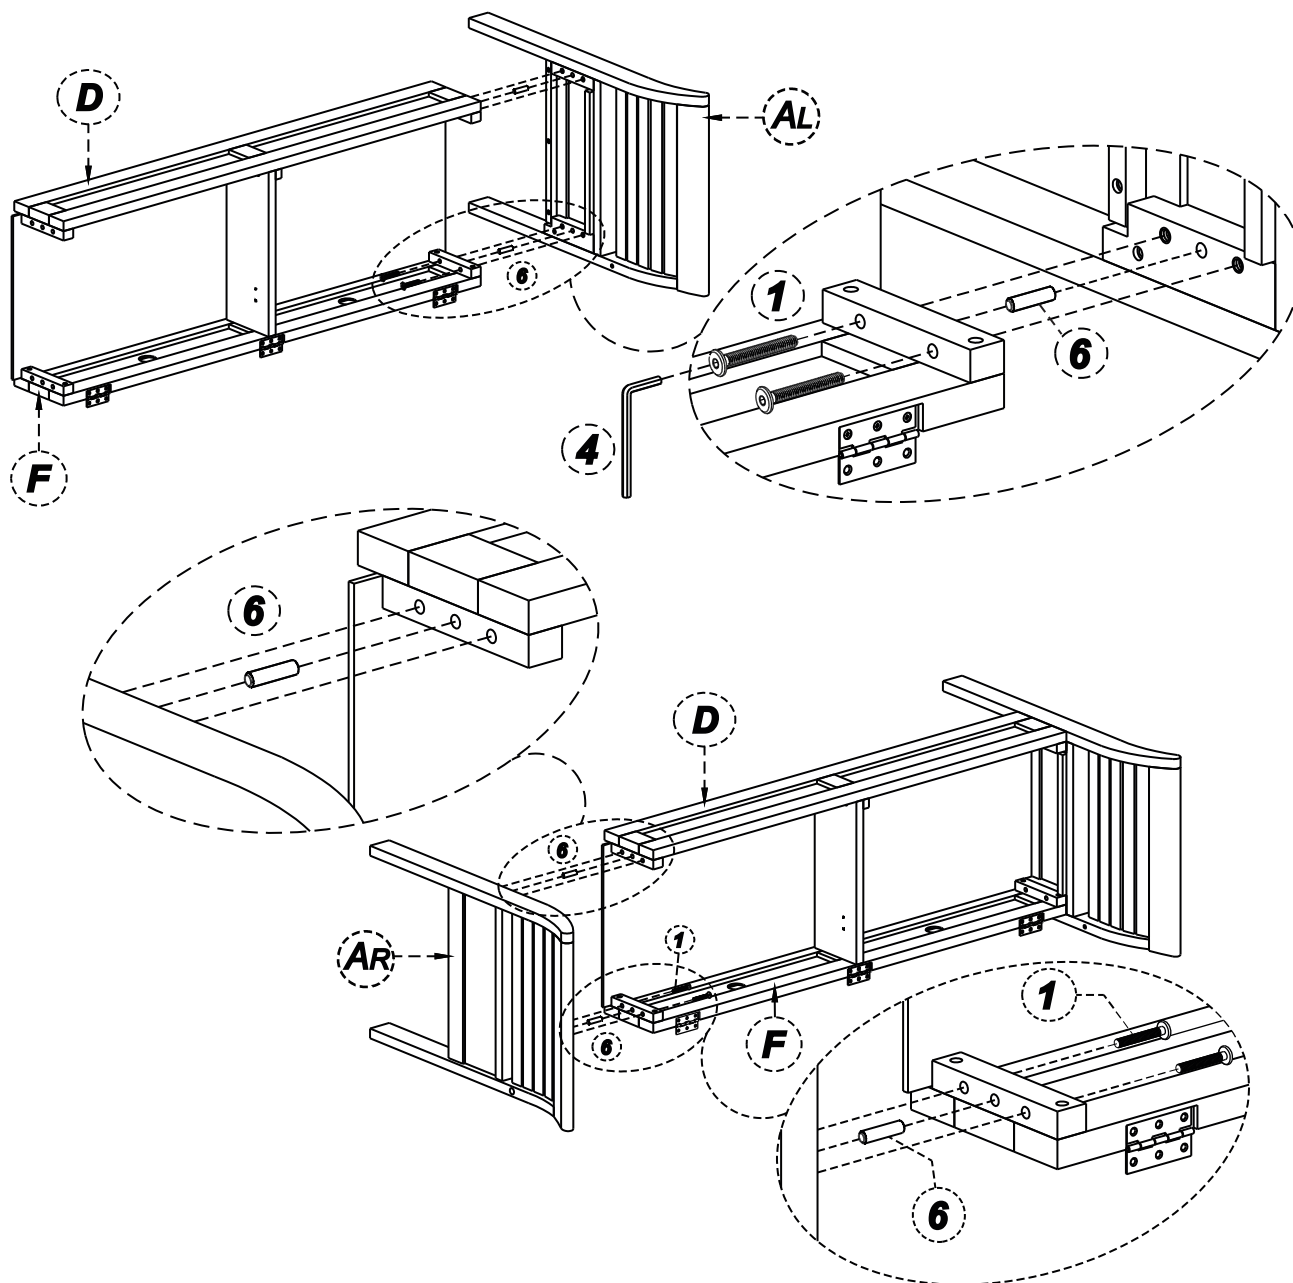


1. Insert 2 Dowels (6) into each Side (AL, AR) at specified location.
2. Use rubber mallet to tap Dowels (6) into bottom of holes securely. 1/2 length of Dowels should be exposed.
3. Align drilled holes on side bars of Front (D) & Back (F) with Dowel (6) on each Side (AL, AR).
4. Using 4 Allen Key Bolts (1) (40mm length) to attach Front (D) & Back (F) to each Side (AL, AR).

ASSEMBLY

STEP 5




NOTE: The screwdriver is not included in the hardware pack.

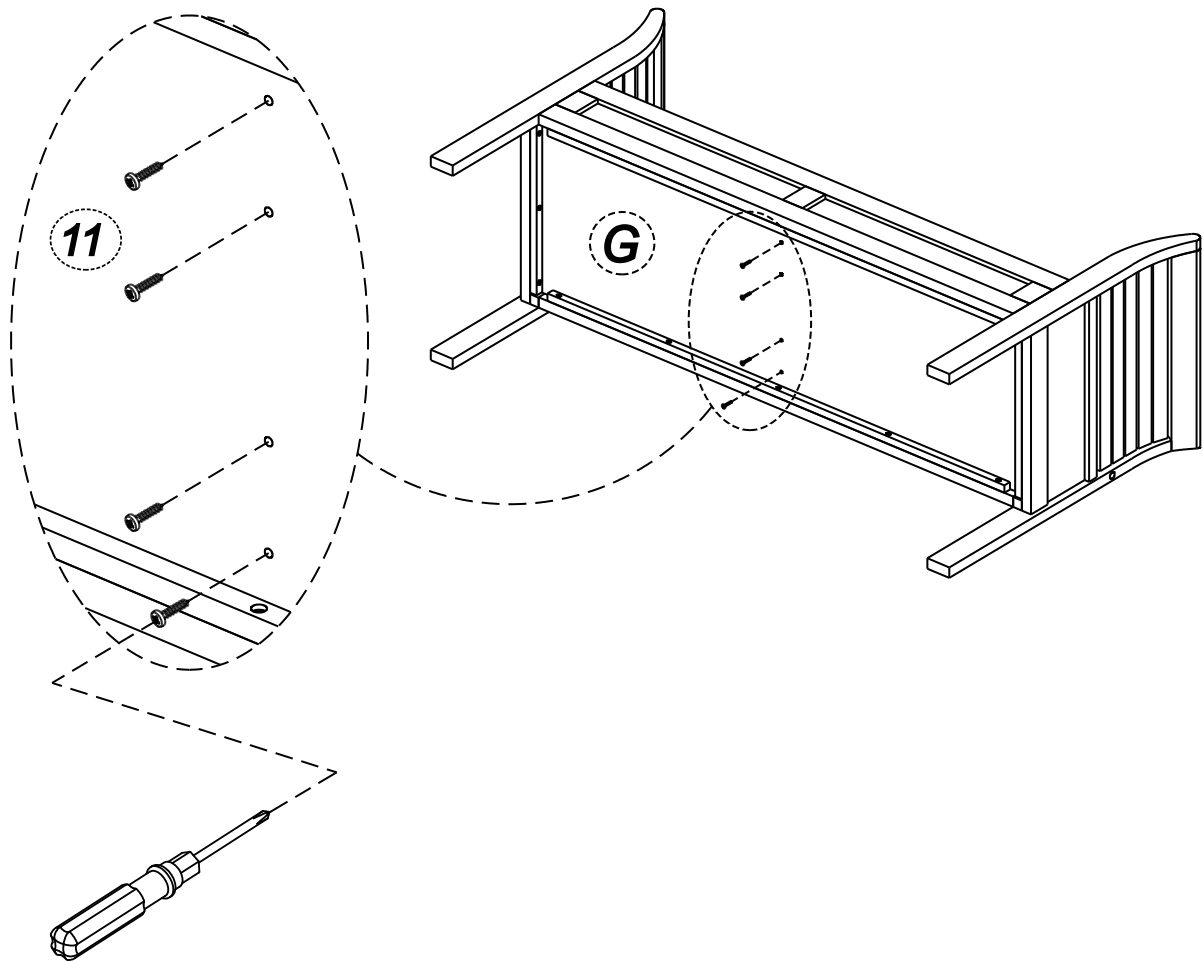


1. Use Phillips screwdriver to attach Phillips Screw Round Head ⑪ into drilled holes on Bottom Panel ⑥.

ASSEMBLY

STEP 6




NOTE: The screwdriver is not included in the hardware pack.

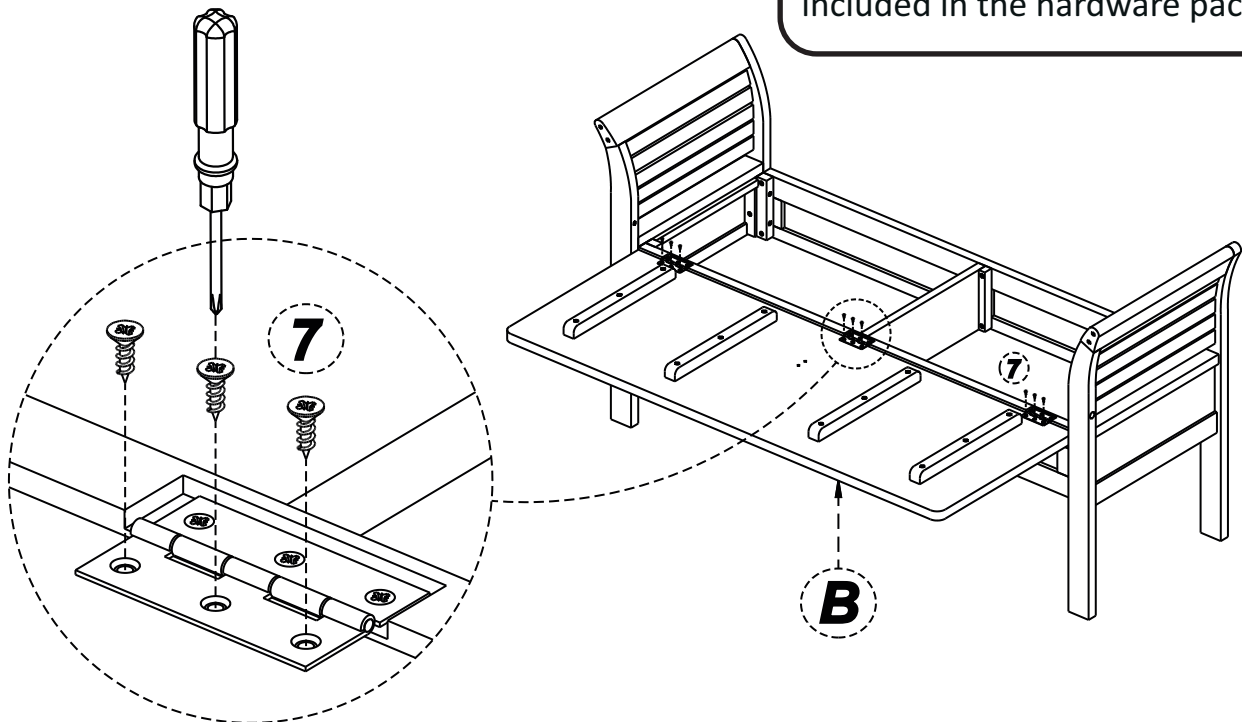

1. Attach Seat (B) to 3 hinges on Back (F) using Phillips Screws (7) (using guide holes underneath of Seat).
2. Use phillips screwdriver to tighten Screws. Do not over-tighten.


STEP 7

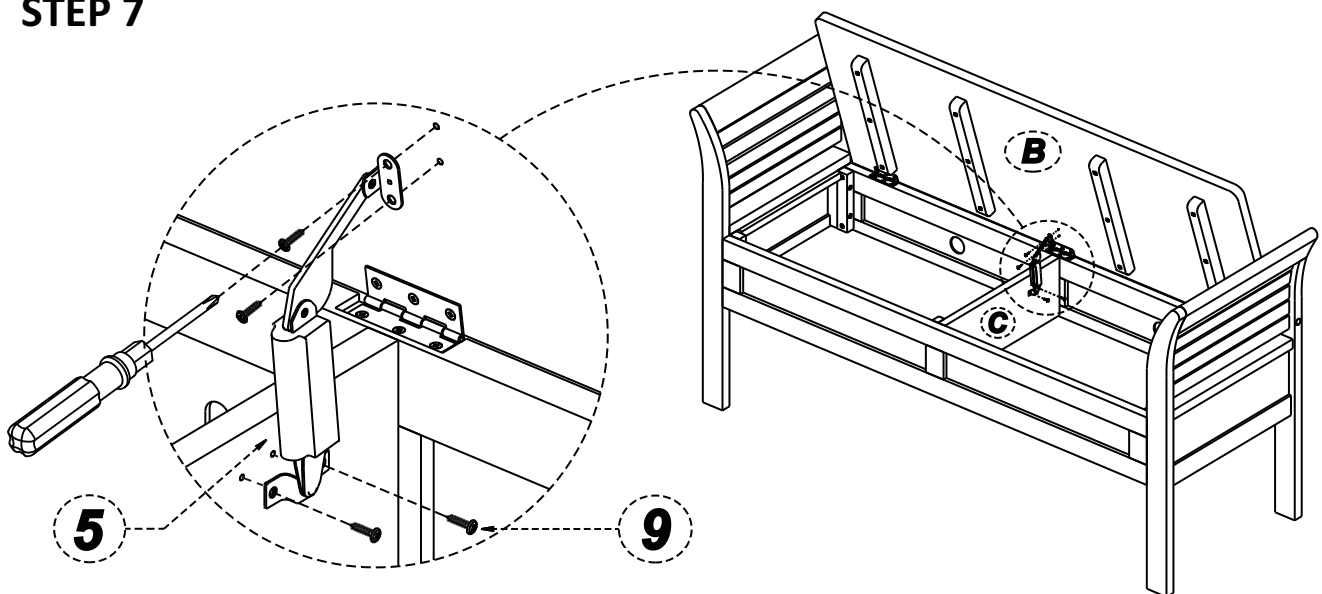

1. Attach Lid Support (5) into pre-drilled holes of Seat (B) and Divider (C) using Phillips Screws Round Head (9).
2. Use phillips screwdriver to tighten Screws. Do not over-tighten.

ASSEMBLY


STEP 8

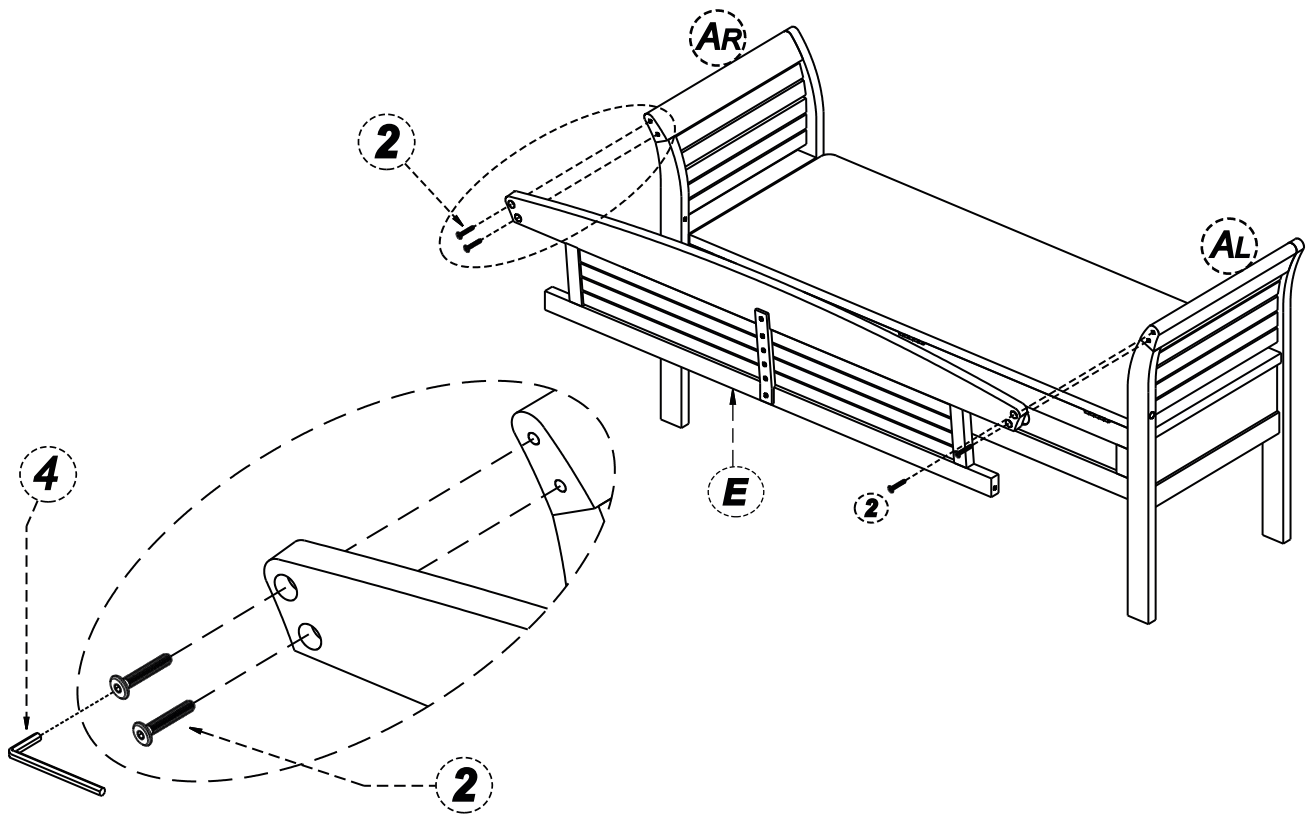

1. Attach Backrest (E) to back of Sides (AL, AR) using Allen Key Bolt (2) through drilled holes from Backrest (E).
2. Use Allen Key (4) to tighten Bolts. Do not over-tighten.


ASSEMBLY

STEP 9

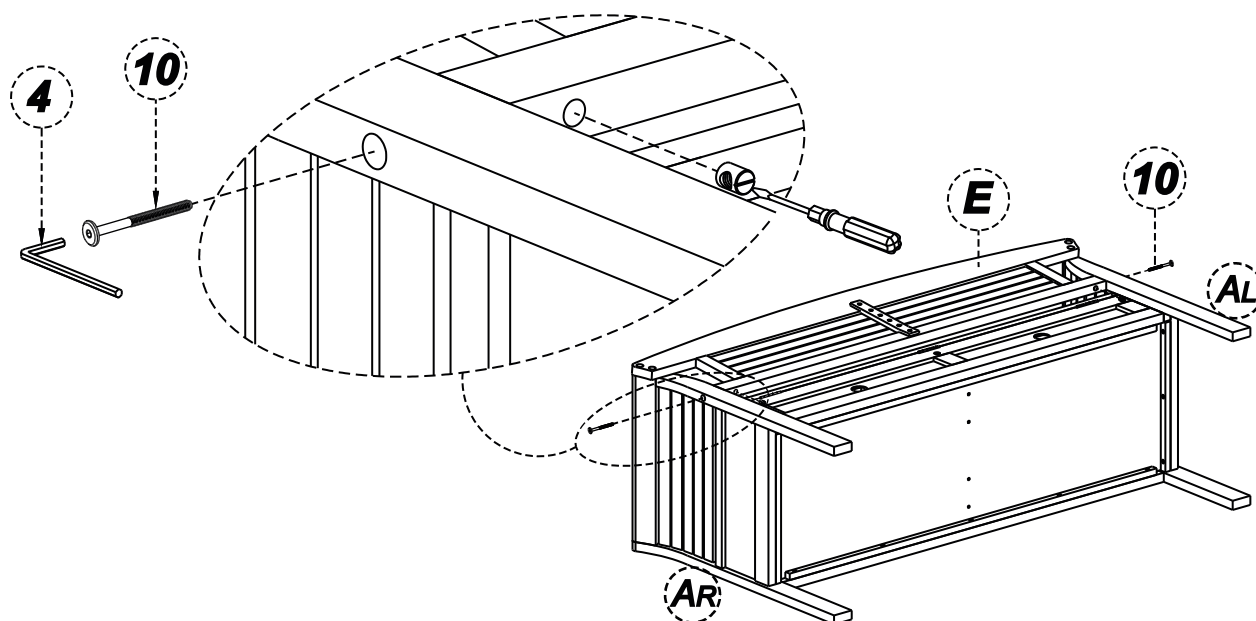

1. Attach Backrest (E) to back of Side (AL), (AR) using Allen Key Bolts (10) into drilled holes on Side (AL), (AR).
2. Insert Cross Nuts (10) into drilled holes in Backrest (E) with the slot facing out. Use a flathead Screwdriver to turn it to align with the Bolts (10). Repeat on the opposite side.
3. Use Allen Key (4) to tighten Bolts.

STEP 10

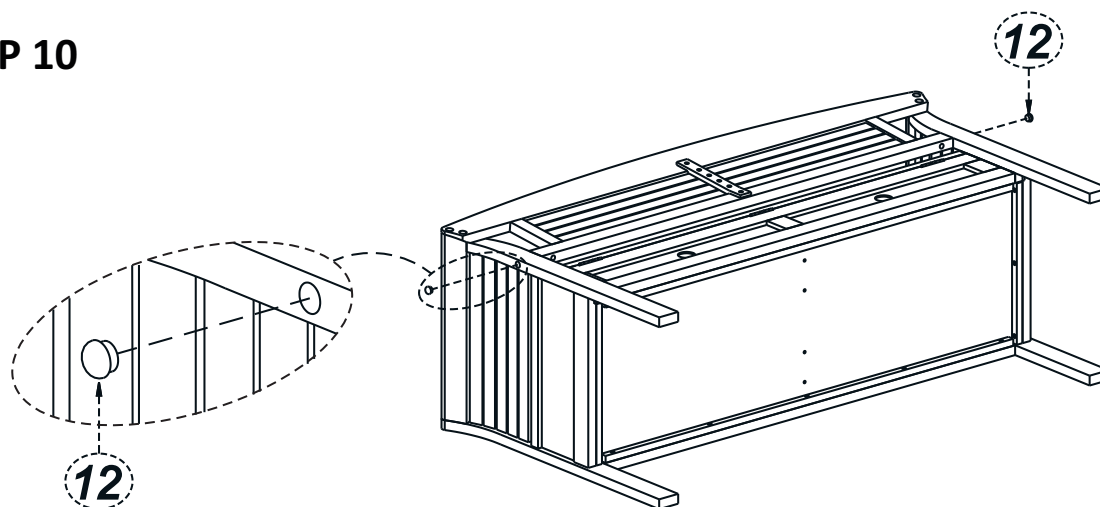

1. Insert 2 Wood Bolt Caps (12) into exposed bolt holes on side of bench.

WARRANTY

Thank you for purchasing our product. These products have been made to demanding, high-quality standards and are guaranteed for domestic use against manufacturing faults for a period of 12 months from the date of purchase. This warranty does not affect your statutory rights.

In case of any malfunction of your product (failure, missing parts, etc.) please contact us at our toll free service line or by email

We reserve the right to repair or replace the defective product, at its discretion.

This product is guaranteed for 12 months if used for normal purposes. Any warranty is invalid if the product has been overloaded or subject to neglect, improper use or an attempted repair by other than an authorized agent. Heavy-duty or daily professional/commercial usage are not guaranteed.

Due to continuous product improvement, we reserve the right to change the product specifications without prior notice.