

Swipe the upper part of the page to the left to switch to the RGB lamp control page. (The RGB feature is not supported by this product)

The RGB lamp control page can adjust the color of the RGB lamp. (Not supported)

The RGB lamp control page can adjust the brightness of the RGB lamp. (Not supported)



Unpair button. Click this button within 5 seconds when the device is powered on. If the device flashes or beeps, it means that the phone is unpaired with the device and the phone will not be able to control the device.


Master: Room control page. When there are devices in the room, all the devices in the room can be controlled in this page. As the above example, all the device in the living room can be controlled.

When in the room page, long press the device card you can delete the device or change the device name.

INSTALLATION MANUAL

CHANDELIER

Model No.: WW2373-16B







APP Control Applicable




Scan for installation vio

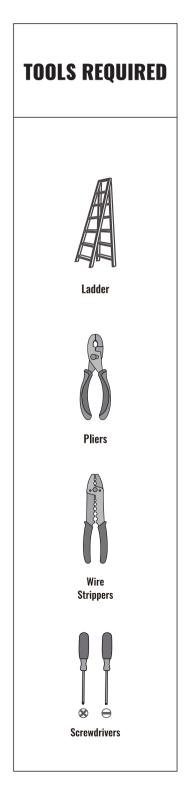

PACKING LIST

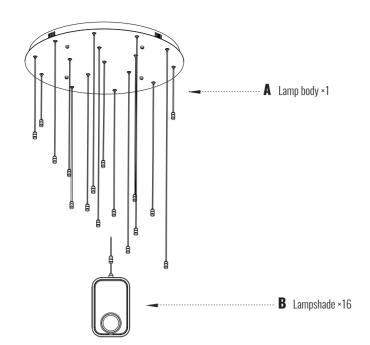

INSTALLATION KIT

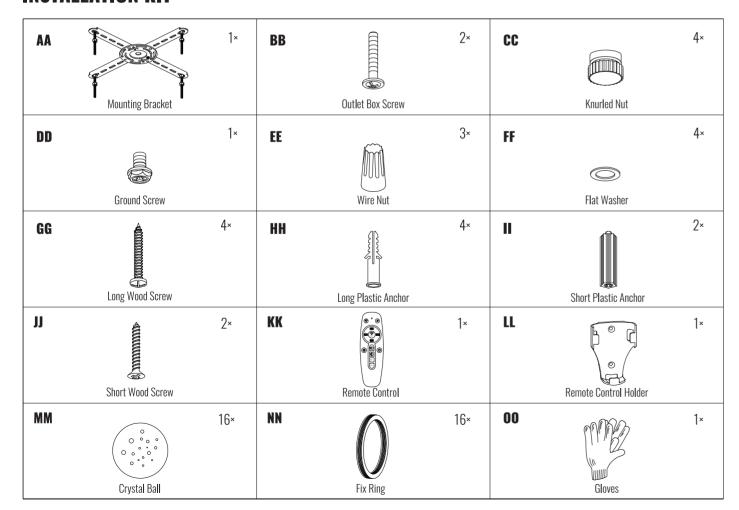


NOTE:


1. DD is pre-installed on AA, AA/CC is pre-installed on A.

MOUNTING AND WIRING

1. Remove Mounting Bracket

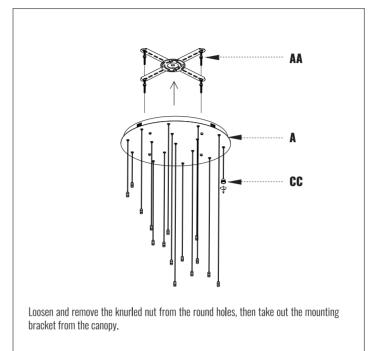


2. Fix the Mounting Bracket




Step 1: Mark and drill screw holes on the ceiling, then insert the Long plastic anchors. **Step 2:** Use outlet box screws to fix the mounting bracket to the outlet box, and then tighten it with flat washer and long wood screws.


3. Connect the Wires

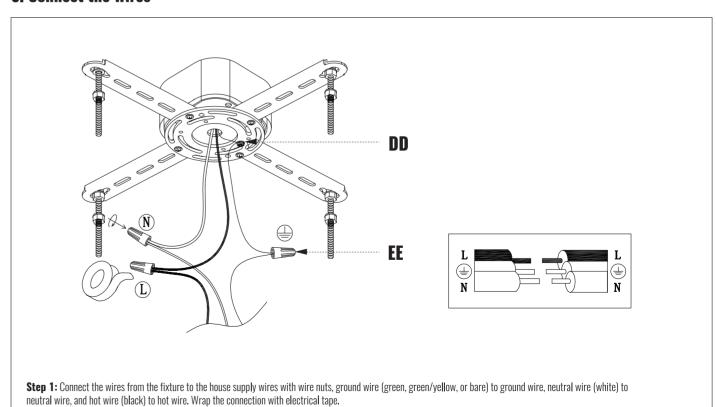

4. Install Canopy

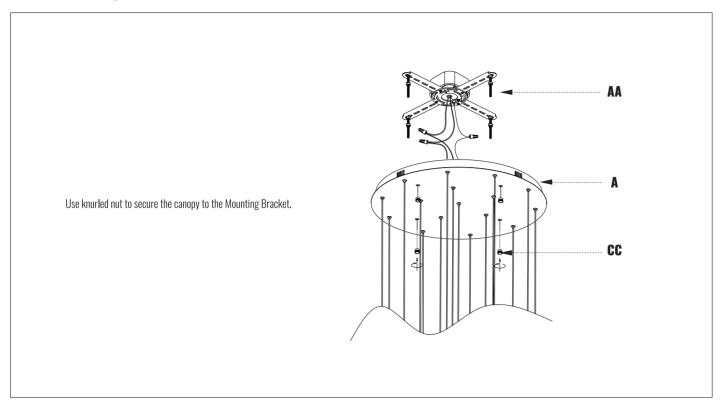


2. Install Lampbody

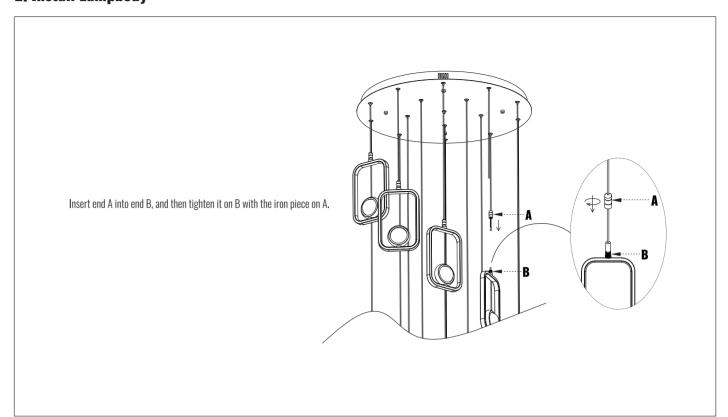


LAMP BODY INSTALLATION

1. Install Lampshade

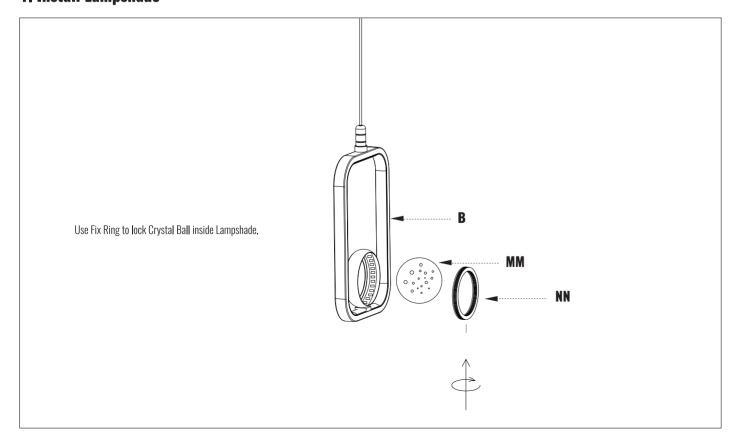


ADJUSTABLE HEIGHT

1. Adjustable Height

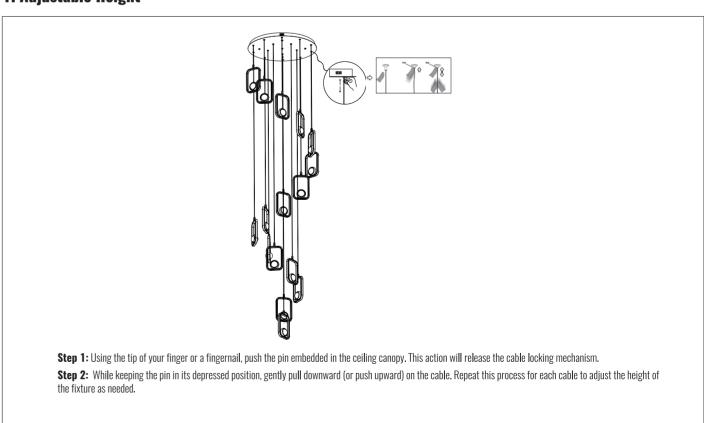

 $_{3}$

REMOTE CONTROL INSTRUCTIONS

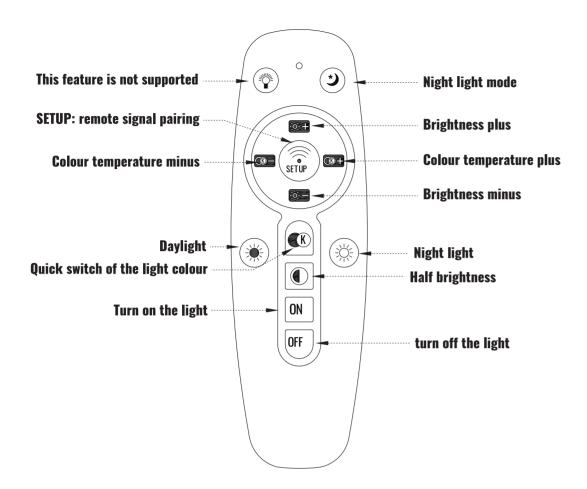

NOTE:

Please insert 2 batteries before using. AAA 1.5V battery x 2pcs (not included)

- 1): Turn on the light.
- ② :Turn off the light.
- (3) (4): Change the color temperature of the light.
- (5) (6): Change the brightness of the light.
- : Night mode: Dim the light.
- 8 : Switch the light among "warm white, white, cool white" three colors.
- 9 : This button is non functional.
- 10 : Press once for a 0.5-hour timer, the indicator light will blink once; Press twice for a 1-hour timer, the indicator light will blink twice.

REMOTE SIGNAL PAIRING:

If the remote control loses signal of the light, turn off the power from wall switch, then turn it on, press ① immediately for around 3 seconds, the light will slowly flash 3 times, indicating successful pairing.

APP CONTROL INSTRUCTIONS



APP Control Applicabl

Install the "Lamp Smart Pro" App from Google Play, Apple App Store, or other App Stores by scanning the QR code or searching for the App name. Ensure that your phone is connected to the internet and Bluetooth enabled.



@	Pair button. Click this button within 5 seconds after the device is powered on. If the device flashes or beeps, it means that the phone has been successfully paired with the device, and then the device can be controlled through the application.
•	The state of the lamp can be adjusted by voice commands. Currently only Chinese and English are supported.
	Change the color temperature of the light.
•	Change the brightness of the light.
O O	After clicking the light color will change in a cycle. (Not supported)
•	Click to select a time to turn off the device.
•	Click to turn on the auxiliary light. (Not supported)
C	Night mode. The white light and the yellow light will light up at the same time, but only at 10% of the maximum brightness.
<u> </u>	When clicked, the white light and yellow light will light up at the same time, and the brightness will be the maximum brightness.
Ŷ	When clicked, only yellow light will light up, and the brightness will be the maximum brightness.
©	When clicked, only white light will light up, and the brightness will be the maximum brightness.