





Assembly Instructions

Caution : You must read this before you proceed

Swivel Chair

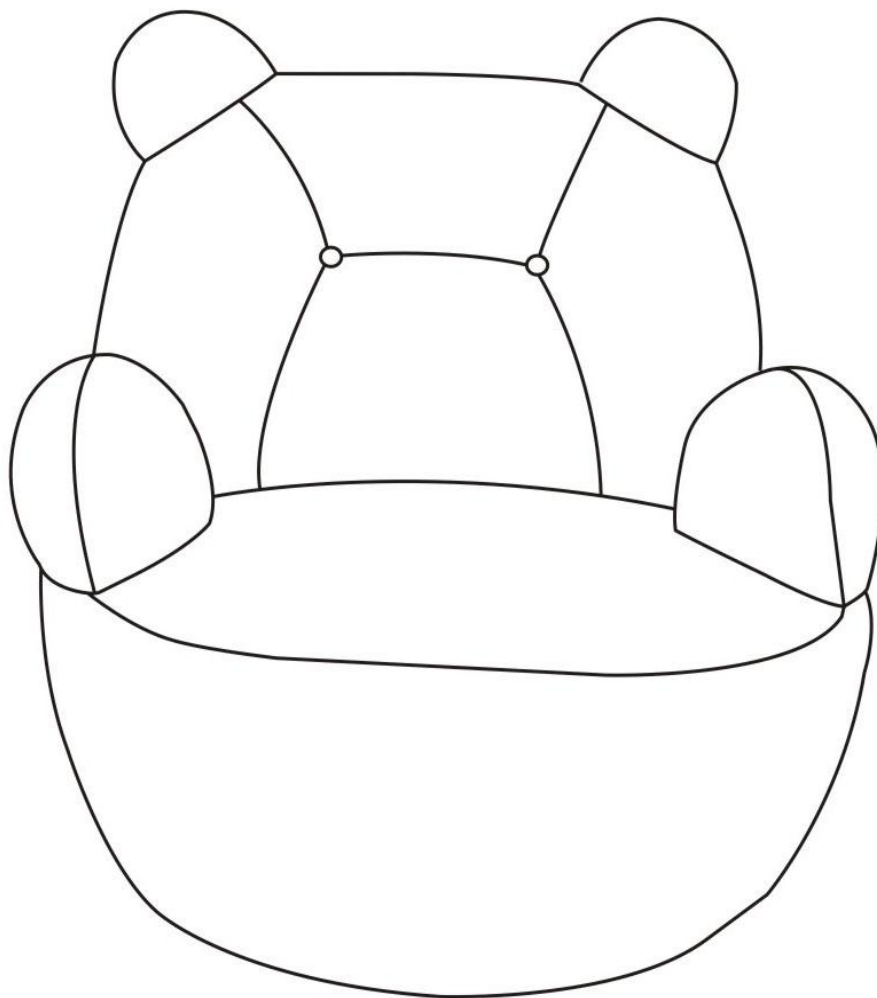

Parts List


Label	Picture	Description	QTY
A		Chair Seat	1
B		Compressed Back Cushion	1
C		Back Metal Frame	1
D		Arm Fiber pad	2

Hardware

Number	Picture	Description	QTY
①		inserting joint connector	2
②		Bolt(M6*25mm)	4
③		Allen Key (M6)	1

Assembly Steps


Step 1

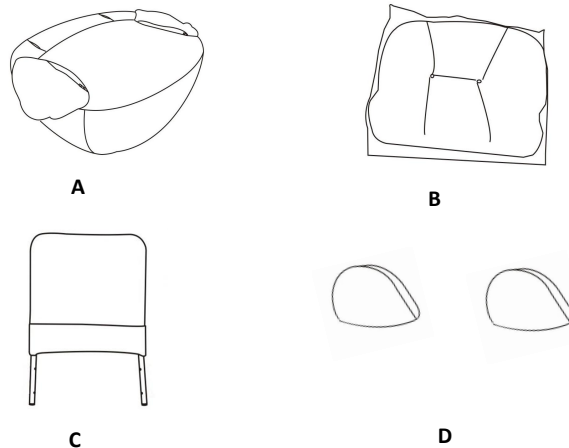

Open the carton and place all the parts on a clean, non-marring surface.

Caution : Do exercise Caution to ensure that your fingers do not get caught or pinched in the assembly process.


Step 2

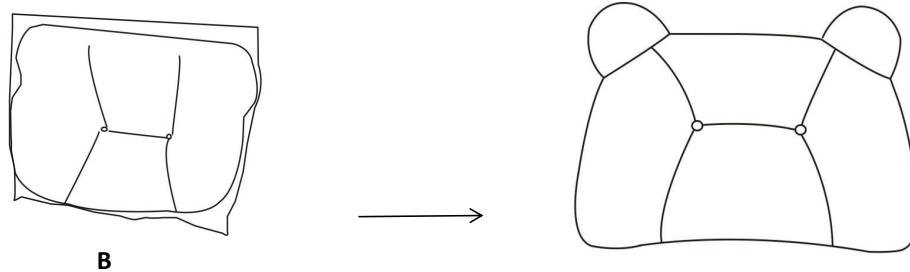

Open the compressed PE bag, take out the back cushion, let it return to loose and fluffy condition as shown.

Tip: It will take about 72 hours to return to original fluffy shape. Or you can pat and shake it properly by hands to let it return more quickly.


Step 3

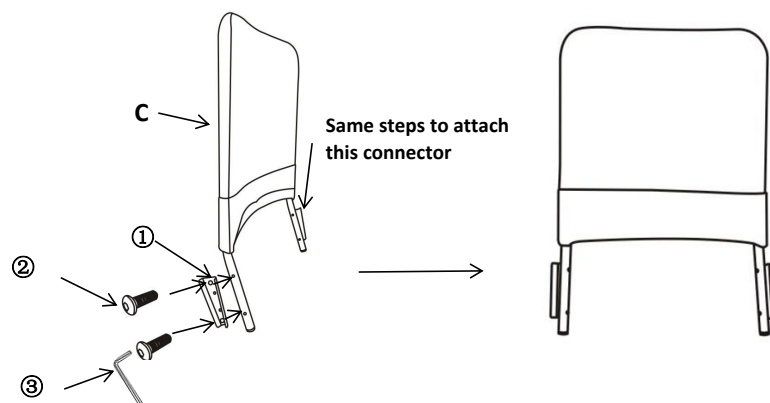

Attach one connector(①) to Back Metal Frame(C) by using 2pieces of Bolts (②) as shown.

Tighten the Bolts fully by the Allen Key (③) in a sequential manner. Then,repeat the same step, attach another connector to Back Metal Frame.


Step 4

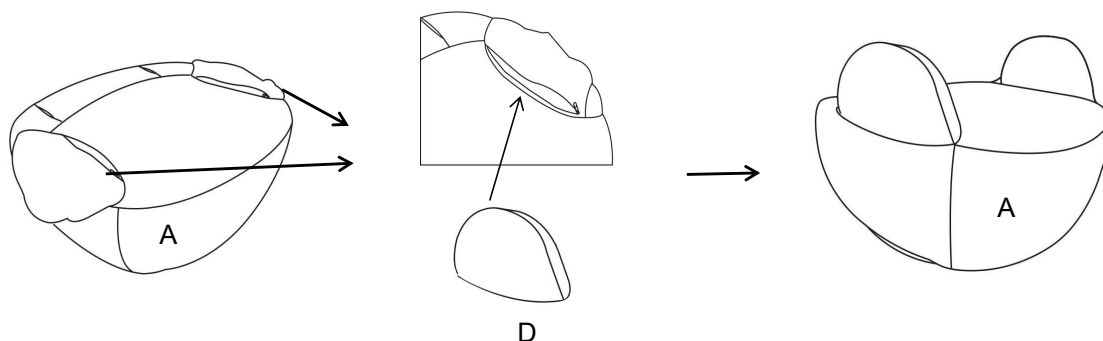

Insert two fiber pads(D) into two arm cover as shown, tidy it ,then close the zipper.

Tip: Pay attention to the shape of fiber pad, when you insert it.

Step 5

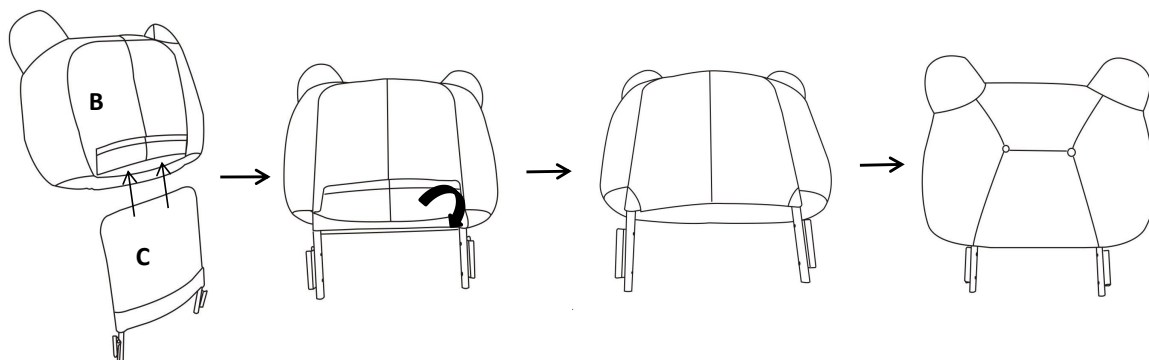


①Insert the Back Metal Frame into the back cushion from the back of cushion as shown.

②There is a narrow cover with velco at the end of back,Insert the narrow cover into the back cover.

③The back of swivel chair is ready now.

Step 6

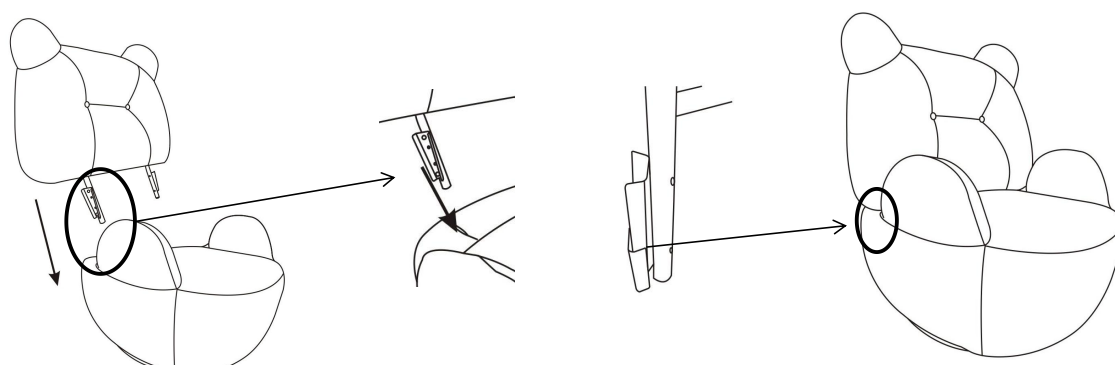

Insert the Back connector into the hole on the Chair seat, to connect the another connector in the hole as shown. Then the back and seat are connected .

The swivel Chair is ready to use now!

Caution: This Swivel Chair can only be used on a flat, level surface.