

EXTENDABLE SMART CURTAIN SYSTEM INSTALLATION INSTRUCTIONS

Features




- **Bi-voltage power supply:** AC100~240V, available for global countries
- **Multiple connections:** Use RJ12 port for several motors online control, and external switch operate each motor
- **Stop on block:** motor stops automatically to protect the whole system when meeting resistance
- **Light touch function:** after power on, pull the curtain slightly about 5cm, curtain will open/close automatically
- **Manually operation:** When the power off, free to open or close the curtain as manually
- **Third limits:** Except for the end limits, you can have the extra third limit in the middle to get the most comfortable indoor light

- **Flexible quiet design:** high-precision drive, leading intelligent design, beside, slow open and close make it light and smooth moving
- **Various control:** According to the application, with option of RF control, hard wire, RS232/485 bus line control etc
- **Remember limits:** Motor remember the first open and close stop, and keep no hit on the parts for longer life usage, even the power off and on again

Product installation instructions


Structure and accessories

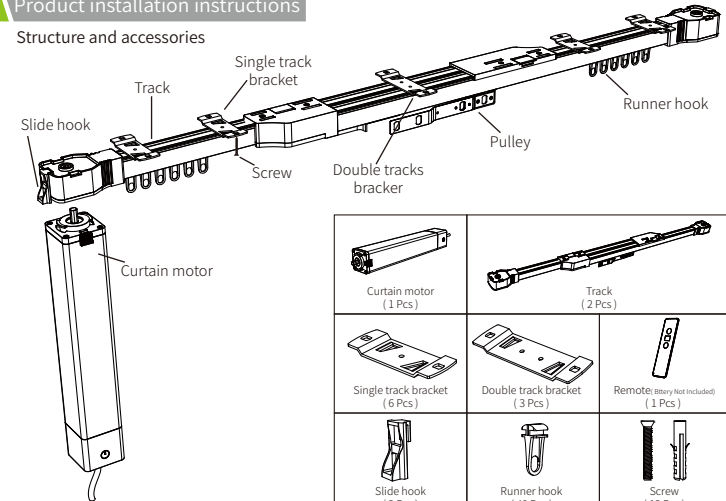


ASTOMI SMART CURTAINS

Installation Steps

① Confirm track length

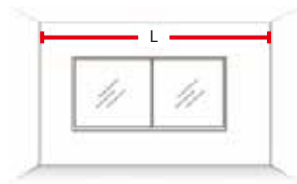


WALL FITTED
CURTAIN TRACK SIZE= L-2 INCH

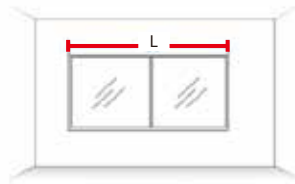


WINDOW FITTED
CURTAIN TRACK SIZE= L+20 INCH

② Adjust the length of the track

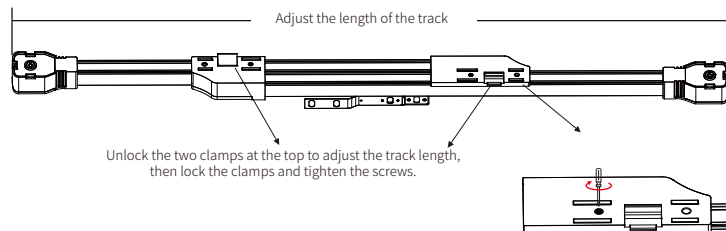


③ Install runner hook and side hook

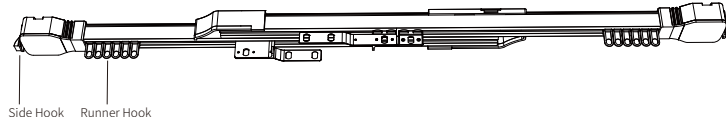


④ Move the pulley to both ends

A. After loosening the screws on the pulley, move the pulley to both ends respectively, and then tighten the screws.

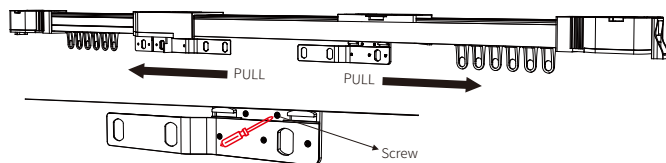


⑤ Install the baffle

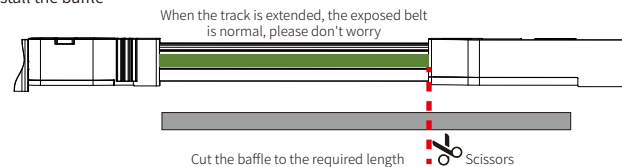


⑥ Mount the track (Two installation methods)


Install the required support in the middle and at both ends of the track

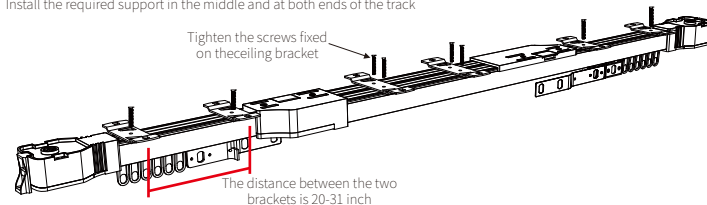

A. Ceiling Installation

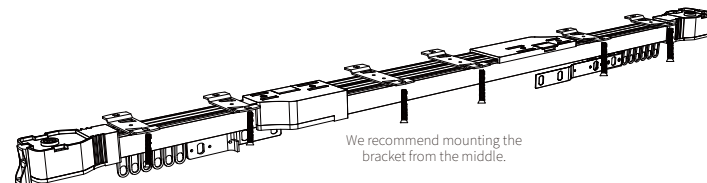

The installation is complete

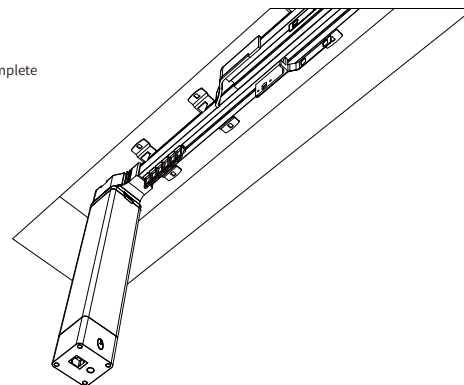


B: Side Wall Installation

Step 1: Install side bracket on the side wall



Step 2: The side brackets and top brackets are connected with screws

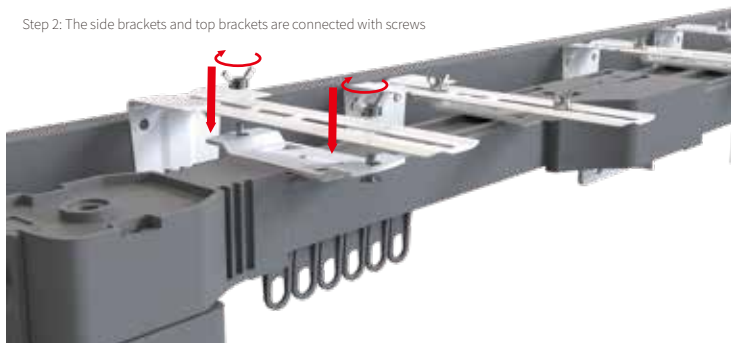


Step 3: The installation is complete




⑦ Install the curtain motor: the curtain motor can be installed on both sides, it is recommended to be installed on the side near the socket.

The motor is mounted on the left.


Step 1

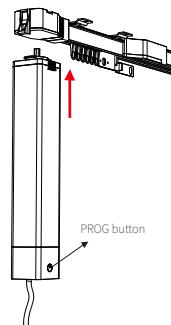

Step 2

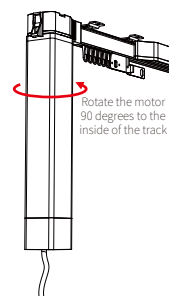


Step 3

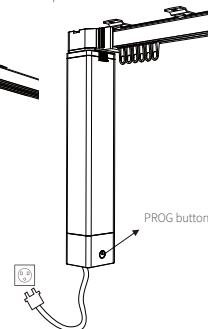


The motor is mounted on the right.


Step 1

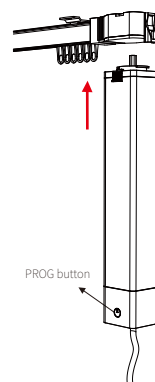

Step 2

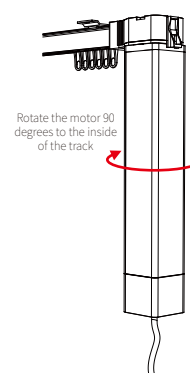


Step 3

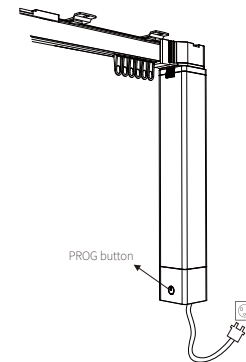


Instruction for Matching Remote


- ① Loosen the screw on the back of the remote and slide the back up.



- ② Put the smooth side of the battery up and insert it into the remote. (Battery Not Included)



③ Programming

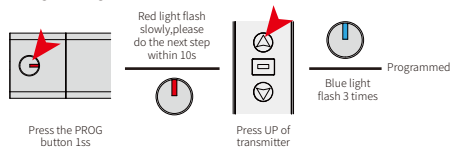

APP Operation Instructions

1. Download the "Tuya Smart" App from Google Play or from Apple Store.



2. Add new device by clicking the "Add device" or "+" sign at the top-right corner.



3. Click "Small Home Appliances" on the right and select "Curtain Wi-Fi".



4. Select the WIFI bound by the device, enter the WIFI password, and click "Next".



5. Short press the motor PROG button 4 times (press time less than 1s), then long press 1 time (more than 3S), red and blue lights flashing alternately on the motor; then tick the words of "confirm the indicator is blinking rapidly", and click "NEXT".



6. Wait for the connection completed (The blue light flashes 3 times, the WIFI connection is successful).



7. After connection is completed, the name of the customized device can be modified. Click "Done".




Trouble shooting

Problem	Analysis	Solution
Power on, but motor no reaction	Check the wiring is correct or not	Please follow the wiring diagram to correct the connection.
Motor is working but the curtain don't move	Check the method of the track installation is right or not.	Please check and adjust the wheel gear and belt.
Motor work automatically	Motor paired by other transmitter	Delete all remotes, programming again.
Can't pull curtain move by hand	1. Power off suddenly when motor running. 2. The hand pull position is wrong, resulting pulley stuck.	1. Pull the curtains back wards, then pull it again. 2. Hand pull position back 10 cm.
If the smart curtain opened to 30% or 80% does not move, how should be solved?	The disorder occurred because of misoperation	1. You need to delete the matching code; 2. Re-match the code; 3. Pull the track back to both sides, and re-memorize the itinerary.

All code deleting

Journey will be deleted and the running direction will be the factory defaulted mode, keeping the touch function.

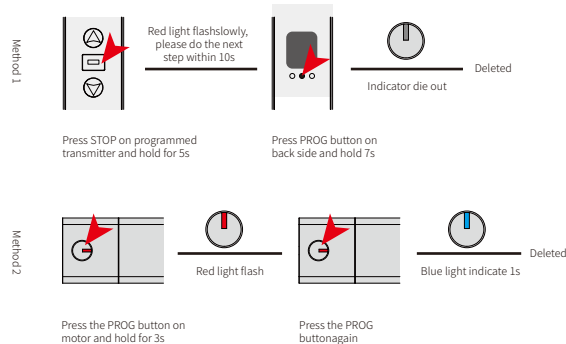

* If you have any problems, please contact us: info@astomishower.com