







①	 ② light arm 6pcs ① lock nut & teeth lock washer 6pcs	⑥	 hanging tube 6pcs	⑧	 ⑧ canopy 1pcs ⑨ cap nut 2pcs	 X 1PCS
②		 X 3PCS				
		 X 3PCS				
③	 threaded nut ③ metal box 1pcs ④ cover 1pcs ⑤ end cap 1pcs	⑦	 splicing connector 2pcs	⑬	 glass lampshade 6pcs	 X 1PCS
④		 X 3PCS				
⑤		 X 3PCS				



1. Rotate to loosen the end cap ⑤ and remove out the end cap ⑤, cover ④ from metal box ③.

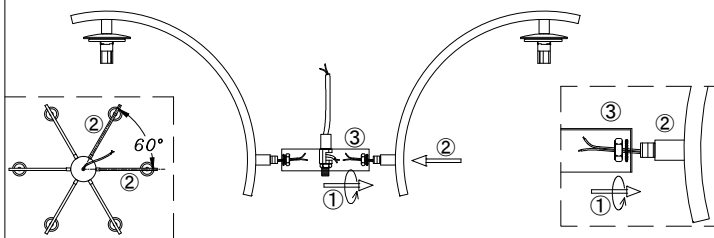

2. Install the light arm ② to the box ③ with lock nut & teeth lock washer ①, after that adjust the light arms to suitable position like picture shown.

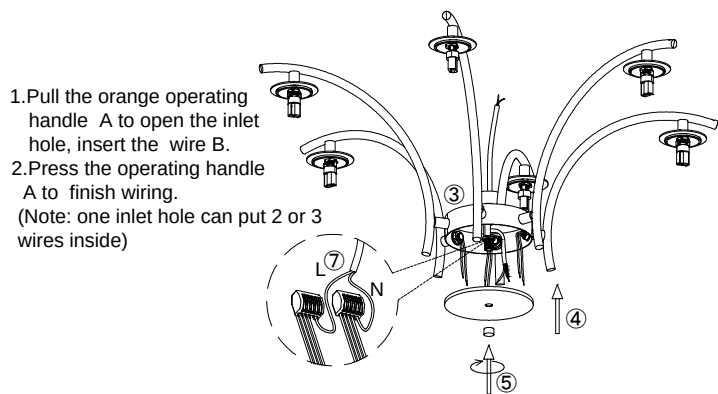


1. Pull the orange operating handle A to open the inlet hole, insert the wire B.

2. Press the operating handle A to finish wiring.


(Note: one inlet hole can put 2 or 3 wires inside)

3. Connect all the wires by parallel with connectors ⑦ (all live line-L use one connector, and neutral Line-N use another connector).


4. Close back the cover ④ to the box ③ with end cap ⑤.

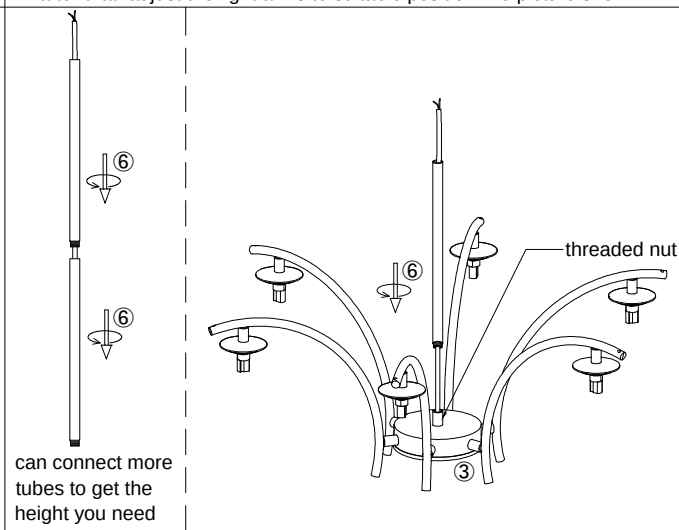

5. Rotate to install the tube ⑥ to the fixture. (can connect more tubes to get the height you need)

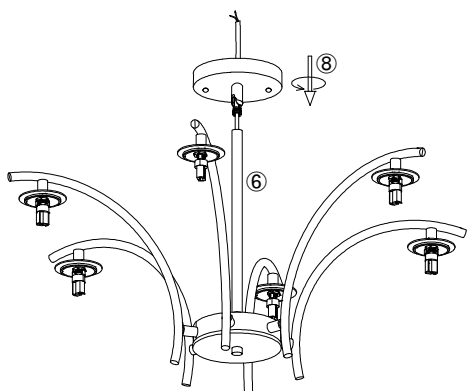

6. Let the wire of the fixture go through the canopy ⑧, rotate to install the canopy ⑧ to the fixture.

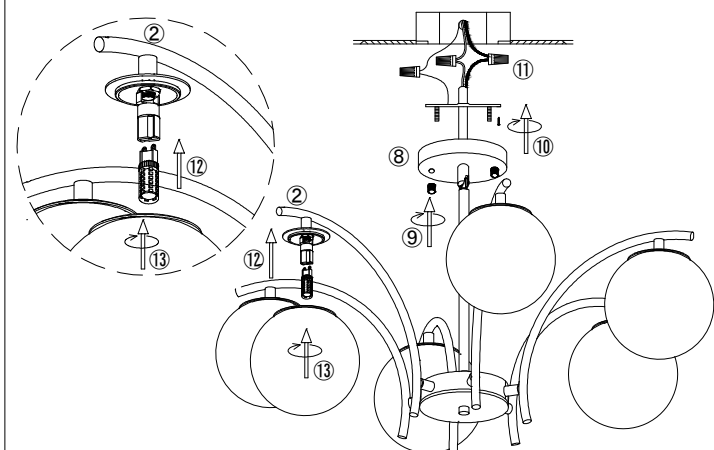

7. Install the bracket to the ceiling junction box with screw ⑩.

8. Connect the wire to your home line with cap connector ⑪.

9. Install the fixture to the bracket with cap nut ⑨.

10. Insert the LED G9 bulb (bulbs are not included in the package), after that rotate to install the glass lampshade ⑬.

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !