


14'×22' HARDTOP GAZEBO WITH DOUBLE ROOF ASSEMBLY MANUAL

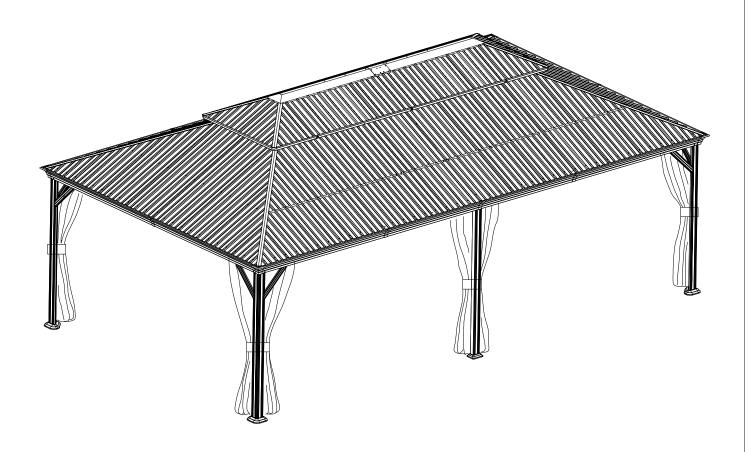

MODEL#: LGMF1691

Missing part? Damaged? Contact us via email at service@domioutdoorliving.com

Pre-assembly



1.Two or more people are required for assembly.



2. You will need one or more stepladders.



3. Wearing protective gloves is recommended.



4. You may need a safety hat.



5. Please use a Phillips screw driver.



6.For ease of construction, you may need a drill.



7. You may need a safety goggle.




8.Do not fully tighten screws prior to complete assembly.


Warning & Attention


- -Try to assemble this product on the flat ground, otherwise it is difficult to carry out;
- -It would be much easier to assemble the product with three or more people;
- -After assembly, please check whether all screws are tightened, to prevent parts from falling apart.

▲ Use bolts to secure the frame to the ground to against the strong wind. IMPORTANT: A gaze may entail to purchase a municipal permit or be subject to specific building codes. It is the consumer's responsibility to inform themselves of any restrictions.


153.58"(3901mm) <u>3.4</u>6"(88mm) 4.92" (125mm) 122.44"(3110mm) 122.44"(3110mm) MOUNTING BLUEPRINT Gazebo14x22 3.15"(80mm) 1<u>22.44"(3110mm)</u> 3.15"(80mm) 122.44"(3110mm) 3.46" (88mm) 153.58"(3901mm)

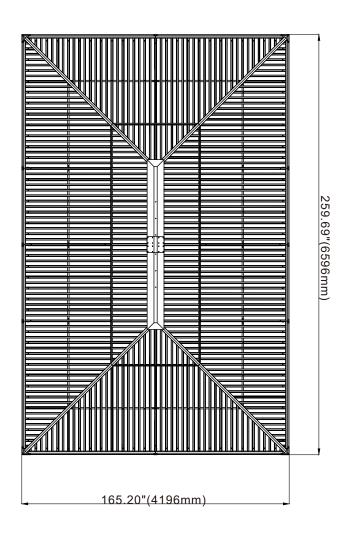


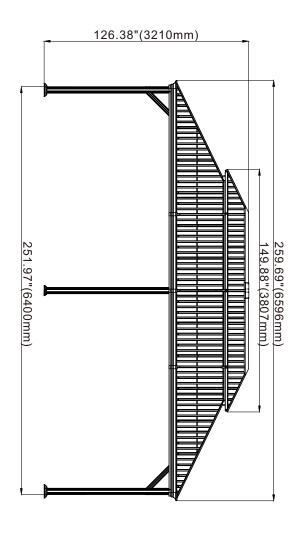

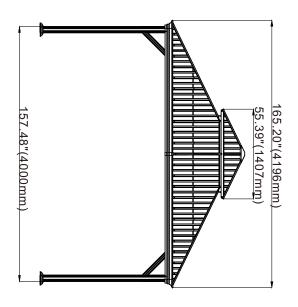




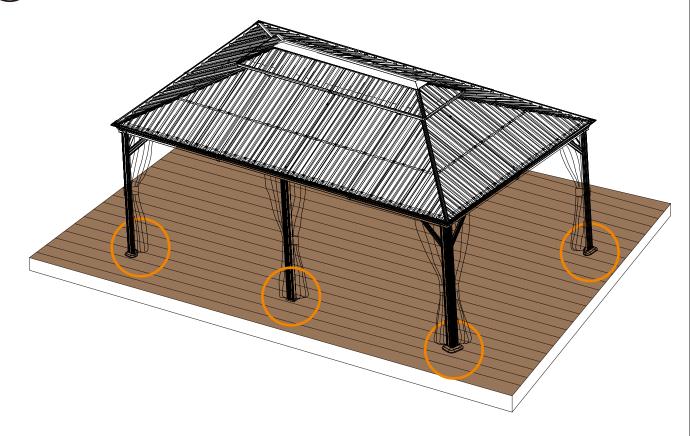






x20

If the deck is hard wood and the depth of it is over 3 inch, you can use **5/16 in. ×4 in. Structural Wood Screw** to mount the gazebo.

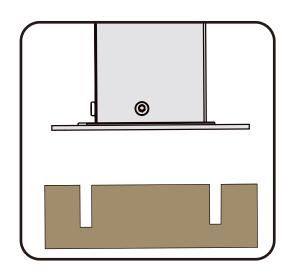


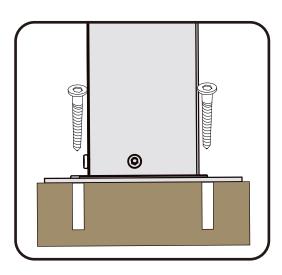

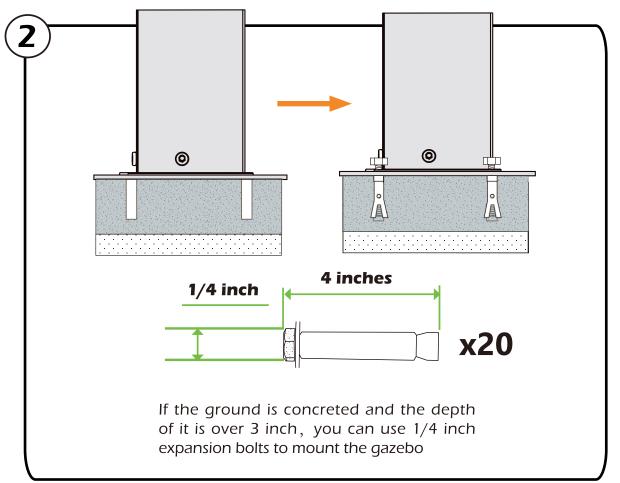


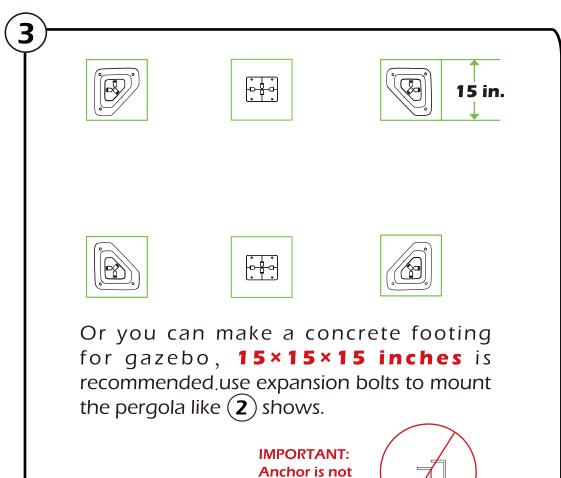


recommended

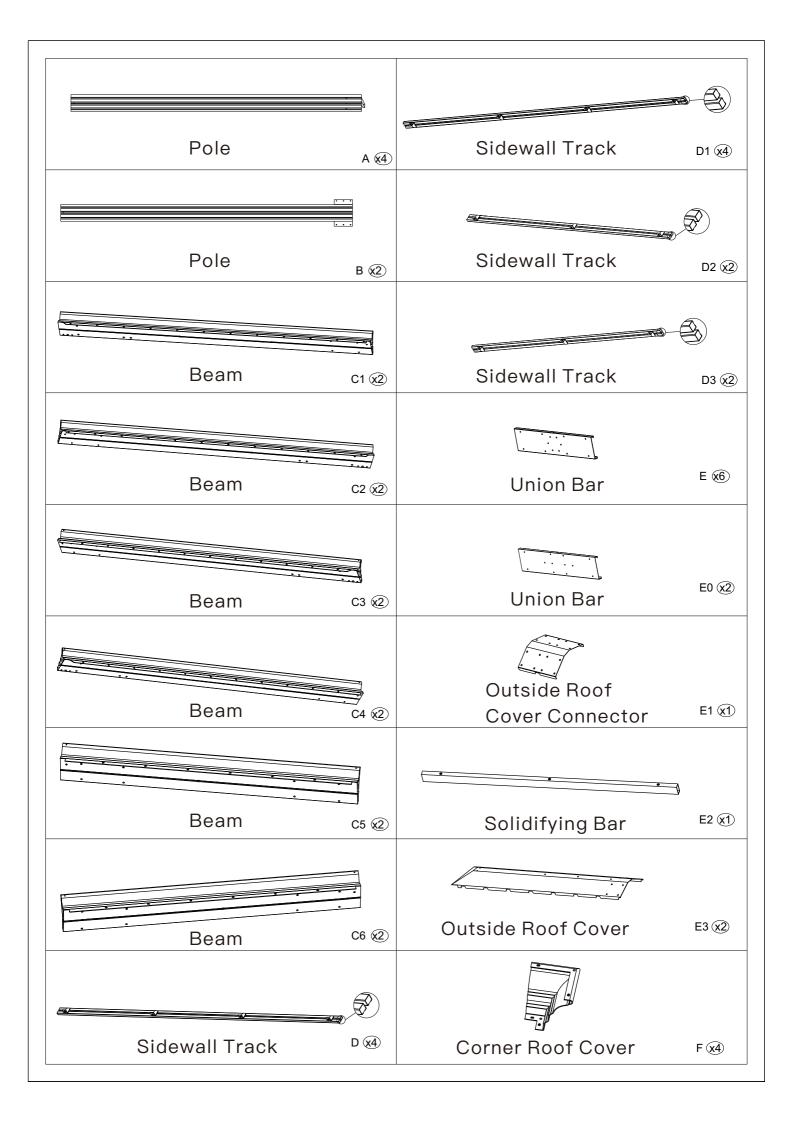





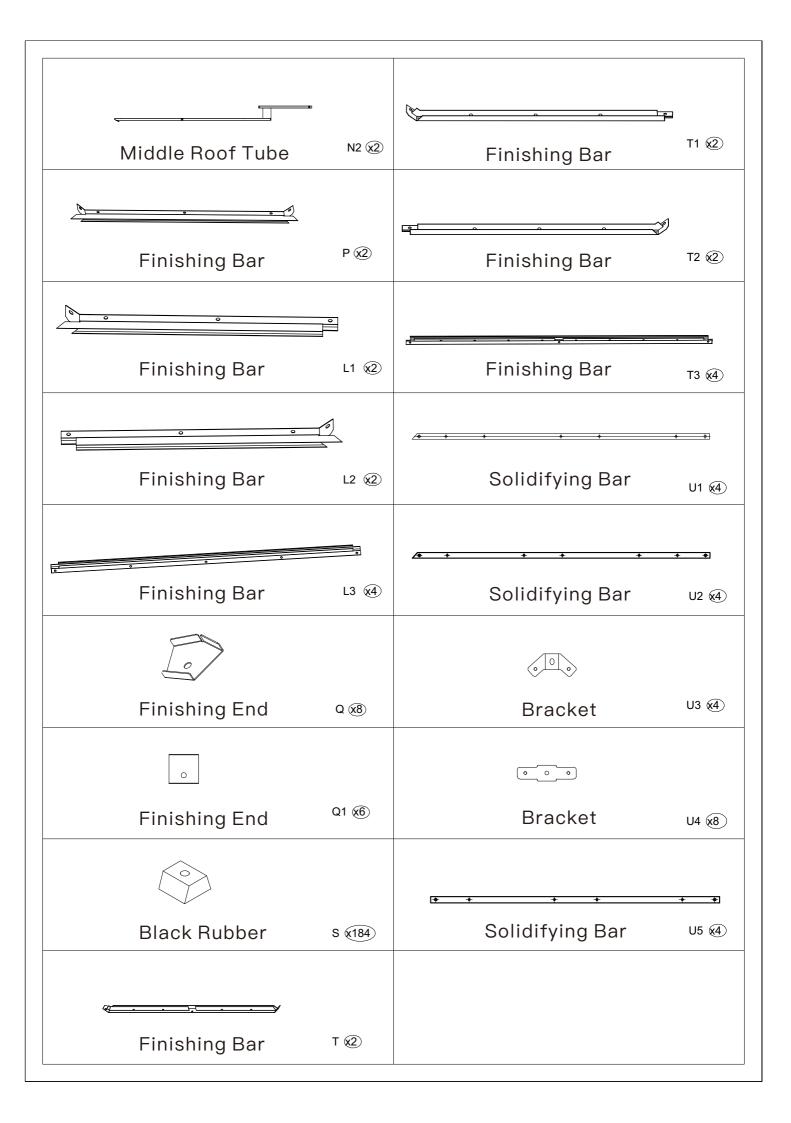

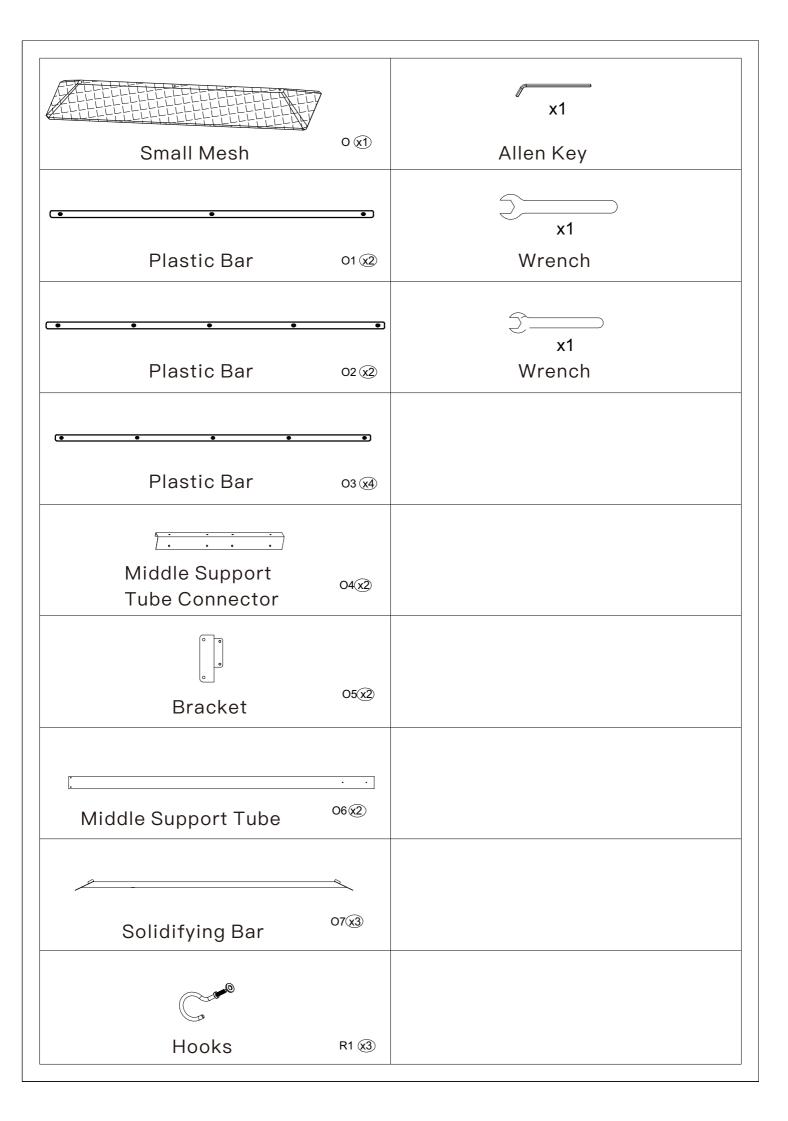


Plastic Clips	z (80)	7# M6x50 x56
Plastic Clips	Z1 (x12)	M5x16 8# x8
		9#
Plastic Clips	Z2 <u>x12</u>	ST4.8 x13 x32
M6x16	1# x325	10# M6x25 x4
		11#
M6x20	2# x36	M6x12 x48
	3# x16	12# ST6.3*15
Plastic Hooks	4# x168	
M6x28	5# x112	
M6x45	6# x12	

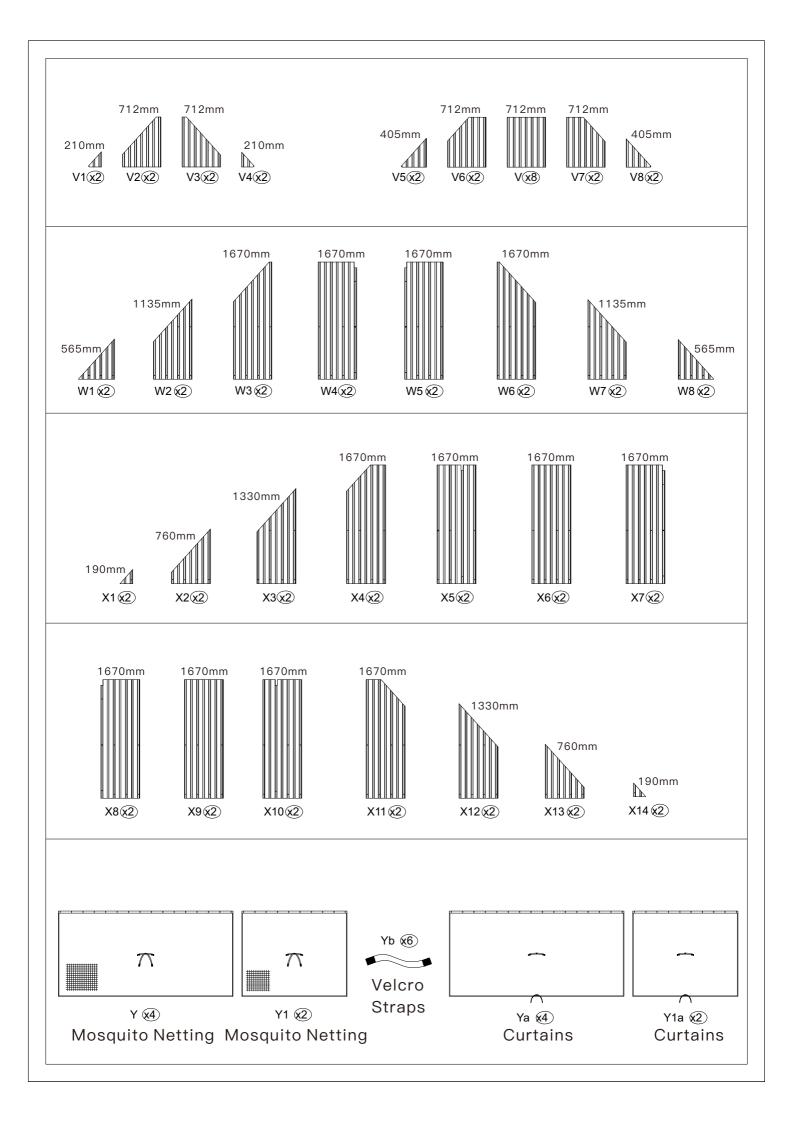

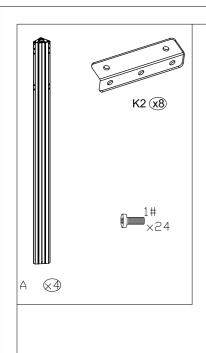


CORNER POLES ASSEMBLY:

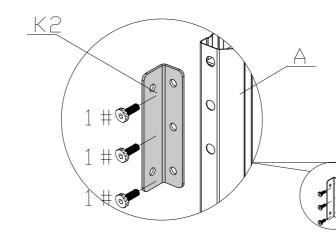


Attach Brackets #K2 to Pole #A with 6 Bolts #1.

Repeat the above procedures to assemble the other 3 Corner Poles.

x4

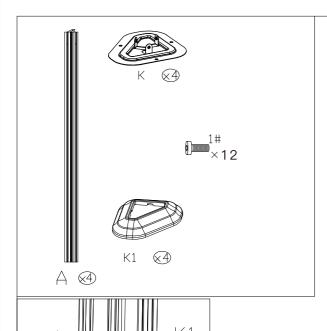



BASE COVER ASSEMBLY:

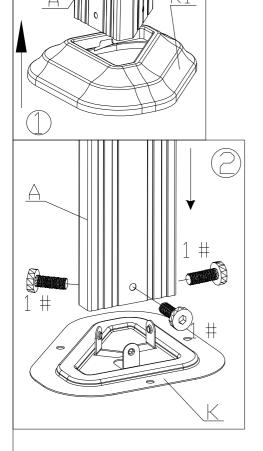


- 1. Put on Base Cover #K1.
- 2. Attach Base #K to Pole #A with 3 Bolts #1.


Repeat the above procedures to assemble the other 3 Corner Poles.

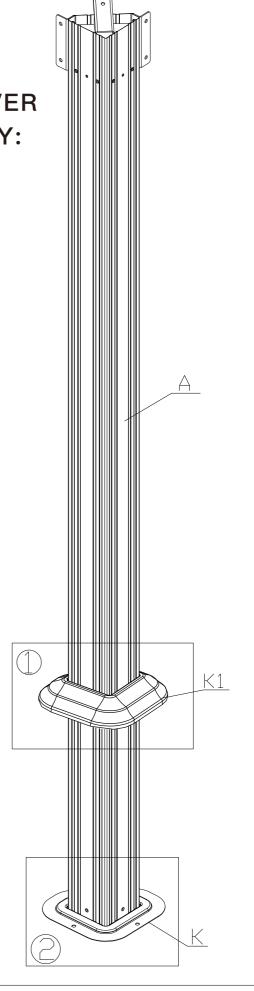

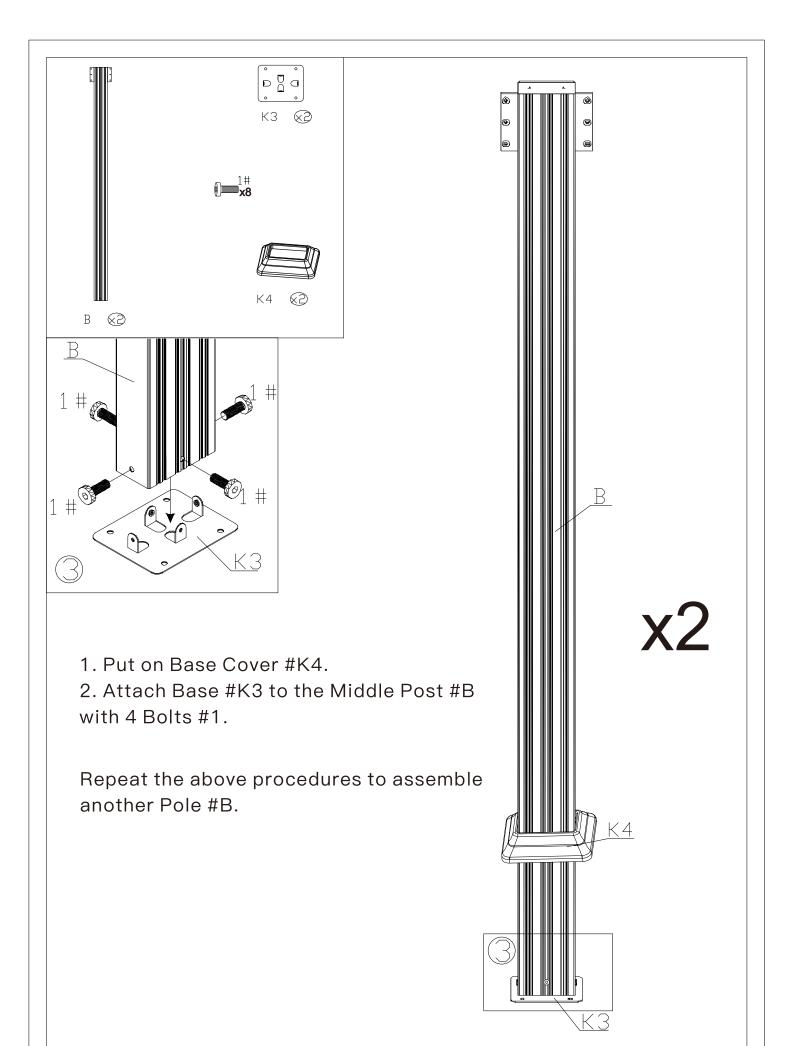

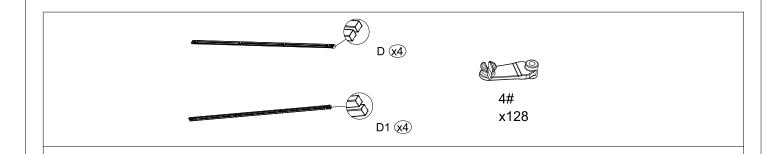

PLASTIC HOOKS ASSEMBLY:

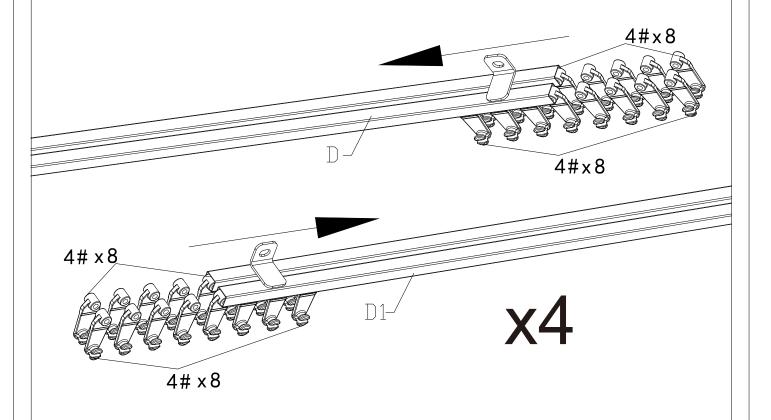



1. Slide the Plastic Hooks to the double rail track #D (Each slot should slide 8 hooks) .


Repeat the above procedure for the other tracks #D.

2. Slide the Plastic Hooks to the double rail track #D1 (Each slot should slide 8 hooks) .

Repeat the above procedure for the other tracks #D1.

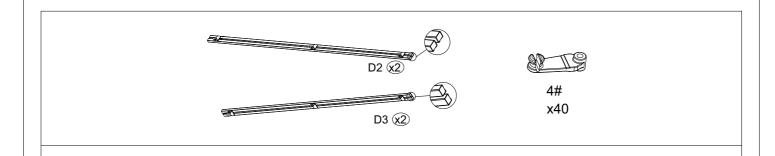

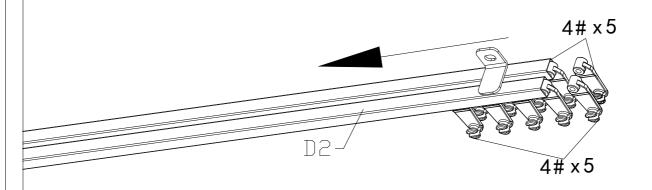

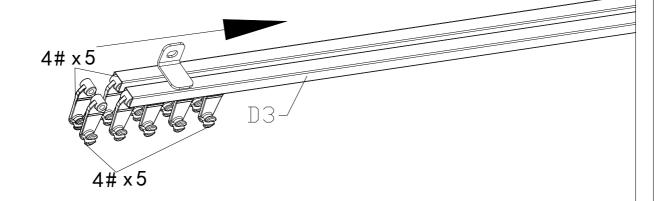


3. Slide the Plastic Hooks to the double rail track #D2 (Each slot should slide 5 hooks) .


Repeat the above procedure for the other tracks #D2.

4. Slide the Plastic Hooks to the double rail track #D3 (Each slot should slide 5 hooks) .

Repeat the above procedure for the other tracks #D3.

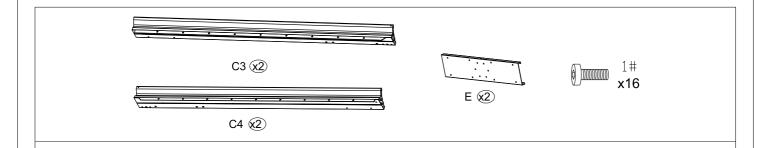


BEAM ASSEMBLY:

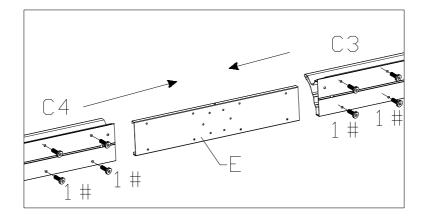


- 1. Insert Union Bar #E into Beam #C4, and secure with 4 Bolts #1.
- 2. Insert the other side of Union Bar #E into Beam #C3 and secure with 4 Bolts #1.


Repeat the above procedures to assemble the other Beam #C4 and #C3.

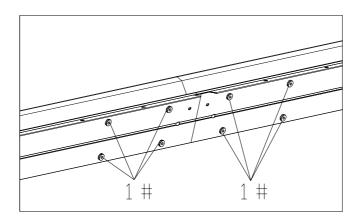


TIPS: It's a normal situation that there's a gap between the 2 beams, please use silicone sealant (part #H) and Joint Cover #G to affix the gap. (see P13)

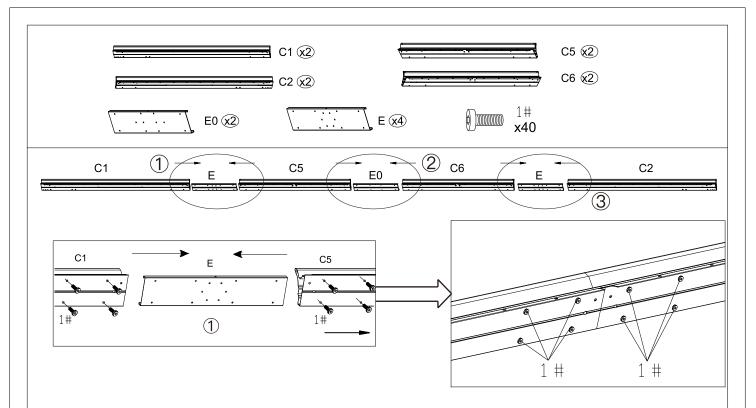

1. Use Part #E to connect Part #C1 and Part #C5, then secure with 8 Bolts #1.

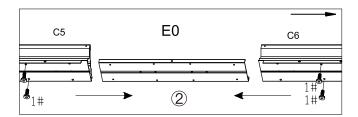

2. Use Part #E0 to connect Part #C5 and Part #C6, then secure with 4 Bolts #1.

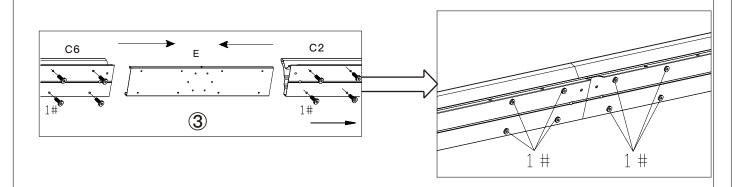


3. Use Part #E to connect Part #C6 and Part #C2, then secure with 8 Bolts #1.

Repeat the above procedures to assemble the other Beams #C1, #C5,#C6 and #C2.




SIDEWALL TRACK ASSEMBLY: 1

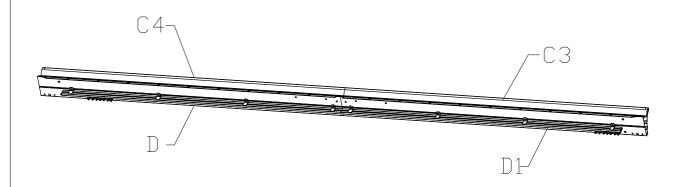

- 1. Secure Sidewall Track #D to Beam #C4 using 4 Bolts #1.
- 2. Secure Sidewall Track #D1 to Beam #C3 using 4 Bolts #1.


Repeat the above procedures for the other tracks #D and #D1.




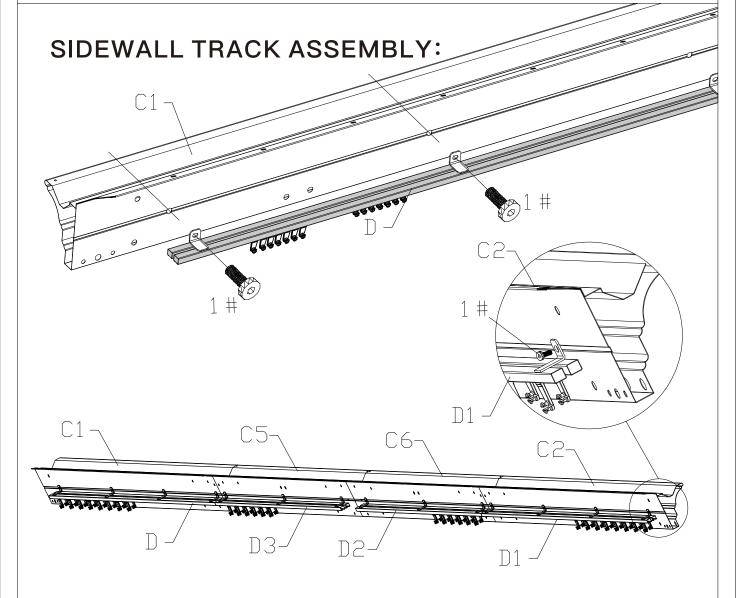

- 1. Secure Sidewall Track #D to Beam #C1 using 4 Bolts #1.
- 2. Secure Sidewall Track #D3 to Beam #C5 using 3 Bolts #1.
- 3. Secure Sidewall Track #D2 to Beam #C6 using 3 Bolts #1.
- 4. Secure Sidewall Track #D1 to Beam #C2 using 4 Bolts #1.


Repeat the above procedures for the other tracks #D, #D3, #D2 and #D1.

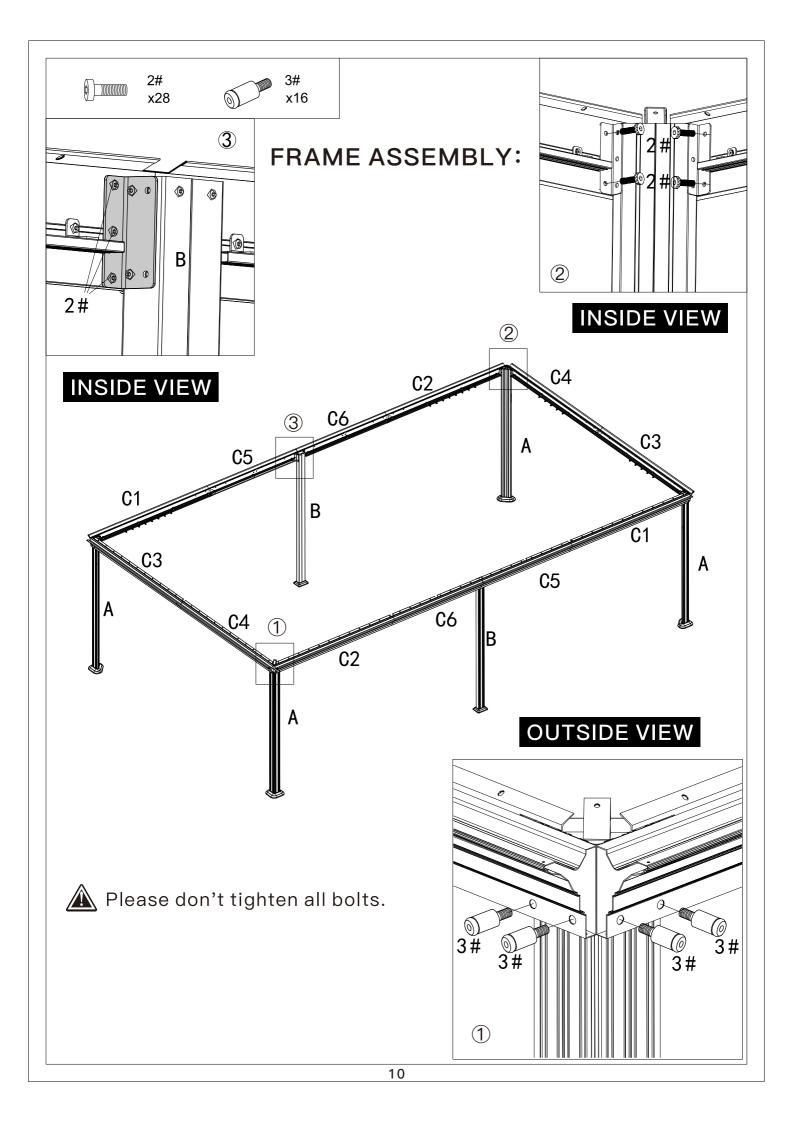


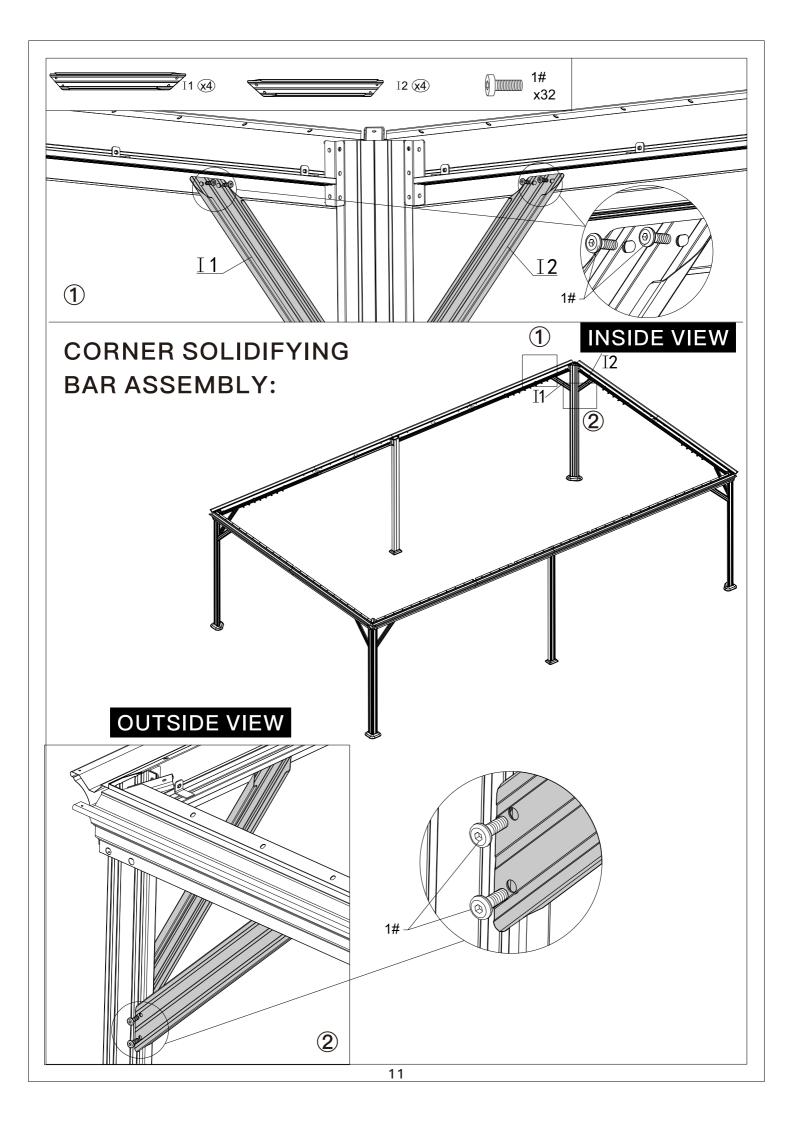



CORNER COVER & JOINT COVER ASSEMBLY:

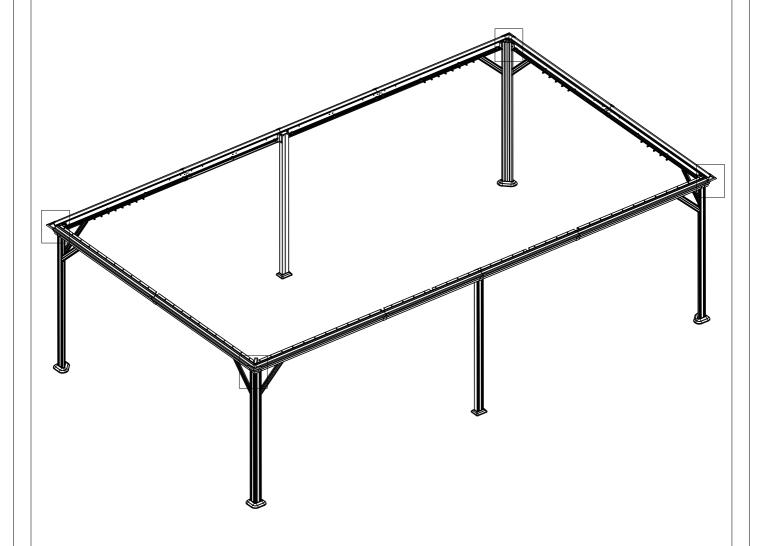

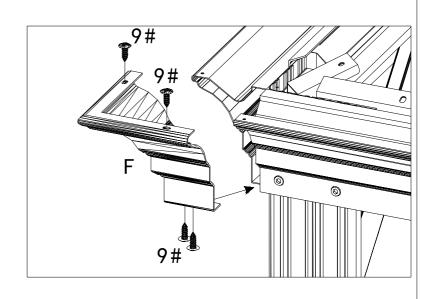














Use 5mm silicone sealant (part #H) and Joint Cover #G to affix the gap.

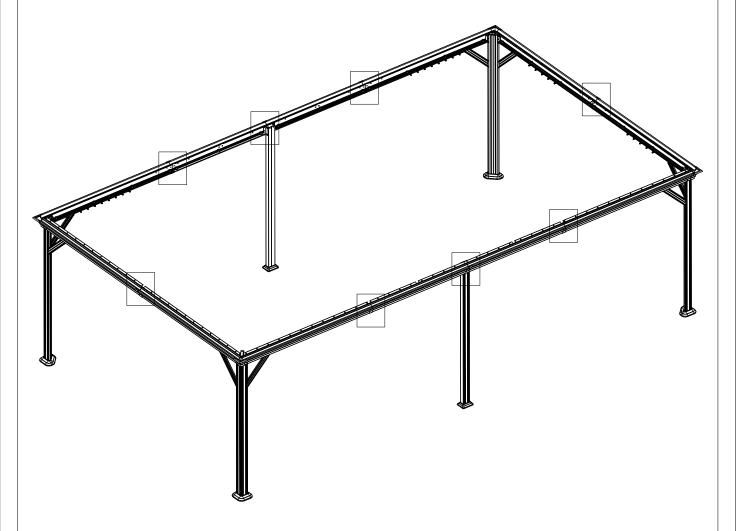


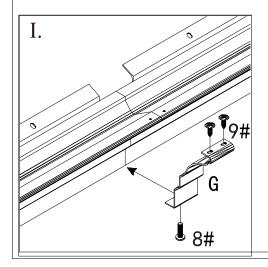


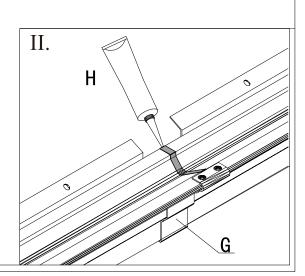


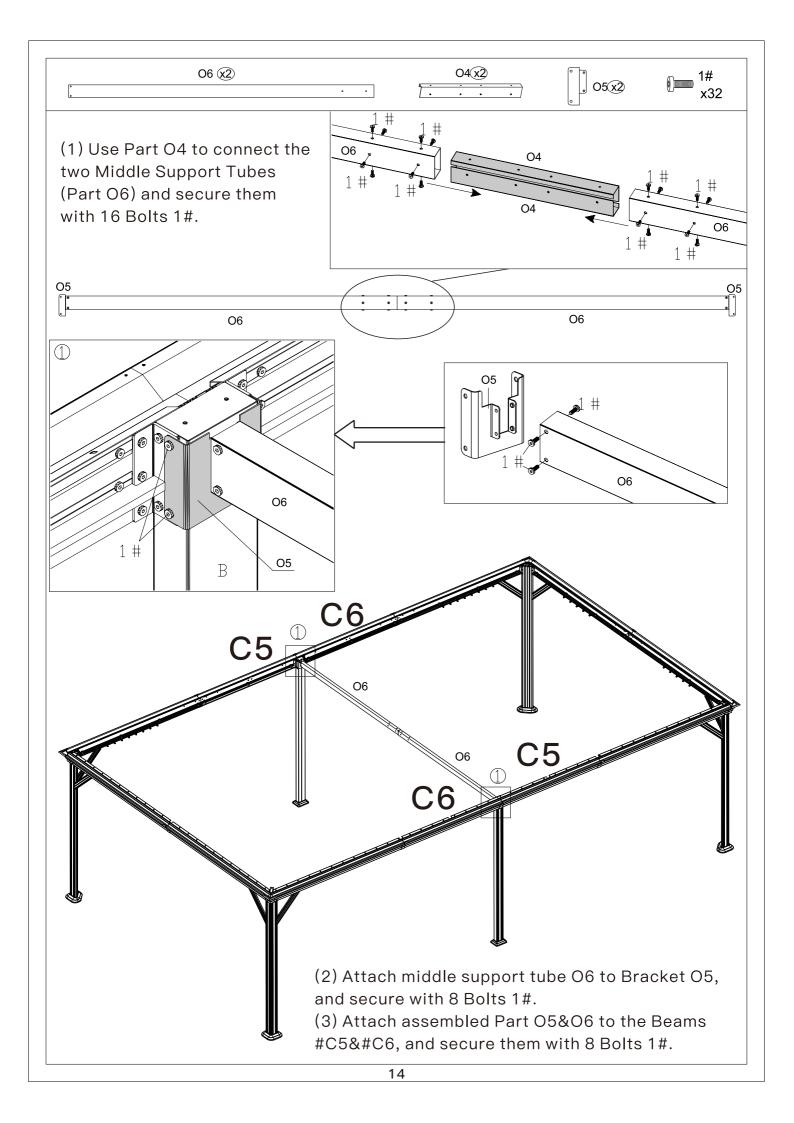

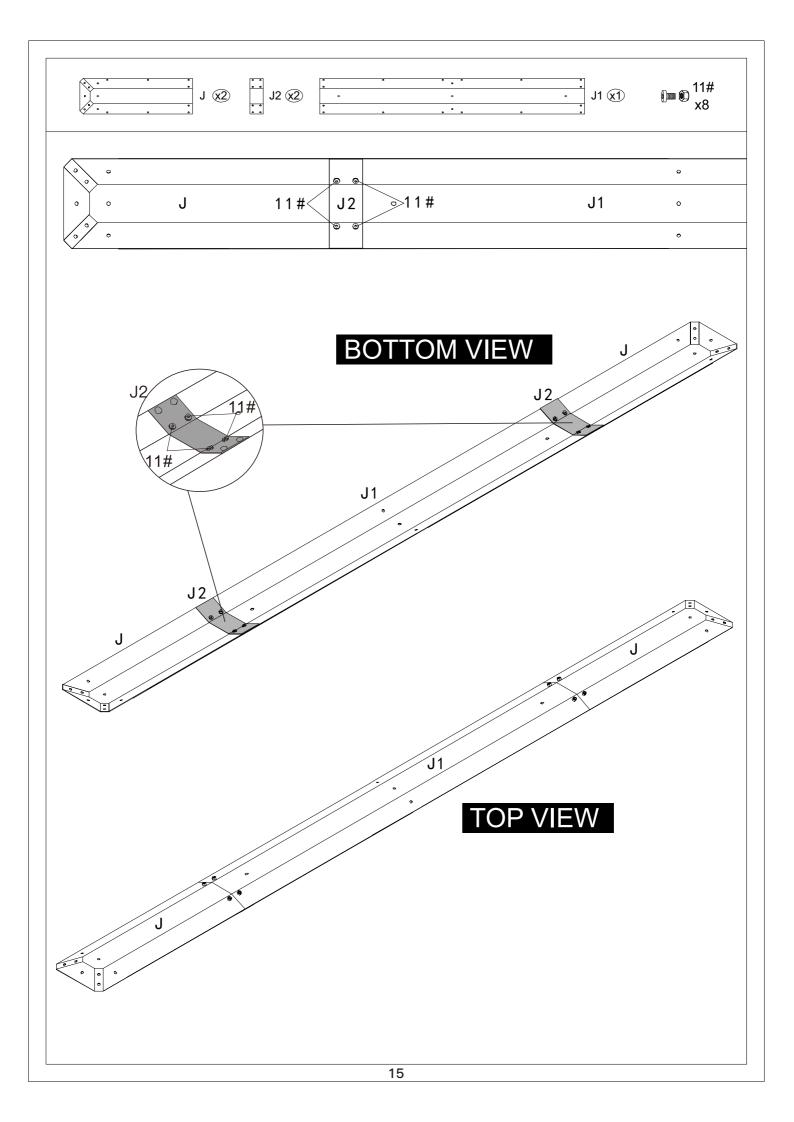


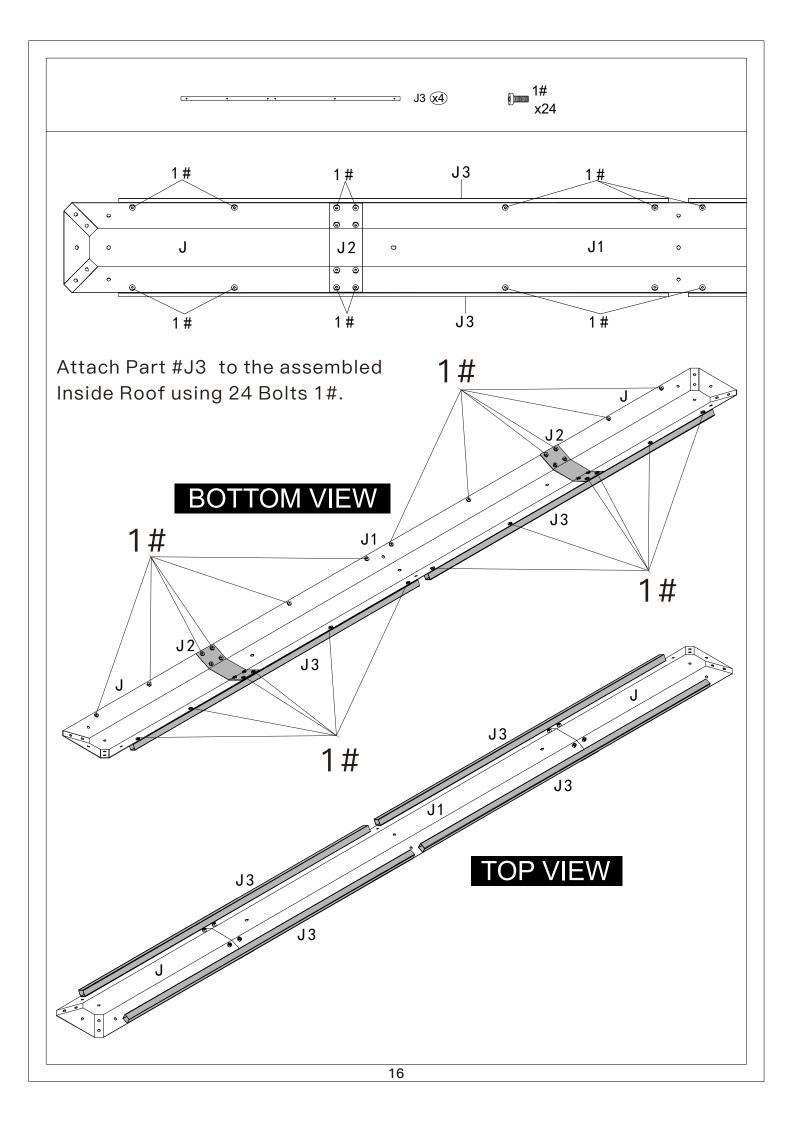

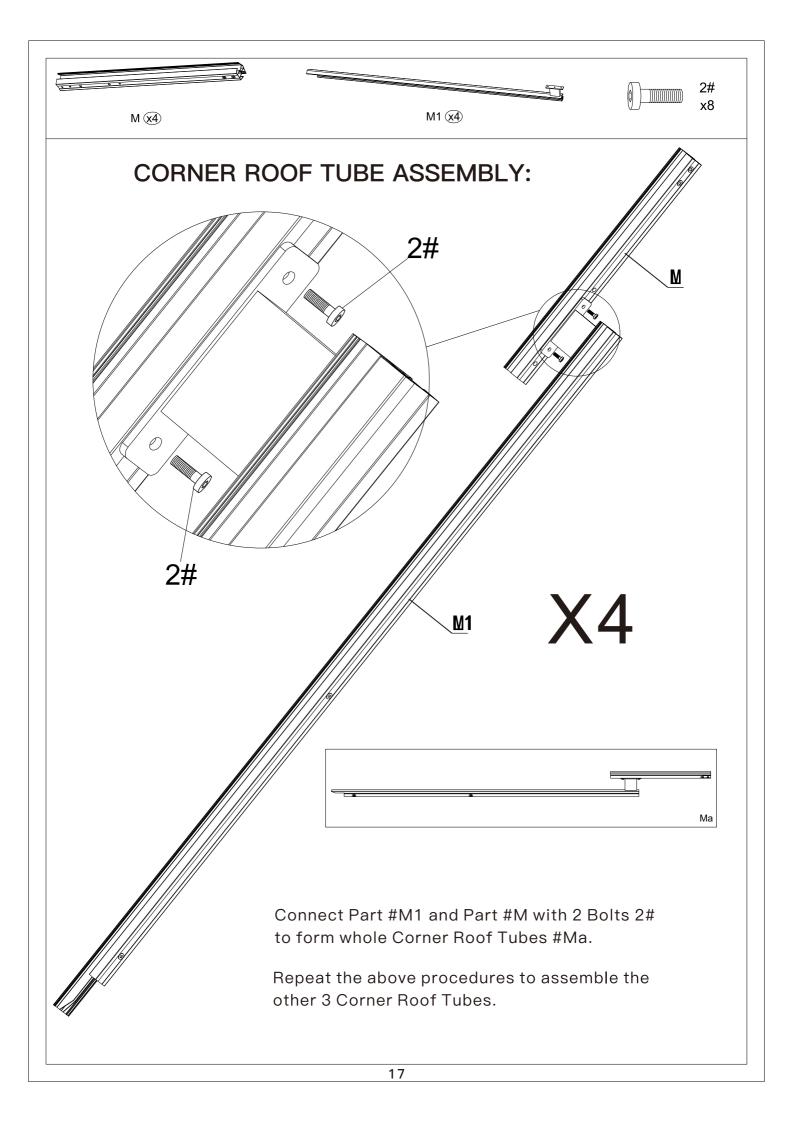

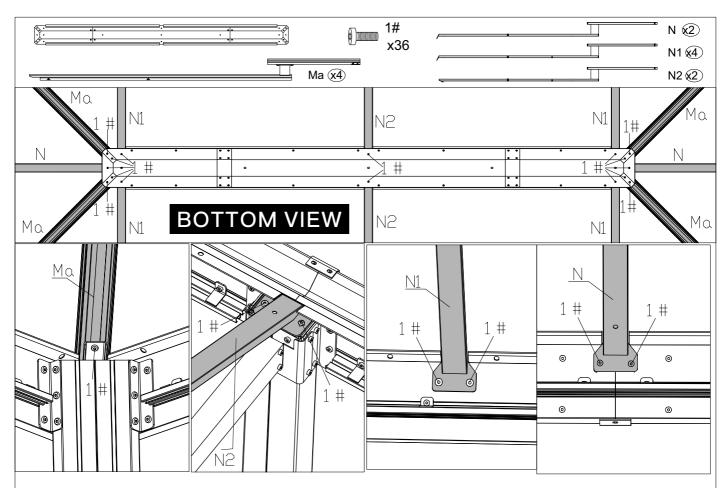



ROOF TUBES AND INSIDE ROOF COVER ASSEMBLY:

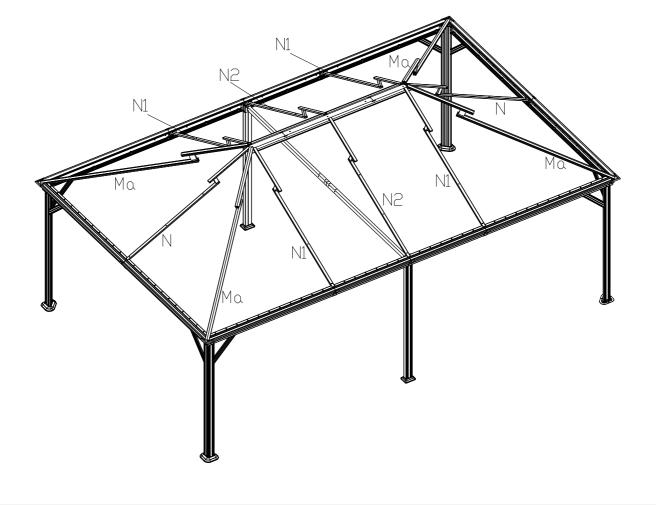


Check the the frame as pictures below shows.




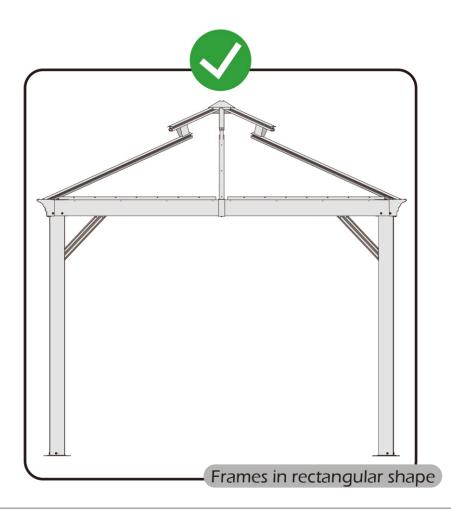

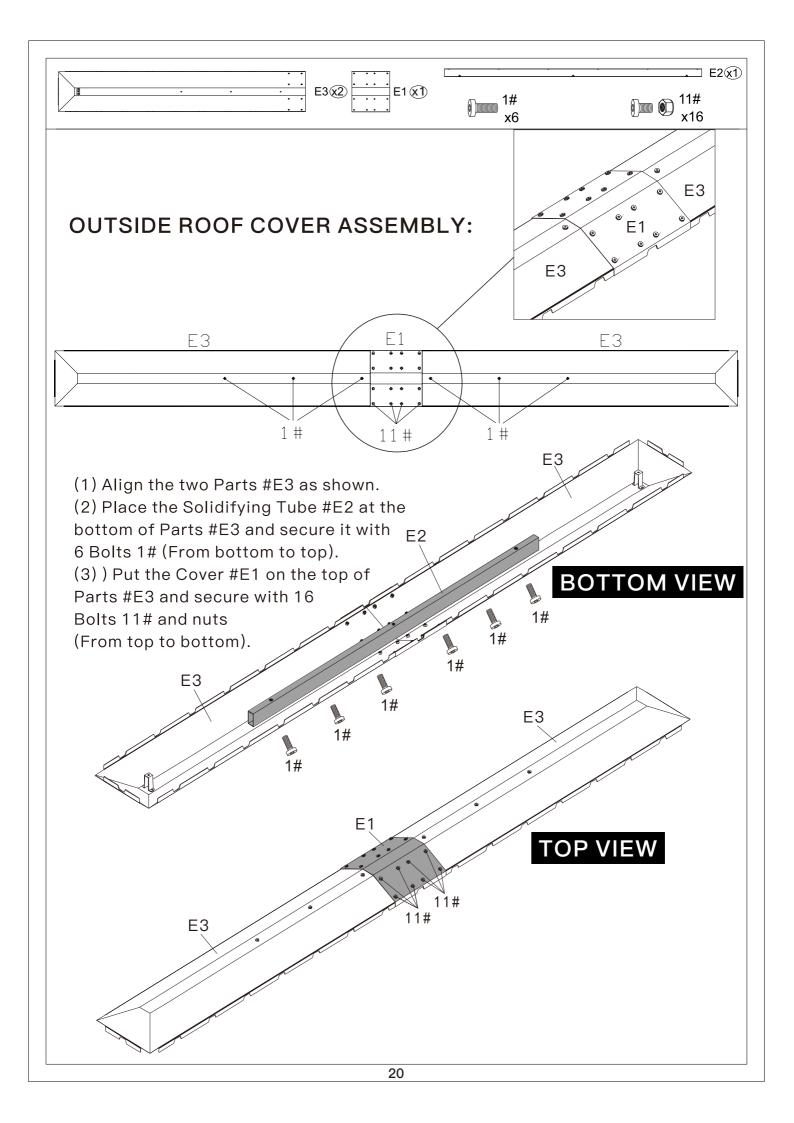




PLASTIC BARS ASSEMBLY:

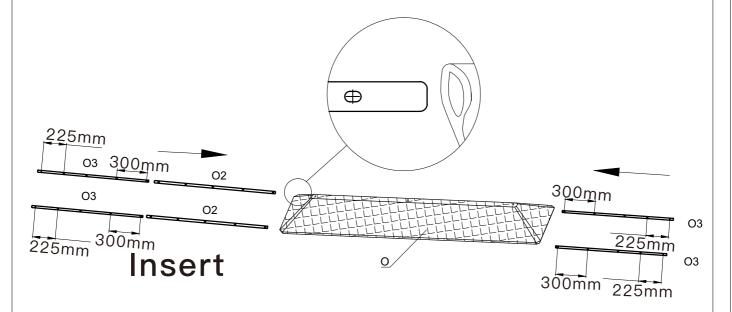


Please pay attention to the installation position of the O3 and do not install it backwards.

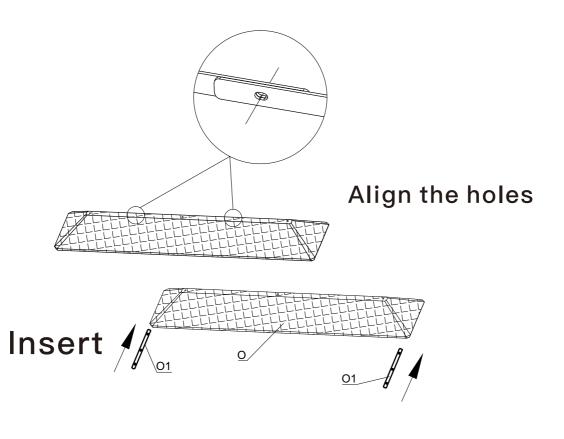





OUTSIDE ROOF COVER AND MESH ASSEMBLY:

- (1) Place the Outside Roof Cover on the Inside Roof Cover.
- (2) Align the holes and use 5 Bolts 1# to secure Small Mesh #O to the Inside Roof Cover (From Bottom to Top).

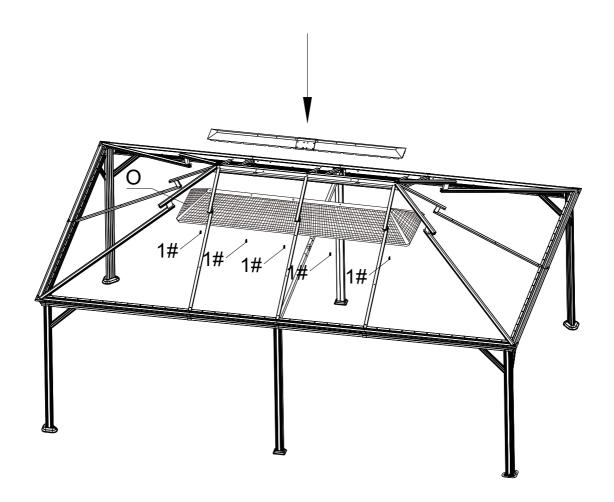


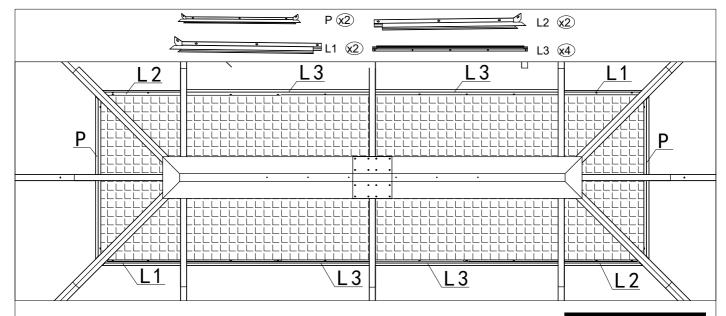


TOP VIEW

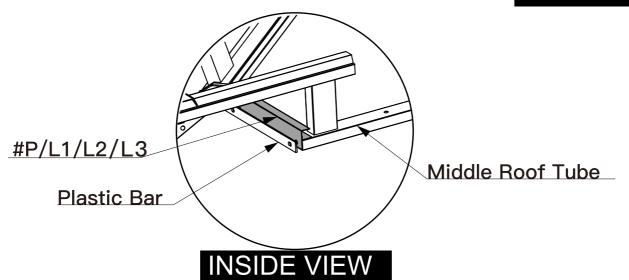


Please do not pull plastic bar out when installing it with #P, L1& L2& L3 on the middle roof tube.

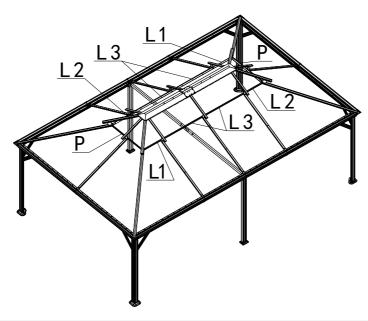


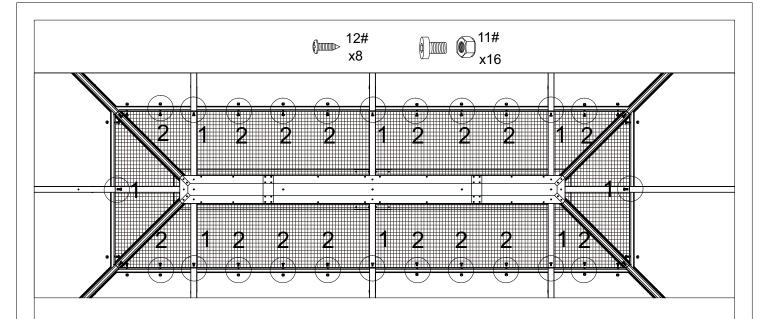


BOTTOM VIEW

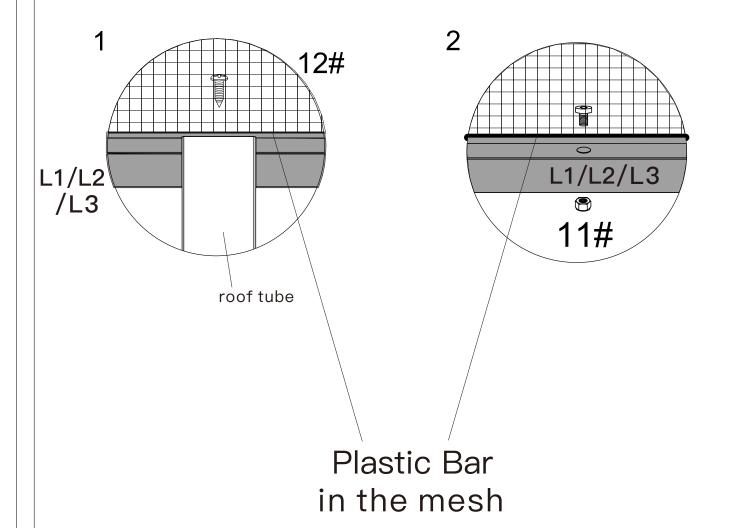


Extend the small mesh, then secure the plastic bar (inside the small mesh) and the finishing bar to the roof tube.

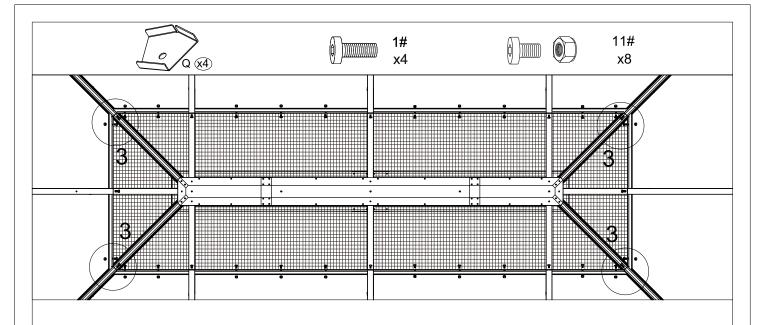


BOTTOM VIEW

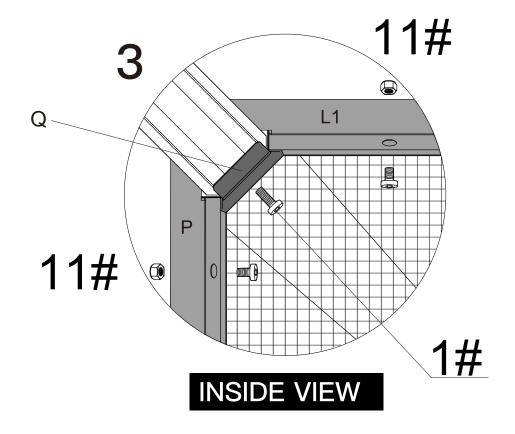


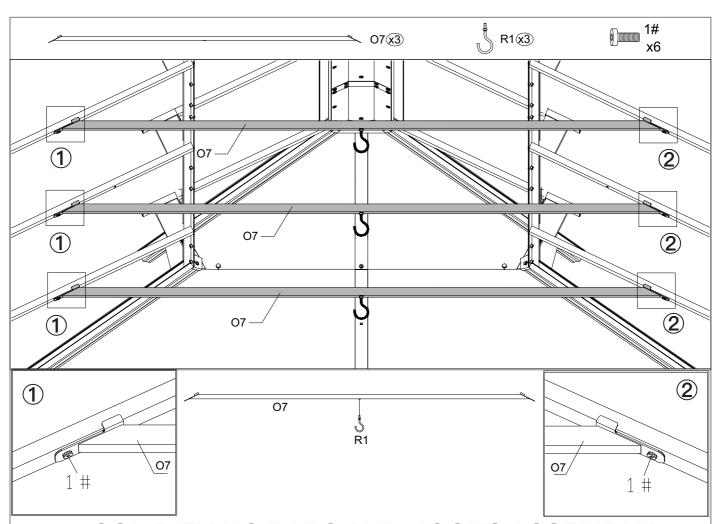

SOLIDIFYING BARS AND HOOKS ASSEMBLY:

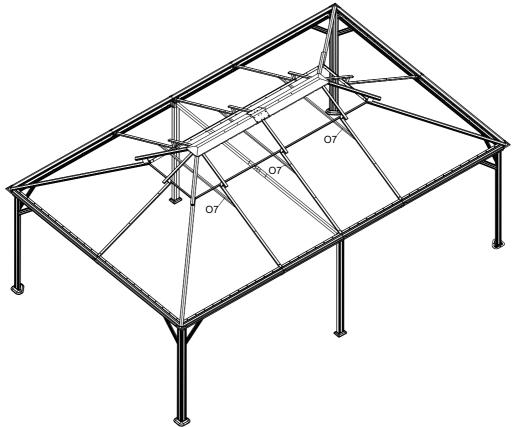


- 1.Attach 3 Parts #07 to the frame and secure them with 6 Bolts 1#.
- 2.Screw Hooks #R1 onto the Bar Part #O7.

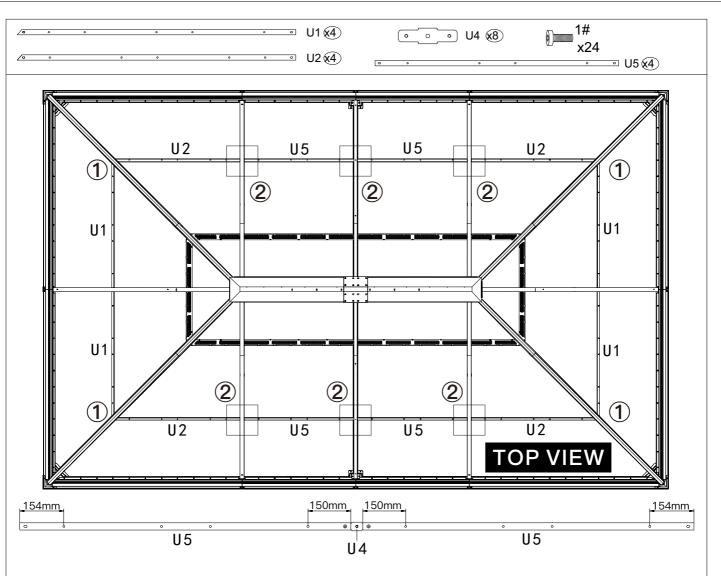



Note: If U5 does not fit properly, the ends of the solidifying bar may be installed in reverse. Insert the Bracket U4 into 2 Part U5 and secure them with 2 Bolts 1#, then attach them to assembled Middle Roof Tube with 1 Bolts 1#.

Repeat the above procedure to assemble the other 7 positions.

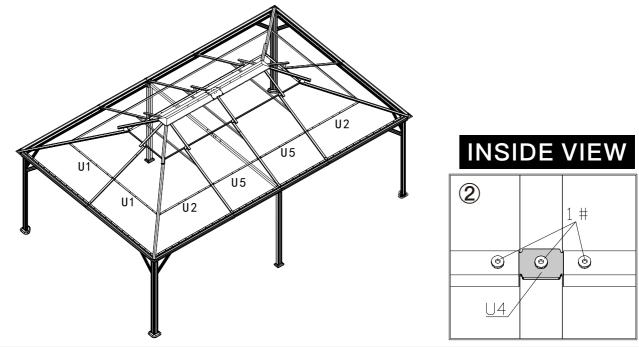




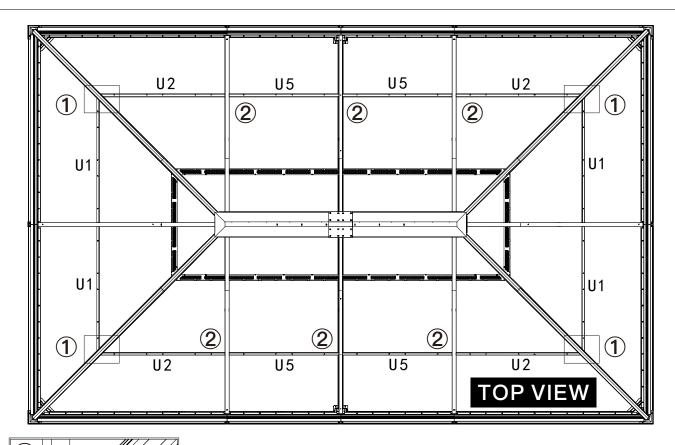

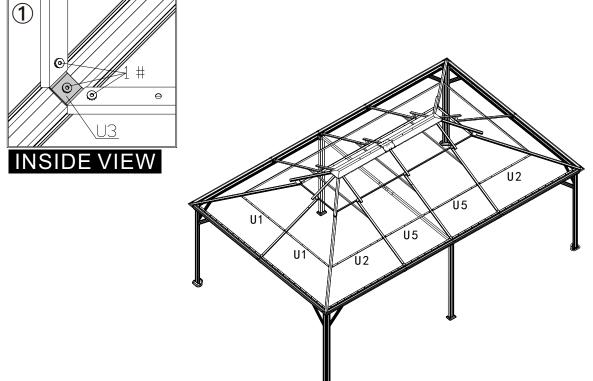


Insert the Bracket U3 into Part U1 and U2, and secure them with 2 Bolts 1#, then attach them to assembled corner roof tube with 1 Bolts 1#.

Repeat the above procedure to assemble the other 3 corners.




Remove the protective film of the panels before installing the roof panels.


Please install Plastic Clips in strict accordance with the instructions.

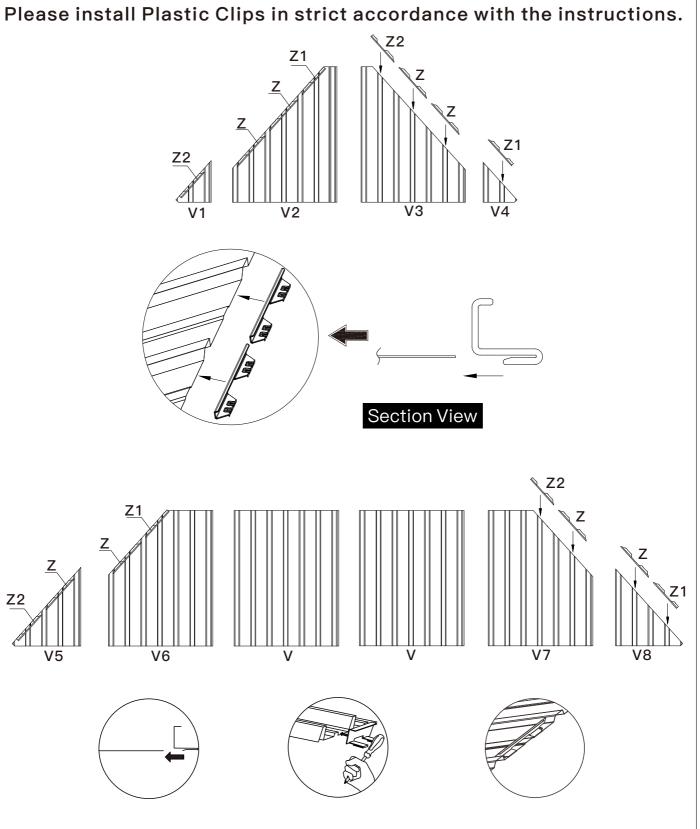


Attach Part #Z,#Z1,#Z2 by lightly tapping with screwdriver.




SMALL ROOF ASSEMBLY:

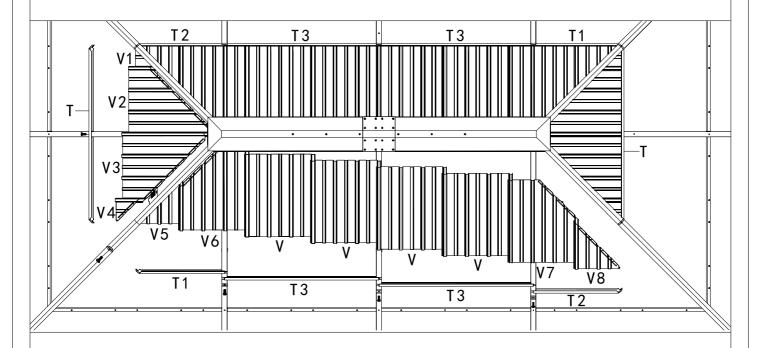


If you can't install #V, push the Outside Roof Cover up and try to insert them again.

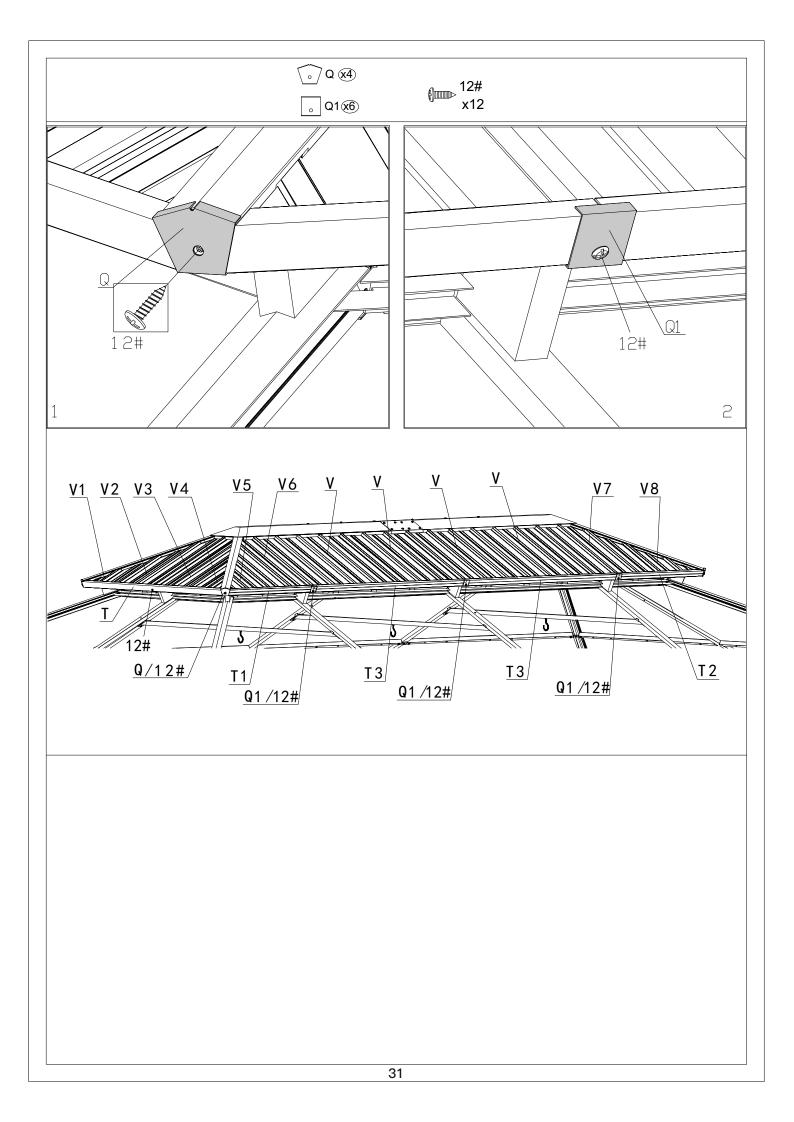


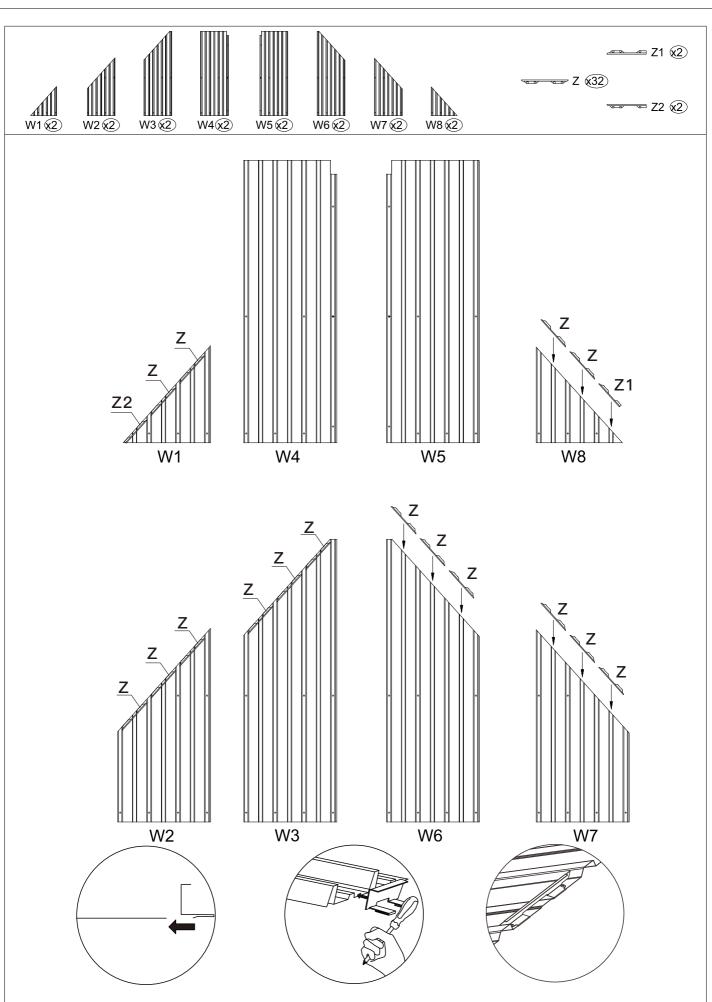

Attach Part #Z,Z1,Z2 by lightly tapping with screwdriver.

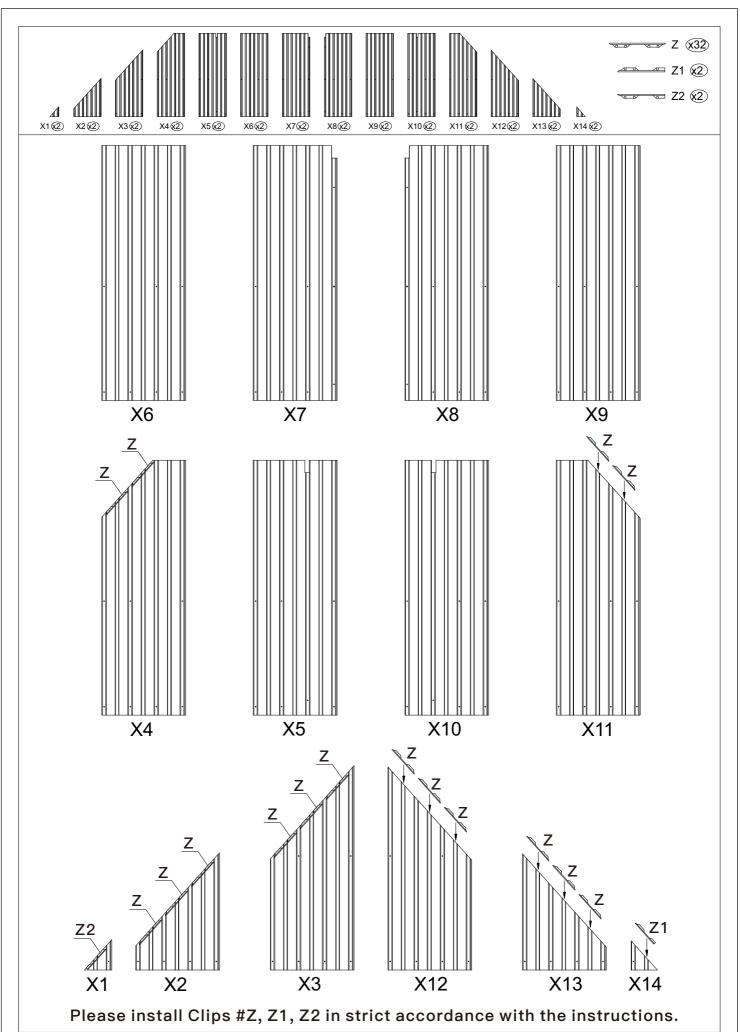


OVER ALL ROOF PANELS ASSEMBLY:

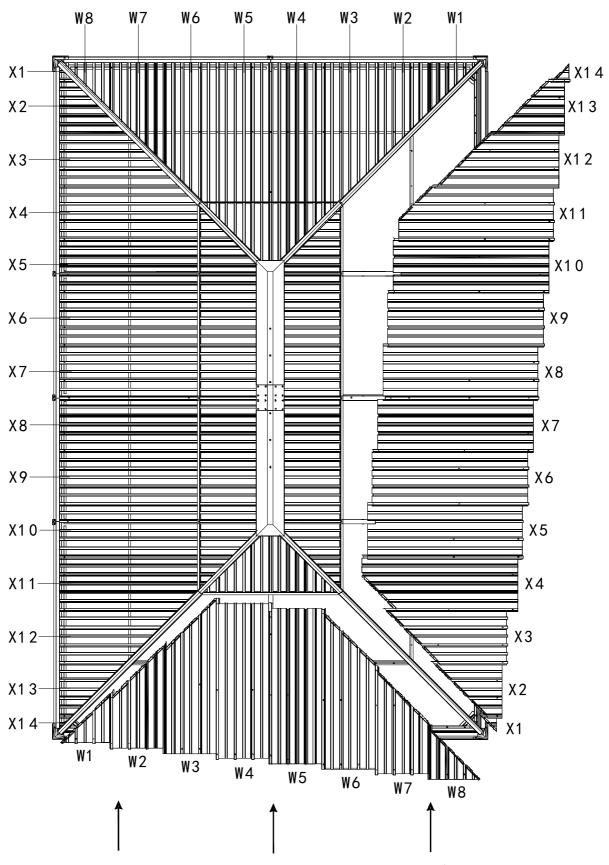



Install the Middle Panels (#X7,X8 or #W4,W5) first, then the small panels on the edge.


The Black Pubber #S Should be assembled when


The Black Rubber #S Should be assembled when installing the roof panels, please see the next page.

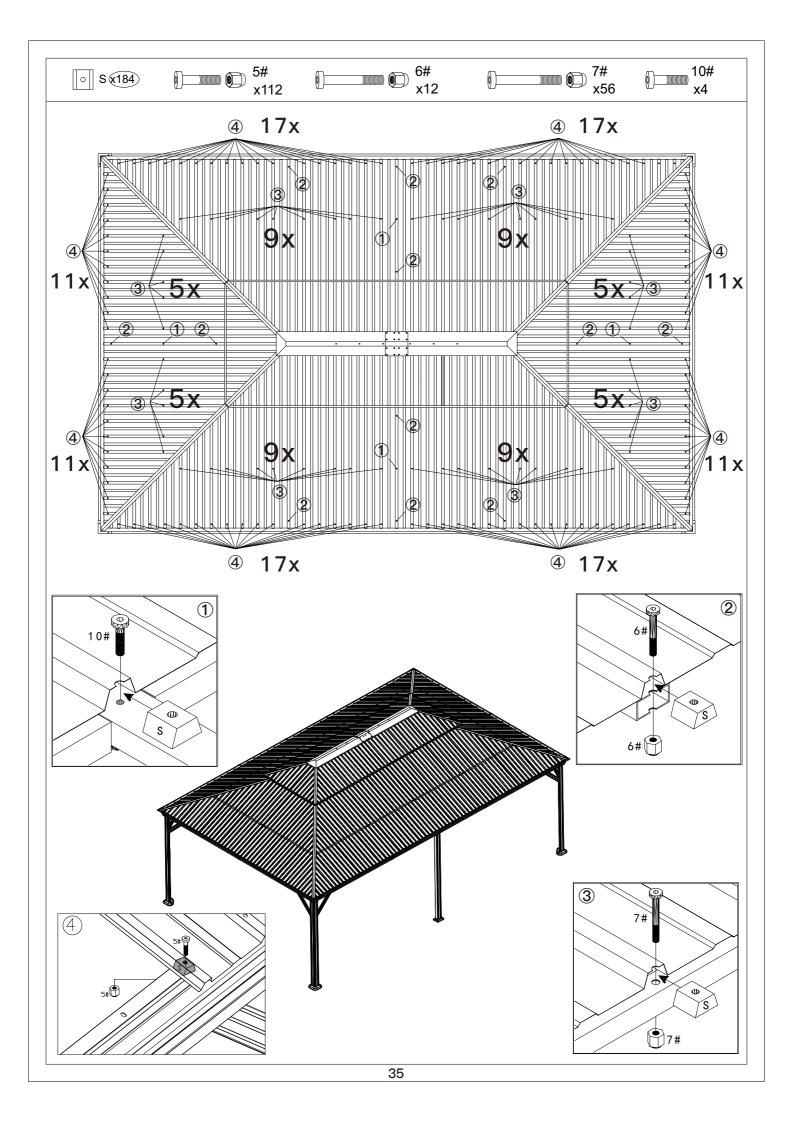


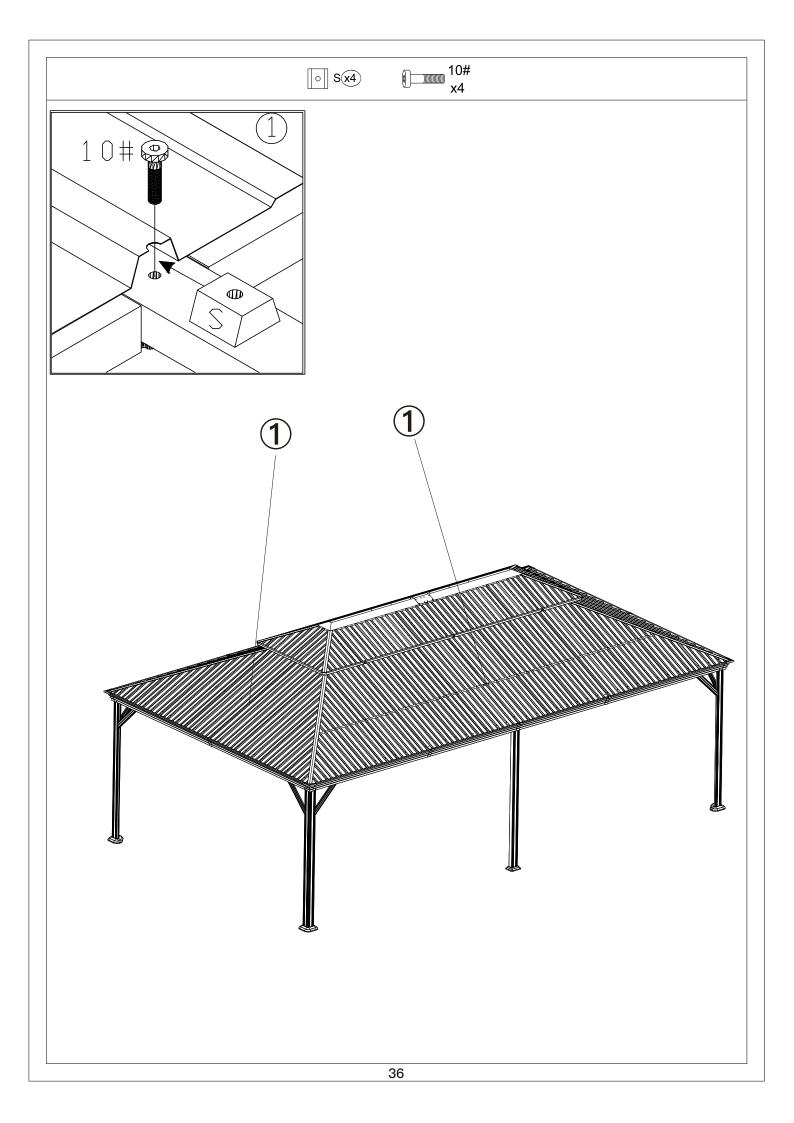


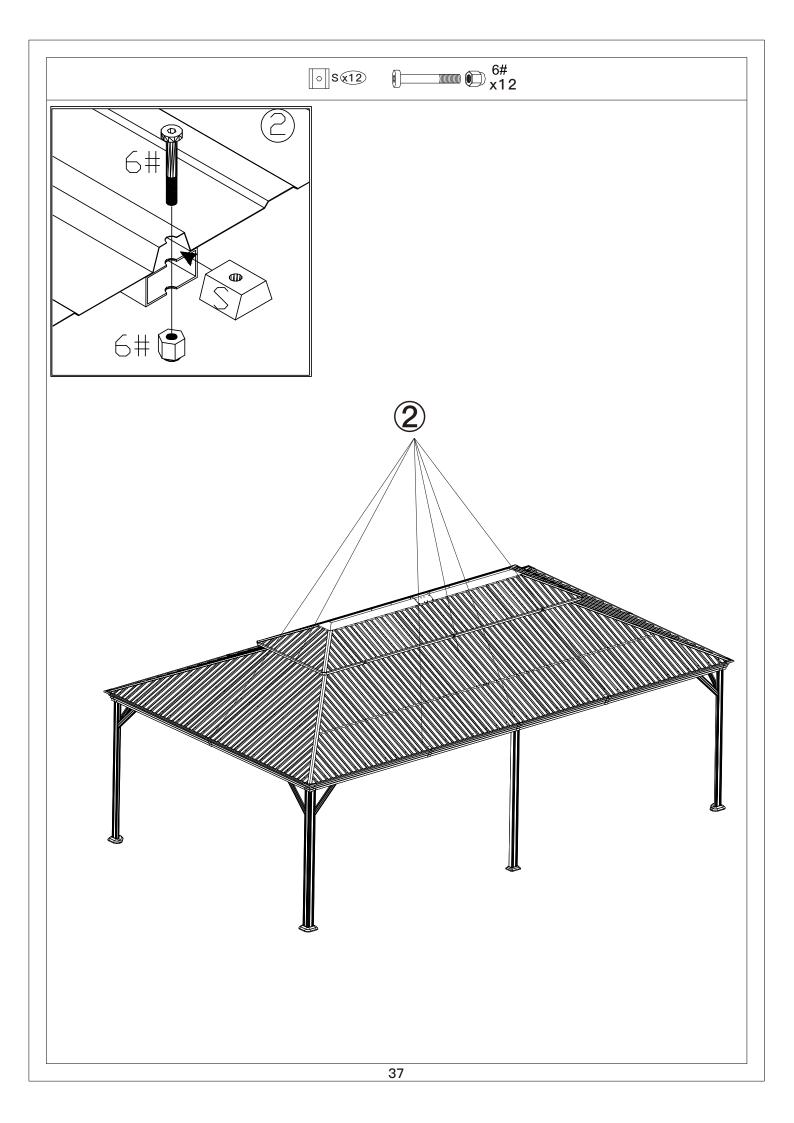


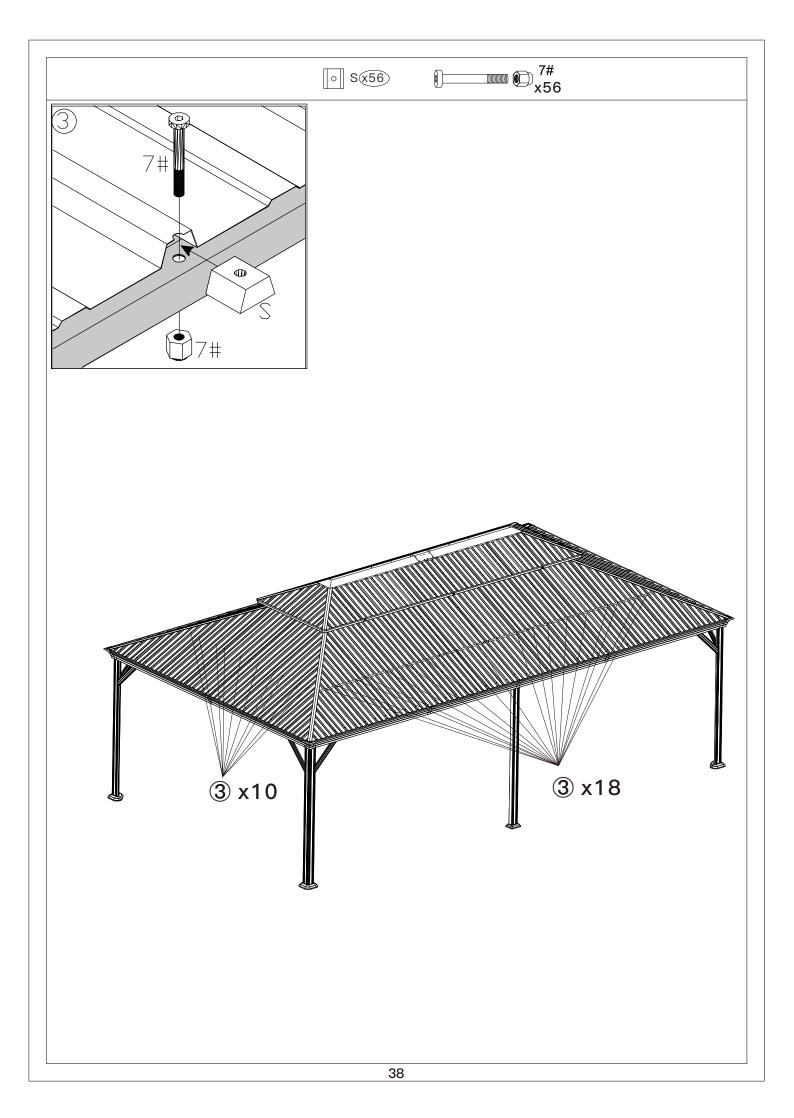


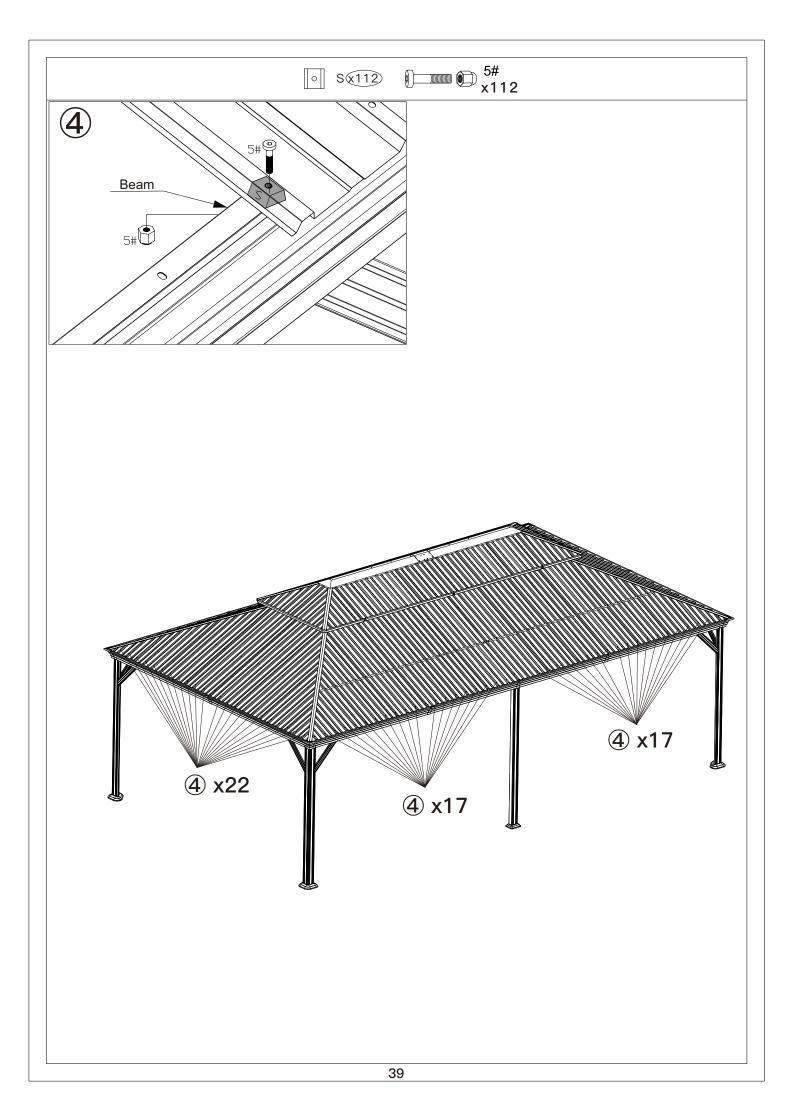


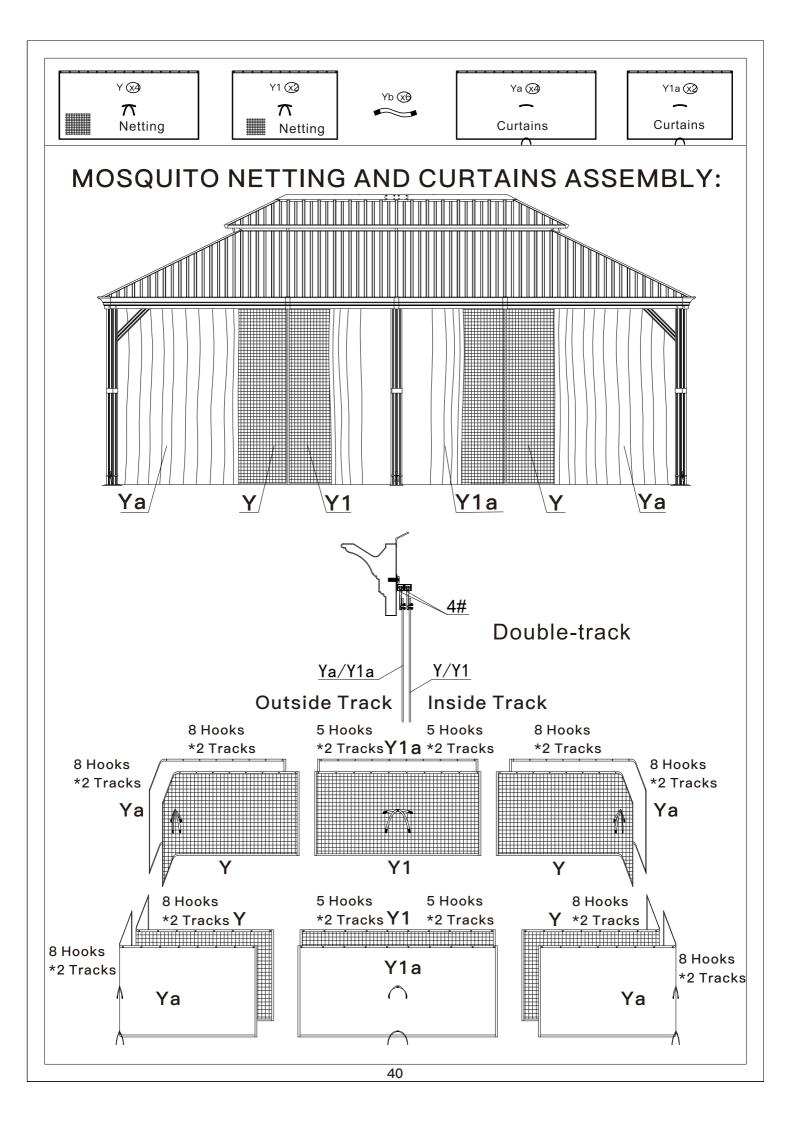

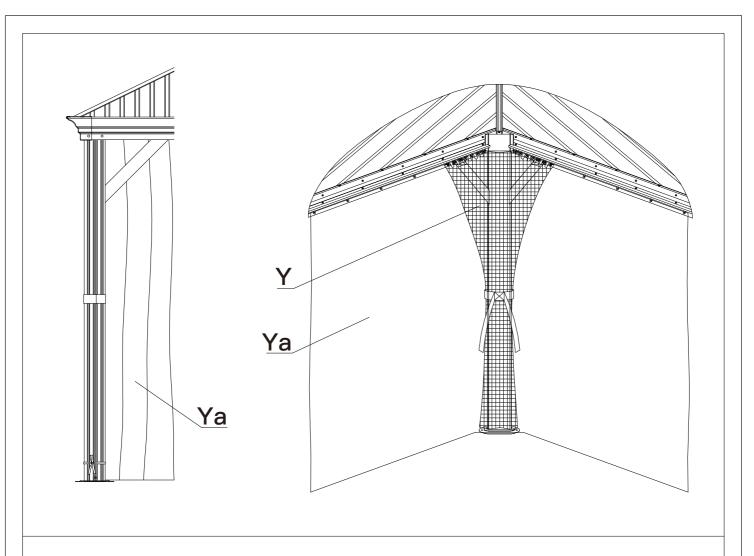



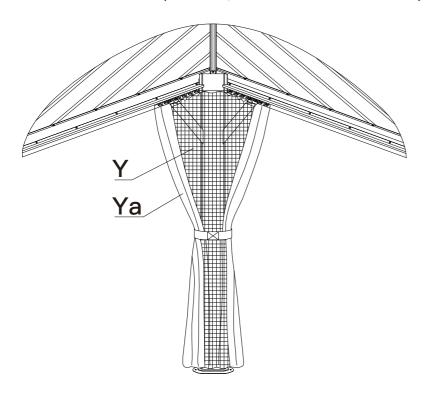

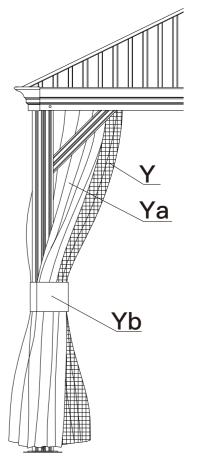



Thanks for your purchase.

At domi outdoor living, we believe in our products.

That's why we provide a 12-month warranty and friendly, easy-to-reach after-sales service. So, if you have any questions about our product or assembly, please feel free to contact us. We are here for you.

Support:





After-sales contact email:

service@domioutdoorliving.com

Business cooperation contact email:

 $\underline{marketing@domioutdoorliving.com}$

Please have your order ID available if you reach out for support.

If you have damaged parts or product, please send us photos for an immediate response.