



Assembly Manual

Sofa

2orner Sofas + 1 Coffee Tae
CS011-A

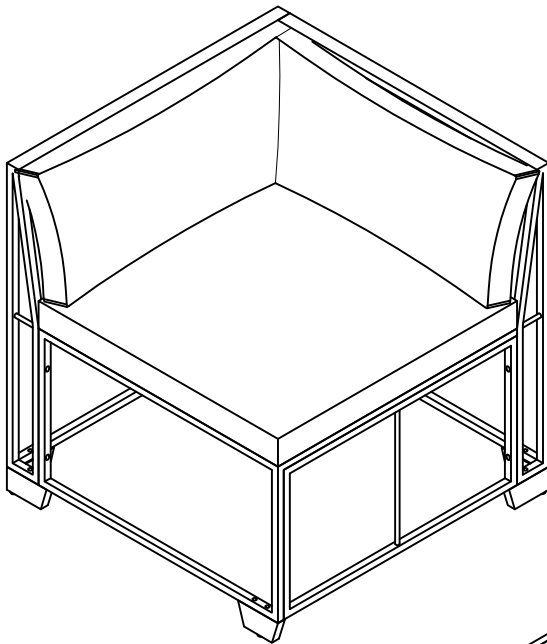


x2

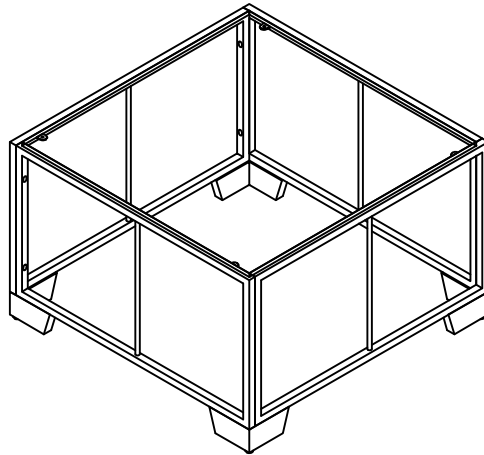

Please read this manual carefully before any operation and keep it properly for future use.

If any problems on our product, please feel free to contact us at ecservice@isunon.com.

Exploded View

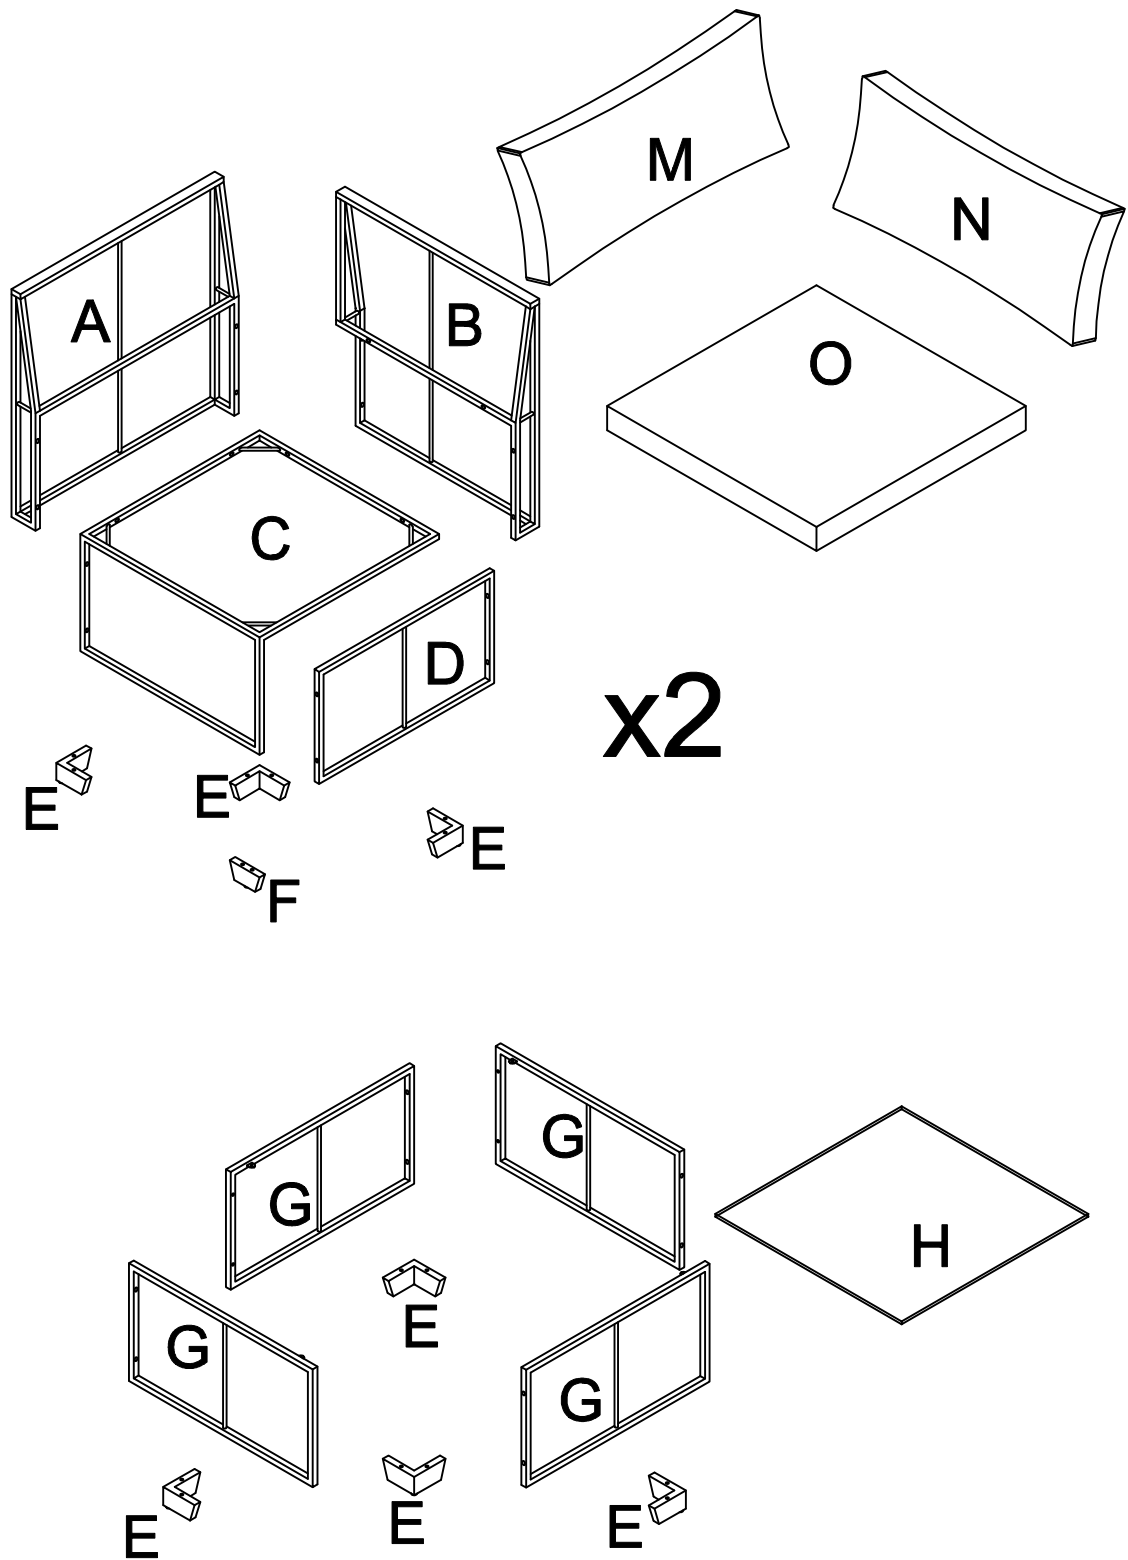


Components List

15 min

Assembly Time




One People

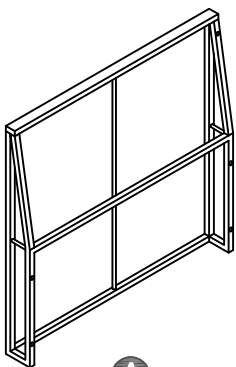


A

Back frame*2

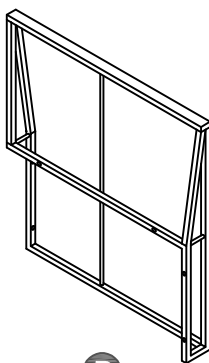


B

side frame*2

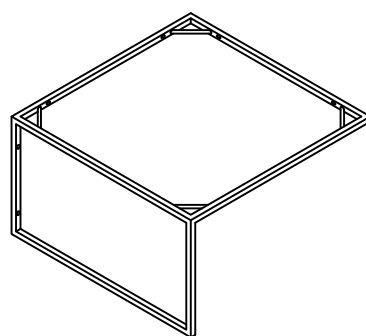


C

Seat frame*2




D

front frame*2




E

foot*10




F

foot*2




G

Tea table side frame*4

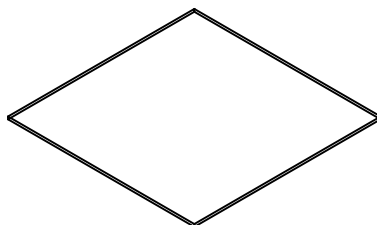

H

Glass countertop*1



M

Armrest pad*2

Components List


15 min

Assembly Time




One People

Note: The number after "+" sign indicates the extra piece(s).











N

Back cushion*2

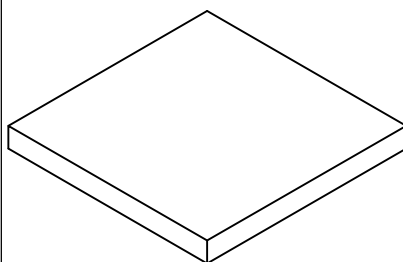

O



Seat cushion*2

1 	2 	3 	4 
Bolt M6x45mm 44+2	Washer M6x14*1.5mm 52+2	Allen wrench #5 1	Bolt M6x30mm 4+1
5 	6 	7 	8 
Nut M6 20+2	Allen wrench 10# 1	Bolt M6x35mm 2	Bolt M6x35mm 8+1
9 	10 	11 	
Non-slip mat 4	snap fastener 4	Allen wrench M4 1	


Assembly instruction

STEP 1

Connect the seat plate (C) and armrest (A) using the washers (2), bolts (1), nuts (5), and wrenches (3) (6). Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow you to make minor adjustments to their positions during the assembly process.

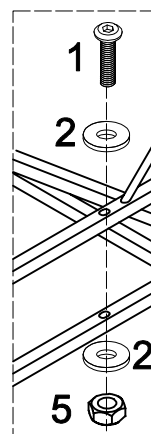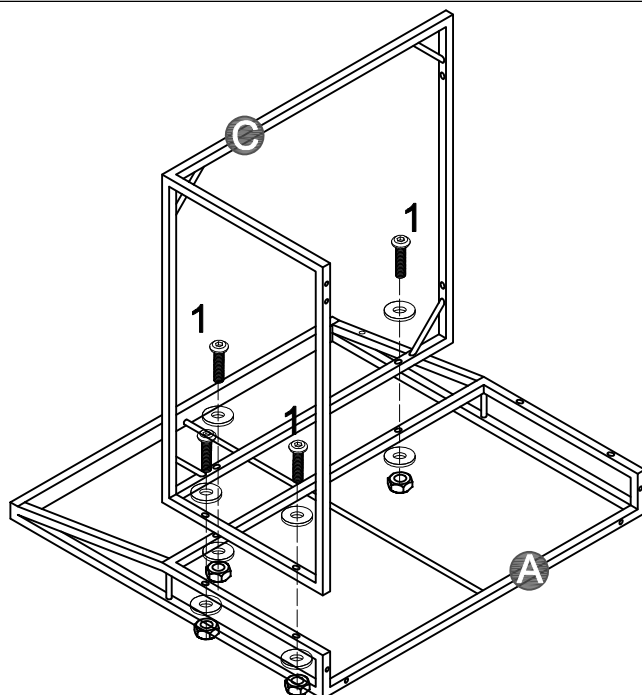


x2

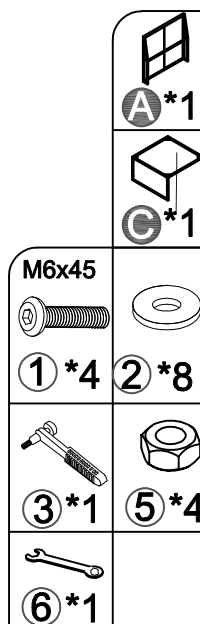

STEP 2

Use bolt (7) and install it into the upper left end of the backboard (B). Tighten the bolt to approximately 1 cm depth.

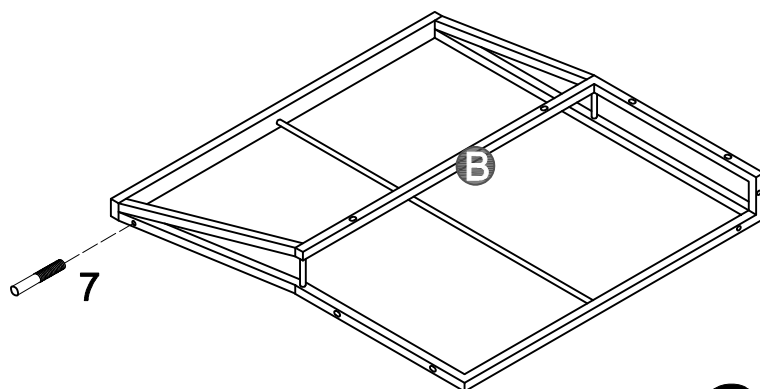


x2



Assembly instruction

STEP 3

Align the backboard (B) with the armrest assembly. Ensure the headless screw rod at the upper end of the backboard is aligned with the hole at the upper end of the armrest.

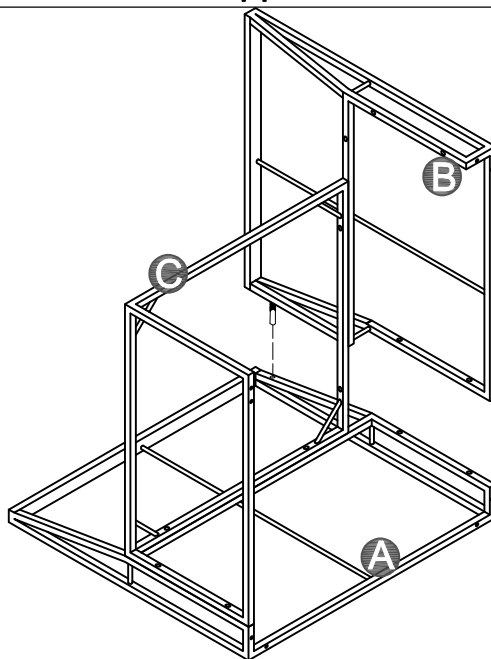



x2




STEP 4

Connect the seat plate (C), backboard (B), and armrest (A) using washers (2), bolts (1), nuts (5), and wrenches (3) (6).

Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during assembly.

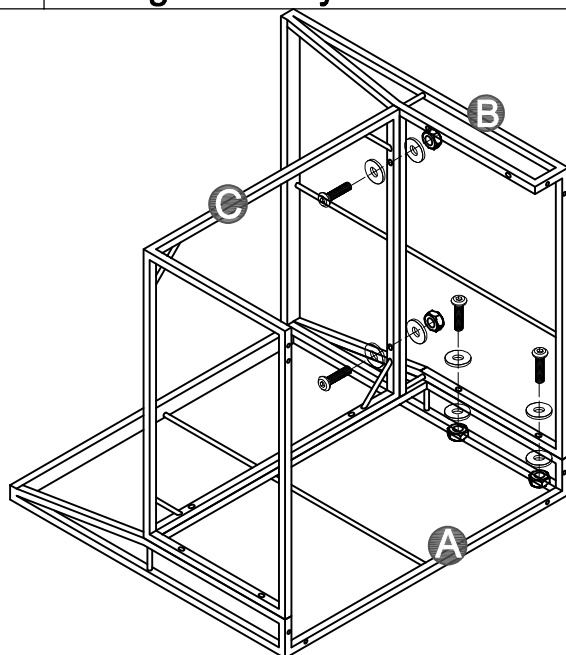


x2

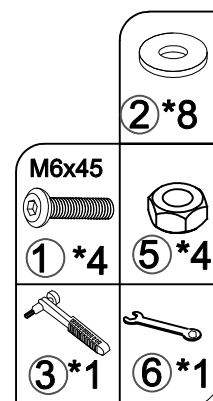

Assembly instruction


STEP 5

Connect the side panel (D), seat plate (C), and backboard (B) using washers (2), bolts (1) (4), nuts (5), and wrenches (3) (6). Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during the assembly process.

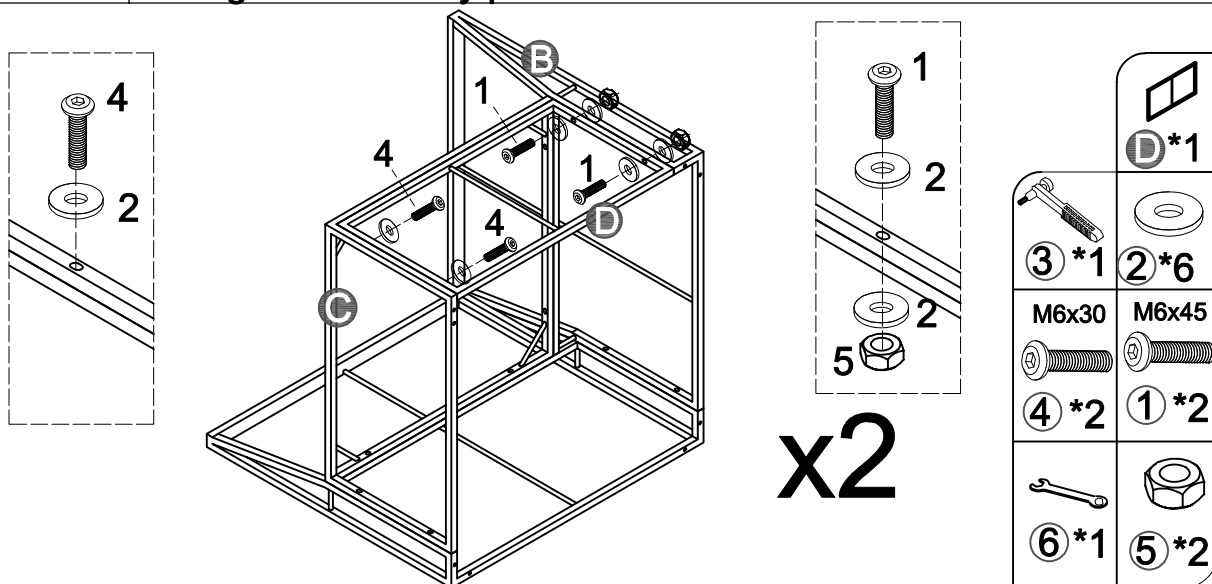

STEP 6


Use bolt (1) and wrench (11) to connect the plastic feet (E) (F) to the sofa. Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during the assembly process.

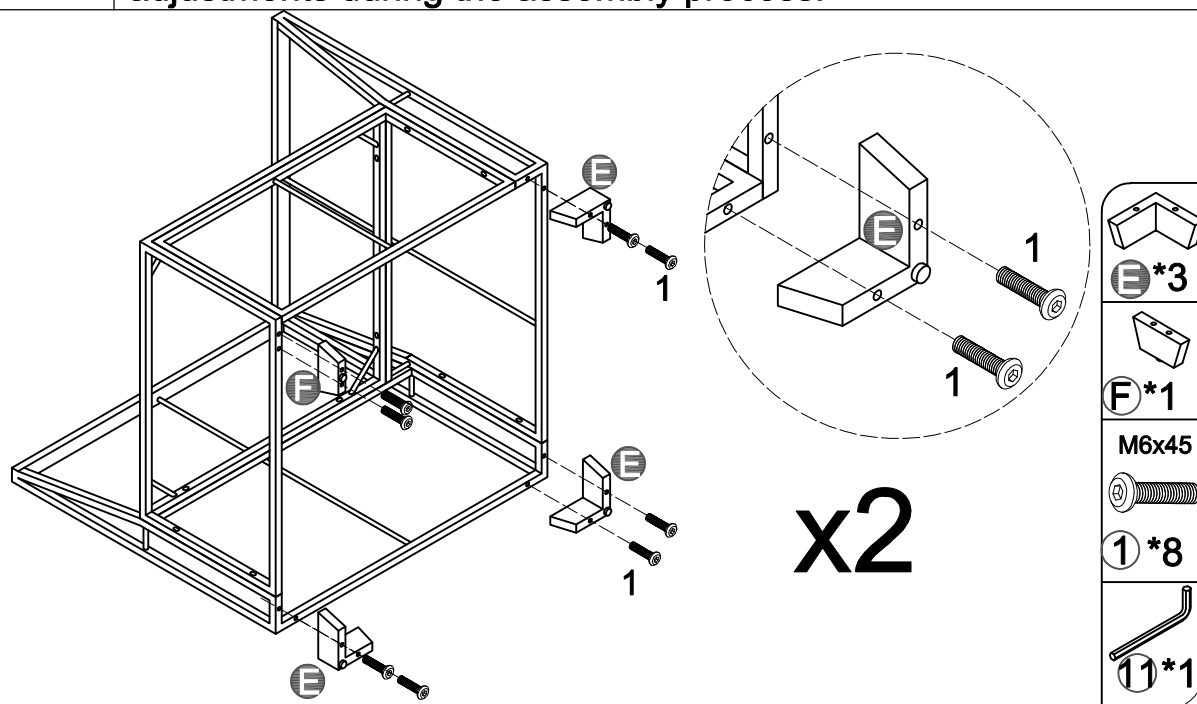

Assembly instruction


STEP 7

Connect the two sofas using the clips (10). Align the two sofas front to back, then snap them into place.

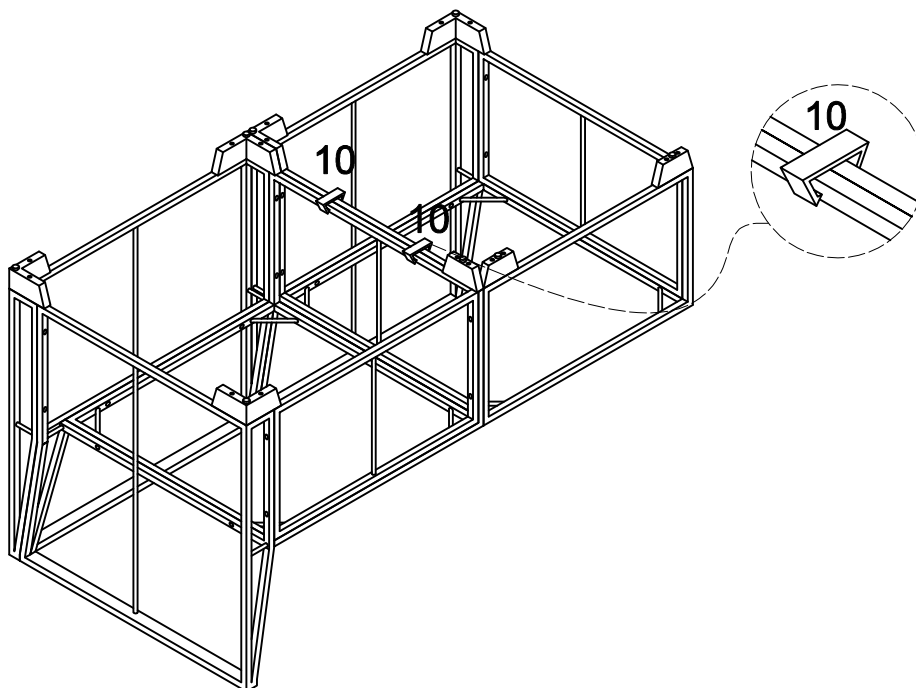

STEP 8

Place the seat cushion (O), armrest cushions (M), and back cushion (N) on the assembled product. Insert the end of the seat cushion (O) with the zipper opening toward the backboard (B). Insert the ends of the armrest cushions (M) and back cushion (N) with the zipper openings toward the seat cushion (O).

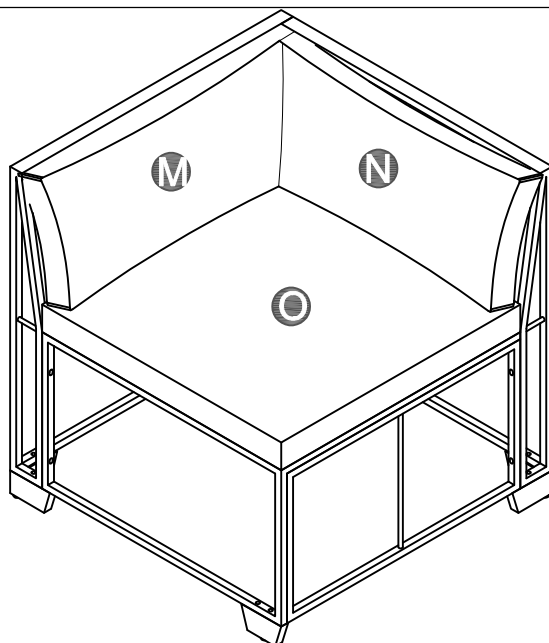



x2



Assembly instruction



STEP 9

Connect the two (G) plates using washers (2), bolts (8), and a wrench (3). Ensure the sides of the (G) plates with lugs face the same direction. Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during the assembly process.

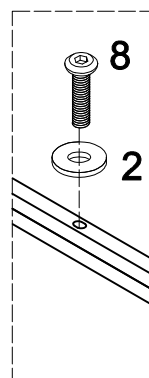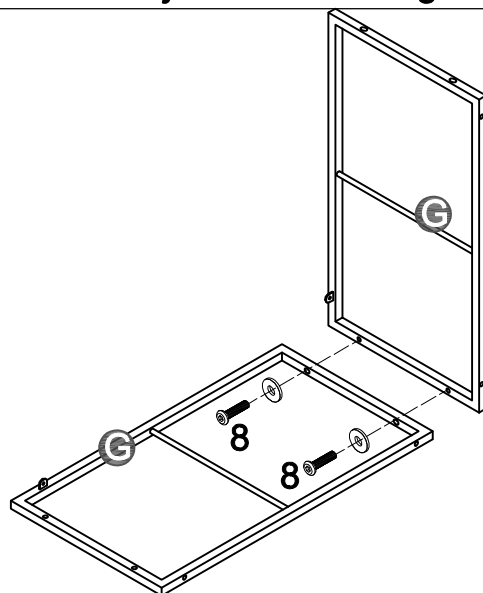

STEP 10



Connect the (G) plate(s) using washers (2), bolts (8), and a wrench (3). Ensure the sides of the (G) plate(s) with lugs face the same direction. Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during the assembly process.

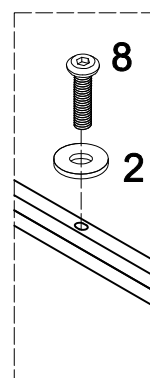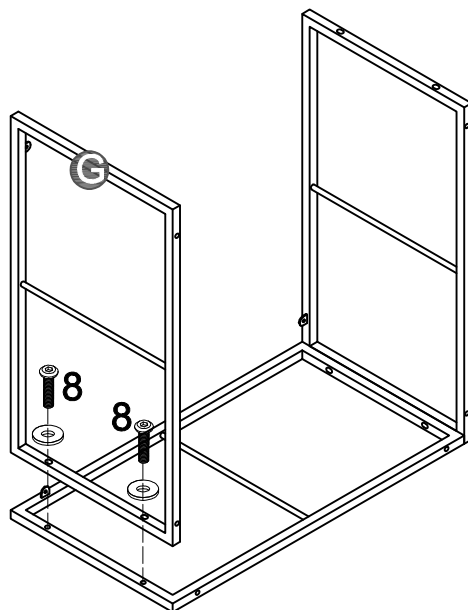

Assembly instruction



STEP 11

Connect the (G) plate(s) using washers (2), bolts (8), and a wrench (3). Make sure the sides of the (G) plate(s) with lugs are oriented in the same direction. Do not fully tighten the bolts until all bolts have been inserted into the correct holes. This will enable you to make minor position adjustments during the assembly process.

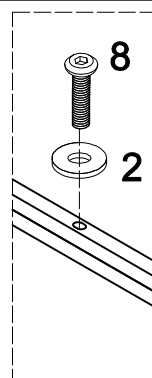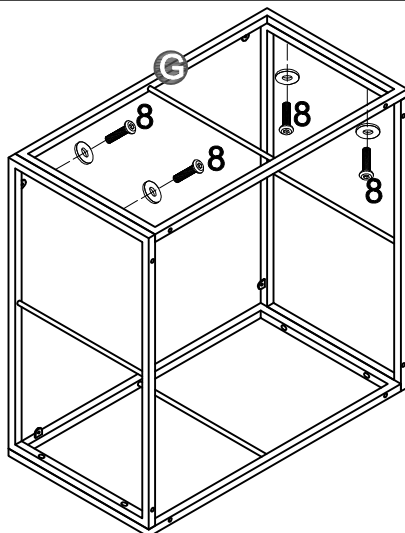

STEP 12

Use bolts (1) and a wrench (11) to connect the plastic feet (E) (F) to the coffee table. Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during the assembly process.

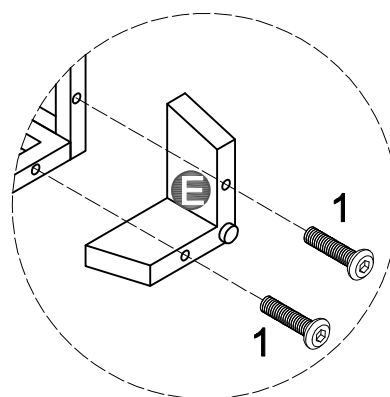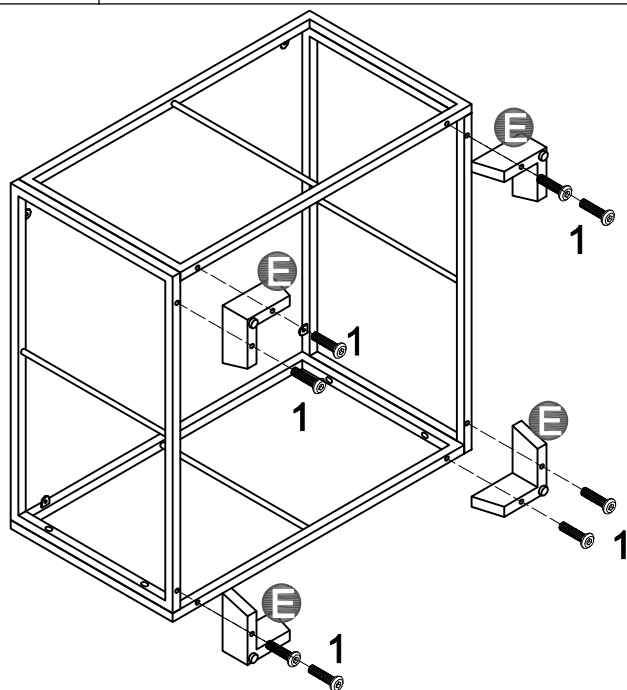

Assembly instruction

STEP 13

Insert the suction cups (9) into the holes of the metal parts inside the coffee table, then place the glass (H) [on the suction cups].

