


Features

- Acrylic
- Six transducers and a control amplifier with 25' (7.6 m) of wiring
- User-friendly high-resolution color touch screen (in polished chrome)
- 122 BubbleMassage™ airjets
- With Zones of Control™ feature
- Blower motor with 300 W heater
- Available with four chromatherapy lights and Bask™ heated surface with three temperature settings [-GVBCW]
- Drop-in or under-mount installation
- Center drain
- 48" (1219 mm) x 48" (1219 mm) x 34" (864 mm)

CUBE VIBRACOUSTIC® BUBBLEMASSAGE™ BATH K-1969-GVB ALSO K-1969-GVBCW

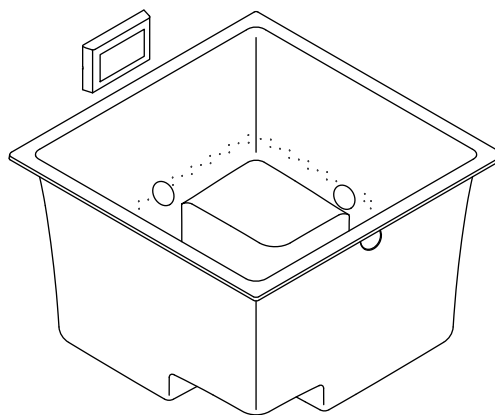

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7/CSA B45.10
- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- UL 1795

Colors/Finishes

- 0: White
- CP: Polished Chrome
- BN: Brushed Nickel
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1969-GVB	Cube VibrAcoustic BubbleMassage bath	☐ 0	☐ Other _____
K-1969-GVBCW	Cube VibrAcoustic BubbleMassage bath with Bask and chromatherapy (shown)	☐ 0	☐ Other _____
Required Accessories			
K-8150	Cable drain AND		☐ NA
K-8134	Cable drain trim kit	☐ CP	☐ Other _____
Optional Accessories			
1172315	VibrAcoustic interface mounting plate (non-CP finish) (cont.)		☐ BN

Product Specification

The acrylic VibrAcoustic bath shall be 48" (1219 mm) in length, 48" (1219 mm) in width, and 34" (864 mm) in height. Bath shall feature six transducers and a control amplifier with 25' (7.6 m) of wiring. Bath shall feature a user-friendly high-resolution color touch screen (in polished chrome). Bath shall have blower motor with 300 W heater, 122 BubbleMassage airjets, and Zones of Control. Bath shall be available with four chromatherapy lights and Bask heated surface with three temperature settings [-GVBCW]. Bath shall be for drop-in or under-mount installation. Bath shall feature center drain. Bath shall be Kohler Model K-1969-_____-_____.

UNDERScore®

K-578

(cont.) Under-mount kit

□ NA

Technical Information

Fixture: Approx. measurements for comparison only.	
Basin area, bottom	39-3/8" (1000 mm) x 39-3/8" (1000 mm)
Basin area, top	44-5/8" (1134 mm) x 44-5/8" (1134 mm)
Weight	160 lbs (72.6 kg)
To overflow:	
Water depth	27-1/2" (699 mm)
Capacity	171 gal (647.3 L)

Drop-in cutout	47" (1194 mm) x 47" (1194 mm)
----------------	-------------------------------

Blower motor/control	300 W	120 V	60 Hz	10 A
Amplifier	15 W (per channel)	120 V	50/60 Hz	-
Heater	65 W	120 V	60 Hz	0.5 A

Required Electrical Service: Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):
Blower motor/heater/amplifier: 120 V, 15 A, 60 Hz

Installation Notes


Install this product according to the installation guide. Ensure that the bath, user interface, amplifier, and transducers are functional before completing the installation.

Control amplifier fits 16" (406 mm) center studs. 25' (7.6 m) cables are included.

Locate the bath within 24" (610 mm) of a GFCI-protected 120 V, 15 A grounded electrical outlet. A second grounded outlet within the wall framing must be within 24" (610 mm) of the planned control amplifier. One electrical service may be used for the entire bath and related electrical components.

Hot water supply should be 70% of capacity or greater. Installations will vary.

Floor support under bath must provide for a minimum of 97.9 lbs/square foot (478.2 kg/square meter) loading.

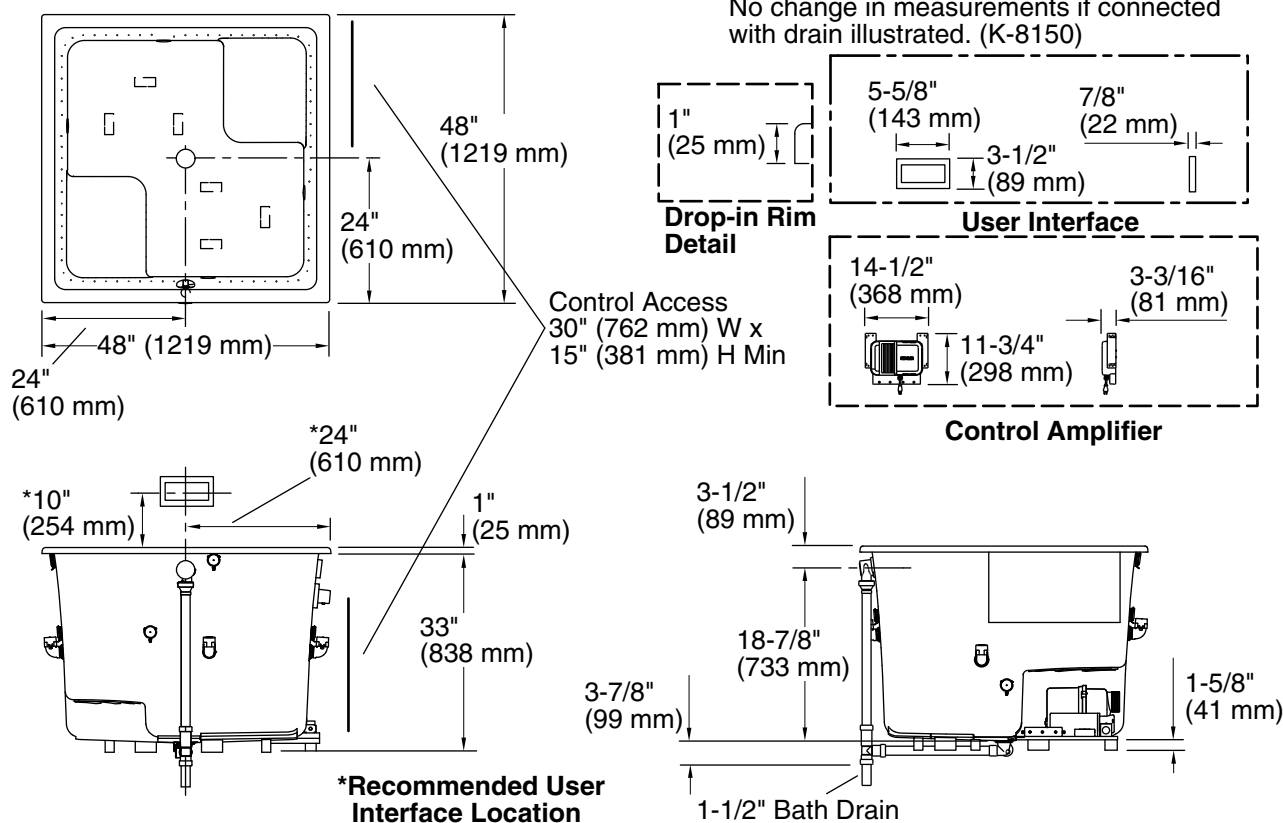

Product Diagram

UNDERScore® CUBE VIBRACOUSTIC® BUBBLEMASSAGE™ BATH

Page 2 of 2
1216007-4-A

THE BOLD LOOK
OF **KOHLER**®