


#### Features

- Acrylic
- Drop-in installation
- Molded lumbar support
- 60" (1524 mm) x 36" (914 mm) x 21" (533 mm)

#### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- CSA B45.0
- CSA B45.5

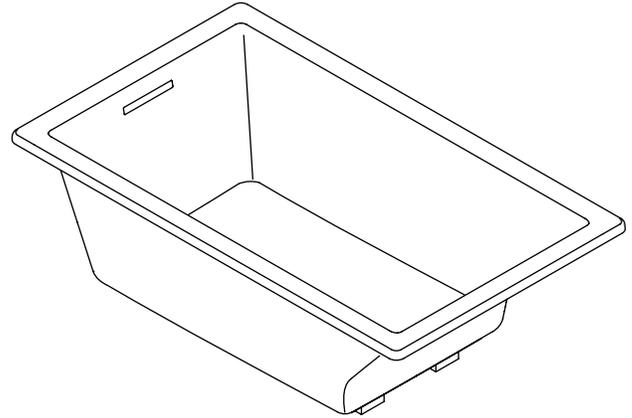

#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

#### Specified Model

Model	Description	Colors/Finishes		
K-1848	Drop-in bath	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
<b>Required Accessories</b>				
K-7271	Clearflo slotted overflow brass bath drain <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
<b>Optional Accessories</b>				
K-534	Undermount kit		<input type="checkbox"/> NA	
K-1491	Pillow	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____

#### Product Specification

The acrylic bath shall be 60" (1524 mm) in length, 36" (914 mm) in width, and 21" (533 mm) in height. Bath shall be for drop-in installation. Bath shall have molded lumbar support. Bath shall be Kohler Model K-1848-\_\_\_\_\_.

# UNDERScore®

## Technical Information


Fixture*:	
Bathing well:	
Basin area, bottom	39-9/16" (1005 mm) x 24-11/16" (627 mm)
Basin area, top	53-5/8" (1362 mm) x 29-1/2" (749 mm)
Weight	75 lbs (34 kg)
To overflow:	
Water depth	17-1/8" (435 mm)
Capacity	81.1 gal (307 L)
* Approximate measurements for comparison only.	
Drop-in cut-out	59-1/2" (1511 mm) x 35-1/2" (902 mm)

## Installation Notes


Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 52 lbs/square foot (230 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

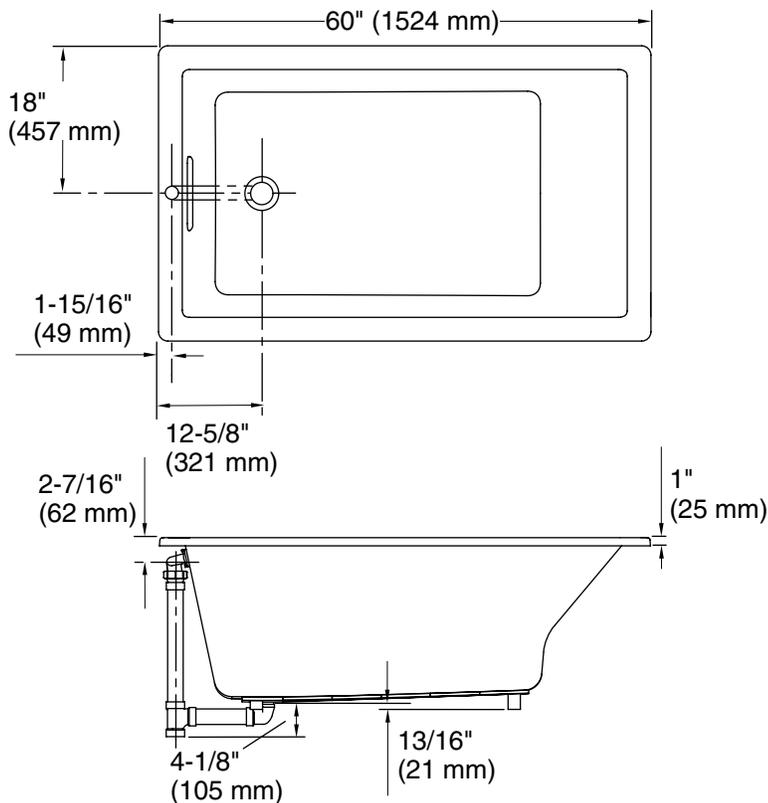

No change in measurement if connected with drain illustrated. (K-7272)

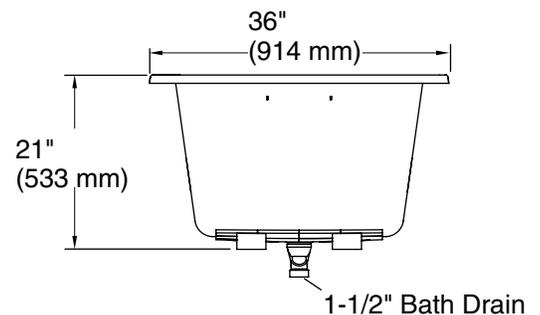

## Product Diagram